```
Q1.
  < Hml>
   <head)
      <title>Angularis Directives</title>
  </head>
 < body>
  イソノ

/ div ng-app="" ng-init="countries = [f locale:'en-India',
name:'India'], { locale:'en-GB', name:'United Kingdom'},
florale:'en-FR', name:'France']"

 Enter your name : Kinput type = "text" ng-model="name">
 Hello < span ng-bind = "name"></span>!
 (p) List of countries with locale:

   </h/>
  </div>
                         "https://ajax.googleapis.com/ajax/libs/angularjs/
1.3.14/angular.min.js">
Locupt src
</script>
</body>
</ html>
```



## Sample

Enter your Name: Viney Dangwal

Hello Viney Dangwal!

List of Countries with locale:

- 1. Country: India, Locale: en-India
- 2. Country: United Kingdom, Locale: en-GB
- 3. Country: France, Locale: en-FR

02.

```
Const http= require ('http');

const server = http. create Server ((req, res) => {

if (req. wrl == '/') res.end ('You are at Viney home page');

else if (req.wrl == '/contact') res.end ('You are at centacts');

else res. write Head (404);


res.end ();

});

server. lister (4002, '127.0.0.1', () => {

console.log ('Listering to the Viney Server...');

});
```

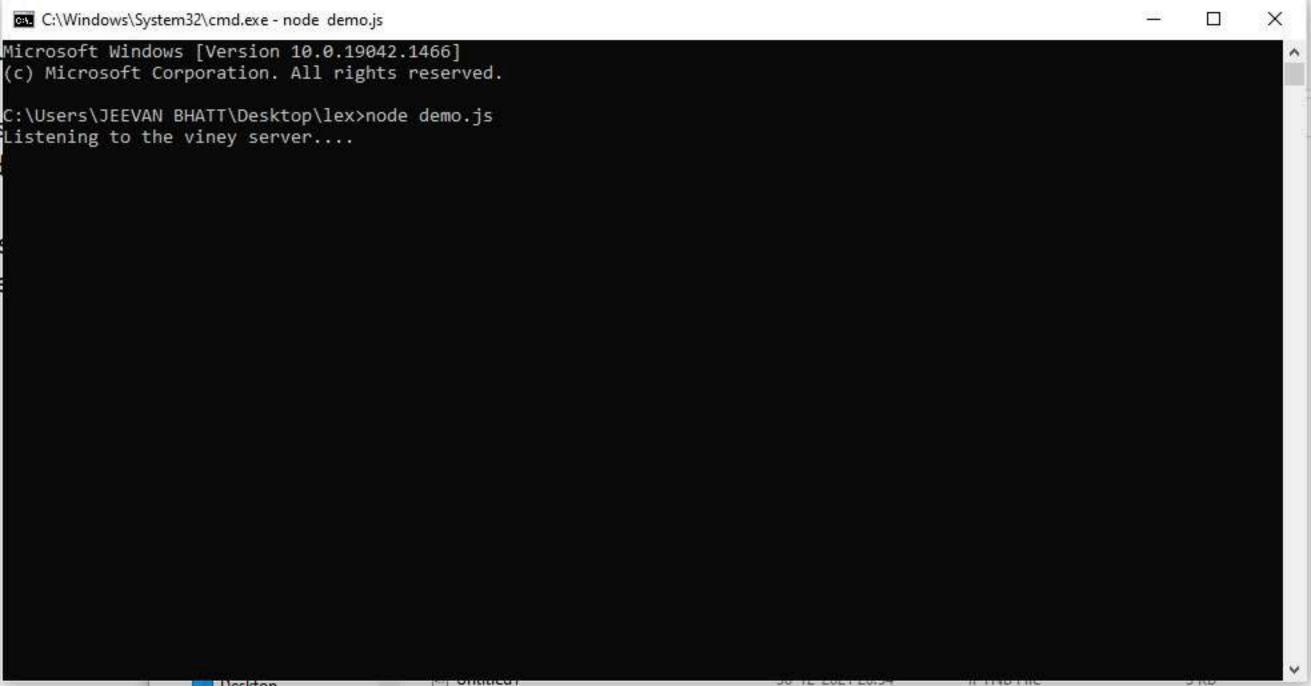



You are at viney home page