
```
Name: - Savrabh Suman
    father's Name: - Shankar Prasad Suman
     University (Roll no: - 2001135 Ensoll no: - PV-92001135
    Course: - MCA
                      Section: - C
    Semester: - 3
     Paper Name: - Full Stack development
    Paper Code: - 8 PMC - 303
Quest < I doctype html>
     <html lang="en" ng-app="app">
     Lhead >
       <meta charset = "UHF-8">
       escript sec = "http://cdnjs.cloudflare.com/ajax/libs/angular-is/
                     1. 6.1/ angular. min.is"> </script>
      (script sec: "script is claript)
     4head>
      ∠body > ng-controller - sctel">
             cting repeat z" item in items track by $index">
               ff Hem id 3) 
              ctd> cbutton type : "button" ng-click = "clone Item (item) >
                  Clone obutton> 4d>
```


< (table>

Sarrabh

```
</body>
< h+m1>
Script is file: -
angular module ('app', CJ)
angular module ('app'). Controller ('sctol', function ($scope)
  $scope item . C
         { id: L, name: 'mango'}
         (id: 2, name: apple )
 $ scope · Clone Item : function (item) (
       $ scope . item . push (angellar . copy(item));
 1)
     Const http - sequire ("http");
     Const sewer - http. create sewer ((8cq, 803)=) {
          res. end (" Succem");
        Sewer lister (8002, "127.0.0.1" }, () > (
          Console log ( Port no: 8002");
```

Sourabh

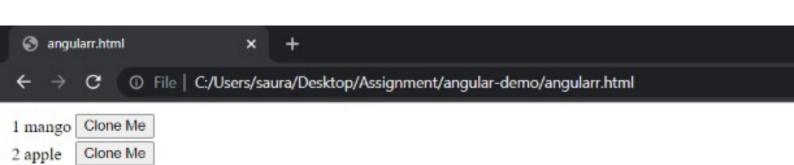

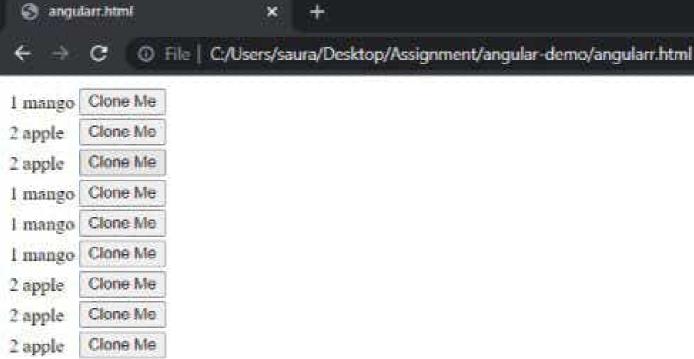

+

x



SUCCESS

PS C:\Users\admin\Desktop> node ques1.js
PORT NUMBER IS 8002