Lab - Install a Printer in Windows

Introduction

In this lab, you will install a printer. You will find, download, and update the driver and the software for the printer.

Recommended Equipment

- A computer running Windows
- Internet connection
- Printer

Instructions

Part 1: Connect a printer.

Connect a printer to a computer directly or connect the printer to a local network. Plug the printer power cord into an AC outlet if necessary. Unlock the printer if it is locked. Refer to the instruction manual if you do not know how to unlock the printer. Printer heads are often locked to prevent damage during shipment.


Part 2: Install the printer driver.

A printer driver is a software program that enables the computer and the printer to communicate with each other. The driver also provides an interface for the user to configure printer options. Each printer model has a unique driver.

a. After you have powered on the printer, the operating system may discover the printer and installs the driver if the printer is directly connected to the computer via a USB cable.

b. If the installation process does not start automatically, navigate to the **Control Panel** > **Devices and Printers**. Click **Add a printer**.

c. Select your printer in the results. If it is not found, click **The printer that I want isn't listed** and provide the necessary information to locate the printer. Follow the on-screen information to complete the installation.

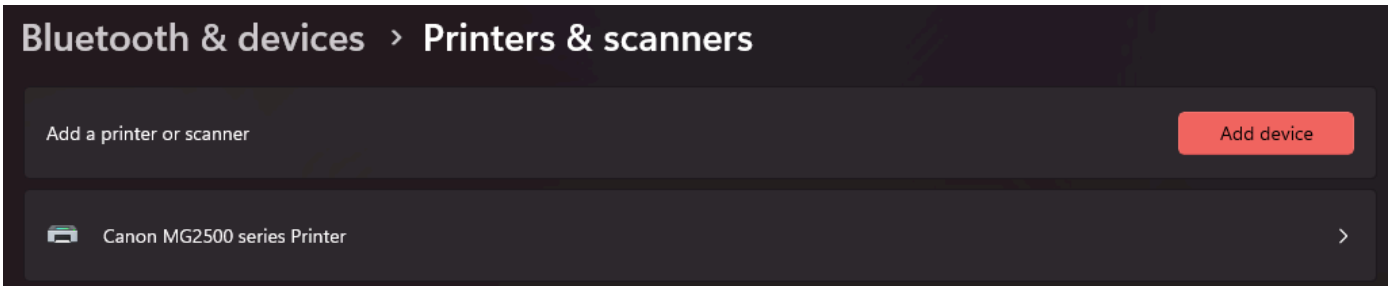

Part 3: Install and download an up-to-date printer driver.

To ensure that your computer has the most current driver, find the manufacturer and the model number of the printer.

Visit the manufacturer's web site and navigate to the product downloads or support page. Download the most recent driver and software for the model of printer device that you have installed. The software and driver must be compatible with your operating system. Make sure that you download the driver with a matching


architecture for your computer (x64 or x32), if necessary.


a. Download the driver. The driver is often found in archive format.

b. Extract the driver to a temporary folder on your desktop, if necessary.

c. The installation wizard may start automatically after file extraction. If not, double-click the .exe file or .msi file.

d. Follow the installation wizard instructions until the software and driver have been installed.

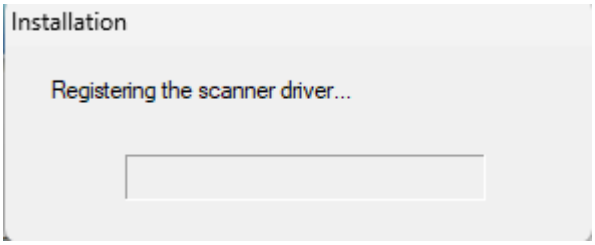

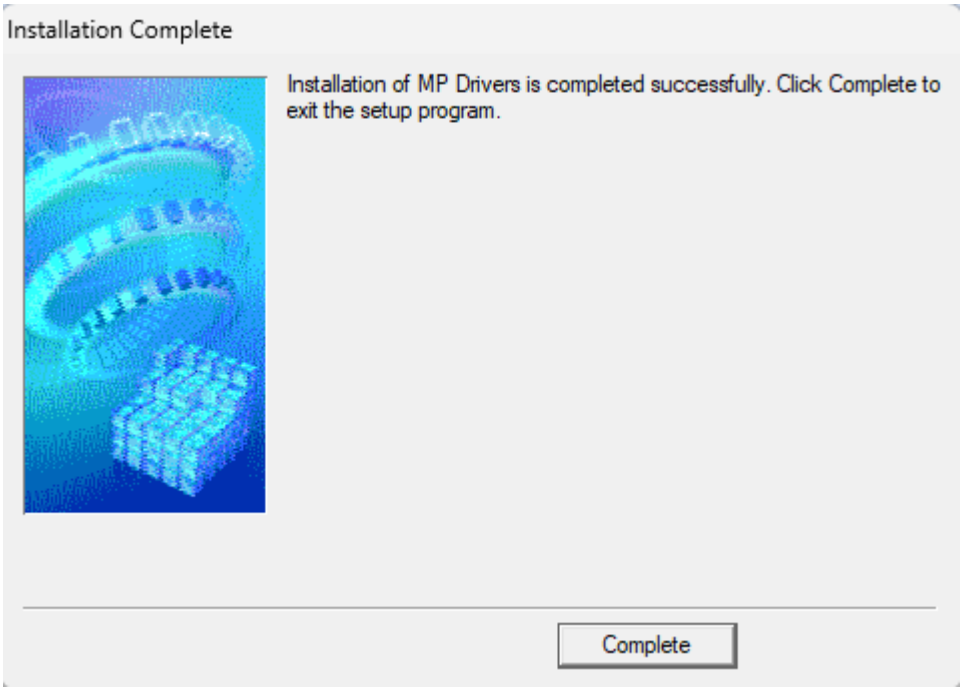

♥ 2015 - 2022 Cisco and/or its affiliates. All rights reserved. Cisco Public

e. Reboot your computer if necessary.


Part 4: Print a test page.

a. To verify printer functionality, navigate to **Control Panel > Devices and Printers**.

b. Right-click the printer and select **Printer Properties**.

c. Click **Print Test Page** in the General tab to print a test page.



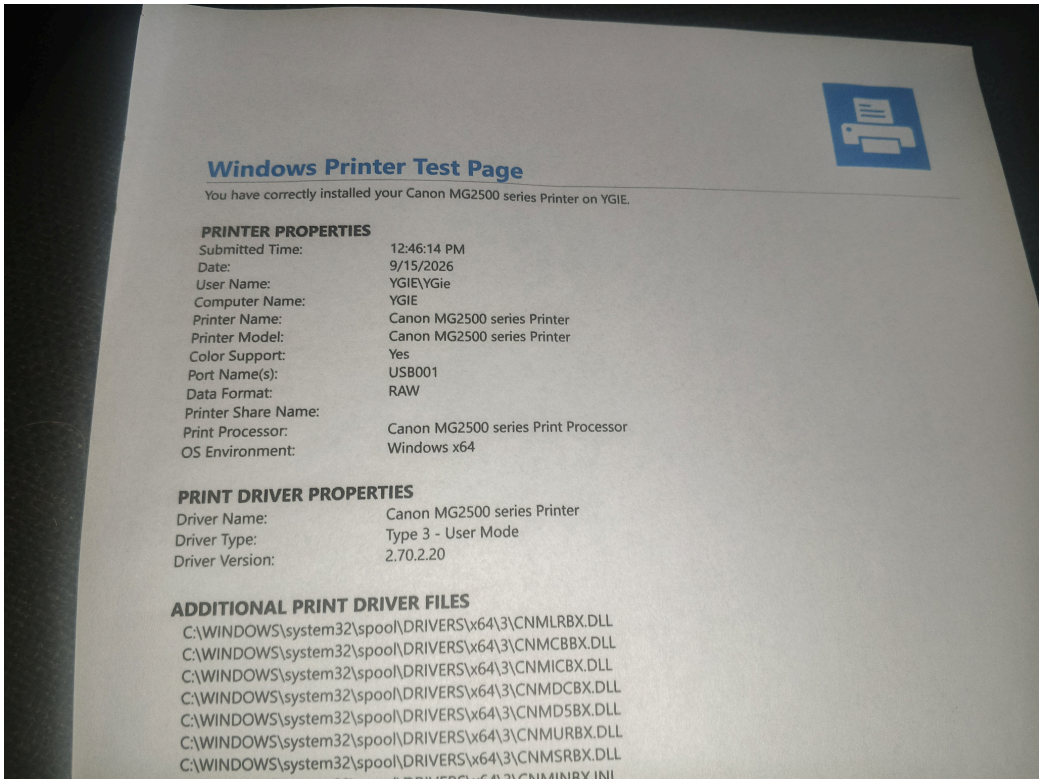

Windows Printer Test Page

You have correctly installed your Canon MG2500 series Printer on YGIE.

PRINTER PROPERTIES

Submitted Time:	12:46:14 PM
Date:	9/15/2026
User Name:	YGIE\YGie
Computer Name:	YGIE
Printer Name:	Canon MG2500 series Printer
Printer Model:	Canon MG2500 series Printer
Color Support:	Yes
Port Name(s):	USB001
Data Format:	RAW
Printer Share Name:	
Print Processor:	Canon MG2500 series Print Processor
OS Environment:	Windows x64

PRINT DRIVER PROPERTIES

Driver Name:	Canon MG2500 series Printer
Driver Type:	Type 3 - User Mode
Driver Version:	2.70.2.20

ADDITIONAL PRINT DRIVER FILES

C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMLRBX.DLL
C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMCBBX.DLL
C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMICBX.DLL
C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMDCBX.DLL
C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMD5BX.DLL
C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMURBX.DLL
C:\WINDOWS\system32\spool\DRIVERS\x64\3\CNMSRBX.DLL

Reflection Question

Why would you download and install software and drivers when windows already installs them for you?

-The manufacturers driver is what it is intended to use, while the windows version can be used to use the printer, the manufacturers driver can unlock advanced printer features, specific settings, and optimal print quality that generic Windows drivers do not provide.

♥ 2015 - 2022 Cisco and/or its affiliates. All rights reserved. Cisco Public