



DC – AI – Routing – Switching – Security – Wireless – Automation

Control and Data Plane Traffic Capture on QFX Switches

An HPE Juniper Networking Techpost

Ridha Hamidi

2026-08-01

HPE



Contents

1	Control and Data Plane Traffic Capture on QFX Switches	3
1.1	Introduction	3
1.2	Traffic Type Definitions	3
1.3	Control Plane Packet Capture	5
1.3.1	Steady State Conditions	5
1.3.2	DDOS Attack Triggered Packet Capture	6
1.3.3	Interface State Transition Triggered Packet Capture	12
1.4	Transit Traffic Capture	14
1.4.1	QFX Running Junos OS Evolved	14
1.4.2	QFX Running Junos OS	15
1.5	Conclusion	17
1.6	References	17
1.7	Glossary	18

List of Figures

1	Traffic-Type-Definitions	4
2	DDOS-Attack-Triggered-Packet-Capture	7
3	Interface	13
4	Wireshark Capture Analysis	14
5	Steps of Packet Capture on QFX running Junos OS	15

1 Control and Data Plane Traffic Capture on QFX Switches

Ridha Hamidi - 08/01/2026

Packet capture on QFX switches enables visibility into control-plane and data-plane traffic for efficient troubleshooting, traffic analysis, and network diagnostics.

Flexible capture methods allow packets to be mirrored and analyzed, providing deeper insight into switch behavior and forwarding operations.

1.1 Introduction

Network troubleshooting frequently presents the challenge of sorting out discrepancies between control-plane and data-plane reported status and error conditions. For example, the control plane may report a fully healthy state across all interfaces, while the data plane silently drops traffic, causing application failures. In such scenarios, direct visibility into the traffic on a particular device becomes essential to uncovering the root cause.

In a previous publication [1], we examined several off-box approaches for capturing control-plane and data-plane traffic, including packet mirroring and TAP aggregation. While effective, these solutions can be costly to deploy and are best justified when there is a sustained, ongoing requirement for packet capture.

This paper instead focuses on temporary, on-box packet capture mechanisms suited to short-lived, active troubleshooting scenarios, where a lightweight, on-demand approach is more appropriate than a permanent capture infrastructure.

1.2 Traffic Type Definitions

Before diving into the on-box packet capturing solutions, it is necessary to lay out some common ground terms.

The diagram below briefly summarizes the different types of traffic that must be considered when troubleshooting a traffic-related issue on a network device.

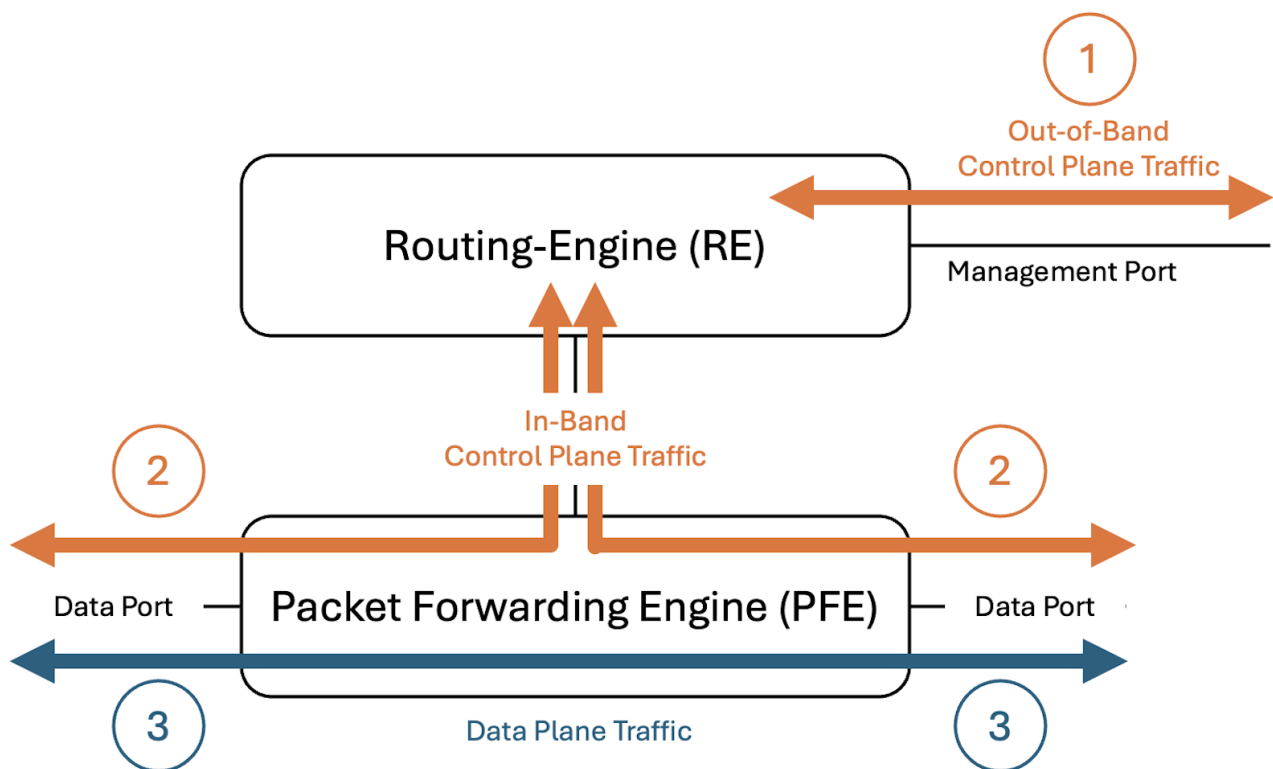


Figure 1: Traffic-Type-Definitions

Relative to the above diagram:

- 1: Out-Of-Band Control Plane Traffic
- 2 : In-Band Control Plane Traffic
- 3 : Transit/Data Plane Traffic

Control-plane traffic, whether out-of-band or in-band, is either sourced from or destined to the Routing Engine. It comprises packets belonging to switching, routing, and management protocols, such as LLDP, ARP, OSPF, BGP, SSH, or SNMP, where either the source or destination IP address is owned by the network device itself, such as a physical interface or loopback.

Data-plane traffic, on the other hand, traverses the network device from one physical interface to another. It is processed entirely by the Packet Forwarding Engine (PFE) and is typically not visible to the Routing Engine, except when the user explicitly configures features such as mirroring, sampling, or other similar flow-tracking capabilities.

In the following sections, we explain how to capture each of these traffic types under various conditions.

This article is organized into two main sections. The first section examines three common approaches to capturing control-plane traffic: steady-state capture, capture triggered by a detected DDoS attack, and capture triggered by an interface state transition. The second section addresses data-plane packet capture, with separate subsections covering QFX devices running Junos OS and QFX devices running Junos OS Evolved.

1.3 Control Plane Packet Capture

1.3.1 Steady State Conditions

Capturing control-plane traffic under steady-state conditions has been supported since initial deployment (Day 1) across all HPE Juniper platforms, regardless of whether the device runs the legacy BSD-based Junos OS or the newer Linux-based Junos OS Evolved. Both operating systems provide a Day-1 CLI command, implemented as a wrapper around the tcpdump utility, that enables users to capture host-bound Type-1 and Type-2 traffic.

The captured traffic can be analyzed directly on-box for straightforward troubleshooting scenarios, or saved to a .pcap file for subsequent analysis with an off-box tool such as Wireshark.

The available options for this command are listed in the output below.

```

1 {master:0}
2 root@qfx5120> monitor traffic interface em0 ?
3 Possible completions:
4 <[Enter]> Execute this command
5 absolute-sequence Display absolute TCP sequence numbers
6 brief Display brief output
7 count Number of packets to receive (0..1000000 packets)
8 detail Display detailed output
9 extensive Display extensive output
10 layer2-headers Display link-level header on each dump line
11 matching Expression for headers of receive packets to match
12 no-domain-names Don't display domain portion of hostnames
13 no-promiscuous Don't put interface into promiscuous mode
14 no-resolve Don't attempt to print addresses symbolically
15 no-timestamp Don't print timestamp on each dump line
16 print-ascii Display packets in ASCII when displaying in hexadecimal format
17 print-hex Display packets in hexadecimal format
18 read-file Read packets from a given file
19 resolve-timeout Period of time to wait for each name resolution (1..4294967295 seconds)
20 size Amount of each packet to receive (bytes)
21 write-file Write packets to specified file
22 | Pipe through a command
23 {master:0}

```

Below is a sample execution of this monitor command and writing the output into a .pcap file

```

1 {master:0}
2 root@qfx5120> monitor traffic interface em0 matching "not tcp port 22" write-file
   Mgmt_Intf_Traffic.pcap
3 Address resolution is ON. Use <no-resolve> to avoid any reverse lookup delay.
4 Address resolution timeout is 4s.
5 Listening on em0, capture size 96 bytes
6
7 ^C
8 106 packets received by filter
9 0 packets dropped by kernel
10
11 {master:0}
12 root@qfx5120>

```

You can read the content of the .pcap file locally on the QFX by using options of the same “monitor traffic” command, as shown below

```

1 {master:0}
2 root@qfx5120> monitor traffic read-file Mgmt_Intf_Traffic.pcap
3 Reverse lookup for 10.92.71.52 failed (check DNS reachability).
4 Other reverse lookup failures will not be reported.
5 Use <no-resolve> to avoid reverse lookups on IP addresses.
6
7 12:25:19.195646 In arp who-has 10.92.71.52 tell sfo-vlan140.englab.juniper.net
8 12:25:19.241517 In IP sfo-vlan140.englab.juniper.net > vrrp.mcast.net: VRRPv2-advertisement 20:
   vrid=11 prio=110 authtype=none intvl=1
9 12:25:19.775473 In arp who-has sflab-vlan140-dhcp-9.englab.juniper.net tell sfo-vlan140.englab.
   juniper.net
10

```

```
11 <snip>
12
13 {master:0}
14 root@qfx5120>
```

If a more detailed traffic analysis is needed, the captured file can be analyzed using an off-box tool such as Wireshark.

Capturing control-plane traffic, as described in the previous section, is straightforward and hardware-independent, unlike data-plane traffic capture, which is described in the Transit Traffic Capture section later in this document.

1.3.2 DDOS Attack Triggered Packet Capture

DDoS-related tickets are part of the daily routine for TAC engineers.

In most cases, the type of attack and its source can be identified offline by analyzing and correlating information from multiple network devices, such as firewalls and monitoring tools, along with their respective knobs and log files. However, attackers constantly find new ways to work around detection mechanisms, forcing network engineers to also find new ways to quickly and effectively detect ongoing attacks.

As an example, let's look at a case where a DDoS attack occurred intermittently, as if the attacker were deliberately operating within a time window too short to troubleshoot and confirm the attack while it was happening.

An on-box packet capture taken while the DDoS attack was in progress allowed us to identify the source of the attack and block it.

The procedure can be summarized in the following steps:

- Install a TAC-provided script on the relevant network devices.
- Wait for the incident to happen again. If so, the script will create a packet capture file (.pcap).
- The .pcap file is transferred to TAC for analysis, or to a separate machine to be analyzed by the customer using applications like Wireshark
- The source of the attack is identified, and appropriate action is taken to block it.

The procedure described above has many downsides:

- Manual: the steps involve manual file transfers
- Slow: the steps are time-consuming because they involve multiple parties. By nature, DDOS attacks must be quickly identified and blocked.
- Customer-dependent: not all customers are willing to install troubleshooting scripts on their production network during peak times. This is especially true with customers who are already irritated and stressed by the DDOS attack.

The alternate procedure we describe in this section is an attempt to address these concerns, in case of a DDOS attack that requires on-box packet captures. It proposes an automation framework to reduce response latency and establish a reusable model for future automated incidence response.

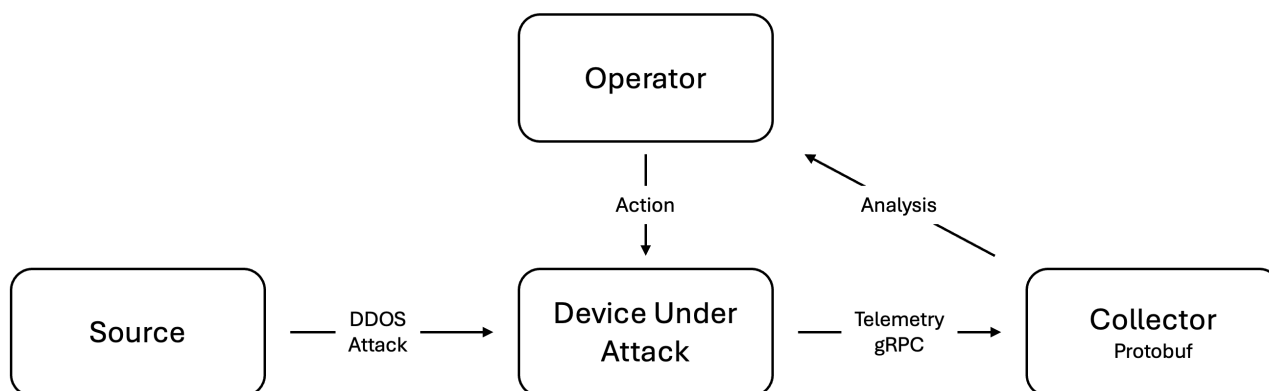


Figure 2: DDOS-Attack-Triggered-Packet-Capture

The framework described above requires network devices to be pre-configured to securely stream DDOS-protection statistics to collectors in a publisher-subscriber model.

The first important building block of this framework is the DDOS attack component. The algorithm uses the underlying Broadcom's pre-configured ASIC queue thresholds that define DDOS attacks. The software monitors these thresholds and reports the violating flows to upper layers that can act on them.

In our case, the action is to capture packets for a period of time (default is 5 seconds with a maximum of 5,000 packets) and send them to the collector via a pre-defined sensor under the HPE-Juniper native data model.

```
1 /junos/system/linecard/packet-capture
```

The output below shows the list of queues and their respective thresholds

```

1 {master:0}
2 root@qfx5120> request pfe execute target fpc0 command "show halp-pkt asic-queue"
3 SENT: Ukern command: show halp-pkt asic-queue
4 -----
5 CMICQ Channel bwidth burst Qlen Proto(s)
6 -----
7 0 3 500 10 200 uncls
8 4 1 4000 200 200 vchassis-unclassified
9 5 3 500 200 200 overlay-arp
10 6 3 500 200 200 overlay-ndpv6
11 7 3 500 200 200 vxlan
12 8 3 1500 200 200 localnh
13 9 3 1000 200 200 vcipc-udp
14 10 3 2000 200 200 sample-source
15 11 3 2000 200 200 sample-dest
16 12 3 50 10 200 l3mtu-fail,ttl,ip-opt
17 14 3 100 10 200 garp-reply
18 15 3 500 10 200 fw-host
19 16 3 500 200 200 ndpv6
20 17 3 1000 200 200 dhcpv4v6
21 19 3 1500 200 200 ipmc-reserved
22 20 3 300 200 200 resolve
23 21 3 100 10 200 l3dest-miss
24 22 3 100 10 200 redirect
25 23 3 300 200 200 l3nhop
26 24 3 100 10 200 l3mc-sgvhit-icl
27 25 3 50 10 200 martian-address
28 26 3 1000 200 200 l2pt
29 27 3 50 10 200 urpf-fail
30 28 3 1000 300 300 ipmcast-miss
31 29 2 300 10 200 nonucast-switch
32 30 2 3000 200 200 rsvp,ldp,bgp
33 31 2 3000 200 200 unknown-l2mc,rip,ospf
34 32 2 1000 200 200 fip-snooping,--non-exist--
35 33 2 1000 200 200 igmp
36 34 2 500 200 200 arp
37 35 2 1500 200 200 pim-data
38 36 2 1500 200 200 ospf-hello
39 37 2 1500 200 200 pim-ctrl

```

```

40      38 2 2000 200 200 isis
41      39 1 250 200 200 lacp
42      40 1 1200 200 200 bfd
43      41 1 100 10 200 ntp
44      42 1 500 200 200 vchassis-aggregate
45      43 1 1000 200 200 stp,pvstp,lldp
46 {master:0}
47 root@qfx5120>

```

For demonstration purposes, we simulated a DDoS attack by sending an excessive number of valid ARP requests. Given that the predefined threshold is 500 frames per second, we triggered the ARP DDoS attack condition by sending valid ARP packets at 1 kpps from a traffic generator.

The second important building block of this framework is the telemetry component.

Establishing a secure SSL connection between the network device and the collector involves multiple steps and is out of the scope. For lab purposes, and to keep this paper focused on the topic of packet capture, we will use the following configuration with an insecure clear-text connection.

Do not use such an insecure connection in production environments.

```

1 set system services extension-service request-response grpc clear-text address 0.0.0.0
2 set system services extension-service request-response grpc clear-text port <Port_Number>
3 set system services extension-service request-response grpc max-connections 30
4 set system services extension-service request-response grpc skip-authentication

```

We also need to enter the following operational commands to trigger logging in the event of a DDoS attack. Note that these commands are ephemeral so they will not persist across reboots.

```

1 {master:0}
2 root@qfx5120> request pfe execute target fpc0 command "show ukern_trace handles" | grep BRCM_PKT
3 17 BRCM_PKT none Off On 1048576 3 -
4
5 {master:0}
6 root@qfx5120>

```

```

1 {master:0}
2 root@qfx5120> request pfe execute target fpc0 command "set ukern_trace 17 file-logging enable"
3 SENT: Ukern command: set ukern_trace 17 logging enable
4 {master:0}
5 root@qfx5120>

```

```

1 {master:0}
2 root@qfx5120> request pfe execute target fpc0 command "set ukern_trace 17 logging enable"
3 SENT: Ukern command: set ukern_trace 17 logging enable
4 {master:0}
5 root@qfx5120>

```

The collector must subscribe as a client to the above-mentioned sensor to receive captured packets. In our example here, this is done with the below command over the unsecure connection

```

1 root@server:~# gnmic --insecure --address <DUT_IP> --port <Port_Number> --username <Username> --
  password <Password> subscribe --path '/junos/system/linecard/packet-capture' --mode stream
  --format json
2 {
3   "sync-response": true
4 }

```

The highlighted lines show that the connection is established successfully from the collector perspective, but we can verify the same from the DUT side as well by using the following commands:

```

1 {master:0}
2 root@qfx5120> show agent sensors
3 <snip>
4 Sensor Information :
5   Name : sensor_1005
6   Resource : /junos/system/linecard/packet-capture/
7   Version : 1.0

```

```
8   Sensor-id : 539528118
9   Subscription-ID : 1005
10  Parent-Sensor-Name : Not applicable
11  Component(s) : PFE
12  Profile Information :
13      Name : export_1005
14      Reporting-interval : 30
15      Payload-size : 5000
16      Format : JSON
17  {master:0}
18  root@qfx5120>
```

```
1  {master:0}
2  root@qfx5120> show system connections | match 57400
3  tcp4 0 0 10.92.71.182.57400 10.92.71.98.37792 ESTABLISHED
4  tcp46 0 0 *.57400 *.* LISTEN
5
6  {master:0}
7  root@qfx5120>
```

```
1  {master:0}
2  root@qfx5120> show extension-service request-response clients
3  Client ID Socket Address Client Type Client
4  Login Time (UTC) Channel Count
5  mgd-api unix::35 gRPC No Login Time 0
6
7  unix::40 unix::40 gRPC No Login Time 1
8
9  unix::41 unix::41 gRPC No Login Time 1
10
11 ipv6:::ffff:10.92.71.98:59102 ipv6:::ffff:10.92.71.98:59102 gRPC Mon Jun 29 01:42:55 2026 1
12
13 {master:0}
14 root@qfx5120>
```

```
1  {master:0}
2  root@qfx5120> show extension-service request-response clients detail
3  Channel information:
4      Client ID: mgd-api
5      Socket Address: unix::35
6      Client Type: gRPC
7      Channel Count: 0
8      Client Login Time (UTC): No Login Time
9      Client ID: unix::40
10     Socket Address: unix::40
11     Client Type: gRPC
12     Channel Count: 1
13     Client Login Time (UTC): No Login Time
14     Channel target: unix:/var/run/japi_na-grpcd
15     Channel status: GRPC_CHANNEL_READY
16     User name: No User
17
18  Channel information:
19     Client ID: unix::41
20     Socket Address: unix::41
21     Client Type: gRPC
22     Channel Count: 1
23     Client Login Time (UTC): No Login Time
24     Channel target: unix:/var/run/japi_na-grpcd
25     Channel status: GRPC_CHANNEL_READY
26     User name: No User
27
28  Channel information:
29     Client ID: ipv6:::ffff:10.92.71.98:59102
30     Socket Address: ipv6:::ffff:10.92.71.98:59102
31     Client Type: gRPC
32     Channel Count: 1
33     Client Login Time (UTC): Mon Jun 29 01:42:55 2026
34     Channel target: unix:/var/run/japi_na-grpcd
35     Channel status: GRPC_CHANNEL_READY
36     User name: root
37  {master:0}
38  root@qfx5120>
```

```
1  {master:0}
2  root@qfx5120> show extension-service request-response servers
3  gRPC server information:
4      Max connections: 8, Skip-authentication: Enabled
```

```

5
6   Address: 0.0.0.0, Port: 57400
7   Status: Up, Type: Clear-text
8
9   Address: unix:/var/run/japi_jsd
10  Status: Up, Type: Clear-text
11
12 {master:0}
13 root@qfx5120>

```

```

1 {master:0}
2 root@qfx5120> show ephemeral-configuration instance junos-analytics
3 ## Last changed: 2026-06-29 01:42:57 UTC
4 services {
5   analytics {
6     <snip>
7     export-profile export_1011 {
8       format json-gnmi; ## Warning: 'format' is deprecated
9       transport grpc; ## Warning: 'transport' is deprecated
10    }
11    <snip>
12    sensor sensor_1011 {
13      export-name export_1011;
14      resource /junos/system/linecard/packet-capture/;
15      subscription-id 1011;
16      reporting-rate 30;
17      end-of-sync-identifiers 8;
18      target-defined;
19      life-time long-lived;
20    }
21  }
22 }
23
24 {master:0}
25 root@qfx5120>

```

Now that we verified that the setup is configured properly and is operationally ready, we can start testing if it handles a DDOS attack properly by capturing the appropriate packets and sending them to the collector.

First, let's verify that no DDOS attack is present before starting the simulation:

```

1 {master:0}
2 root@qfx5120> show ddos-protection protocols violations
3 Packet types: 47, Currently violated: 0
4
5 {master:0}
6 root@qfx5120>

```

```

1 {master:0}
2 root@qfx5120> show ddos-protection protocols statistics terse
3 Packet types: 47, Received traffic: 4, Currently violated: 0
4
5 Protocol Packet Received Dropped Rate Violation State
6 group type (packets) (packets) (pps) counts
7 stp aggregate 58 0 1 0 ok
8 lldp aggregate 58 0 1 0 ok
9 arp aggregate 1 0 0 0 ok
10 pvstp aggregate 58 0 1 0 ok
11
12 {master:0}
13 root@qfx5120>

```

Given that we're using a lab environment as a POC, we do not have a real telemetry collector. Instead, we will capture specific packets on the server acting as collector and process them manually. To that end, we can capture the relevant telemetry packets on the collector by using the following tcpdump command and writing the captured packets into a file.

```

1 root@server:~# tcpdump -i ens9f0 'port 57400' -w My_DDOS_Packet_Capture
2 tcpdump: listening on ens9f0, link-type EN10MB (Ethernet), snapshot length 262144 bytes

```

We now start the simulated ARP DDOS attack on the traffic generator and verify if it is detected properly.

```

1 {master:0}
2 root@qfx5120> show ddos-protection protocols violations
3 Packet types: 47, Currently violated: 1
4 Protocol Packet Bandwidth Arrival Peak Policer bandwidth
5 group type (pps) rate(pps) rate(pps) violation detected at
6 arp aggregate 500 999 1000 2026-06-29 02:49:11 UTC
7   Detected on: FPC-0
8 {master:0}
9 root@qfx5120>

```

```

1 {master:0}
2 root@qfx5120> show ddos-protection protocols statistics terse
3 Packet types: 47, Received traffic: 4, Currently violated: 1
4 Protocol Packet Received Dropped Rate Violation State
5 group type (packets) (packets) (pps) counts
6 stp aggregate 1637 0 2 0 ok
7 lldp aggregate 1637 0 2 0 ok
8 arp aggregate 49035 19715 1001 1 viol
9 pvstp aggregate 1637 0 2 0 ok
10 {master:0}
11 root@qfx5120>

```

We can see from the above outputs that the DDOS attack has been detected properly. We can now stop the tcpdump packet capture on the collector and start analyzing the file.

Given that the captured packets are in Protobuf format, we found that Wireshark cannot analyze the file without additional tweaks. We used an AI-generated Python script to convert the Protobuf file into a .pcap file, which we then analyzed with Wireshark or directly on-box using tcpdump .

The output below shows an AI-generated Python script that does the Protobuf to pcap conversion.

```

1 root@server:~# cat protobuf-to-pcap.py
2 #!/usr/bin/env python3
3
4 from scapy.all import rdpcap, wrpcap, Ether
5 import re
6 import sys
7
8 def extract_embedded_packets(input_pcap, output_pcap):
9     """
10     Read a PCAP file, search payloads for ASCII hex-encoded Ethernet frames,
11     reconstruct packets, and write them into a new PCAP file.
12     """
13     # Match long sequences of hex bytes:
14     # Example:
15     # ff ff ff ff ff 64 c3 d6 60 76 00 08 00 ...
16     hex_pattern = re.compile(
17         rb'((?:[0-9a-fA-F]{2}[\s:.-?]){20,})'
18     )
19
20     packets = rdpcap(input_pcap)
21     extracted_packets = []
22
23     for pkt in packets:
24         raw_data = bytes(pkt)
25         matches = hex_pattern.findall(raw_data)
26         for match in matches:
27             try:
28                 # Decode ASCII bytes
29                 hex_string = match.decode("ascii", errors="ignore")
30
31                 # Remove separators/spaces
32                 cleaned = re.sub(r'^0-9a-fA-F|', '', hex_string)
33
34                 # Must be even-length hex
35                 if len(cleaned) % 2 != 0:
36                     continue
37
38                 packet_bytes = bytes.fromhex(cleaned)
39
40                 # Minimum Ethernet frame header
41                 if len(packet_bytes) < 14:
42                     continue
43
44                 # Create Ethernet packet
45                 ether_pkt = Ether(packet_bytes)

```

```

46         extracted_packets.append(ether_pkt)
47
48     except Exception as e:
49         print(f"Skipping invalid match: {e}")
50
51     if not extracted_packets:
52         print("No embedded packets found.")
53         return
54
55     wrpcap(output_pcap, extracted_packets)
56
57     print(f"Extracted {len(extracted_packets)} packets")
58     print(f"New PCAP written to: {output_pcap}")
59
60
61 def main():
62     if len(sys.argv) != 3:
63         print("Usage:")
64         print(f" {sys.argv[0]} <input.pcap> <output.pcap>")
65         sys.exit(1)
66
67     input_pcap = sys.argv[1]
68     output_pcap = sys.argv[2]
69     extract_embedded_packets(input_pcap, output_pcap)
70
71 if __name__ == "__main__":
72     main()
73
74 root@server:~#

```

We used the above script to convert the captured file from ProtoBuf to pcap, as shown below:

```

1 root@server:~# python3 protobuf-to-pcap.py My_DDOS_Packet_Capture My_DDOS_Packet_Capture.pcap
2 Extracted 2549 packets
3 New PCAP written to: My_DDOS_Packet_Capture.pcap
4 root@server:~#

```

Then we analyzed the pcap file with tcpdump

```

1 root@server:~# tcpdump -r My_DDOS_Packet_Capture.pcap -c 100
2 reading from file My_DDOS_Packet_Capture.pcap, link-type EN10MB (Ethernet), snapshot length
   65535
3 03:10:21.660046 LLDP, length 357: dc-tme-qfx5120-03.englab.juniper.net
4 <snip>
5 03:10:21.664622 ARP, Request who-has 192.85.2.1 tell 192.85.2.2, length 110
6 03:10:21.664921 ARP, Request who-has 192.85.2.1 tell 192.85.2.2, length 110
7 03:10:21.665169 ARP, Request who-has 192.85.2.1 tell 192.85.2.2, length 110
8 <snip>
9 root@server:~#

```

The source of the DDoS attack is now clearly identified from the output as 192.85.2.2. This device is sending ARP requests approximately 3 times per second.

1.3.3 Interface State Transition Triggered Packet Capture

Supported QFX Models: QFX5130-32CD, QFX5130E-32CD, QFX5130-48C, QFX5700, QFX5230-64CD, QFX5240-64OD, and QFX5240-64QD

Software Release: Junos: 23.4X100-D40-EVO onward

A recurring troubleshooting scenario involves statistical discrepancies on point-to-point links between directly connected routers or switches. Specifically, the transmitted packet counter reported on one device may not match the received packet counter reported on its peer — for the same packet flow, across the same physical link. The counters on either side of the link appear to tell contradictory stories about the same traffic, which can obscure the true source of packet loss and complicate fault isolation. The packet capture feature described in this section records a configurable number of host-bound packets per physical interface and exports them to an external collector using the Junos Telemetry Interface (JTI). This capability provides

engineers with direct visibility into ingress traffic at the interface level, enabling efficient root-cause analysis of network and performance issues without the need for external capture infrastructure.

Upon each interface transition from the DOWN state to the UP state, the device automatically captures the first 50 ingress packets received on that interface. Captured data is encoded in Google Protocol Buffer (GPB) format and streamed to the configured collector over gRPC with SSL encryption, ensuring both efficiency and transport-layer security.

To receive packet capture data, the collector needs to subscribe to the following JTI sensor path: `/junos/system/linecard/packet-capture`.

To illustrate how this feature works, we will use the following POC setup

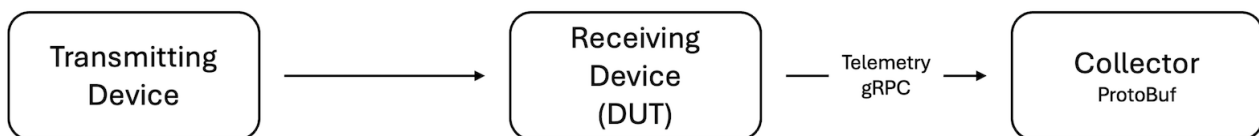


Figure 3: Interface

As described in the previous section, which also uses a ProtoBuf Collector, it's important to make sure that this building block is configured and ready for secure or insecure collection of telemetry records.

Please follow the same instructions for configuration and verification as described in the previous section.

Also, the CLI command below must be added to the DUT

```
1 set system packet-forwarding-options packet-capture packet-capture-enable
```

After we verify that the setup is configured properly and is operationally ready, we can start testing.

We start by shutting down the ingress interface on the DUT, then start packet capture on the ProtoBuf Collector with tcpdump and saving into a file.

```
1 root@server:~# tcpdump -i ens9f0 host 10.92.74.57 -w rh-packet-capture
```

Then we bring the same interface back up and wait for a few seconds, until all protocols are stabilized, then stop the capture. At this point, we have a ProtoBuf packet file saved into the collector.

In a production environment, this packet capture would be analyzed in real time, but in our POC setup, we can process this file and convert it into a .pcap file by using the same Python script mentioned in a previous section.

By using this script, we can process the captured packets and write them into a .pcap file

```
1 root@server:~# python3 protobuf-to-pcap.py if-packet-capture if-packet-capture.pcap
2 Extracted 50 packets
3 New PCAP written to: if-packet-capture.pcap
4 root@server:~#
```

Then the .pcap file is analyzed with Wireshark

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	JuniperNetwo_ef:11...	Nearest-Bridge	LLDP	128	MA/2c:4c:15:ef:14:45 IN/et-0/0/8 120 SysN=dc-tme-qfx5
2	0.000187	JuniperNetwo_ef:11...	Nearest-Bridge	LLDP	128	MA/2c:4c:15:ef:14:45 IN/et-0/0/8 120 SysN=dc-tme-qfx5
3	0.000465	192.168.1.0	192.168.1.1	TCP	78	58654 → 179 [SYN] Seq=0 Win=32120 Len=0 MSS=1460 SAC
4	0.000710	192.168.1.0	192.168.1.1	TCP	128	58654 → 179 [PSH, ACK] Seq=1 Ack=1 Win=32120 Len=58 1
5	0.000975	192.168.1.0	192.168.1.1	TCP	70	[TCP Previous segment not captured] 58654 → 179 [ACK
6	0.001195	JuniperNetwo_ef:11...	Nearest-Bridge	LLDP	128	MA/2c:4c:15:ef:14:45 IN/et-0/0/8 120 SysN=dc-tme-qfx5
7	0.001363	JuniperNetwo_ef:11...	Nearest-Bridge	LLDP	128	MA/2c:4c:15:ef:14:45 IN/et-0/0/8 120 SysN=dc-tme-qfx5
8	0.001520	192.168.1.0	192.168.1.1	BGP	89	KEEPALIVE Message
9	0.001753	192.168.1.0	192.168.1.1	TCP	70	58654 → 179 [ACK] Seq=83 Ack=87 Win=32034 Len=0 TSva1
10	0.001980	192.168.1.0	192.168.1.1	BGP	128	UPDATE Message
11	0.002248	192.168.1.0	192.168.1.1	TCP	70	[TCP Previous segment not captured] 58654 → 179 [ACK
12	0.002452	203.0.113.4	203.0.113.5	BFD Control	70	Diag: Control Detection Time Expired, State: Init, Fl
13	0.002777	JuniperNetwo_ef:11...	Nearest-Bridge	LLDP	128	MA/2c:4c:15:ef:14:45 IN/et-0/0/8 120 SysN=dc-tme-qfx5
14	0.002910	203.0.113.4	203.0.113.5	BFD Control	70	Diag: No Diagnostic, State: Up, Flags: 0x08
15	0.003196	203.0.113.4	203.0.113.5	BFD Control	70	Diag: No Diagnostic, State: Up, Flags: 0x18
16	0.003485	203.0.113.4	203.0.113.5	BFD Control	70	Diag: No Diagnostic, State: Up, Flags: 0x28

Figure 4: Wireshark Capture Analysis

This Wireshark screenshot lists all control plane packets captured right after the interface transitioned from “DOWN” to “UP”.

1.4 Transit Traffic Capture

1.4.1 QFX Running Junos OS Evolved

To capture transit traffic on a QFX running Junos OS Evolved, follow these steps:

Configure a firewall filter with action log or syslog

```
1 set firewall family inet filter MyFilter term 1 from protocol icmp
2 set firewall family inet filter MyFilter term 1 then log
```

Attach the filter on the input of the interface where traffic is to be captured. Note that transit traffic can be captured on ingress only, as the actions log and syslog are not supported on egress.

```
1 set interfaces et-0/0/0 unit 0 family inet filter input MyFilter
2 set interfaces et-0/0/0 unit 0 family inet address 192.168.3.1/31
```

While traffic is running, run the provided Python script from the shell to start the packet capture. The output below shows the available arguments of this script

```
1 [vrf:none] root@qfx5130:~# start_pcap.py -h
2 usage: start_pcap.py [-h] [-n NUM_PACKETS] [-m MAX_RUN_TIME]
3
4 Specifications.
5
6 optional arguments:
7   -h, --help show this help message and exit
8   -n NUM_PACKETS, --num_packets NUM_PACKETS
9                     Maximum packets to captured(1000)
10  -m MAX_RUN_TIME, --max_run_time MAX_RUN_TIME
11                     Maximum run time in seconds(2..60)
12 [vrf:none] root@qfx5130:~#
```

For example

```
1 [vrf:none] root@qfx5130:~# start_pcap.py -n 10
2 Starting packet capture
3 Script execution completed successfully.
4 [vrf:none] root@qfx5130:~#
```

You should find a .pcap file under /var/tmp/pcap. The file name is generated automatically as is a the combination of the interface name and a timestamp, as shown below

```

1 root@qfx5130> file list /var/tmp/pcap/ detail | grep pcap
2 /var/tmp/pcap/:
3 -rw-r--r-- 1 root root 1204 Jul 4 13:19 et_0_0_0_20260704_131935.pcap
4
5 root@qfx5130>

```

You can analyze the file locally or export it and analyze it with a tool like Wireshark.

```

1 root@qfx5130> monitor traffic read-file /var/tmp/pcap/et_0_0_0_20260704_131935.pcap
2 reading from file /var/tmp/pcap/et_0_0_0_20260704_131935.pcap, link-type EN10MB (Ethernet)
3
4 13:19:24.559092 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 15, length 64
5 13:19:25.606870 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 16, length 64
6 13:19:26.630809 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 17, length 64
7 13:19:27.655982 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 18, length 64
8 13:19:28.656884 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 19, length 64
9 13:19:29.657333 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 20, length 64
10 13:19:30.658392 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 21, length 64
11 13:19:31.658960 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 22, length 64
12 13:19:32.660023 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 23, length 64
13 13:19:33.661005 IP 192.168.3.0 > 192.168.1.0: ICMP echo reply, id 7558, seq 24, length 64
14
15 root@qfx5130>

```

1.4.2 QFX Running Junos OS

The feature described in this section is supported on QFX5110 and QFX5120 models running Junos OS Release 24.4R1 onward.

This packet capture feature is based on the implementation described in the figure below




Figure 5: Steps of Packet Capture on QFX running Junos OS

QFX platforms running Junos OS have the capability of on-box transit packet capturing from the operational mode, so there's no need to change the QFX configuration to use this capability.

This capability enables packet capturing on the ingress or egress ports of a QFX and supports filtering based on one or more packet header fields, depending on hardware capabilities. With this feature, operators can inspect live packet streams entering or leaving a device by executing a single CLI command, without relying on external capture infrastructure.

The following examples list the supported attributes per QFX model, alongside supported and unsupported combinations of attributes.

QFX5110, based on Broadcom Trident 2+ chipset

Single attribute: VLAN, DMAC, SMAC, DIPv4, and SIPv4

Double attribute: VLAN+DMAC and DIPv4+SIPv4

Triple attribute: VLAN+DMAC+SMAC

Note : VLAN+SMAC and DMAC+SMAC are not supported

QFX5120, based on Broadcom Trident 3 chipset

Single attribute: inner-SMAC, inner-DMAC, inner-SIPv4, inner-DIPv4, outer-DMAC, outer-SIPv4, outer-DIPv4, VLAN-ID, and VNID.

Double attribute: VLAN+Outer-DMAC, Outer-DIPv4+Outer-SIPv4

Triple attribute: VLAN+Outer-DMAC+Outer-SMAC

Note : outer-SMAC is not supported.

At least one of these attributes must be specified in the CLI command for the packet capture to be triggered. Also, the interface name and traffic direction ingress vs egress are mandatory in the CLI command.

Users have the option to save captured packets in PCAP format for offline analysis. With this feature, operators can inspect live packet streams entering or leaving a device by executing a single CLI command, without relying on external capture infrastructure.

The CLI supports packet capturing using either a single filter attribute or a combination of attributes. Certain attribute combinations are not supported on some platforms due to hardware constraints. Additionally, combinations of L2 and L3 attributes are not supported on any platform.

When the capture command is executed, a TCAM capture filter is installed in the PFE for a default duration of 5 minutes. This can be modified by the user with the CLI command below, between 5 and 60 minutes.

```
1 set services pfe traffic monitor-timer <time>
```

The filter will remain in place for the duration of the timer or until a new command is entered. However, if the user is executes the packet capture command before the timer expires, it might happen that the captured traffic matches the previously executed command. This is expected, and we recommend in this case running the same command a second time to clear the packets that are already in the kernel.

Below is an example of a valid CLI ingress packet capture command on a QFX5120

```
1 {master:0}
2 root@qfx5120> monitor pfe traffic interface et-0/0/48 outer-dmac 80:7f:f8:d2:02:95 ingress count
3 1
4 Action successful
5 verbose output suppressed, use <detail> or <extensive> for full protocol decode
6 Address resolution is ON. Use <no-resolve> to avoid any reverse lookup delay.
7 Address resolution timeout is 4s.
8 Listening on et-0/0/48, capture size 96 bytes
9
10 Reverse lookup for 192.168.100.1 failed (check DNS reachability).
11 Other reverse lookup failures will not be reported.
12 Use <no-resolve> to avoid reverse lookups on IP addresses.
13 15:53:12.648946 In IP truncated-ip - 28 bytes missing! 192.168.100.1 > 192.168.100.13: ICMP echo
14 request, id 59105, seq 14005, length 64
15 {master:0}
16 root@qfx5120>
```

Egress packet monitoring requires an additional, otherwise-unused interface, due to a hardware limitation that prevents true egress mirroring. To work around this constraint, the unused interface is configured with a soft loopback. When egress mirroring is enabled on the interface of interest, egressing packets are mirrored to the soft-loopback-enabled interface, where a filter is then applied using the desired match conditions.

For example, consider et-0/0/48 as the interface of interest, on which egress traffic is to be monitored, and et-0/0/50 as an unused interface configured with a soft loopback. Packets egressing et-0/0/48 are mirrored to et-0/0/50, where the filter is installed to capture the traffic matching the specified conditions.

The example shown below represents the above description for egress traffic capture.

```
1 {master:0}[edit]
2 root@qfx5120# set interfaces et-0/0/50 ether-options loopback
3
4 {master:0}[edit]
5 root@qfx5120# commit and-quit
6 configuration check succeeds
7 commit complete
8 Exiting configuration mode
9
10 {master:0}
11 root@qfx5120> monitor pfe traffic interface et-0/0/48 egress-interface et-0/0/50 outer-src-ipv4
    192.168.100.13 egress count 1 no-resolve
12 Action successful
13 verbose output suppressed, use <detail> or <extensive> for full protocol decode
14 Address resolution is OFF.
15 Listening on et-0/0/50, capture size 96 bytes
16
17 22:05:06.958404 In IP truncated-ip - 28 bytes missing! 192.168.100.13 > 192.168.100.1: ICMP echo
    reply, id 59105, seq 33779, length 64
18
19 {master:0}
20 root@qfx5120>
```

1.5 Conclusion

This paper walked through the range of on-box, temporary packet capture tools available on HPE-Juniper QFX switches, offering a lightweight alternative to permanent TAP or mirroring infrastructure for short-term troubleshooting.

Control-plane capture remains the simplest case, supported since Day-1 via the tcpdump-based monitor traffic command on both BSD-based Junos and Junos OS Evolved.

For more demanding scenarios, such as intermittent DDoS attacks, an automated telemetry framework built on ASIC queue threshold violations and JTI streaming allows packet data to reach a collector without manual intervention or customer-installed scripts.

A related mechanism captures the first ingress packets whenever an interface transitions from DOWN to UP, helping isolate counter mismatches between directly connected peers.

Transit traffic capture differs by OS: Junos OS Evolved relies on a firewall filter combined with a Python capture script, while classic Junos OS offers a native operational-mode command with rich header-based filtering.

Across all these methods, captured data can be reviewed on-box or exported as a .pcap file for deeper analysis in Wireshark. Where captures arrive in Protocol Buffer format, a conversion step is needed before standard packet analysis tools can be used.

Collectively, these mechanisms give engineers direct, on-demand visibility into both control-plane and data-plane behavior. This reduces reliance on external capture infrastructure and speeds up root-cause analysis for elusive, hard-to-reproduce network issues.

1.6 References

[1] TAP Aggregation for Network Observability <https://juniper.github.io/techpost/articles/tap-aggregation-for-network-observability/article/>)

1.7 Glossary

- ASIC : Application-Specific Integrated Circuit
- BGP : Border Gateway Protocol
- BFD : Bidirectional Forwarding Detection
- CLI : Command-Line Interface
- DDoS : Distributed Denial of Service
- FPC : Flexible PIC Concentrator
- GPB : Google Protocol Buffer
- JTI : Junos Telemetry Interface
- LACP : Link Aggregation Control Protocol
- LLDP : Link Layer Discovery Protocol
- NDP : Neighbor Discovery Protocol
- NTP : Network Time Protocol
- OSPF : Open Shortest Path First
- PCAP : Packet Capture (file format)
- PFE : Packet Forwarding Engine
- PIM : Protocol Independent Multicast
- PVSTP : Per-VLAN Spanning Tree Protocol
- RSVP : Resource Reservation Protocol
- SSL : Secure Sockets Layer
- STP : Spanning Tree Protocol
- TAC : Technical Assistance Center
- TAP : Test Access Point
- TCP : Transmission Control Protocol
- VLAN : Virtual Local Area Network
- VNID : VXLAN Network Identifier
- VRRP : Virtual Router Redundancy Protocol
- VXLAN : Virtual Extensible LAN