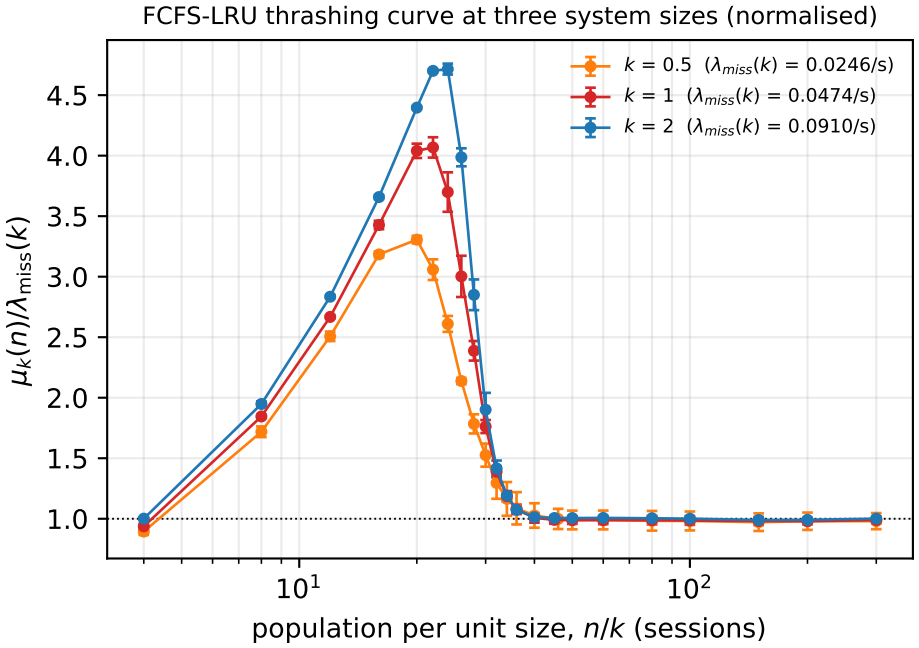
FCFS-LRU thrashing curve at three system sizes (normalised)
k = 0.5 ($\lambda_{miss}(k)$ = 0.0246/s)
k = 1 ($\lambda_{miss}(k)$ = 0.0474/s)
k = 2 ($\lambda_{miss}(k)$ = 0.0910/s)
$\mu_k(n)/\lambda_{\mathrm{miss}}(k)$
4.5
4.0
3.5
3.0
2.5
2.0
1.5
1.0
10^1
10^2
population per unit size, n/k (sessions)

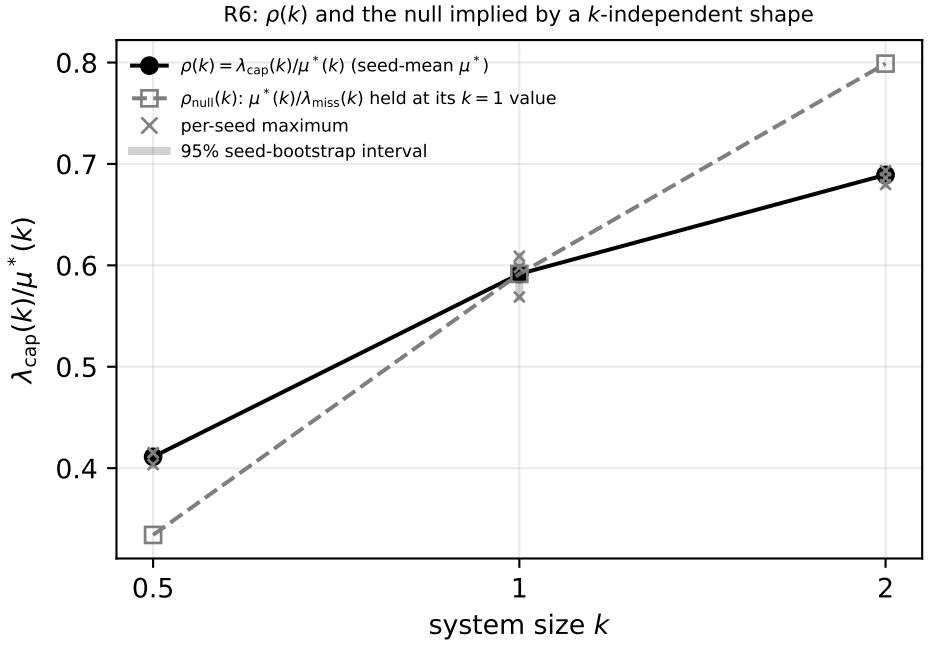
R6: $\rho(k)$ and the null implied by a k-independent shape
$\rho(k) = \lambda_{\mathrm{cap}}(k)/\mu^*(k)$ (seed-mean μ^*)
$\rho_{\mathrm{null}}(k)$: $\mu^*(k)/\lambda_{\mathrm{miss}}(k)$ held at its $k = 1$ value
per-seed maximum
95% seed-bootstrap interval
$\lambda_{\mathrm{cap}}(k)/\mu^*(k)$
0.8
0.7
0.6
0.5
0.4
0.5
1
2
system size k