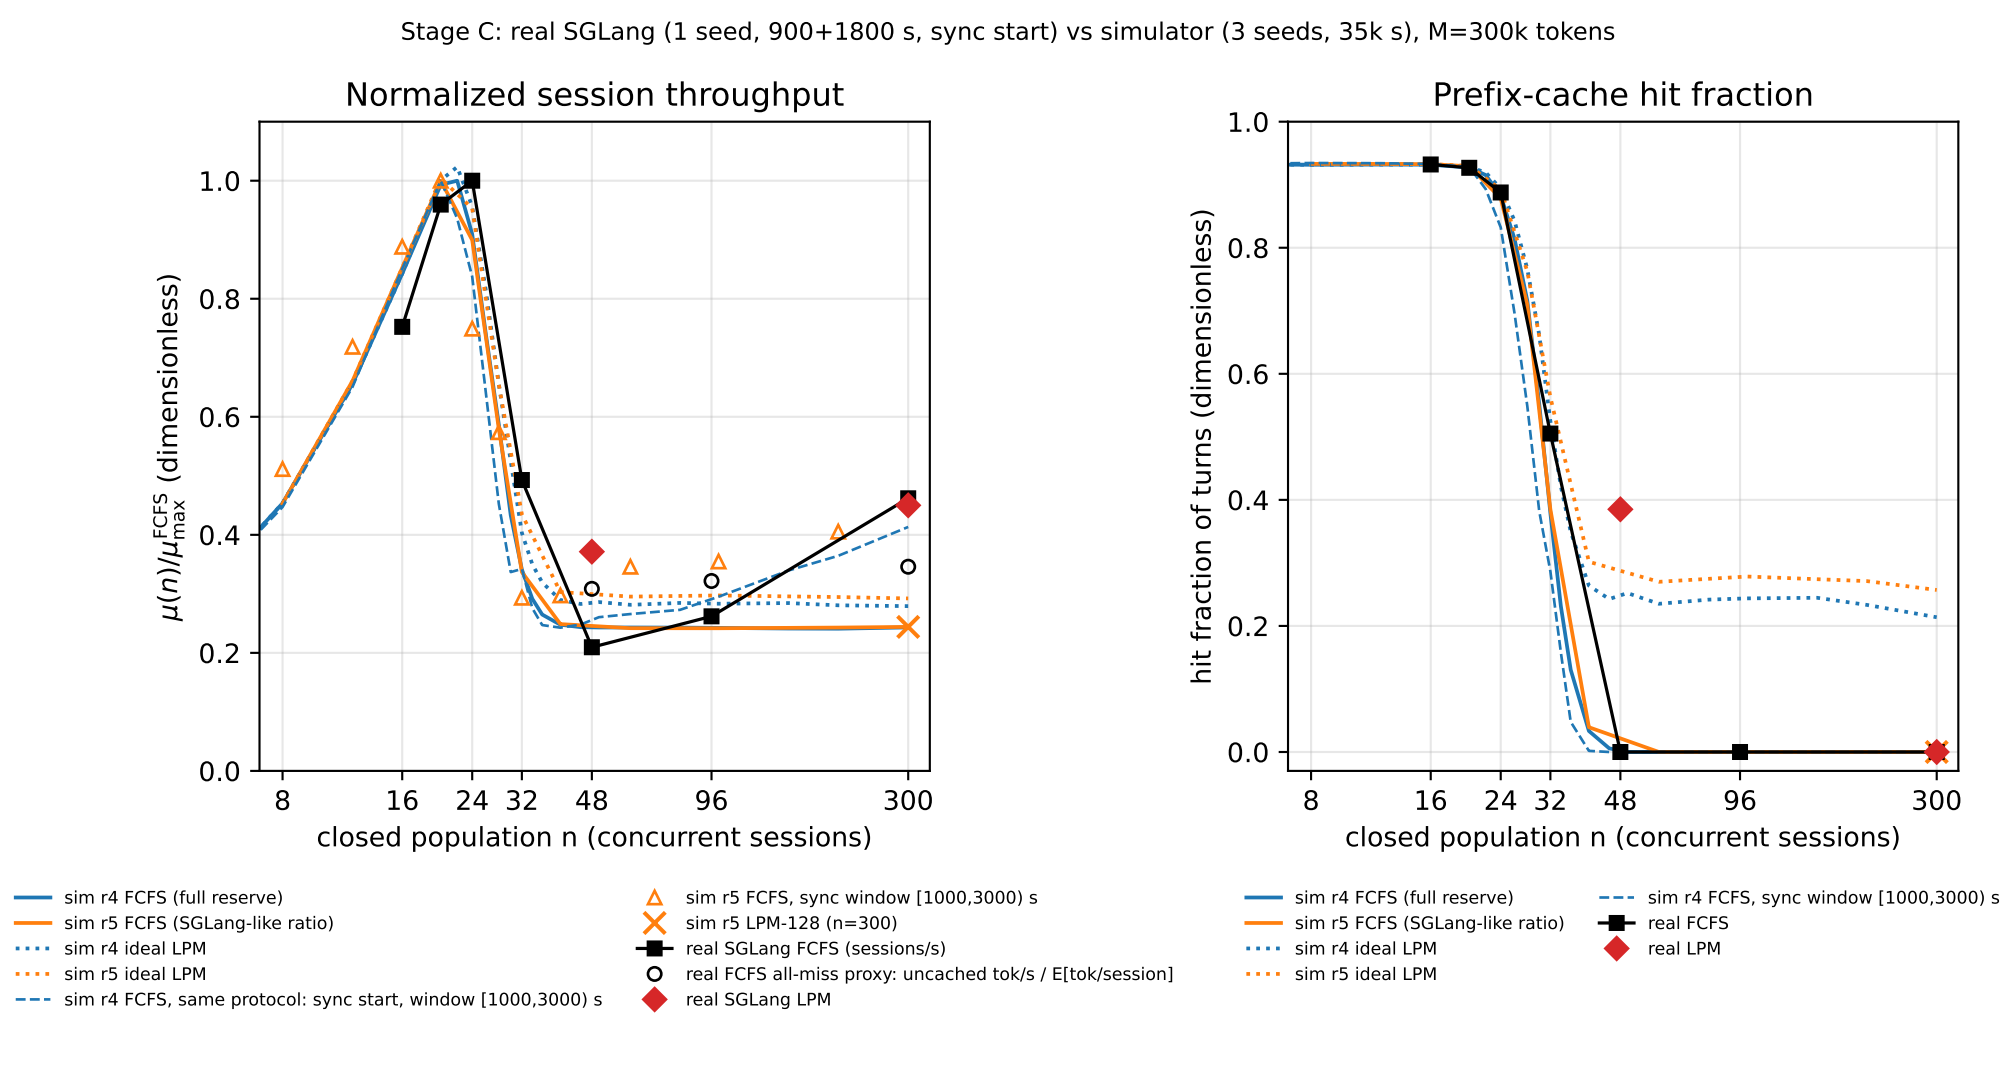
Stage C: real SGLang (1 seed, 900+1800 s, sync start) vs simulator (3 seeds, 35k s), M=300k tokens
Normalized session throughput
$\mu(n)/\mu_{max}^{FCFS}$ (dimensionless)
closed population n (concurrent sessions)
Prefix-cache hit fraction
hit fraction of turns (dimensionless)
closed population n (concurrent sessions)
sim r4 FCFS (full reserve)
sim r5 FCFS (SGLang-like ratio)
sim r4 ideal LPM
sim r5 ideal LPM
sim r4 FCFS, same protocol: sync start, window [1000,3000) s
sim r5 FCFS, sync window [1000,3000) s
sim r5 LPM-128 (n=300)
real SGLang FCFS (sessions/s)
real FCFS all-miss proxy: uncached tok/s / E[tok/session]
real SGLang LPM
sim r4 FCFS (full reserve)
sim r5 FCFS (SGLang-like ratio)
sim r4 ideal LPM
sim r5 ideal LPM
sim r4 FCFS, sync window [1000,3000) s
real FCFS
real LPM