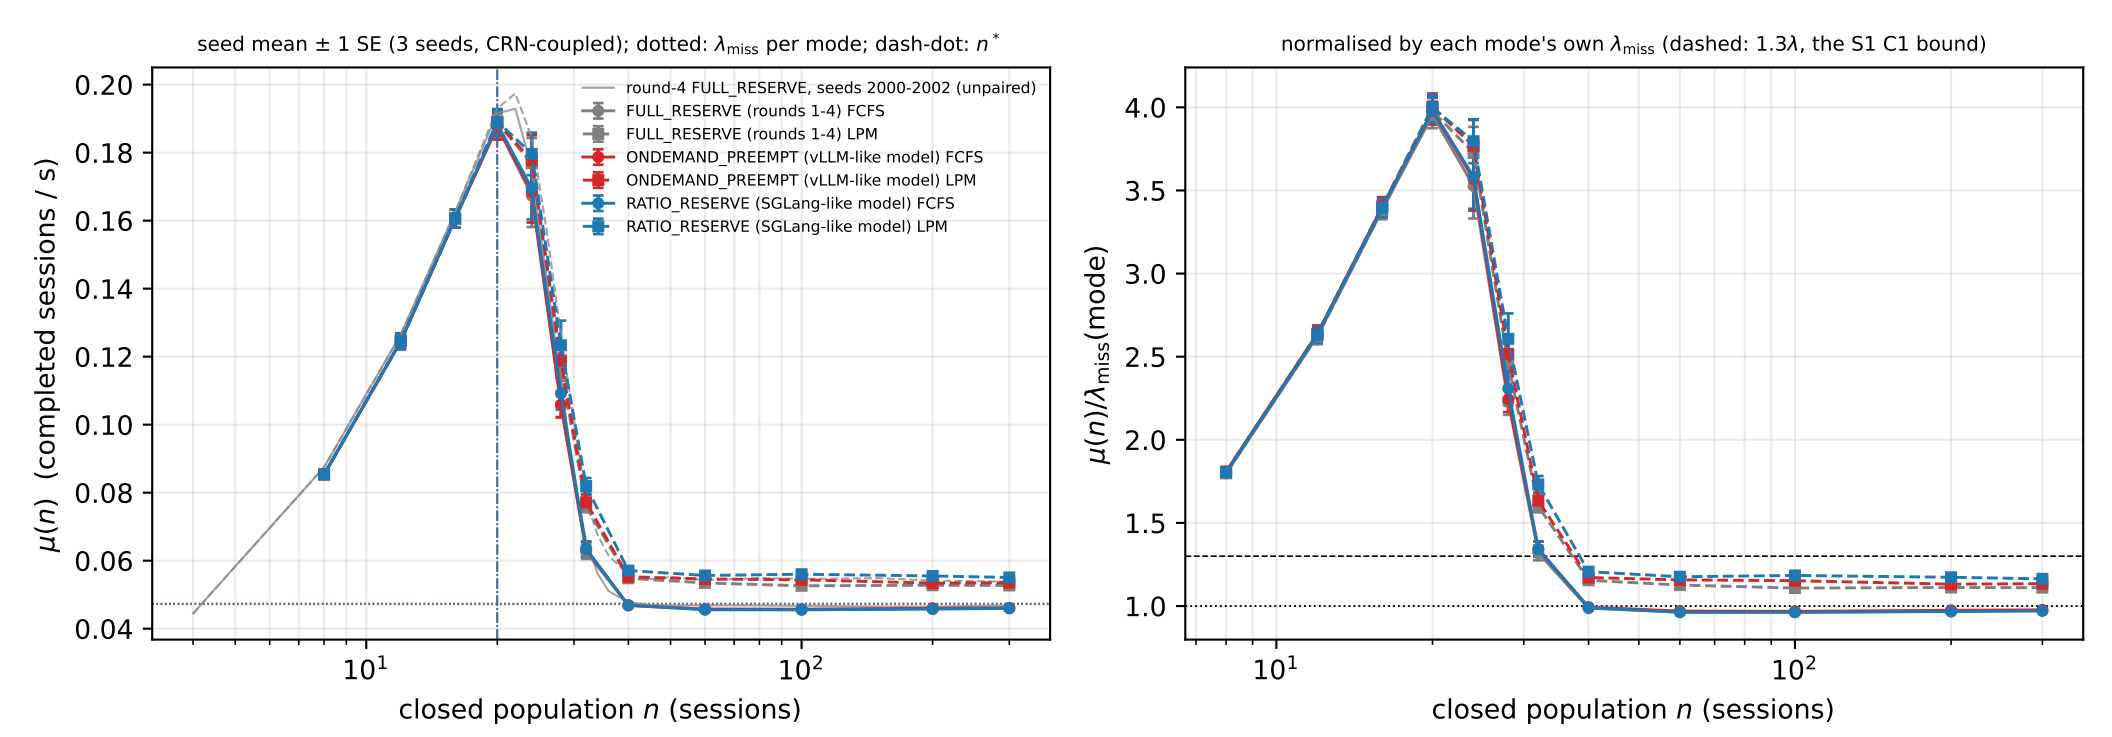
seed mean ± 1 SE (3 seeds, CRN-coupled); dotted: λ_{miss} per mode; dash-dot: n^*
round-4 FULL_RESERVE, seeds 2000-2002 (unpaired)
FULL_RESERVE (rounds 1-4) FCFS
FULL_RESERVE (rounds 1-4) LPM
ONDEMAND_PREEMPT (vLLM-like model) FCFS
ONDEMAND_PREEMPT (vLLM-like model) LPM
RATIO_RESERVE (SGLang-like model) FCFS
RATIO_RESERVE (SGLang-like model) LPM
$\mu(n)$ (completed sessions / s)
closed population n (sessions)
normalised by each mode's own λ_{miss} (dashed: 1.3λ, the S1 C1 bound)
$\mu(n)/\lambda_{miss}$(mode)
closed population n (sessions)