

Cucumber Report

08-Feb-2025, 12:56:22 pm

Start : Feb 08, 12:54:41.590 pm

End : Feb 08, 12:56:21.570 pm

Duration : 1 m 39.980 s

Features







PASSED - 1
FAILED - 1
SKIPPED - 0

Scenarios

PASSED - 7
FAILED - 1
SKIPPED - 0


Steps

PASSED - 48
FAILED - 1
SKIPPED - 1

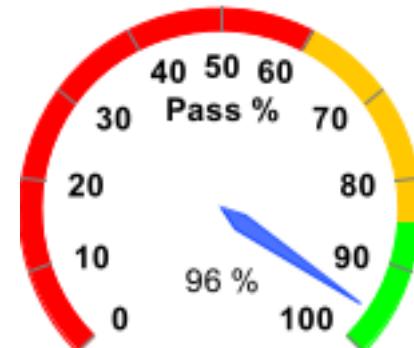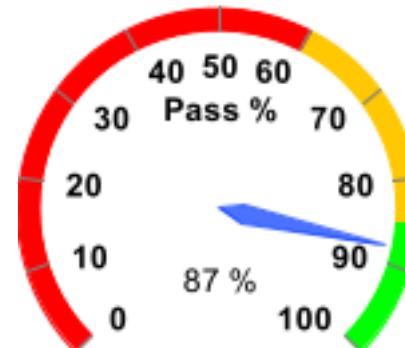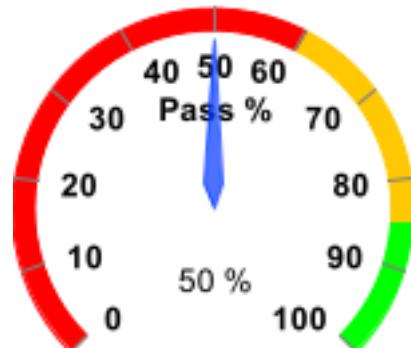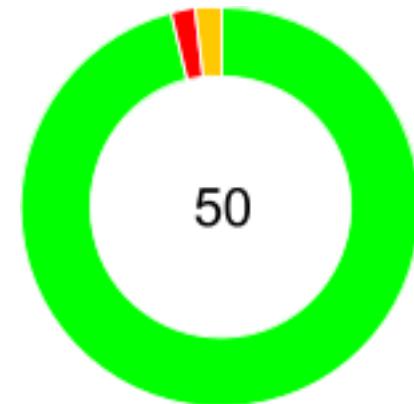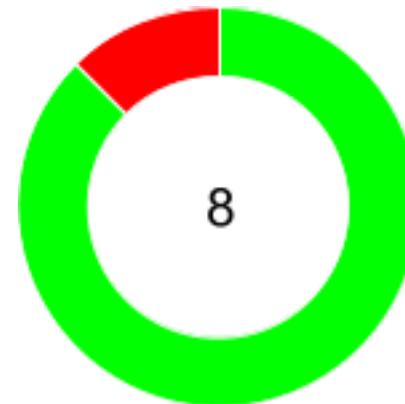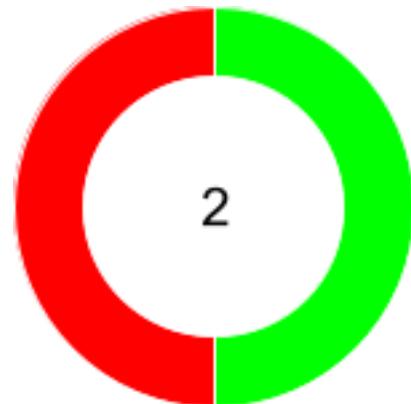






#	Feature Name	T	P	F	S	Duration
1	<u>Employee Module</u>	3	2	1	0	55.240 s
2	<u>Login and Logout Functionality</u>	5	5	0	0	44.710 s


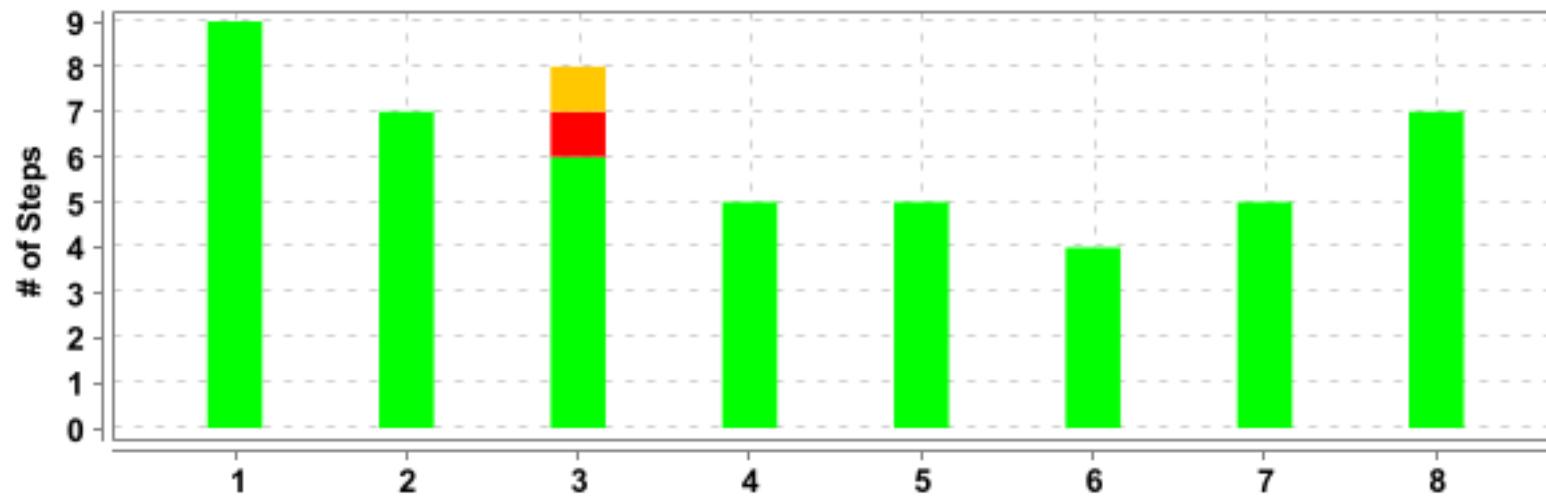



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Employee Module</u>	<u>Add Employee to the System</u>	9	9	0	0	23.607 s
2	<u>Employee Module</u>	<u>Search for an Employee</u>	7	7	0	0	10.967 s
3	<u>Employee Module</u>	<u>Delete an Employee</u>	8	6	1	1	20.621 s
4	<u>Login and Logout Functionality</u>	<u>Verify Successful Login</u>	5	5	0	0	8.120 s
5	<u>Login and Logout Functionality</u>	<u>Verify Login with Invalid Credentials</u>	5	5	0	0	7.681 s
6	<u>Login and Logout Functionality</u>	<u>Verify Login with Empty Fields</u>	4	4	0	0	6.448 s
7	<u>Login and Logout Functionality</u>	<u>Forgot Password Functionality</u>	5	5	0	0	12.497 s
8	<u>Login and Logout Functionality</u>	<u>Verify Logout Functionality</u>	7	7	0	0	9.910 s

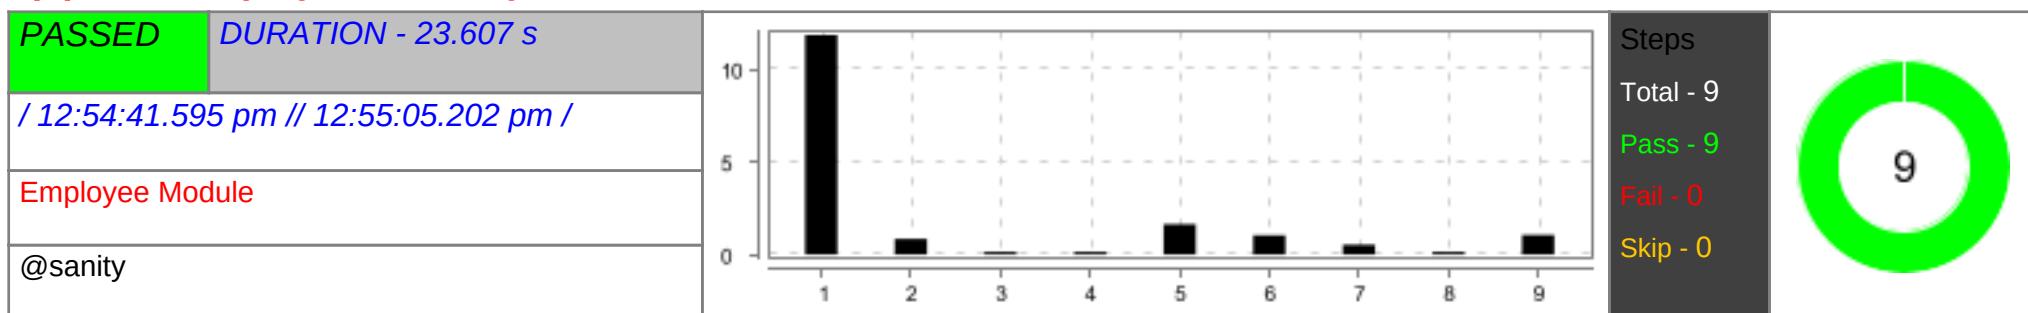(F)- Employee Module**(S)- Add Employee to the System**


#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System 	PASSED	11.842 s
2	And - And the user enters valid username "Admin" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System 	PASSED	0.838 s
3	And - And the user enters valid password "admin123"	PASSED	0.141 s


#	Step / Hook Details	Status	Duration
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System 	PASSED	0.168 s
4	And - And the user clicks on the Login button	PASSED	0.141 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System 	PASSED	1.286 s
5	When - When User navigates to "PIM" module	PASSED	1.643 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System 	PASSED	0.157 s
6	And - And Clicks on the "Add Employee" button	PASSED	1.036 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System 	PASSED	0.176 s
7	And - And Enters "John" as First Name, "Doe" as Last Name	PASSED	0.520 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Add_Employee_to_the_System	PASSED	0.232 s

#	Step / Hook Details	Status	Duration
			
8	And - And Clicks on Save	PASSED	0.142 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.202 s
	Add_Employee_to_the_System		
			
9	Then - Then Employee "John Doe" should be added successfully	PASSED	1.053 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.255 s
	Add_Employee_to_the_System		
			

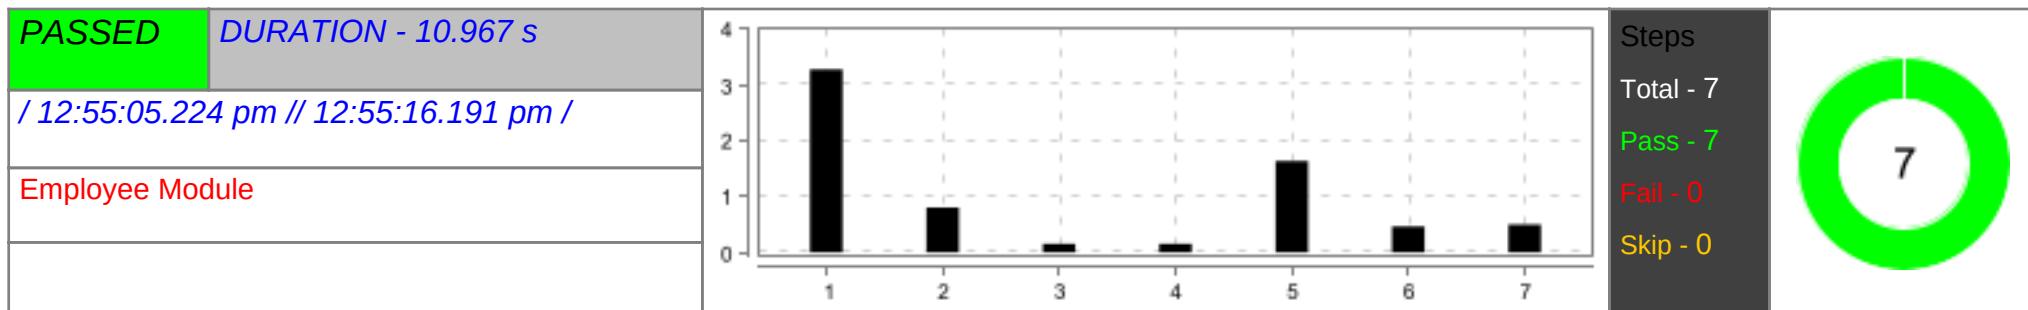
(S)- Search for an Employee


#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	3.278 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.142 s
	Search_for_an_Employee		



#	Step / Hook Details	Status	Duration
	+ 		
2	And - And the user enters valid username "Admin" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Search_for_an_Employee 	PASSED	0.804 s
3	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Search_for_an_Employee 	PASSED	0.153 s
4	And - And the user clicks on the Login button AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Search_for_an_Employee 	PASSED	0.153 s
5	When - When User navigates to "PIM" module AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Search_for_an_Employee 	PASSED	1.639 s
6	And - And Searches for Employee with name "John Doe" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.461 s

#	Step / Hook Details	Status	Duration
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Search_for_an_Employee  +	PASSED	0.198 s
7	Then - Then Employee details should be displayed	PASSED	0.498 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Search_for_an_Employee  +	PASSED	0.186 s

(S)- Delete an Employee

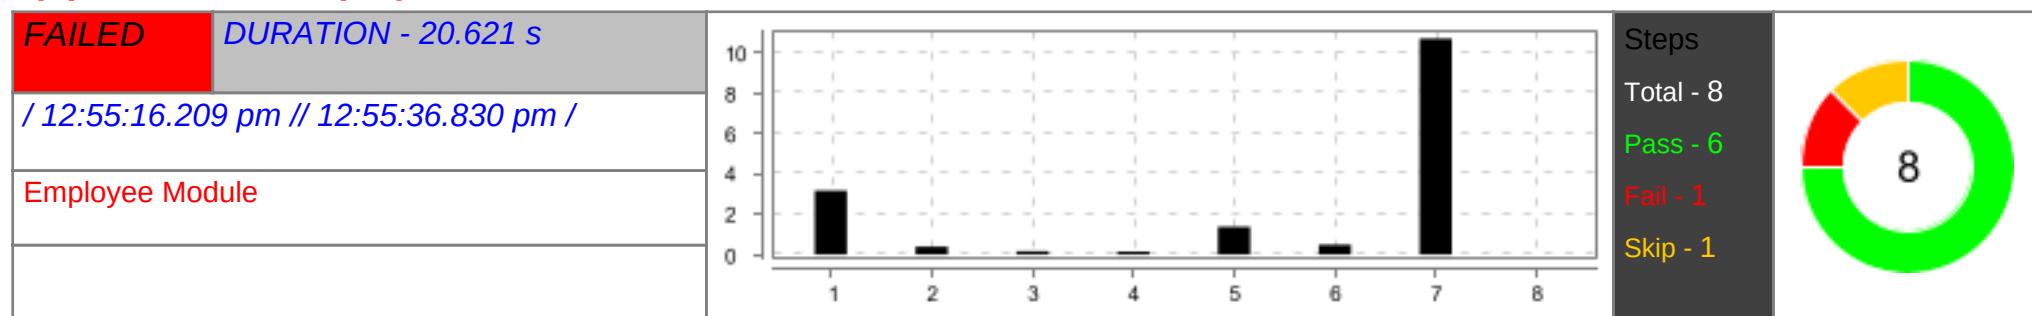

#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	3.161 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Delete_an_Employee  +	PASSED	0.156 s
2	And - And the user enters valid username "Admin"	PASSED	0.389 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.308 s

#	Step / Hook Details	Status	Duration
	Delete_an_Employee 		
3	And - And the user enters valid password "admin123"	PASSED	0.169 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.189 s
	Delete_an_Employee 		
4	And - And the user clicks on the Login button	PASSED	0.141 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	1.277 s
	Delete_an_Employee 		
5	When - When User navigates to "PIM" module	PASSED	1.370 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.158 s
	Delete_an_Employee 		
6	And - And Searches for Employee with name "John Doe"	PASSED	0.482 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.190 s
	Delete_an_Employee		


#	Step / Hook Details	Status	Duration
			
7	<p>And - And Clicks on the "Delete" button</p> <pre>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//button[contains(.,'Yes, Delete ')]"} (Session info: chrome=132.0.6834.160) For documentation on this error, please visit: https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'DESKTOP-NSKERIB', ip: '172.20.0.1', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 132.0.6834.160, chrome: {chromedriverVersion: 132.0.6834.159 (2d77d3fc445..., userDataDir: C:\Users\Admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:55241}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: ebbeec7930efd5517fe3f9b0a3e5f444 *** Element info: {Using>xpath, value=//button[contains(.,' Yes, Delete ')]}</pre> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323) at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428) at org.openqa.selenium.By\$ByXPath.findElement(By.java:353) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:69) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy22.click(Unknown Source) at pages.EmployeePage.clickOnDeletebtn(EmployeePage.java:72) at stepDefinitions.EmployeeStep.clicks_on_the_button(EmployeeStep.java:23) at ?.Clicks on the "Delete" button(file:///C:/Users/Admin/testAutomation/testAutomation/src/test/java/features/Employee.feature:26)</p> <p>* Not displayable characters are replaced by '?'.</p>	FAILED	10.673 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.208 s
	Delete_an_Employee		

#	Step / Hook Details	Status	Duration
	 +		
8	Then - Then Employee should be removed from the system	SKIPPED	0.002 s



(F)- Login and Logout Functionality


PASSED	DURATION - 44.710 s / 12:55:36.860 pm // 12:56:21.570 pm /	Scenarios Total - 5 Pass - 5 Fail - 0 Skip - 0	Steps Total - 26 Pass - 26 Fail - 0 Skip - 0
			

(S)- Verify Successful Login

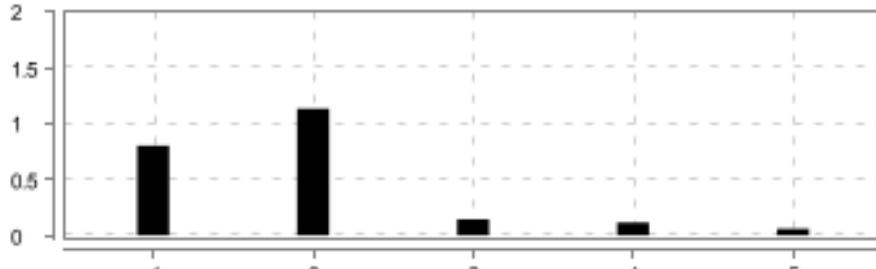PASSED	DURATION - 8.120 s / 12:55:36.860 pm // 12:55:44.980 pm / Login and Logout Functionality	Steps Total - 5 Pass - 5 Fail - 0 Skip - 0	
--------	--	--	---


#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	0.803 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	2.150 s
	Verify_Successful_Login		
			
2	When - When the user enters valid username "Admin"	PASSED	1.136 s

#	Step / Hook Details	Status	Duration
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Successful_Login 	PASSED	0.328 s
3	And - And the user enters valid password "admin123" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Successful_Login 	PASSED	0.143 s
4	And - And the user clicks on the Login button AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Successful_Login 	PASSED	0.114 s
5	Then - Then the user should be redirected to the Dashboard page AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Successful_Login 	PASSED	0.059 s

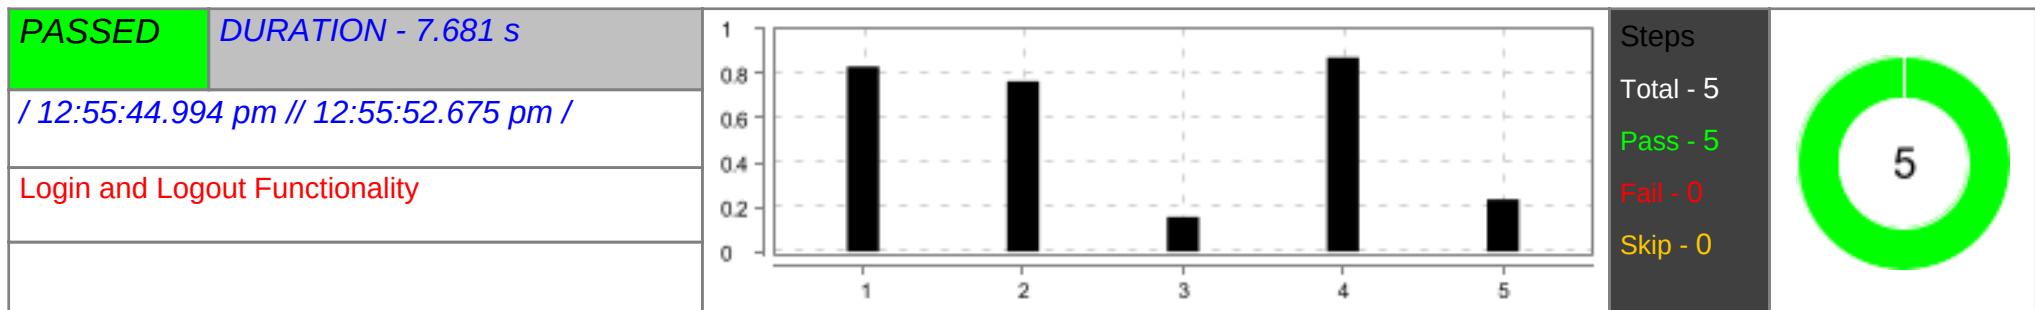(S)- Verify Login with Invalid Credentials


#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Login_with_Invalid_Credentials  +	PASSED	0.831 s
2	When - When the user enters invalid username "WrongUser" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Login_with_Invalid_Credentials  +	PASSED	0.765 s
3	And - And the user enters invalid password "WrongPass123" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Login_with_Invalid_Credentials  +	PASSED	0.155 s
4	And - And the user clicks on the Login button AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.873 s
		PASSED	0.174 s

#	Step / Hook Details	Status	Duration
	Verify_Login_with_Invalid_Credentials +		
5	Then - Then the user should see an error message "Invalid credentials"	PASSED	0.235 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.151 s
	Verify_Login_with_Invalid_Credentials		
	 +		

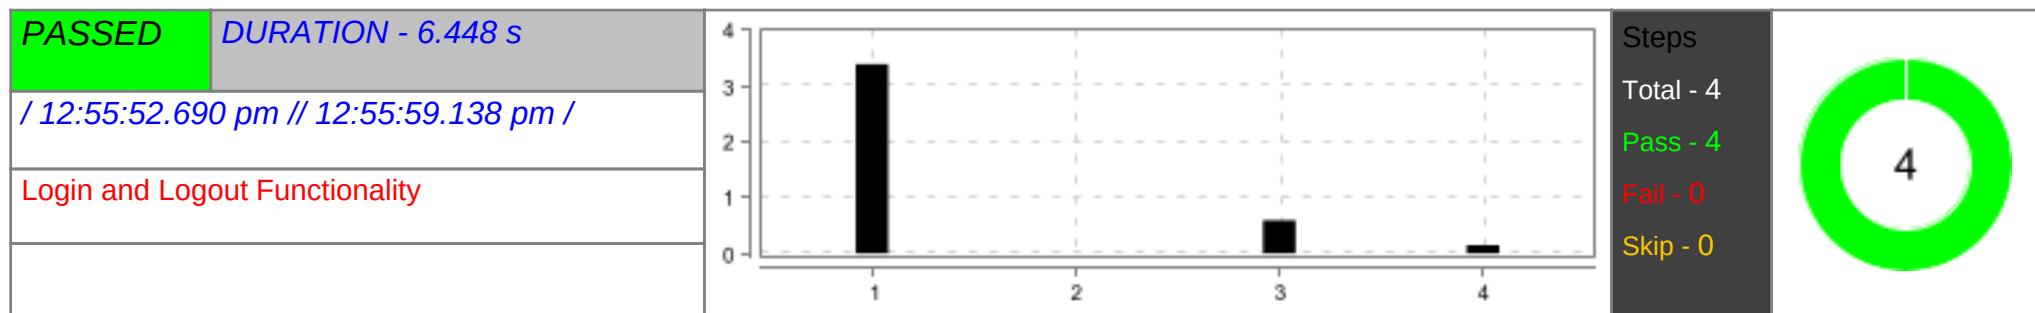(S)- Verify Login with Empty Fields

#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	3.391 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.153 s
	Verify_Login_with_Empty_Fields		
	 +		
2	When - When the user leaves the username and password fields empty	PASSED	0.001 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.159 s

#	Step / Hook Details	Status	Duration
	Verify_Login_with_Empty_Fields +		
3	And - And the user clicks on the Login button	PASSED	0.593 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.281 s
	Verify_Login_with_Empty_Fields 		
4	Then - Then the user should see a validation message "Required"	PASSED	0.146 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.152 s
	Verify_Login_with_Empty_Fields 		

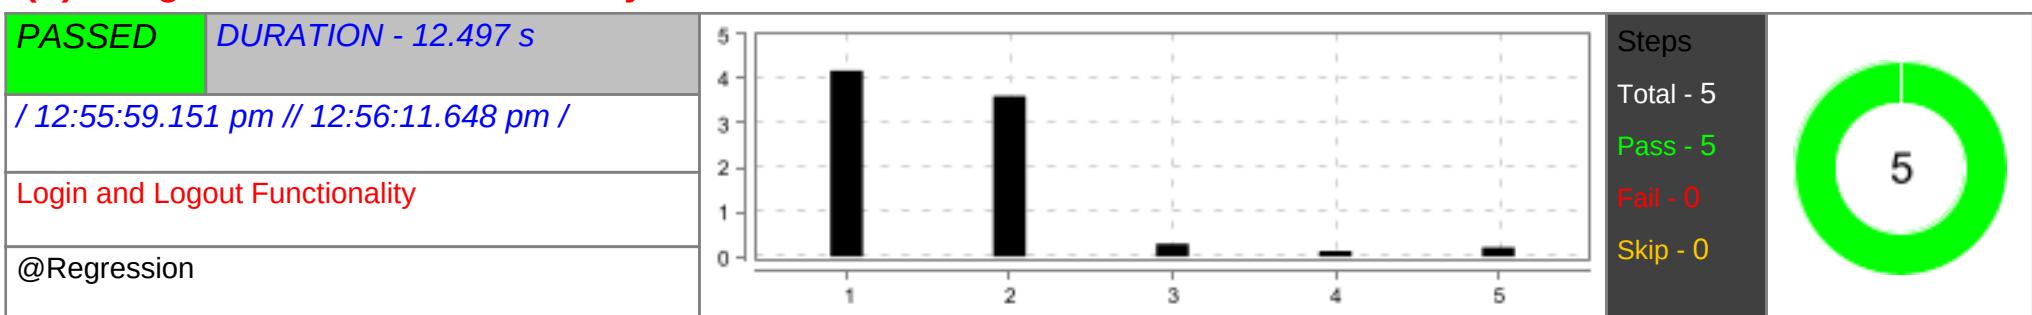
(S)- Forgot Password Functionality



#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	4.180 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.162 s




#	Step / Hook Details	Status	Duration
	Forgot_Password_Functionality +		
2	When - When User clicks on the "Forgot your password?" link	PASSED	3.604 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.168 s
	Forgot_Password_Functionality +		
3	And - And Enters the username "Admin"	PASSED	0.285 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.150 s
	Forgot_Password_Functionality +		
4	And - And Clicks on the Reset Password button	PASSED	0.123 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.920 s
	Forgot_Password_Functionality +		
5	Then - Then User should see a "Reset Password link sent successfully" message	PASSED	0.204 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.169 s
	Forgot_Password_Functionality		

#	Step / Hook Details	Status	Duration
	 +		

(S)- Verify Logout Functionality

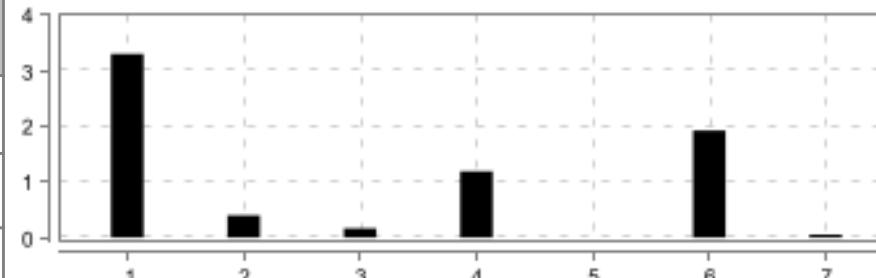PASSED	DURATION - 9.910 s / 12:56:11.660 pm // 12:56:21.570 pm / Login and Logout Functionality		Steps Total - 7 Pass - 7 Fail - 0 Skip - 0	
--------	--	--	--	---

#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality	PASSED	3.304 s
		PASSED	0.139 s
2	When - When the user enters valid username "Admin" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality	PASSED	0.401 s
		PASSED	0.319 s
3	And - And the user enters valid password "admin123" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality	PASSED	0.167 s
		PASSED	0.163 s

#	Step / Hook Details	Status	Duration
			
4	And - And the user clicks on the Login button AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality 	PASSED	1.192 s
5	When - When the user clicks on the profile icon AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality 	PASSED	0.001 s
6	And - And the user clicks on "Logout" AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality 	PASSED	1.926 s
7	Then - Then the user should be redirected back to the login page AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario) Verify_Logout_Functionality 	PASSED	0.055 s

(Step) AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)


(S) Add Employee to the System

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)

(S) Add Employee to the System

(F) Employee Module

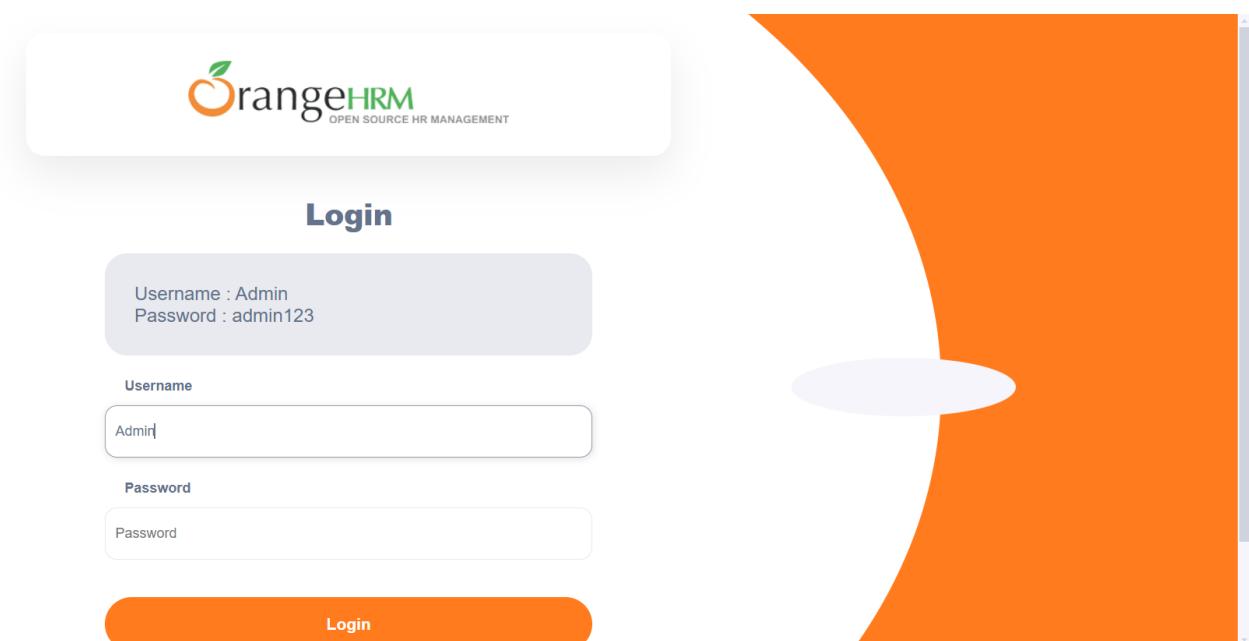

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Add Employee to the System

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Add Employee to the System

(F) Employee Module

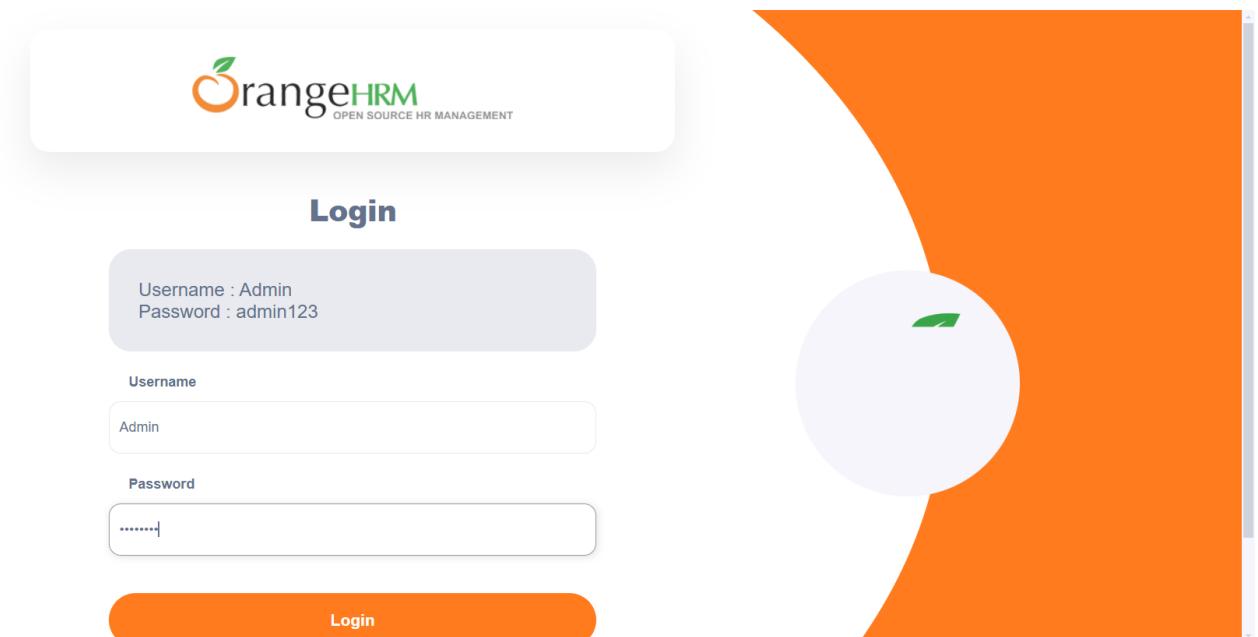

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Add Employee to the System


(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Add Employee to the System

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

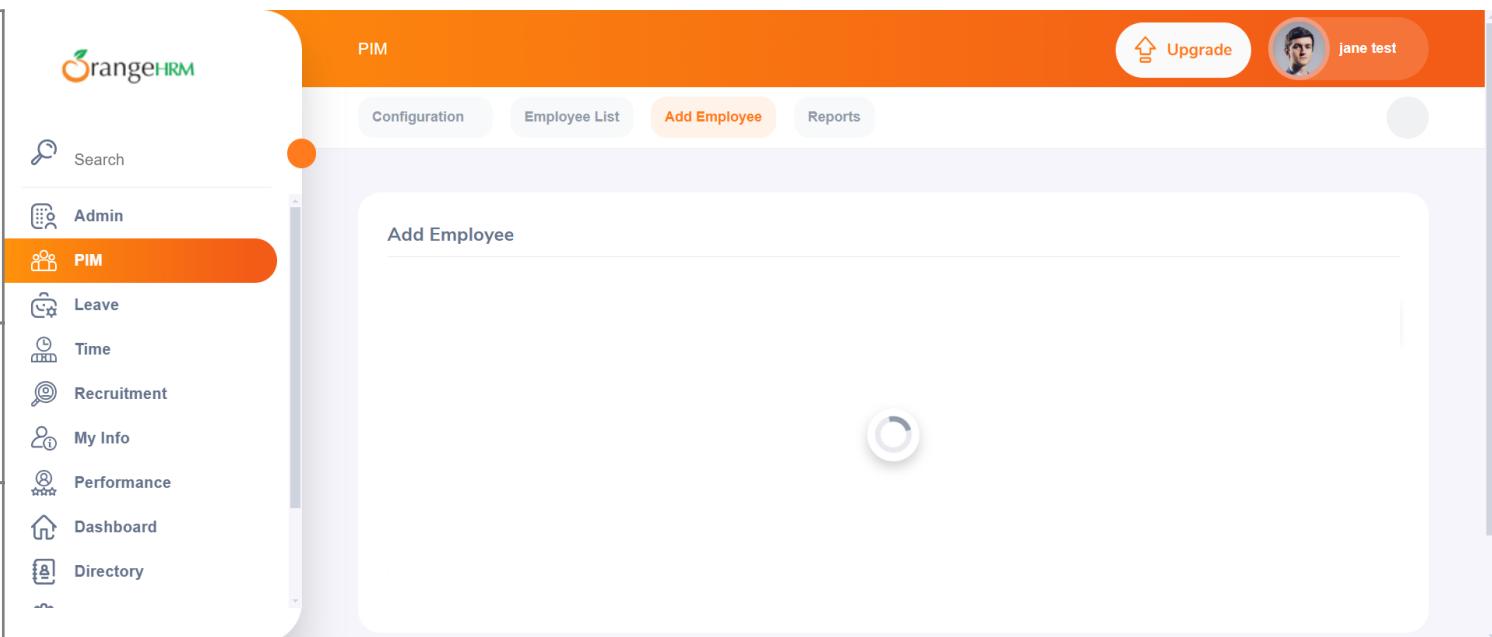

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

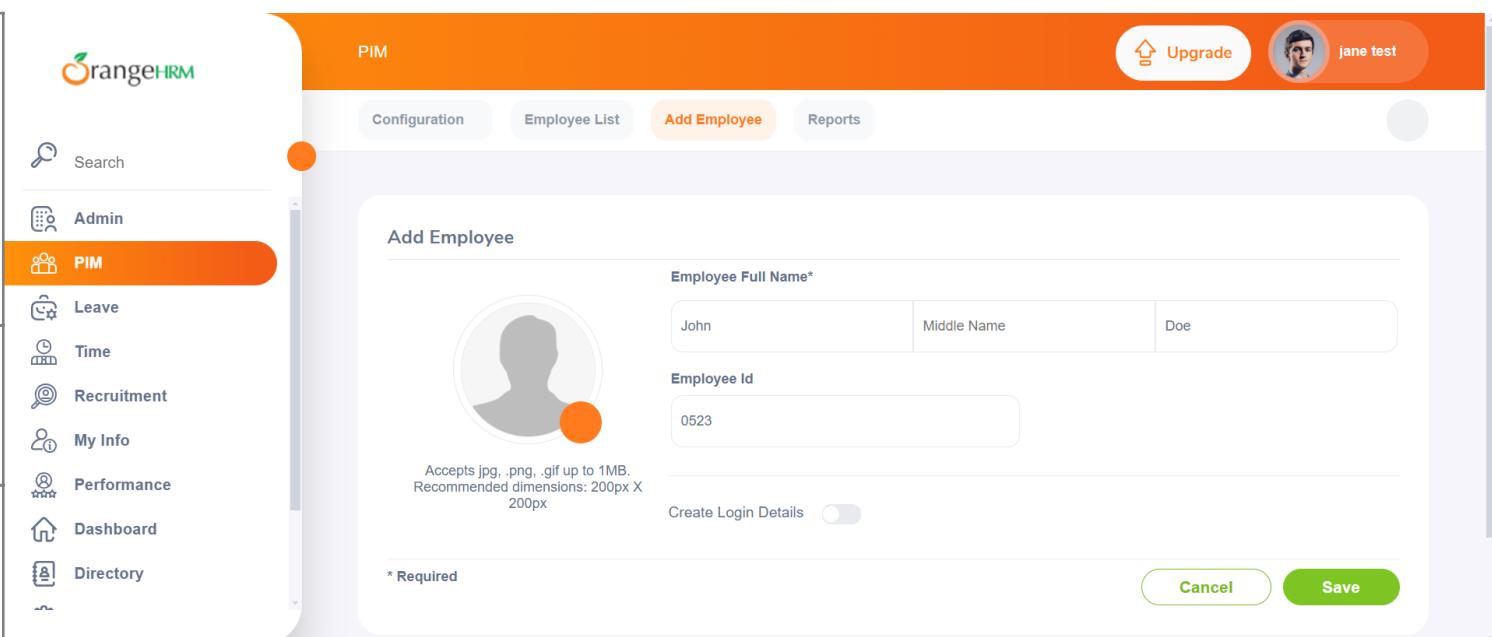

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Add Employee to the System

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Search for an Employee

(F) Employee Module

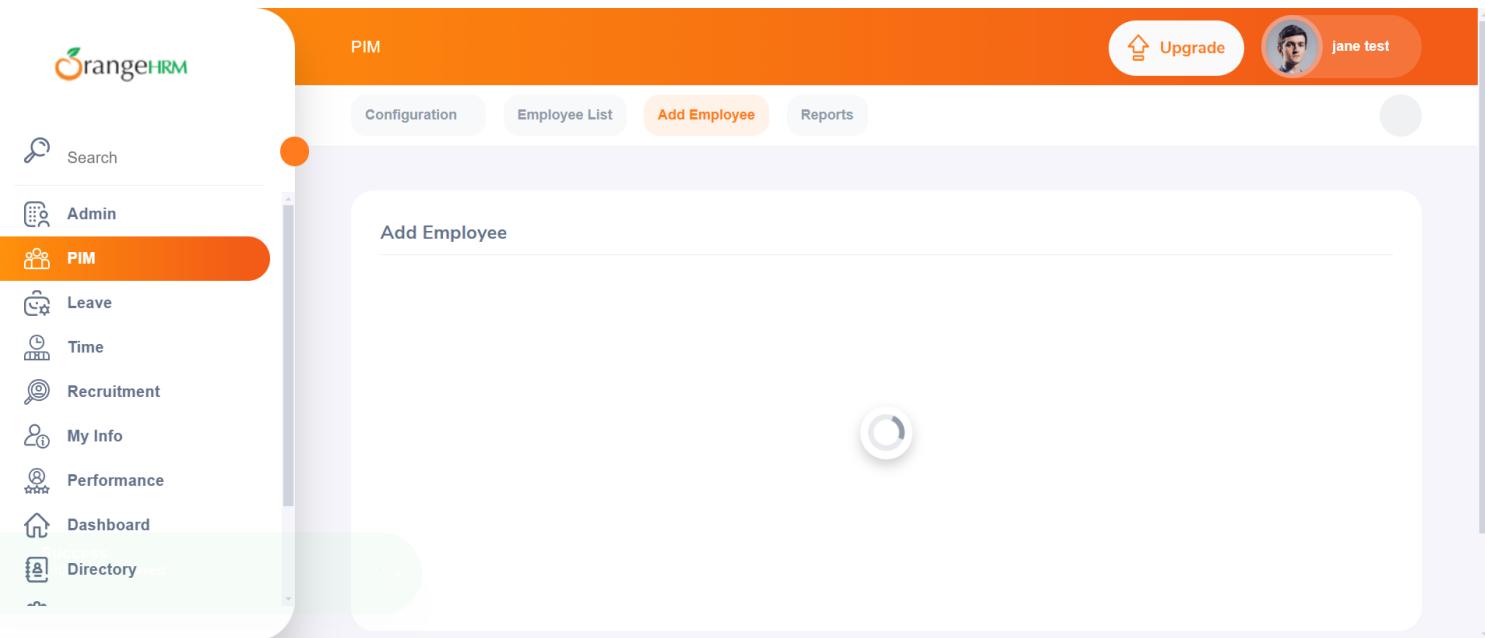

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Search for an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Search for an Employee

(F) Employee Module



Login

Username : Admin
Password : admin123

Username

Password

Login



Login

Username : Admin
Password : admin123

Username

Password

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Search for an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Search for an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Search for an Employee


(F) Employee Module

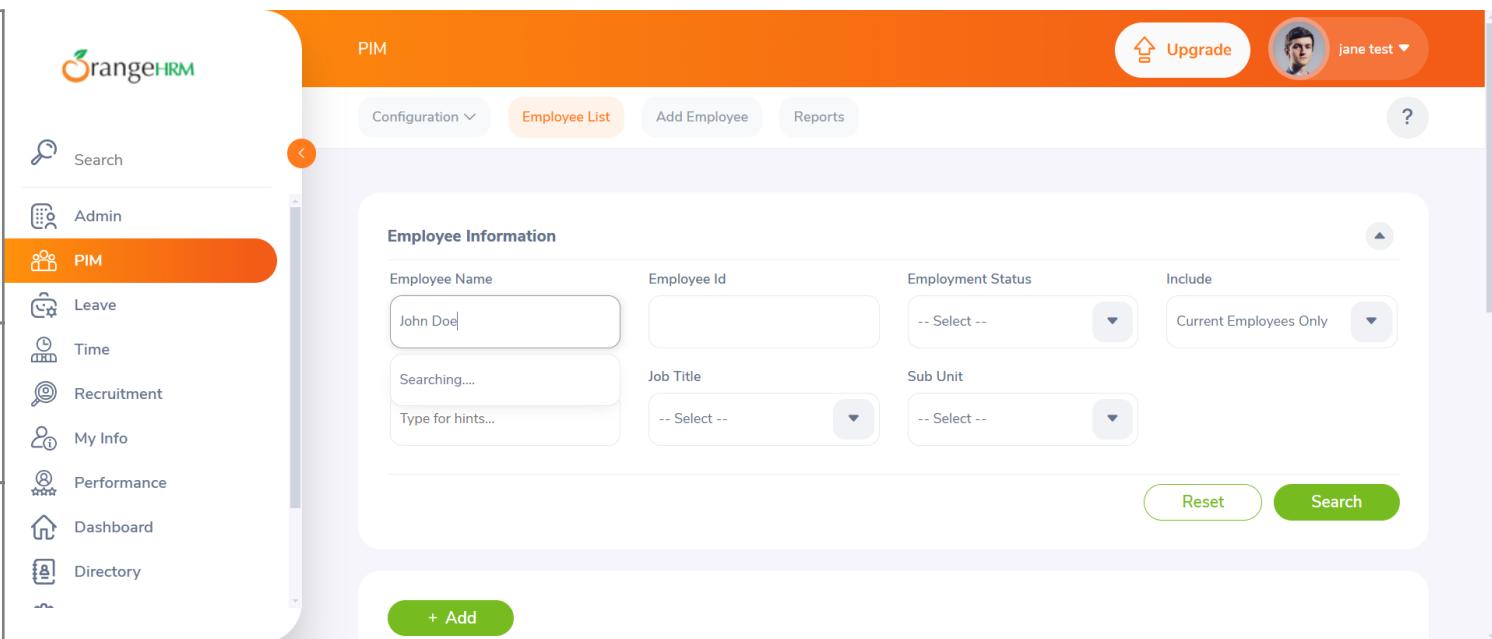

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Search for an Employee

(F) Employee Module

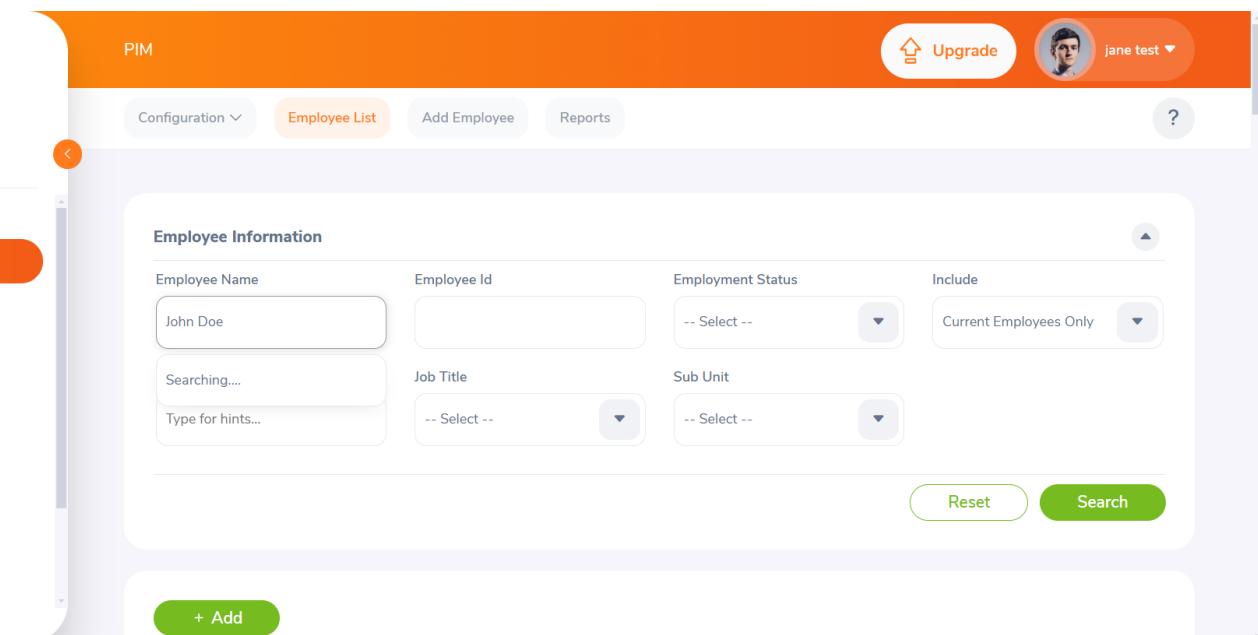

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Delete an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Delete an Employee

(F) Employee Module




Login

Username : Admin
Password : admin123

Username

Password

Login

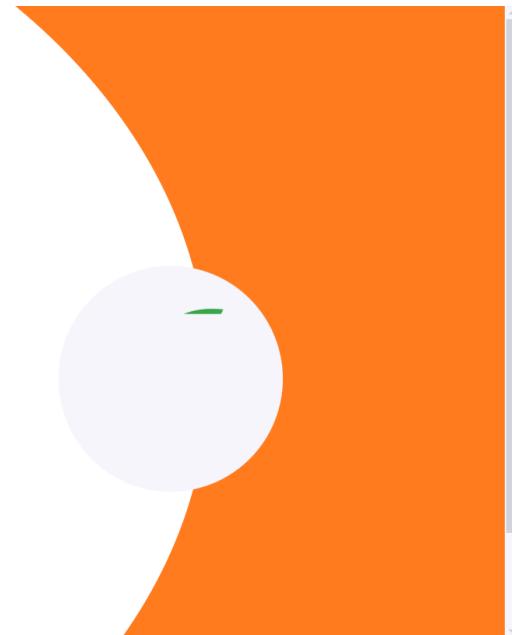

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Delete an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Delete an Employee

(F) Employee Module

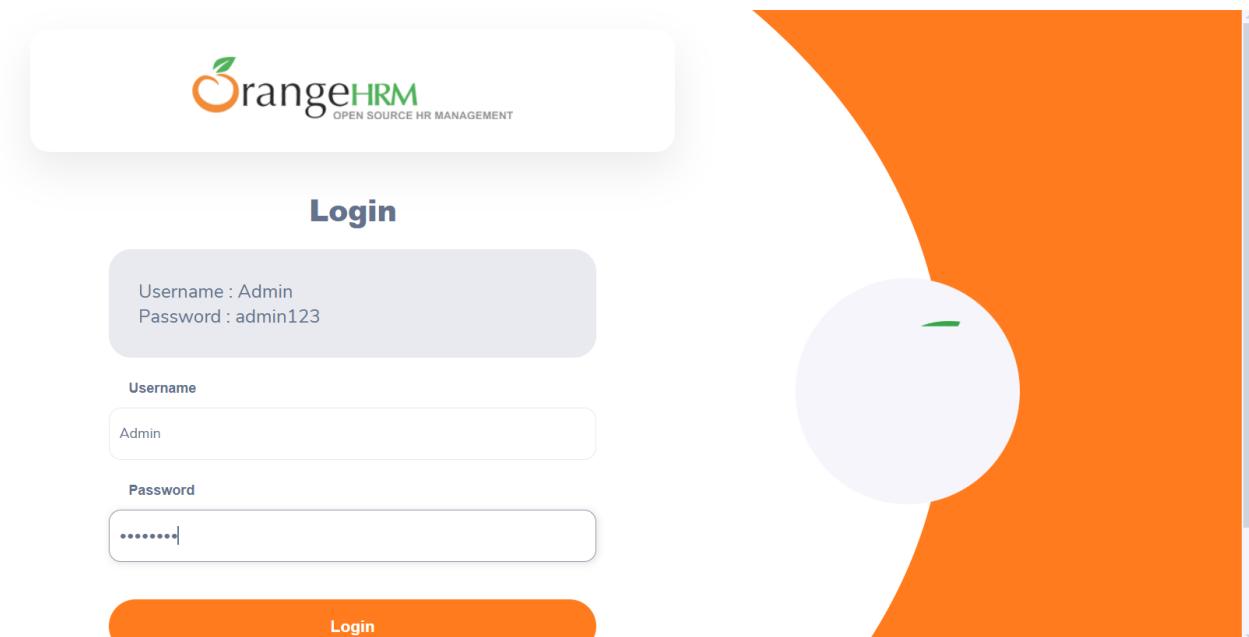

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Delete an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Delete an Employee

(F) Employee Module

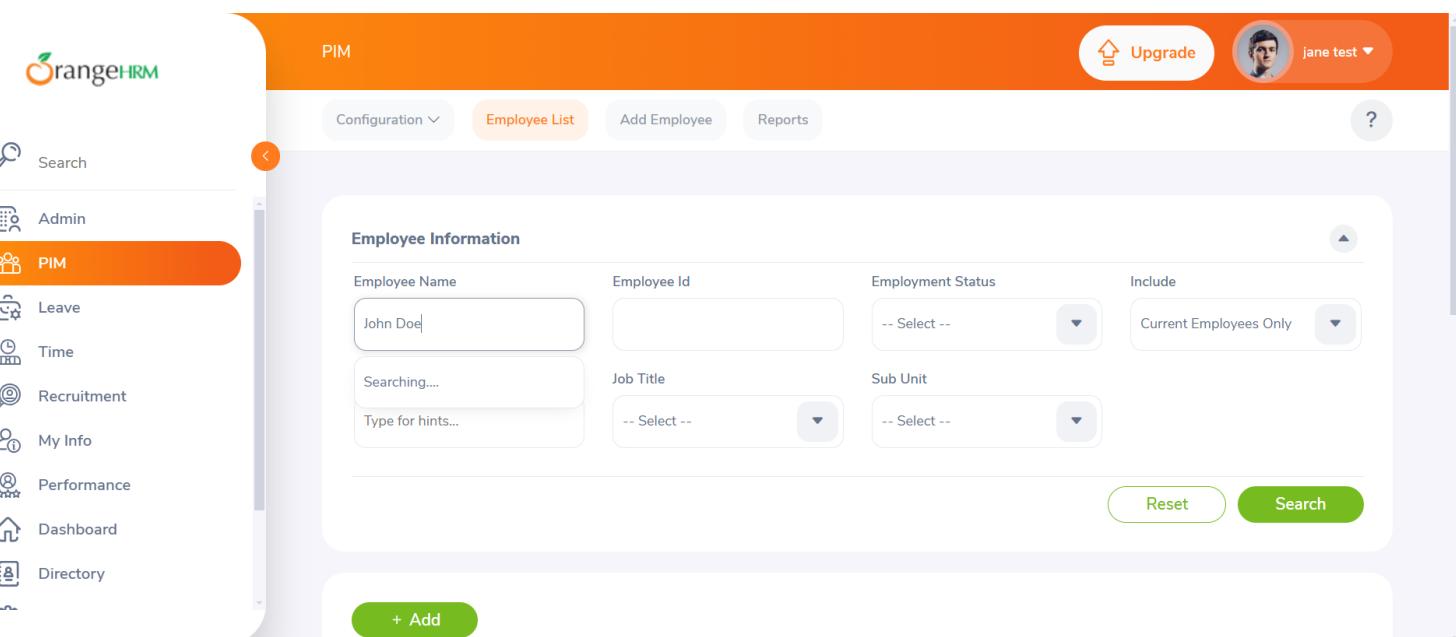

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Delete an Employee

(F) Employee Module

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

The screenshot shows the OrangeHRM application interface. On the left is a vertical sidebar with icons for various modules: Search, Admin, PIM (highlighted in orange), Leave, Time, Recruitment, My Info, Performance, Dashboard, and Directory. The main content area is titled 'PIM' and has tabs for Configuration, Employee List (which is selected and highlighted in orange), Add Employee, and Reports. The 'Employee List' tab displays a table with 248 records found. The columns are: Id (sorted by Last Name), First (& Middle), Last Name, Job Title, Employment Status, Sub Unit, Supervisor, and Actions. A search bar at the top includes fields for Supervisor Name, Job Title, and Sub Unit, along with 'Type for hints...', 'Reset', and 'Search' buttons. The top right corner features an 'Upgrade' button, a user profile for 'jane test', and a help icon.

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality



Login

Username : Admin
Password : admin123

Username

Password

Login



Login

Username : Admin
Password : admin123

Username

Password

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

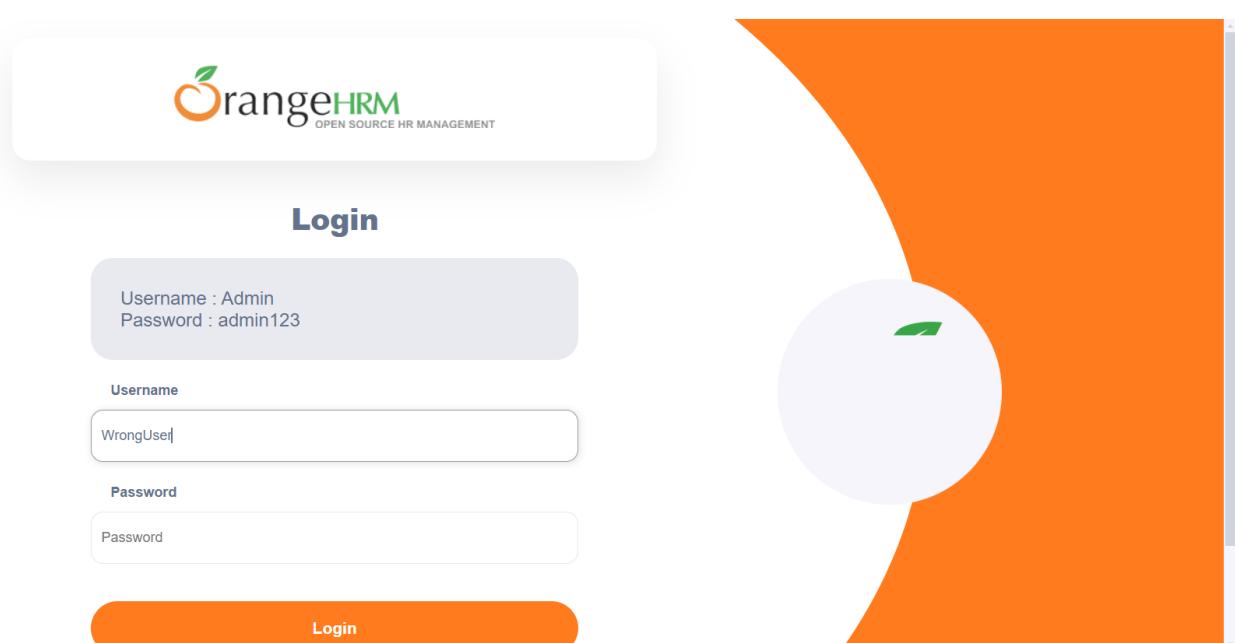

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

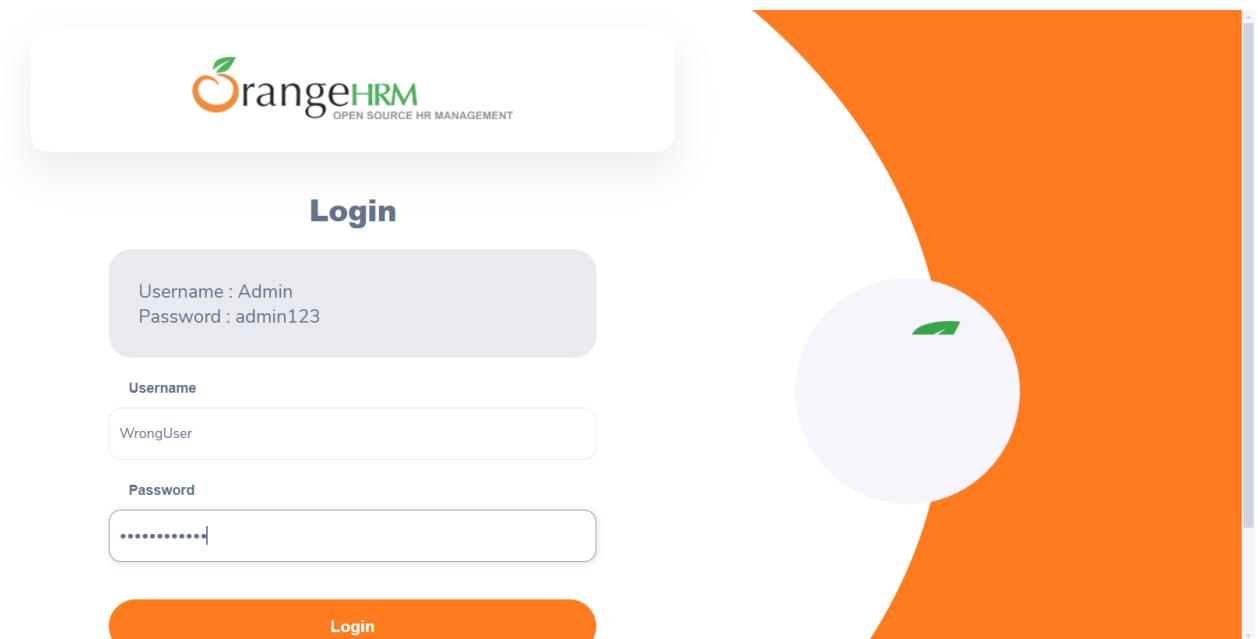

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

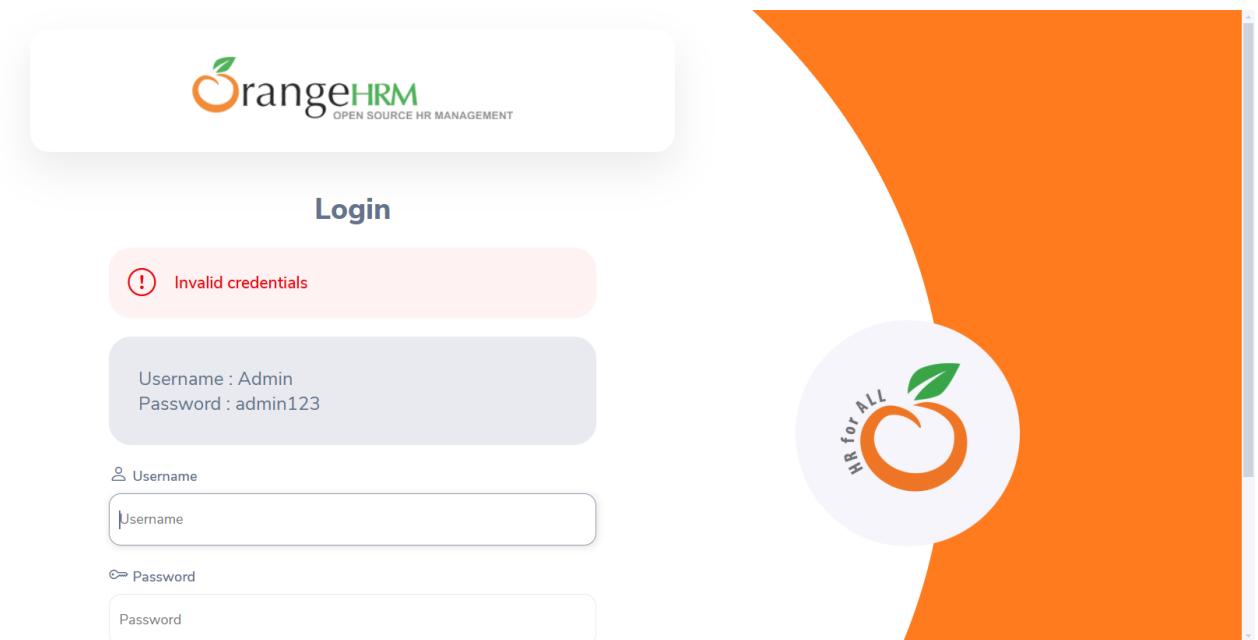

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

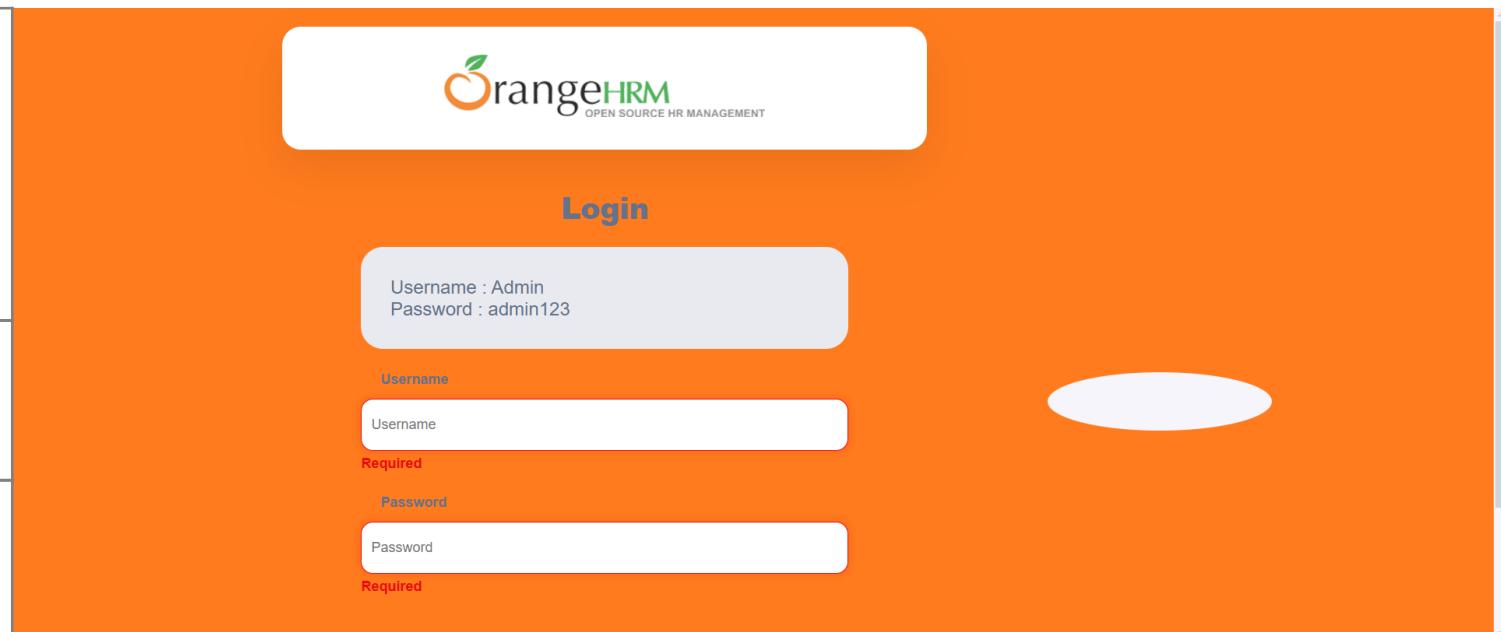

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Forgot Password Functionality

(F) Login and Logout Functionality



(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Forgot Password Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Forgot Password Functionality

(F) Login and Logout Functionality

Reset Password

Please enter your username to identify your account to reset your password

Username

[Cancel](#) [Reset Password](#)

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Forgot Password Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Forgot Password Functionality

(F) Login and Logout Functionality

Reset Password link sent successfully

A reset password link has been sent to you via email.

You can follow that link and select a new password.

Note:

If the email does not arrive, please contact your OrangeHRM Administrator.

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

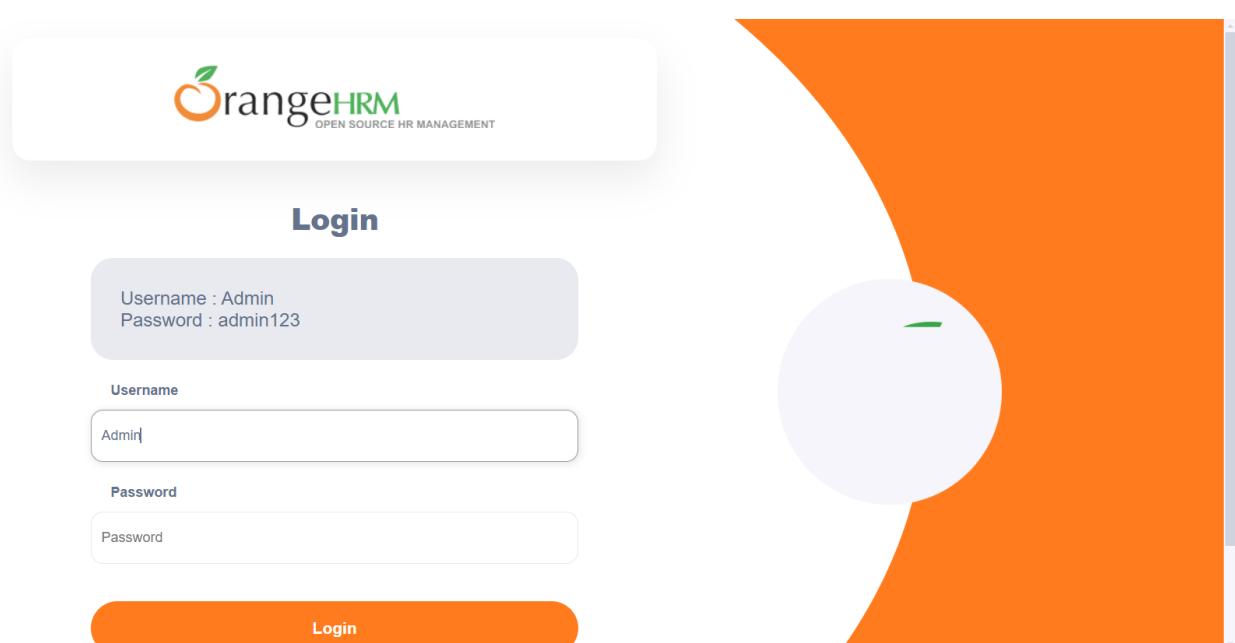

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)


(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

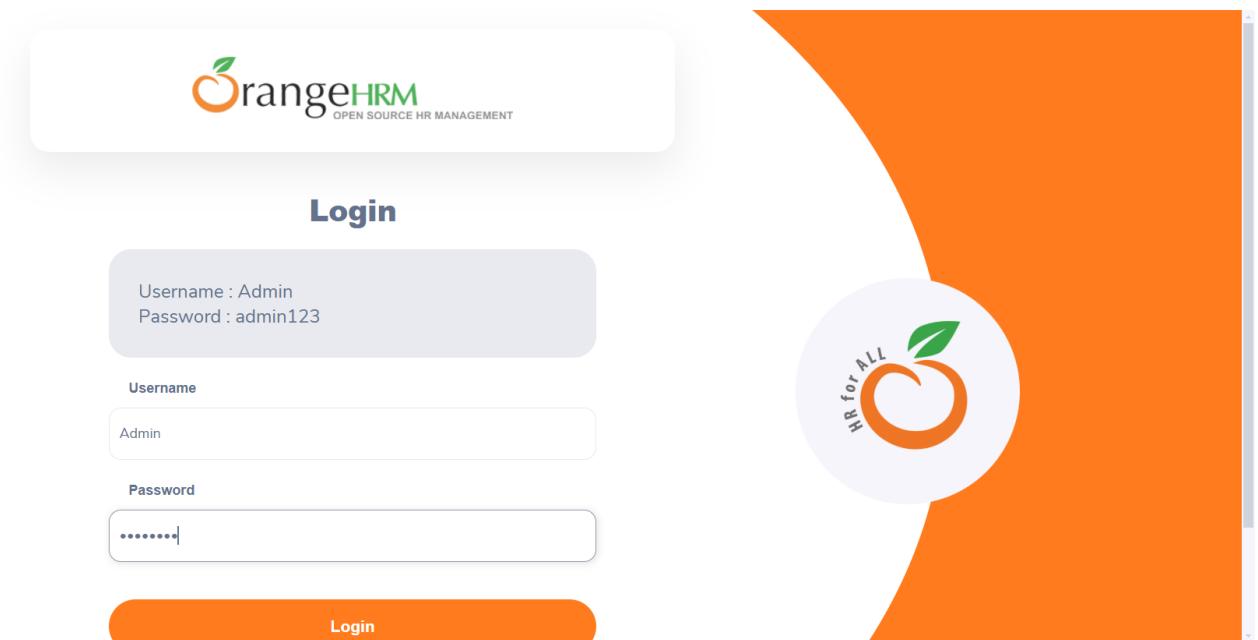

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality