Cucumber Report

Start : Feb 01, 10:11:02.529 am	*End : Feb 01, 10:11:40.807 am*	*Duration : 38.278 s*
Features	Scenarios	Steps
PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 4 FAILED - 0 SKIPPED - 0	PASSED - 21 FAILED - 0 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	Login and Logout Functionality	4	4	0	0	38.278 s
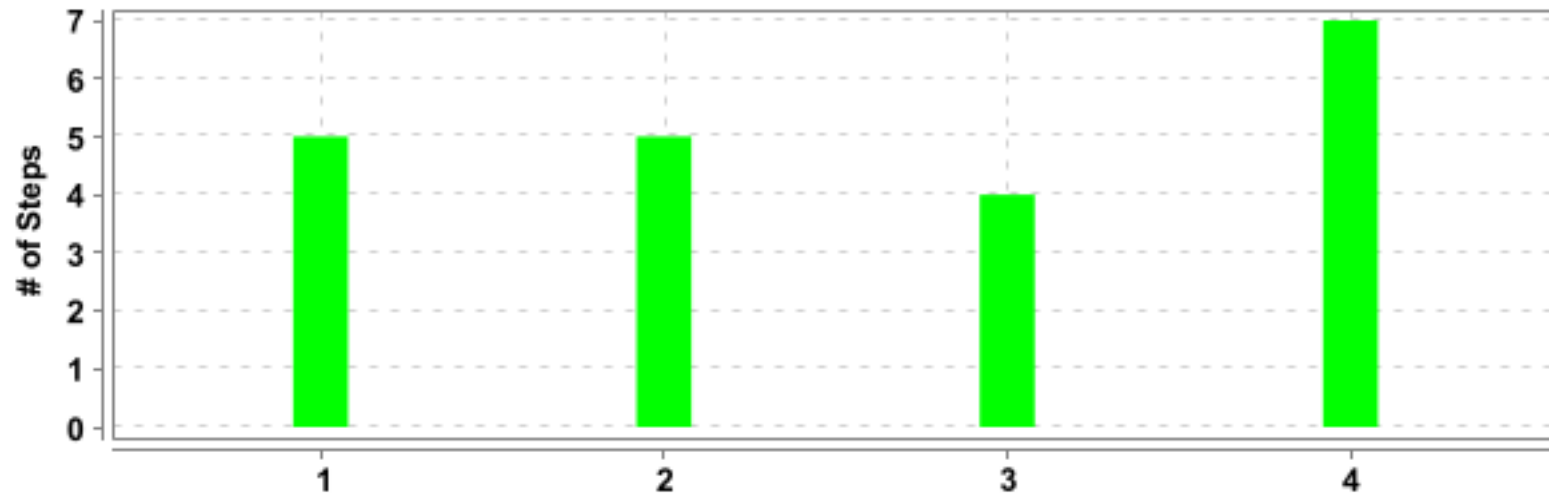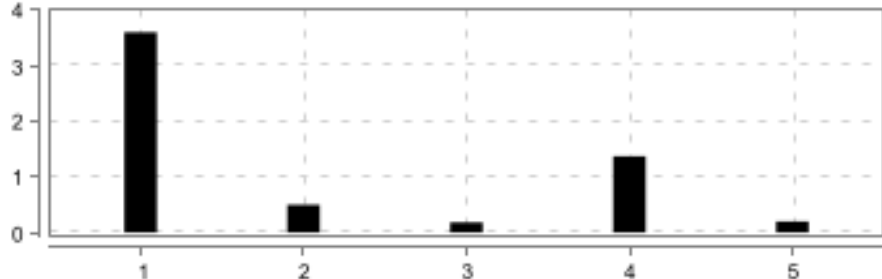
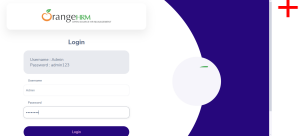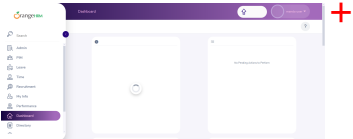| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login and Logout Functionality	Verify Successful Login	5	5	0	0	10.240 s
2	Login and Logout Functionality	Verify Login with Invalid Credentials	5	5	0	0	9.733 s
3	Login and Logout Functionality	Verify Login with Empty Fields	4	4	0	0	7.028 s
4	Login and Logout Functionality	Verify Logout Functionality	7	7	0	0	11.132 s

(F)- Login and Logout Functionality

PASSED	DURATION - 38.278 s	Scenarios		Steps	
		Total - 4		Total - 21	
/ 10:11:02.529 am // 10:11:40.807 am /		Pass - 4	4	Pass - 21	21
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	
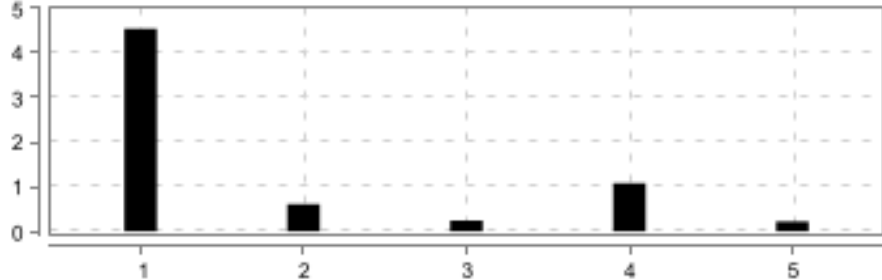
(S)- Verify Successful Login

PASSED	DURATION - 10.240 s		Steps	
/ 10:11:02.535 am // 10:11:12.775 am /			Total - 5	
Login and Logout Functionality			Pass - 5	5
			Fail - 0	
			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	3.601 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.234 s
	Verify_Successful_Login		
	+		
2	When - When the user enters valid username "Admin"	PASSED	0.498 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.430 s
	Verify_Successful_Login		
	+		
3	And - And the user enters valid password "admin123"	PASSED	0.180 s
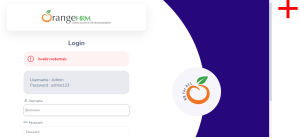
#	Step / Hook Details	Status	Duration
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.215 s
	Verify_Successful_Login		
	+		
4	And - And the user clicks on the Login button	PASSED	1.374 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.238 s
	Verify_Successful_Login		
	+		
5	Then - Then the user should be redirected to the Dashboard page	PASSED	0.198 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.525 s
	Verify_Successful_Login		
	+		

(S)- Verify Login with Invalid Credentials
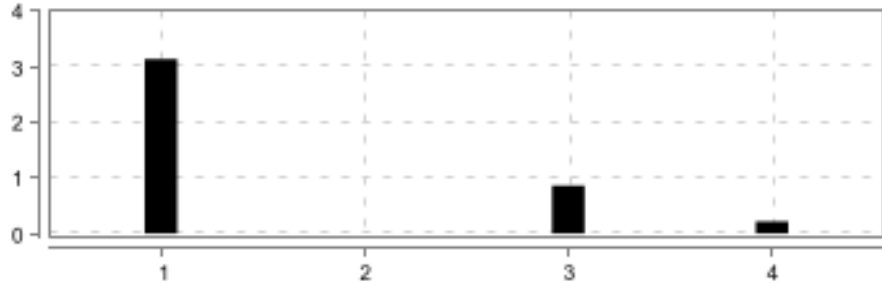
PASSED	DURATION - 9.733 s		Steps	
/ 10:11:12.863 am // 10:11:22.596 am /			Total - 5	
Login and Logout Functionality			Pass - 5	
			Fail - 0	
			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	4.539 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.205 s

#	Step / Hook Details	Status	Duration
	Verify_Login_with_Invalid_Credentials		
	+		
2	When - When the user enters invalid username "WrongUser"	PASSED	0.608 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.422 s
	Verify_Login_with_Invalid_Credentials		
	+		
3	And - And the user enters invalid password "WrongPass123"	PASSED	0.239 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.187 s
	Verify_Login_with_Invalid_Credentials		
	+		
4	And - And the user clicks on the Login button	PASSED	1.081 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.203 s
	Verify_Login_with_Invalid_Credentials		
	+		
5	Then - Then the user should see an error message "Invalid credentials"	PASSED	0.217 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.157 s
	Verify_Login_with_Invalid_Credentials		

#	Step / Hook Details	Status	Duration
	+		
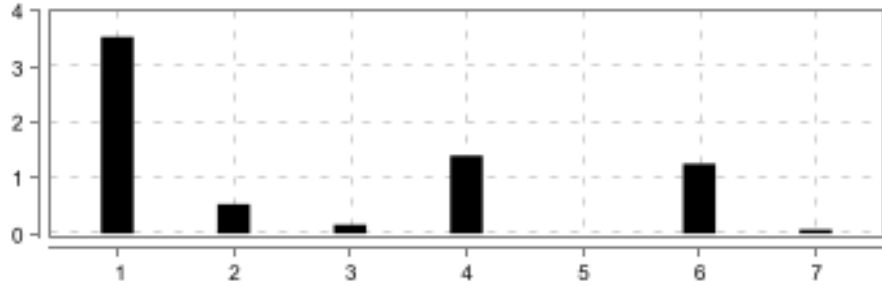
(S)- Verify Login with Empty Fields

PASSED	*DURATION - 7.028 s*	Steps	
/ 10:11:22.613 am // 10:11:29.641 am /		Total - 4	
		Pass - 4	
Login and Logout Functionality		Fail - 0	
		Skip - 0	

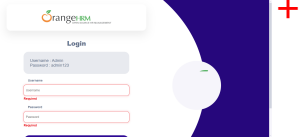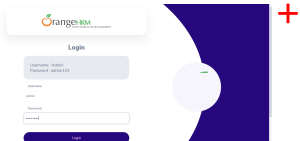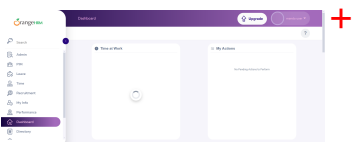| #	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	3.136 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.159 s
	Verify_Login_with_Empty_Fields		
	+		
2	When - When the user leaves the username and password fields empty	PASSED	0.000 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.163 s
	Verify_Login_with_Empty_Fields		
	+		
3	And - And the user clicks on the Login button	PASSED	0.863 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.469 s
	Verify_Login_with_Empty_Fields		

#	Step / Hook Details	Status	Duration
4	Then - Then the user should see a validation message "Required"	PASSED	0.218 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.196 s
	Verify_Login_with_Empty_Fields		

(S)- Verify Logout Functionality

PASSED	DURATION - 11.132 s		Steps
/ 10:11:29.675 am // 10:11:40.807 am /			Total - 7
Login and Logout Functionality			Pass - 7
			Fail - 0
			Skip - 0

#	Step / Hook Details	Status	Duration
1	Given - Given user is on the OrangeHRM login page	PASSED	3.535 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.237 s
	Verify_Logout_Functionality		
2	When - When the user enters valid username "Admin"	PASSED	0.527 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.372 s
	Verify_Logout_Functionality		

#	Step / Hook Details	Status	Duration
	+		
3	And - And the user enters valid password "admin123"	PASSED	0.157 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.185 s
	Verify_Logout_Functionality		
	+		
4	And - And the user clicks on the Login button	PASSED	1.400 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.411 s
	Verify_Logout_Functionality		
	+		
5	When - When the user clicks on the profile icon	PASSED	0.001 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.595 s
	Verify_Logout_Functionality		
	+		
6	And - And the user clicks on "Logout"	PASSED	1.256 s
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.205 s
	Verify_Logout_Functionality		
	+		
7	Then - Then the user should be redirected back to the login page	PASSED	0.068 s

#	Step / Hook Details	Status	Duration
	AFTER_STEP - appHooks.Hook.tearDown(io.cucumber.java.Scenario)	PASSED	0.372 s
	Verify_Logout_Functionality		

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

rangeHRM
OPEN SOURCE HR MANAGEMENT

Login

Username : Admin
Password : admin123

Username

Admin

Password

Password

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

ⓞrangeHRM
OPEN SOURCE HR MANAGEMENT

Login

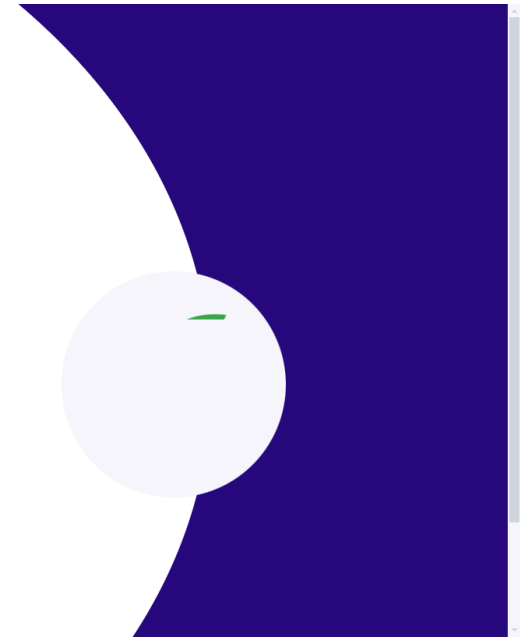Username : Admin
Password : admin123

Username

Admin

Password

••••••••

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Successful Login

(F) Login and Logout Functionality

OrangeHRM

Dashboard

manda user ▼

?

Search

Admin

PIM

Leave

Time

Recruitment

My Info

Performance

Dashboard

Directory

No Pending Actions to Perform

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

OrangeHRM
OPEN SOURCE HR MANAGEMENT

Login

Username : Admin
Password : admin123

Username

WrongUser

Password

Password

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

OrangeHRM
OPEN SOURCE HR MANAGEMENT

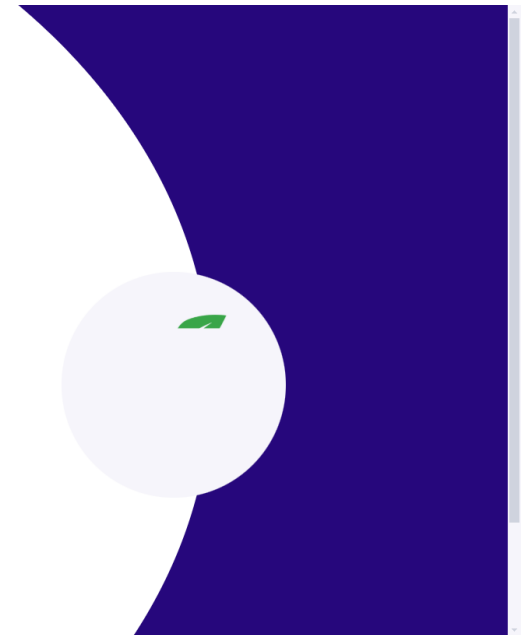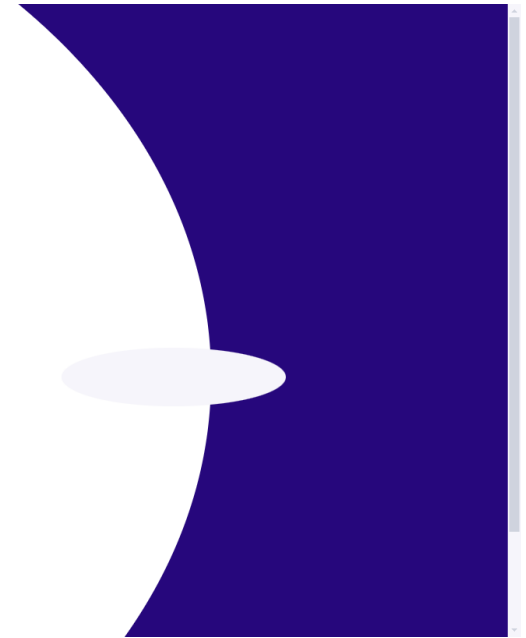**Login**

Username : Admin
Password : admin123

Username

WrongUser

Password

•••••••••••

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Invalid Credentials

(F) Login and Logout Functionality

Login

⊘ Invalid credentials

Username : Admin
Password : admin123

Username

Username

Password

Password

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Login with Empty Fields

(F) Login and Logout Functionality

Login

Username : Admin
Password : admin123

Username

Username

Required

Password

Password

Required

Login

Username : Admin
Password : admin123

Username

Username

Required

Password

Password

Required

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

OrangeHRM
OPEN SOURCE HR MANAGEMENT

Login

Username : Admin
Password : admin123

Username

Admin

Password

Password

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

OrangeHRM
OPEN SOURCE HR MANAGEMENT

Login

Username : Admin
Password : admin123

Username

Admin

Password

••••••••

Login

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

OrangeHRM

Search

Admin

PIM

Leave

Time

Recruitment

My Info

Performance

Dashboard

Directory

Dashboard

Upgrade   manda user ▼

?

Time at Work

My Actions

No Pending Actions to Perform

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality

(Step) AFTER_STEP - appHooks.Hook.
tearDown(io.cucumber.java.Scenario)

(S) Verify Logout Functionality

(F) Login and Logout Functionality
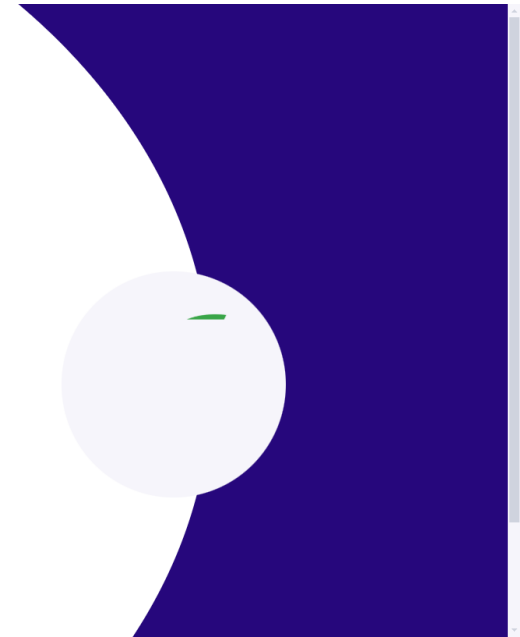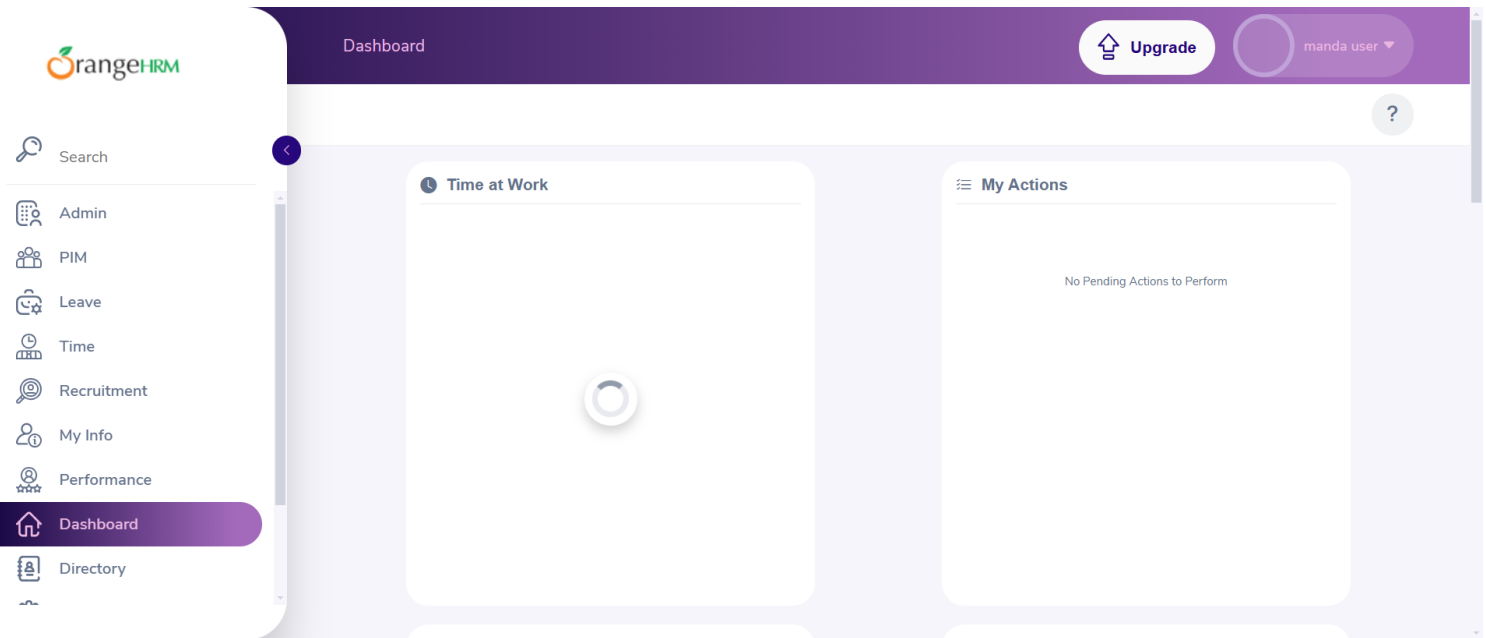
Login

Username : Admin
Password : admin123

Username

Username

Password

Password

Login