




(a) LSTM, five random classes/episode, one-hot vector labels

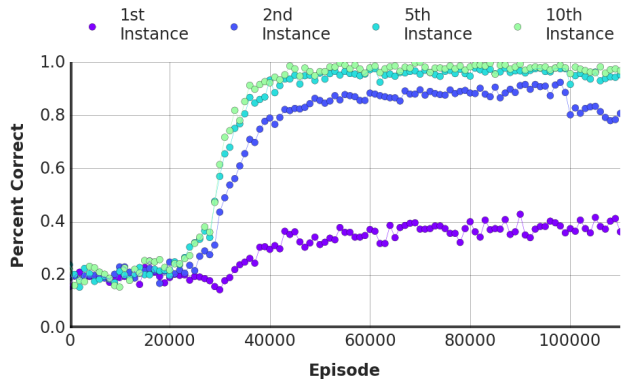

(b) MANN, five random classes/episode, one-hot vector labels

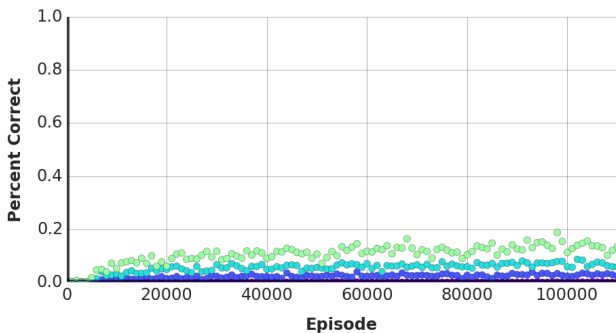

(c) LSTM, fifteen classes/episode, five-character string labels

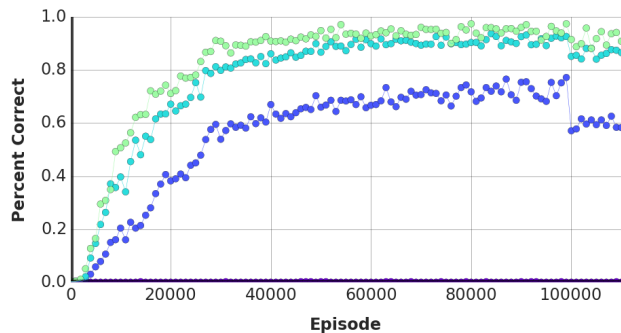

(d) MANN, fifteen classes/episode, five-character string labels

*Figure 2.* Omniglot classification. The network was given either five (a-b) or up to fifteen (c-d) random classes per episode, which were of length 50 or 100 respectively. Labels were one-hot vectors in (a-b), and five-character strings in (c-d). In (b), first instance accuracy is above chance, indicating that the MANN is performing “educated guesses” for new classes based on the classes it has already seen and stored in memory. In (c-d), first instance accuracy is poor, as is expected, since it must make a guess from 3125 random strings. Second instance accuracy, however, approaches 80% during training for the MANN (d). At the 100,000 episode mark the network was tested, without further learning, on distinct classes withheld from the training set, and exhibited comparable performance.