Nama : Puji Nugroho
NIM : L200170123
Kelas : C
Modul : 4

Kegiatan 1

1. Rancangan Jaringan

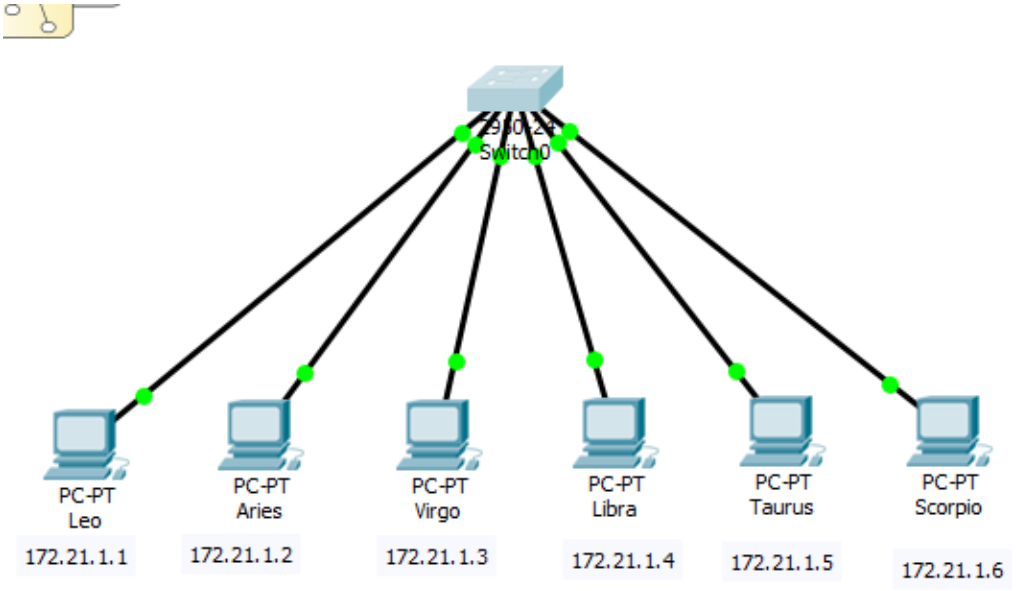

2. Membuat vlan dengan nama zodiak1, zodiak2 dan zodiak3

```
Switch>enable
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#
```

3. Konfigurasi port untuk masing – masingpc ke vlan
   a. Untuk zodiak1 = leo(port 0/1) dan libra(port 0/4)

```
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#int fa 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
```

   b. Untuk zodiak2 = aries(port 0/2) dan taurus(port 0/5)

```
Switch(config)#int fa 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#int fa 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
```

c. Untuk zodiak3 = virgo(port 0/3) dan scorpio(port 0/6)

```
Switch(config)#int fa 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
```

4. Melihat hasil

a. Melihat informasi vlan secara keseluruhan

```
Switch#show vlan brief

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
1    default                           active    Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                                 Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                                 Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                                 Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                                 Fa0/23, Fa0/24
10   zodiak1                           active    Fa0/1, Fa0/4
20   zodiak2                           active    Fa0/2, Fa0/5
30   zodiak3                           active    Fa0/3, Fa0/6
1002 fddi-default                      active
1003 token-ring-default                active
1004 fddinet-default                   active
1005 trnet-default                     active
```

b. Melihat vlan id 10

```
Switch#show vlan id 10

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
10   zodiak1                           active    Fa0/1, Fa0/4

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
10   enet  100010     1500  -      -      -        -    -        0      0
```

c. Melihat vlan id 20

```
Switch#show vlan id 20

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
20   zodiak2                           active    Fa0/2, Fa0/5

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
20   enet  100020     1500  -      -      -        -    -        0      0
```

d. Melihat vlan id 30

```
Switch#show vlan id 30

VLAN Name                              Status    Ports
---- --------------------------------- --------- -------------------------------
30   zodiak3                           active    Fa0/3, Fa0/6

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
30   enet  100030     1500  -      -      -        -    -        0      0
```

No.	Variabel	Nilai		
1	Nomor Vlan	10	20	30
2	Nama Vlan	zodiak1	zodiak2	zodiak3
3	Port	0/1, 0/4	0/2, 0/5	0/3, 0/6
4	Status	Active	Active	Active

Kegiatan 2

1. Rancangan Jaringan

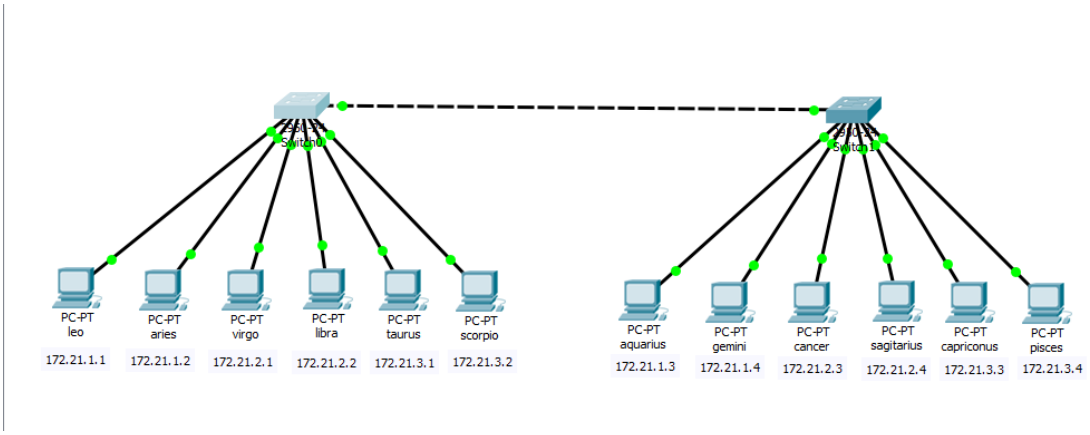

2. Membuat vlan dengan nama zodiak1, zodiak2 dan zodiak3

```
Switch>enable
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#
```

3. Konfigurasi port untuk masing-masing pc ke vlan
   a. Untuk zodiak1 = leo(port 0/1) dan aries(port 0/4)

```
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#int fa 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
```

   b. Untuk zodiak2 = virgo(port 0/2) dan libra(port 0/5)

```
Switch(config)#int fa 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#int fa 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
```

   c. Untuk zodiak3 = taurus(port 0/3) dan scorpio(port 0/6)

```
Switch(config)#int fa 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
```

4. Melakukan konfigurasi trunk pada port 7

```
Switch(config)#int fa 0/7
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
```

5. Hasilnya

```
Switch#show int fa 0/7 switchport
Name: Fa0/7
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Appliance trust: none
```

```
Switch#show int trunk
Port        Mode         Encapsulation  Status        Native vlan
Fa0/7       on           802.1q         trunking      1

Port        Vlans allowed on trunk
Fa0/7       1-1005

Port        Vlans allowed and active in management domain
Fa0/7       1,10,20,30

Port        Vlans in spanning tree forwarding state and not pruned
Fa0/7       1,10,20,30
```

```
Switch#show vlan

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Fa0/8, Fa0/9, Fa0/10, Fa0/11
                                                Fa0/12, Fa0/13, Fa0/14, Fa0/15
                                                Fa0/16, Fa0/17, Fa0/18, Fa0/19
                                                Fa0/20, Fa0/21, Fa0/22, Fa0/23
                                                Fa0/24
10   zodiak1                          active    Fa0/1, Fa0/4
20   zodiak2                          active    Fa0/2, Fa0/5
30   zodiak3                          active    Fa0/3, Fa0/6
1002 fddi-default                     active
1003 token-ring-default               active
1004 fddinet-default                  active
1005 trnet-default                    active

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
1    enet  100001     1500  -      -      -        -    -        0      0
10   enet  100010     1500  -      -      -        -    -        0      0
20   enet  100020     1500  -      -      -        -    -        0      0
30   enet  100030     1500  -      -      -        -    -        0      0
 --More--
```

Tugas 7A : Untuk port 0/7 pada switch 0 telah disetting untuk trunk dan berhasil. Sehingga port 0/7 tidak tersedia untuk vlan.

6. Melakukan ping dari leo ke pisces

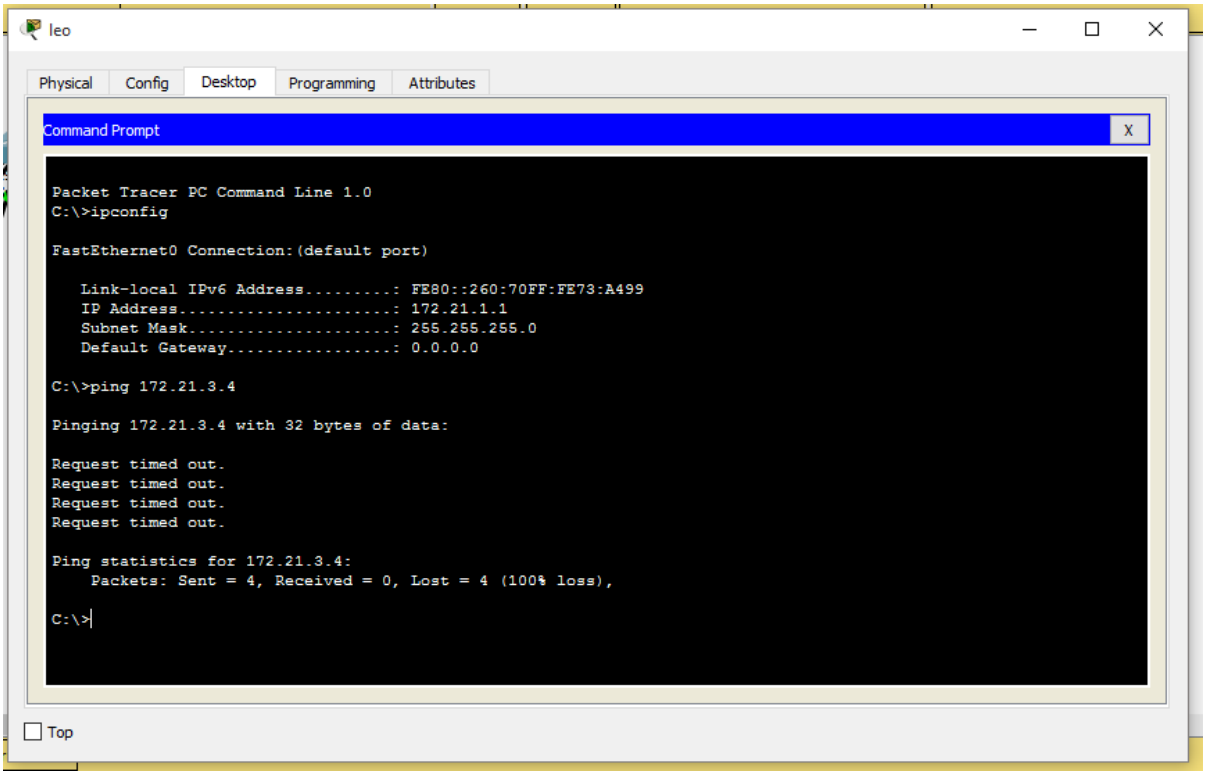

Tugas 8A: Hasilnya adalah RTO karena berada pada jaringan yang berbeda dan pada switch 1 belum disetting trunk.

7. Melakukan konfigurasi trunk pada switch 1

```
Switch(config)#int fa 0/7
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
```

Tugas 10A: Berhubung udah dikerjain di kelas dan ngga aku sc mas, jadinya hasilnya konfigurasi vlan yang udah jadi. Yang harusnya int fa 0/7 masih tersedia sebagai vlan.

8. Konfigurasi vlan
   a. zodiak1: aquarius (port 0/1) dan gemini (port 0/2)

```
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#int fa 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
```

   b. zodiak2: cancer (port 0/3) dan sagitarius (port 0/4)

```
Switch(config)#int fa 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#int fa 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
```

c. zodiak3: capriconus (port 0/5) dan pisces (port 0/6)

```
Switch(config)#int fa 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
```

9. melakukan ping
   a. leo – aries

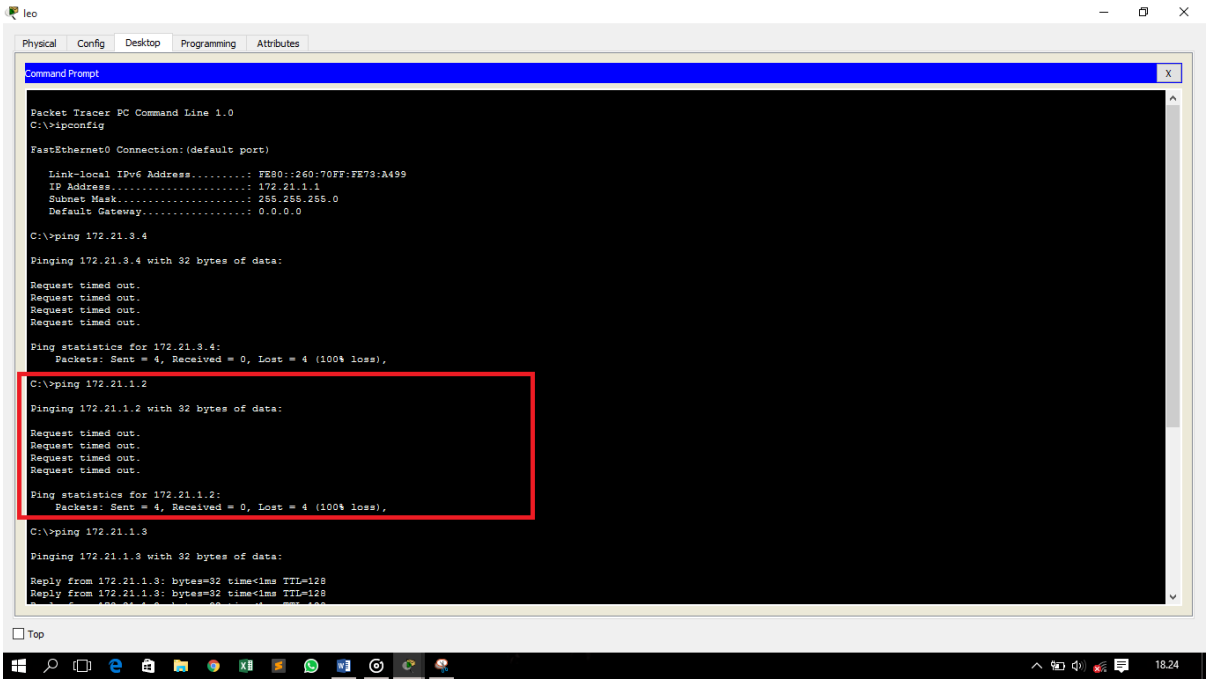

   b. leo – aquarius

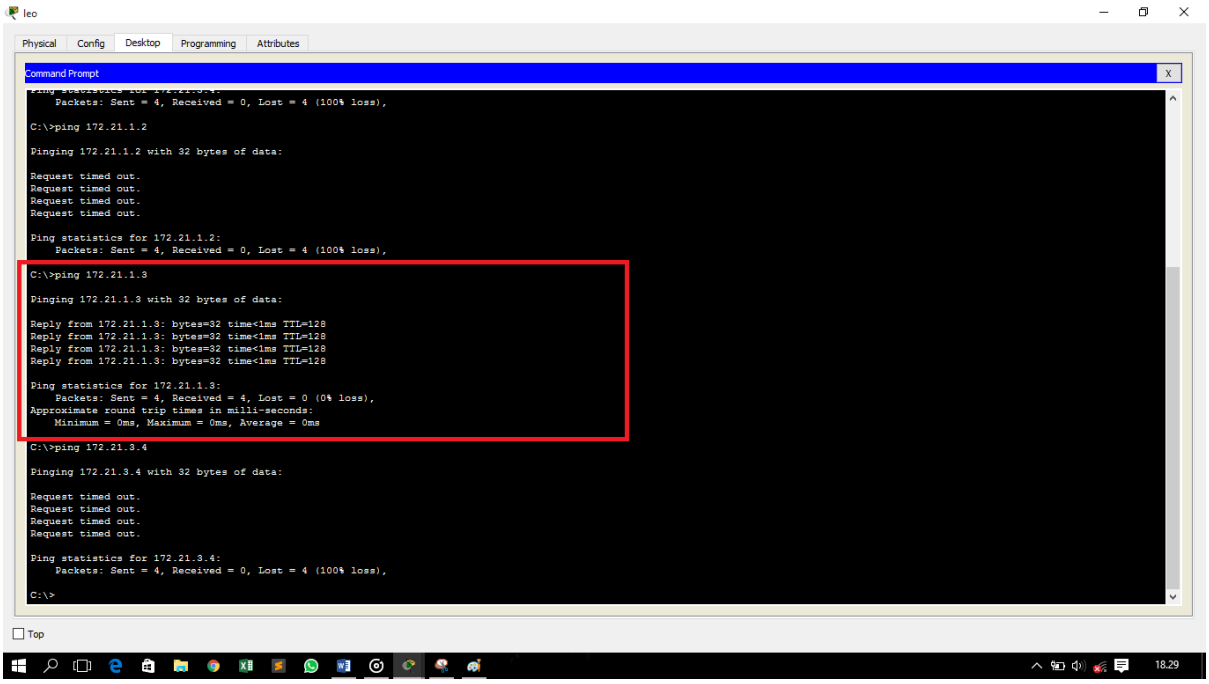

c. leo – pisces

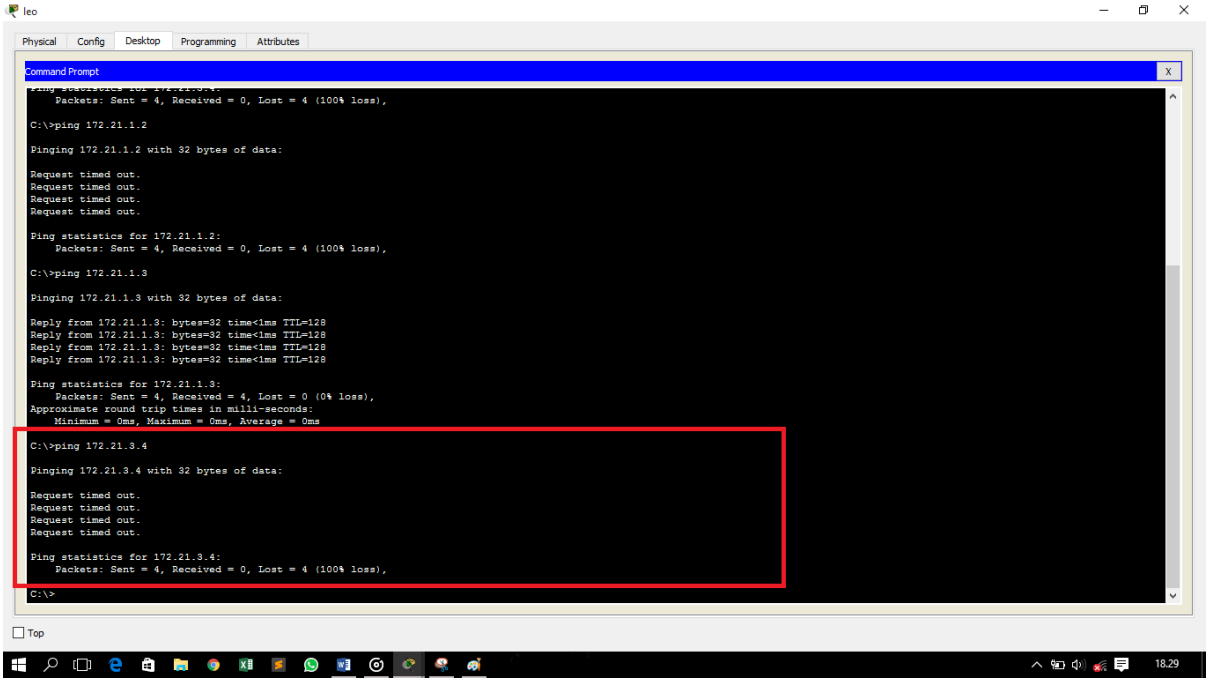

d. libra – cancer

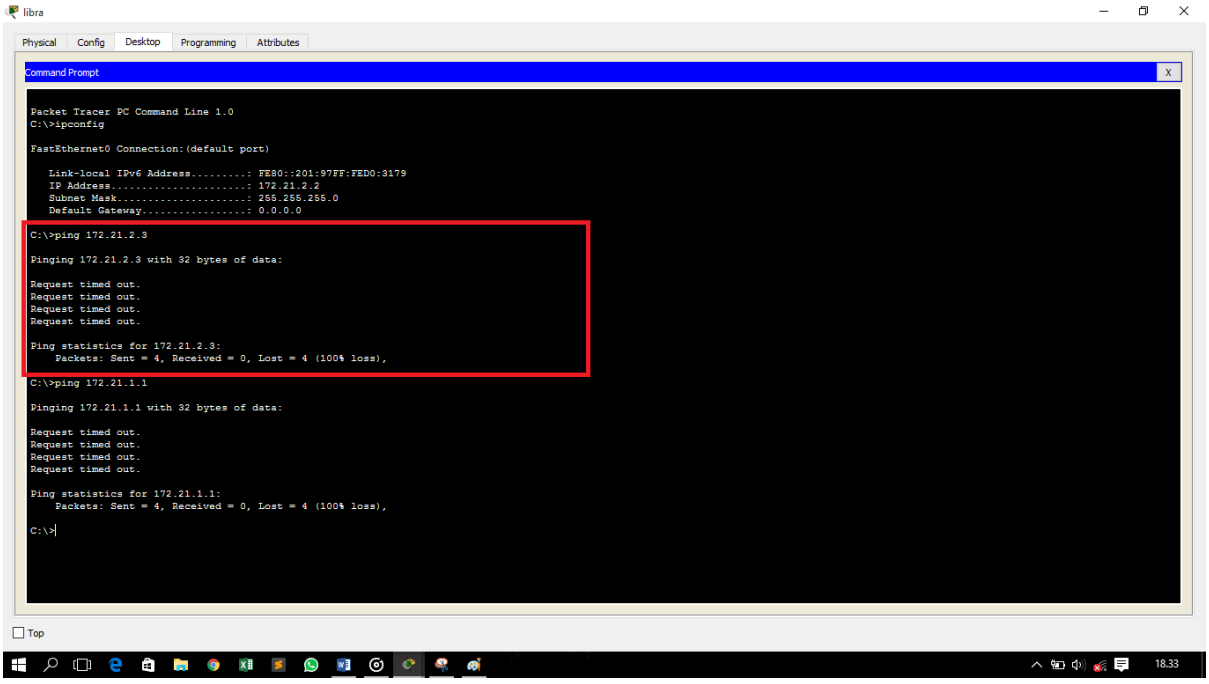

e. libra – leo

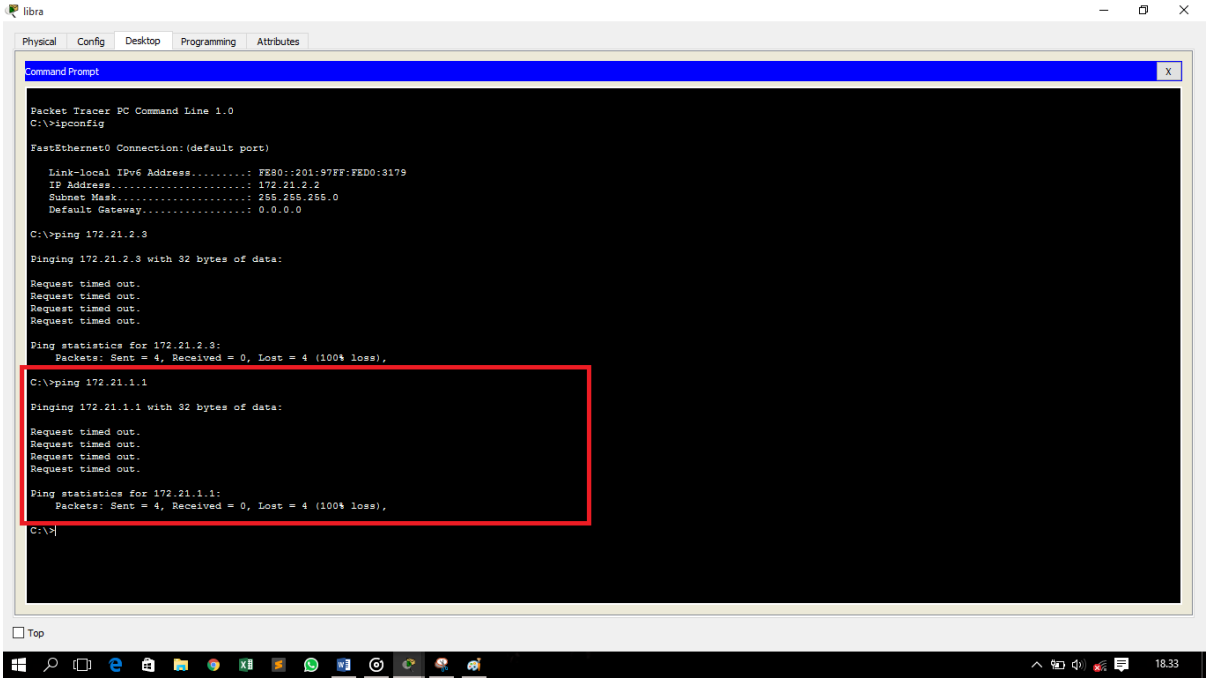

Tugas 12A:
Dari hasil yang diperoleh. Bahwa akan mendapatkan hasil reply apabila pc berada pada jaringan dan vlan yang sama. Apabila hanya sama dari salah satu vlan atau jaringan maka hasilnya juga akan RTO.