

Ivanovitch A.A.R


L200170153

Kelas D

Modul 7

KEGIATAN 1 STATIC ROUTING

1. Buat topologi
2. Beri nama

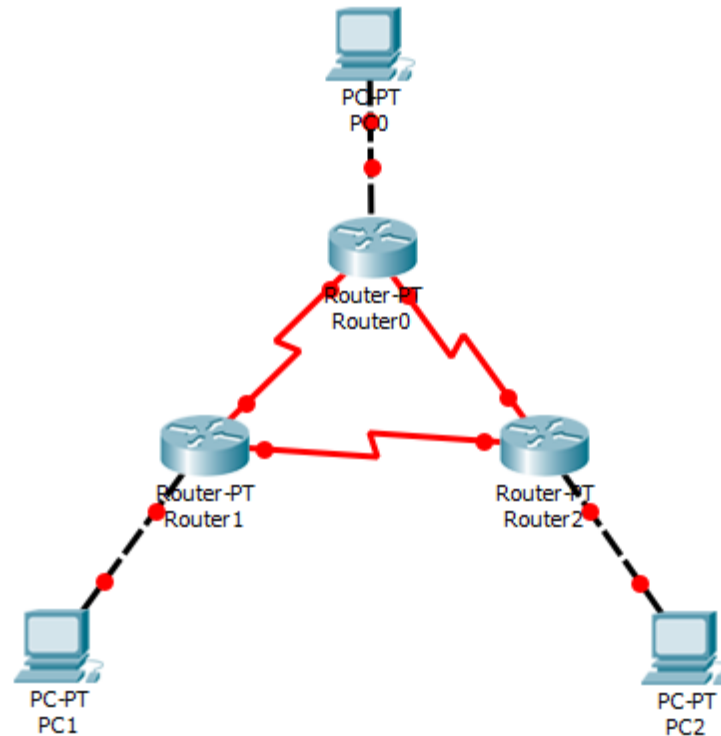

3. - Konfigurasi IP address interface ethernet 0 untuk router eagle

```
Router#en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip add 172.21.10.10 255.255.255.0
Router(config-if)#no shutdown
```

- Konfigurasi IP address interface serial 0 dan serial 1 untuk router eagle

```
Router(config-if)#int se2/0
Router(config-if)#clock rate 2000000
Router(config-if)#ip add 172.21.1.1 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#int se3/0
Router(config-if)#clock rate 2000000
Router(config-if)#ip add 172.21.2.1 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#
```

- Konfigurasi IP address interface ethernet 0 untuk router puma

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip add 172.21.20.20 255.255.255.0
Router(config-if)#no shutdown
```

- Konfigurasi IP address interface serial 0 dan serial 1 untuk router puma

```
Router(config-if)#int se2/0
Router(config-if)#ip add 172.21.1.2 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#int se3/0
Router(config-if)#cl
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to up
% Ambiguous command: "c"
Router(config-if)#clock rate 2000000
Router(config-if)#ip add 172.21.3.2 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#
```

- Konfigurasi IP address interface ethernet 0 untuk router tiger

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip add 172.21.30.30 255.255.255.0
Router(config-if)#no shutdown
```

- Konfigurasi IP address interface serial 0 dan serial 1 untuk router tiger

```
Router(config-if)#int se2/0
Router(config-if)#ip add 172.21.2.3 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#int se3/0
Router(config-if)#ip add 162
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to up


^
% Invalid input detected at '^' marker.

Router(config-if)#ip add 172.21.3.3 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0,
changed state to up
|
```

4. - Konfigurasi IP address PC Leo

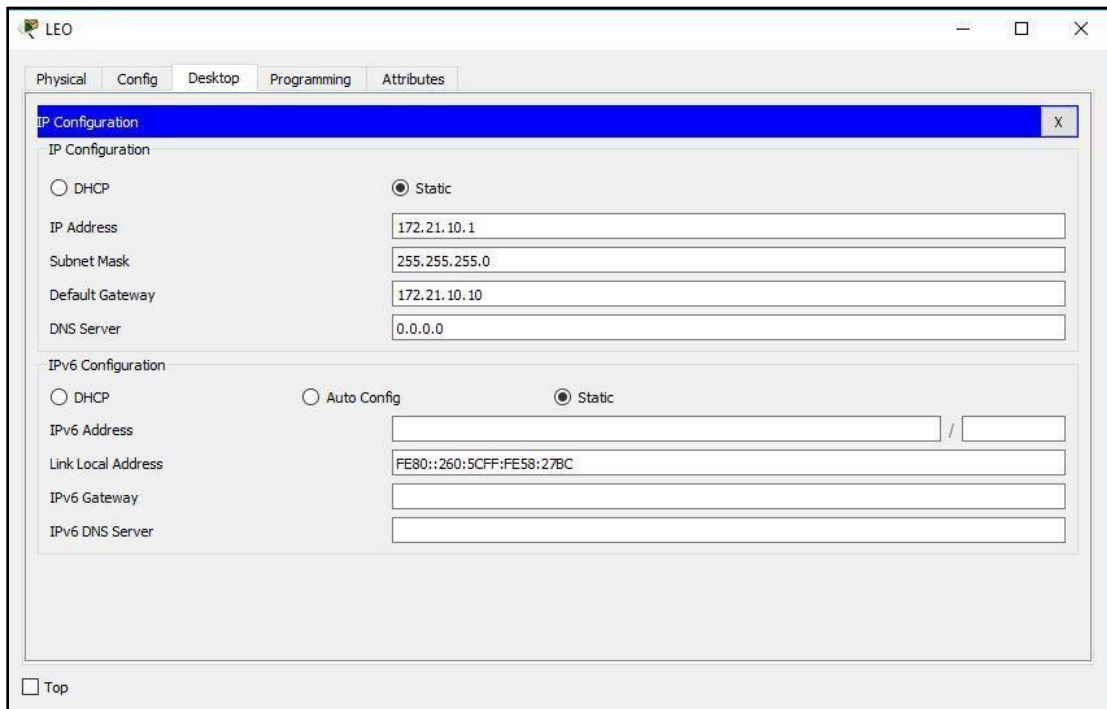


The screenshot shows the LEO configuration window with the 'Config' tab selected. The 'IP Configuration' section is active, displaying settings for both IPv4 and IPv6. The IPv4 configuration is set to 'Static' with an IP address of 172.21.10.1, subnet mask of 255.255.255.0, default gateway of 172.21.10.10, and DNS server of 0.0.0.0. The IPv6 configuration is also set to 'Static' with a link local address of FE80::260:5CFF:FE58:27BC. The 'Top' button is visible at the bottom left.

IP Configuration	
<input type="radio"/> DHCP <input checked="" type="radio"/> Static	
IP Address	172.21.10.1
Subnet Mask	255.255.255.0
Default Gateway	172.21.10.10
DNS Server	0.0.0.0

IPv6 Configuration	
<input type="radio"/> DHCP <input type="radio"/> Auto Config <input checked="" type="radio"/> Static	
IPv6 Address	/
Link Local Address	FE80::260:5CFF:FE58:27BC
IPv6 Gateway	
IPv6 DNS Server	

☐ Top

- Konfigurasi IP address PC Aries

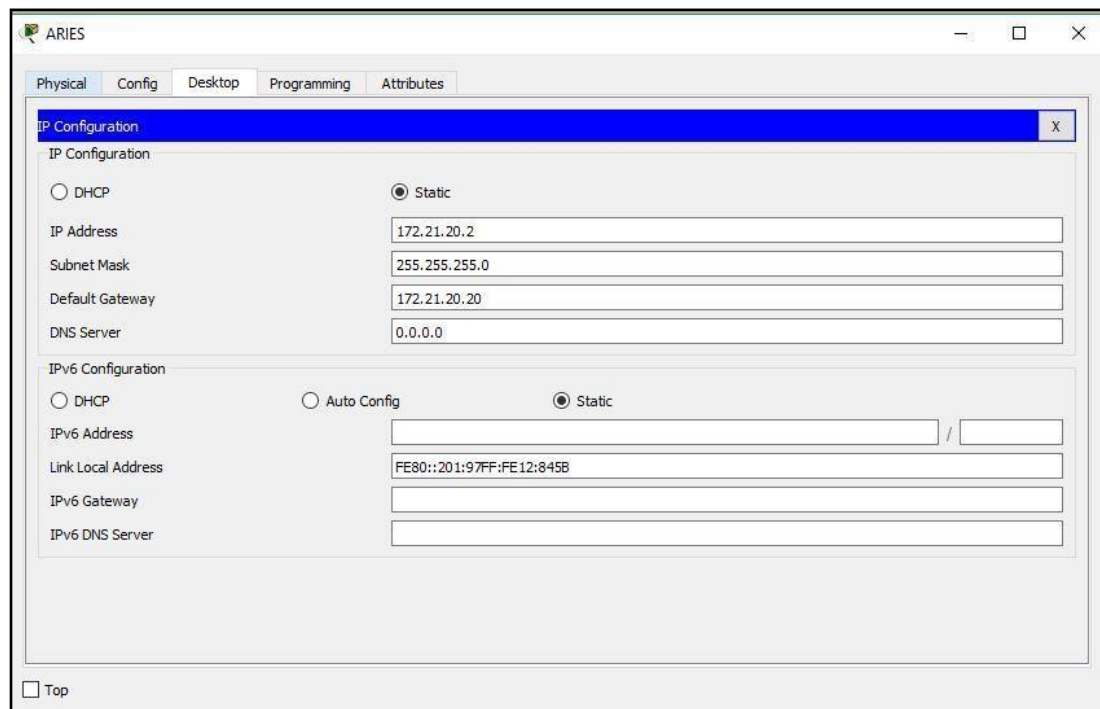


The screenshot shows the ARIES configuration window with the 'Config' tab selected. The 'IP Configuration' section is active, displaying settings for both IPv4 and IPv6. The IPv4 configuration is set to 'Static' with an IP address of 172.21.20.2, subnet mask of 255.255.255.0, default gateway of 172.21.20.20, and DNS server of 0.0.0.0. The IPv6 configuration is also set to 'Static' with a link local address of FE80::201:97FF:FE12:845B. The 'Top' button is visible at the bottom left.

IP Configuration	
<input type="radio"/> DHCP <input checked="" type="radio"/> Static	
IP Address	172.21.20.2
Subnet Mask	255.255.255.0
Default Gateway	172.21.20.20
DNS Server	0.0.0.0

IPv6 Configuration	
<input type="radio"/> DHCP <input type="radio"/> Auto Config <input checked="" type="radio"/> Static	
IPv6 Address	/
Link Local Address	FE80::201:97FF:FE12:845B
IPv6 Gateway	
IPv6 DNS Server	

☐ Top

- Konfigurasi IP address PC Virgo

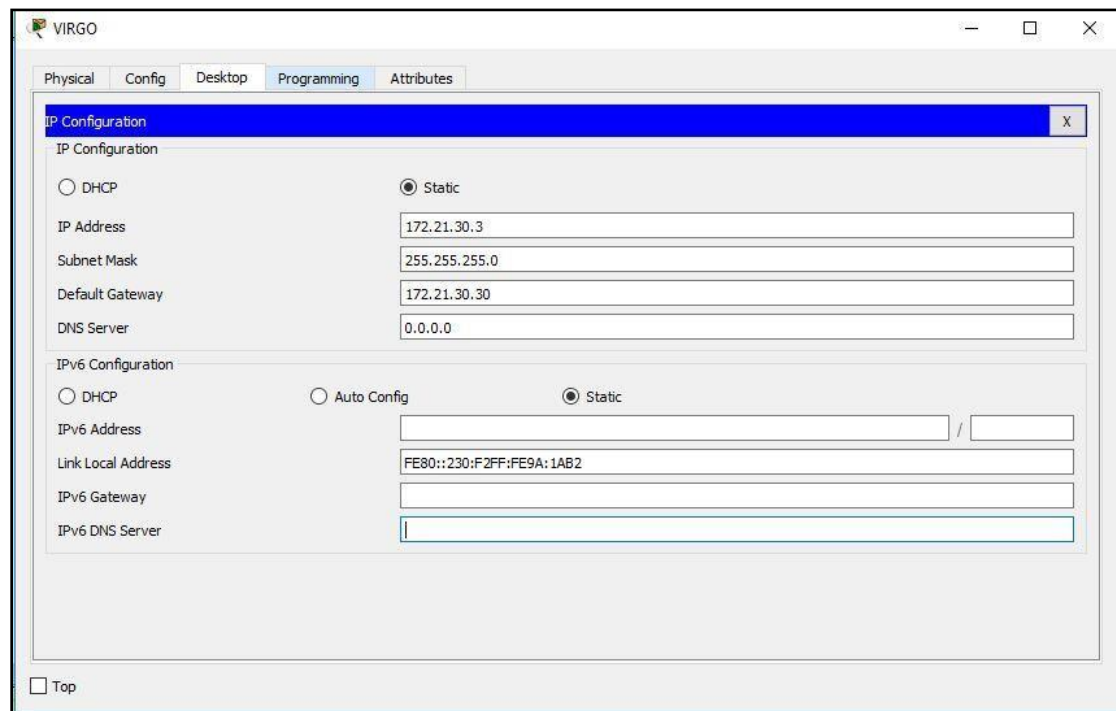

5. Lakukang ping dari PC leo ke router eagle

```
C:\>ping 172.21.1.1


Pinging 172.21.1.1 with 32 bytes of data:

Reply from 172.21.1.1: bytes=32 time=1ms TTL=255
Reply from 172.21.1.1: bytes=32 time<1ms TTL=255
Reply from 172.21.1.1: bytes=32 time<1ms TTL=255
Reply from 172.21.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.21.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

- Lakukan ping dari PC aries ke router puma

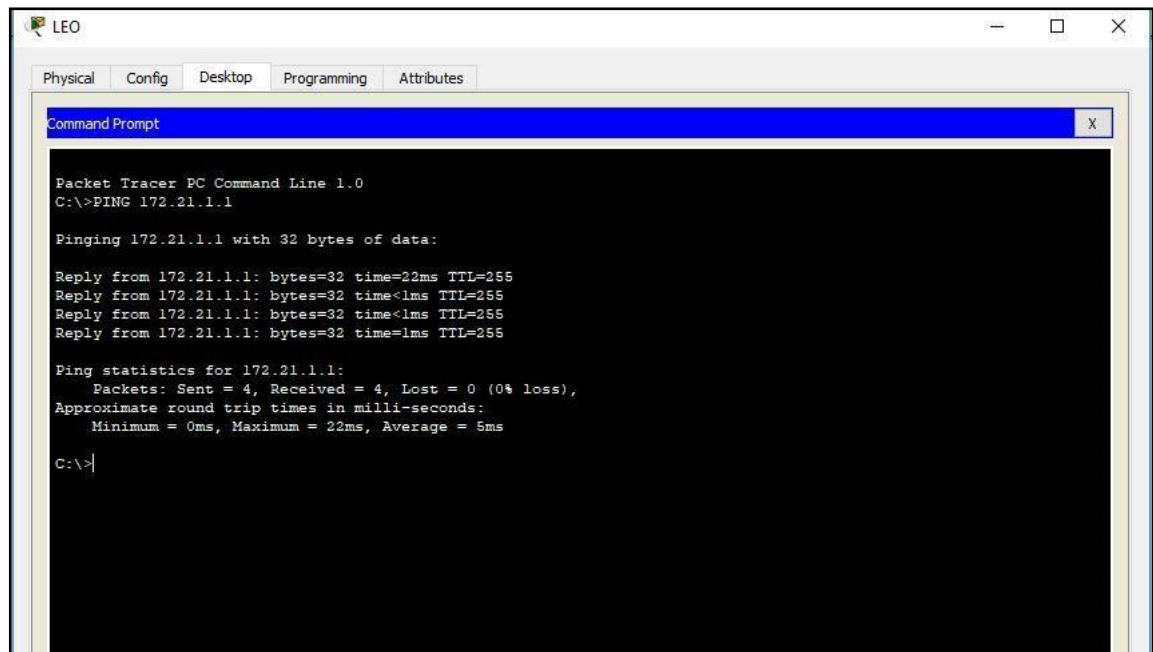

LEO

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>PING 172.21.1.1


Pinging 172.21.1.1 with 32 bytes of data:

Reply from 172.21.1.1: bytes=32 time=22ms TTL=255
Reply from 172.21.1.1: bytes=32 time<1ms TTL=255
Reply from 172.21.1.1: bytes=32 time<1ms TTL=255
Reply from 172.21.1.1: bytes=32 time=1ms TTL=255

Ping statistics for 172.21.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 22ms, Average = 5ms

C:\>
```

- Lakukan ping dari PC aries ke router puma

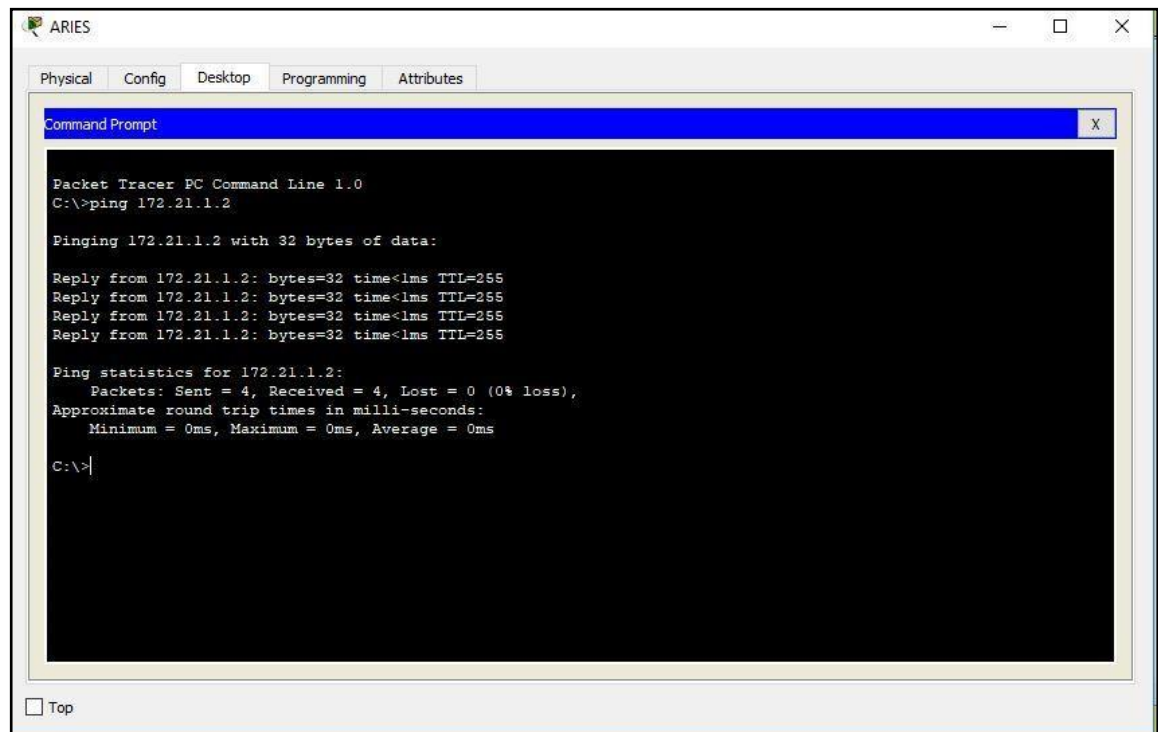

ARIES

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.1.2

Pinging 172.21.1.2 with 32 bytes of data:


Reply from 172.21.1.2: bytes=32 time<1ms TTL=255
Reply from 172.21.1.2: bytes=32 time<1ms TTL=255
Reply from 172.21.1.2: bytes=32 time<1ms TTL=255
Reply from 172.21.1.2: bytes=32 time<1ms TTL=255

Ping statistics for 172.21.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>
```

☐ Top


- Lakukan ping dari PC virgo ke router tiger

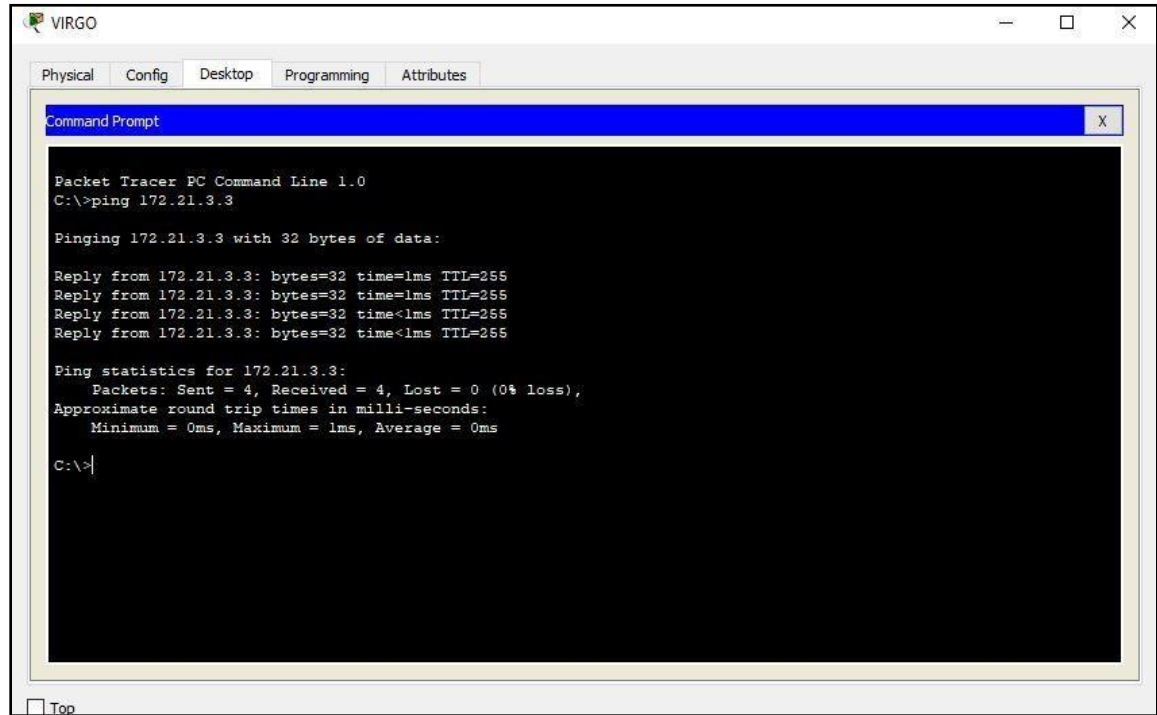


- Lakukan ping dari router eagle ke router puma

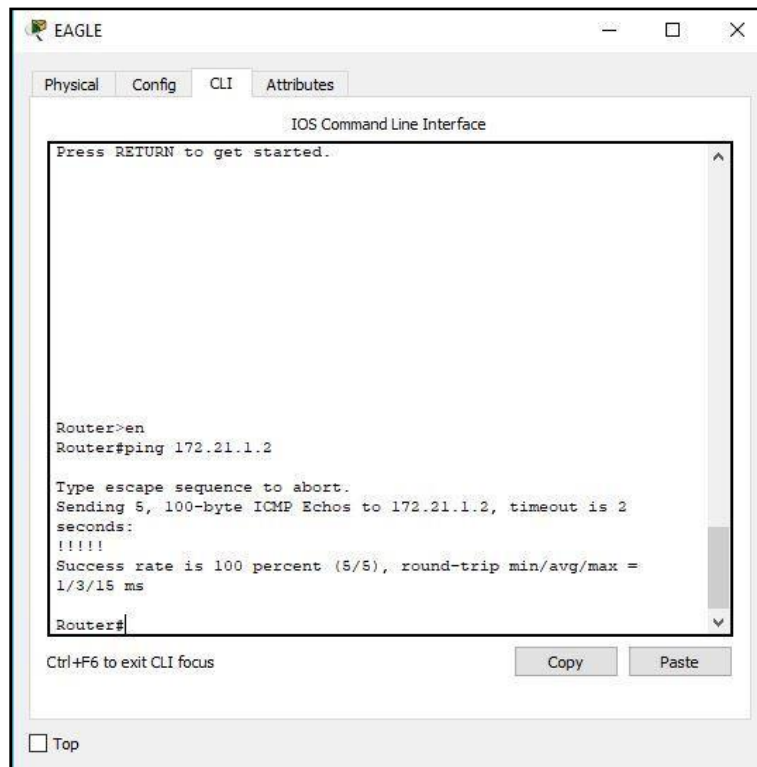


- Lakukan ping dari router eagle ke router tiger

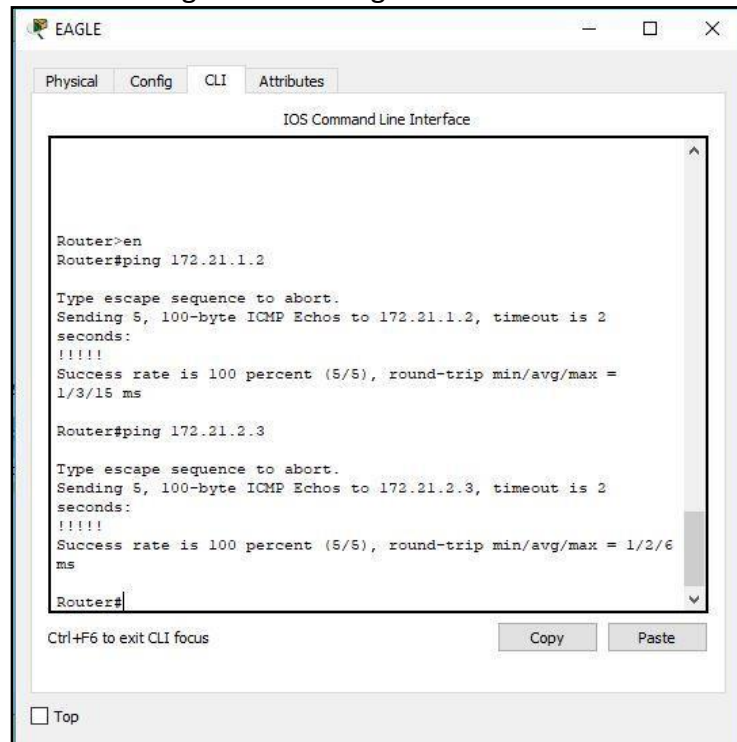

- Lakukan ping dari router puma ke router tiger

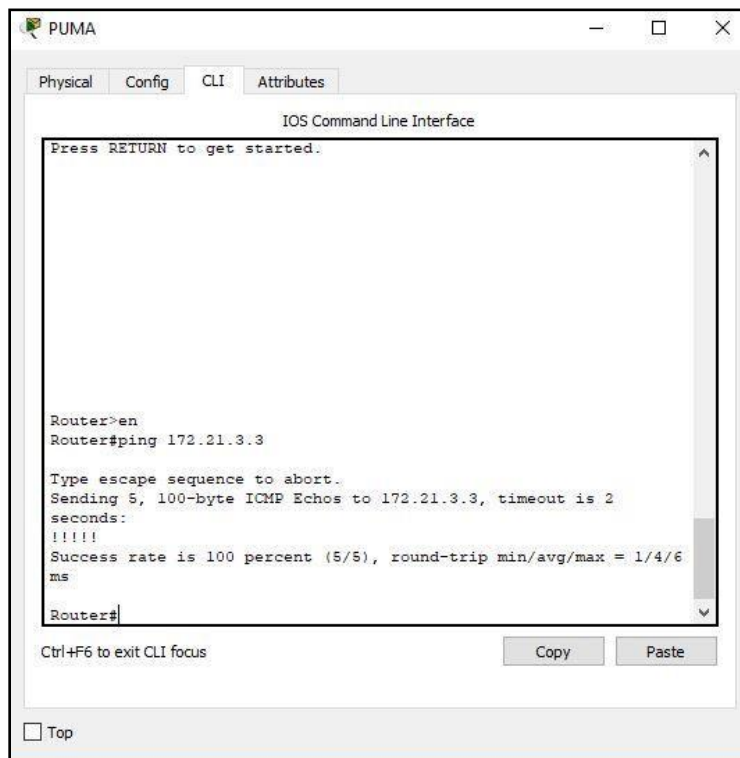

6. Simpan konfigurasi seluruh device yang telah dilakukan
7. - Melihat route table router eagle

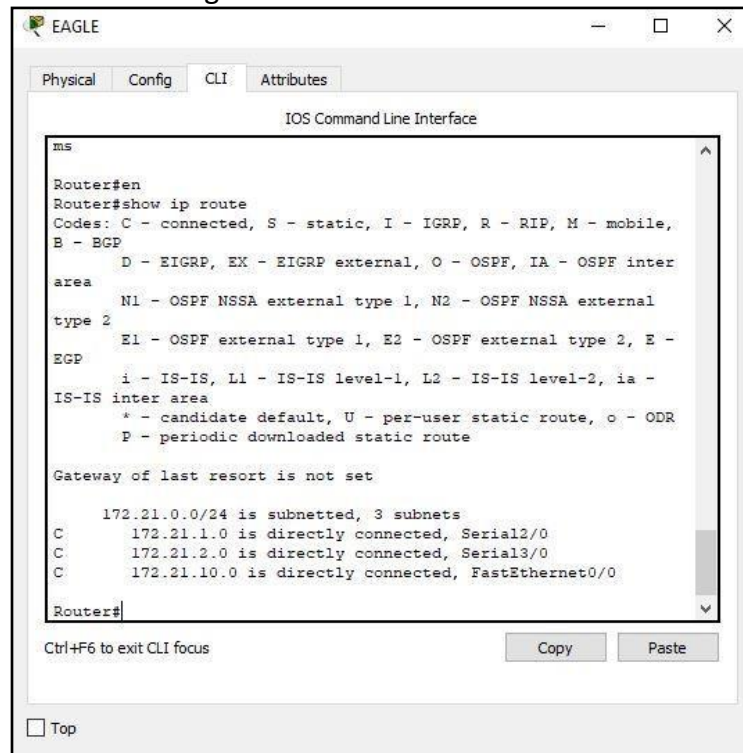


The screenshot shows the EAGLE router's CLI interface. The command 'show ip route' has been entered, and the output displays the routing table. The output includes a legend for route codes (C, S, I, R, M, B), a list of route types (D, EX, O, IA, N1, N2, E1, E2, E, i, L1, L2, ia, *, U, o, P), and a list of connected routes (172.21.0.0/24, 172.21.1.0, 172.21.2.0, 172.21.10.0) with their respective interfaces (Serial2/0, Serial3/0, FastEthernet0/0). The Gateway of last resort is not set.

```
ms
Router#
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.21.0.0/24 is subnetted, 3 subnets
C       172.21.1.0 is directly connected, Serial2/0
C       172.21.2.0 is directly connected, Serial3/0
C       172.21.10.0 is directly connected, FastEthernet0/0
Router#
```

- Melihat route table router puma

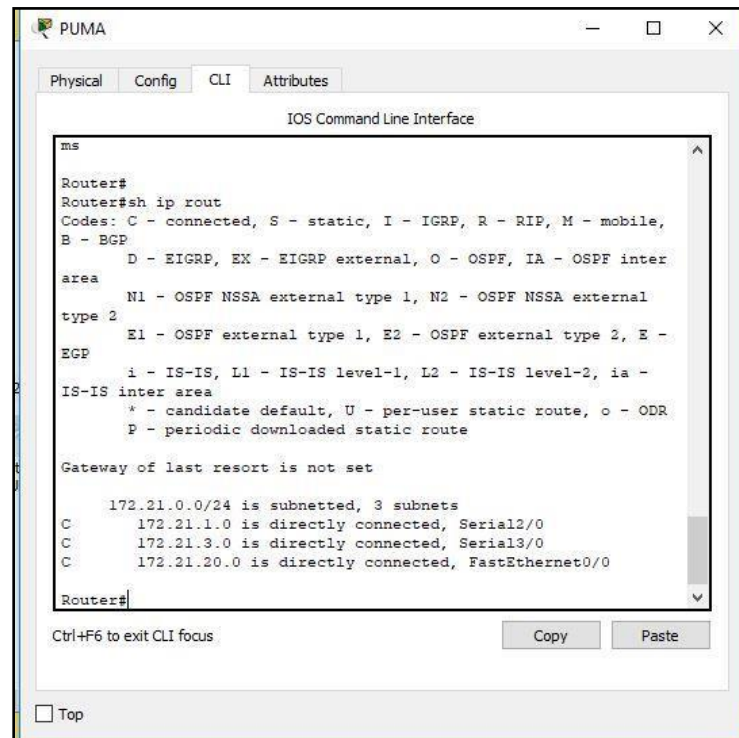


The screenshot shows the PUMA router's CLI interface. The command 'show ip route' has been entered, and the output displays the routing table. The output includes a legend for route codes (C, S, I, R, M, B), a list of route types (D, EX, O, IA, N1, N2, E1, E2, E, i, L1, L2, ia, *, U, o, P), and a list of connected routes (172.21.0.0/24, 172.21.1.0, 172.21.3.0, 172.21.20.0) with their respective interfaces (Serial2/0, Serial3/0, FastEthernet0/0). The Gateway of last resort is not set.

```
ms
Router#
Router#sh ip rout
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.21.0.0/24 is subnetted, 3 subnets
C       172.21.1.0 is directly connected, Serial2/0
C       172.21.3.0 is directly connected, Serial3/0
C       172.21.20.0 is directly connected, FastEthernet0/0
Router#
```

- Melihat route table router tiger

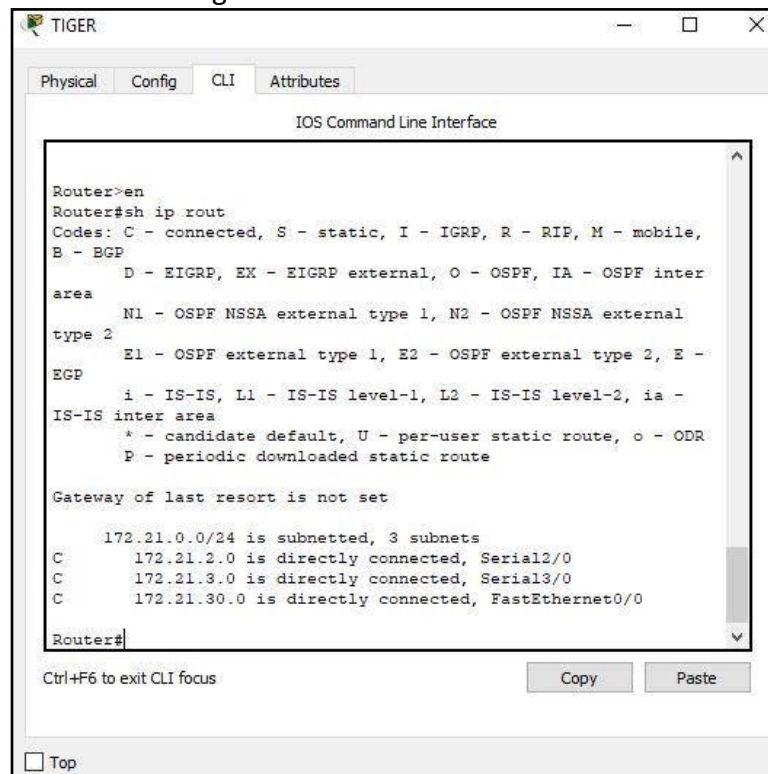

```
TIGER
Physical Config CLI Attributes
IOS Command Line Interface


Router>en
Router#sh ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
       area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
       type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
       EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
       IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.21.0.0/24 is subnetted, 3 subnets
C       172.21.2.0 is directly connected, Serial2/0
C       172.21.3.0 is directly connected, Serial3/0
C       172.21.30.0 is directly connected, FastEthernet0/0

Router#
```

8. Lakukan ping dari router eagle kealamat interface S0 router puma(172.21.20.20)

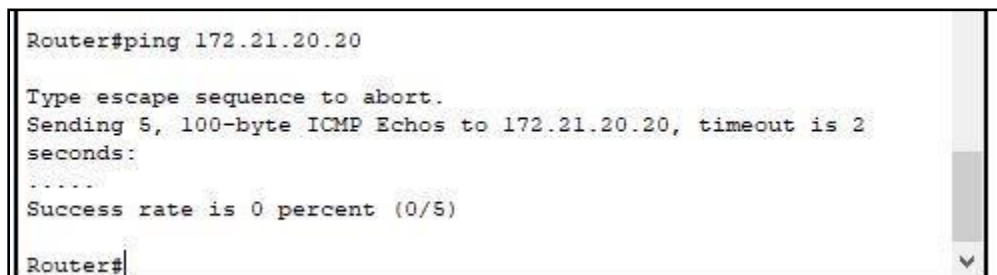


```
Router#ping 172.21.20.20

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.21.20.20, timeout is 2
seconds:
.....
Success rate is 0 percent (0/5)

Router#
```

9. Lakukan trace dari PC leoke PC aries

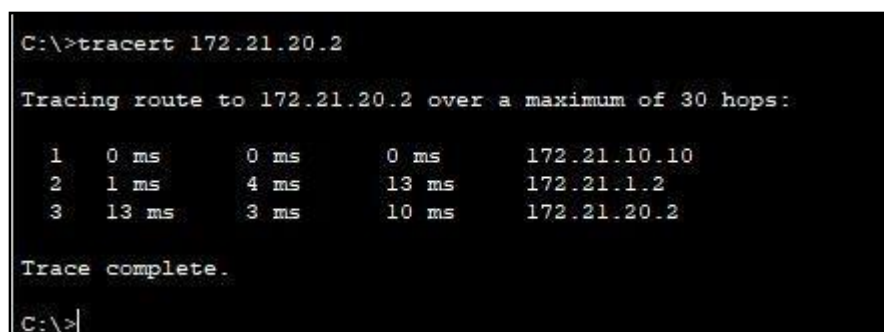

```
C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

  0  0 ms    0 ms    0 ms    172.21.10.10
  1  1 ms     4 ms   13 ms   172.21.1.2
  2  13 ms    3 ms   10 ms   172.21.20.2

Trace complete.

C:\>
```

10. Lakukan trace dari PC leokealamat interface s0 router eagle(172.21.1.1)

```
C:\>tracert 172.21.1.1

Tracing route to 172.21.1.1 over a maximum of 30 hops:

  1  0 ms      0 ms      0 ms      172.21.1.1

Trace complete.

C:\>|
```

11. - Menambahkan route table pada router eagle

```
Router#en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.20.0 255.255.255.0 172.21.1.2
Router(config)#ip route 172.21.30.0 255.255.255.0 172.21.2.3
Router(config)#|
```

- Menambahkan route table pada router puma

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.10.0 255.255.255.0 172.21.1.1
Router(config)#ip route 172.21.30.0 255.255.255.0 172.21.3.3
Router(config)#|
```

- Menambahkan route table pada router tiger

```
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.10.0 255.255.255.0 172.21.2.1
Router(config)#ip route 172.21.20.0 255.255.255.0 172.21.3.2
Router(config)#|
```

12. Lakukan ping dari PC leoke PC aries, danlakukan pula trace dari PC leokearies

```
C:\>tracert 172.21.1.1

Tracing route to 172.21.1.1 over a maximum of 30 hops:

  1  0 ms      0 ms      0 ms      172.21.1.1

Trace complete.

C:\>ping 172.21.20.2

Pinging 172.21.20.2 with 32 bytes of data:

Reply from 172.21.20.2: bytes=32 time=1ms TTL=126
Reply from 172.21.20.2: bytes=32 time=2ms TTL=126
Reply from 172.21.20.2: bytes=32 time=1ms TTL=126
Reply from 172.21.20.2: bytes=32 time=1ms TTL=126

Ping statistics for 172.21.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms
```

```
C:\>tracert 172.21.20.2
```

```
Tracing route to 172.21.20.2 over a maximum of 30 hops:
```


1	0 ms	0 ms	0 ms	172.21.10.10
2	1 ms	4 ms	13 ms	172.21.1.2
3	13 ms	3 ms	10 ms	172.21.20.2

```
Trace complete.
```

```
C:\>
```

KEGIATAN 2 RIP (Routing Information Protocol)

3. Pada mode configuration, konfigurasi routing RIP pada router eagle.

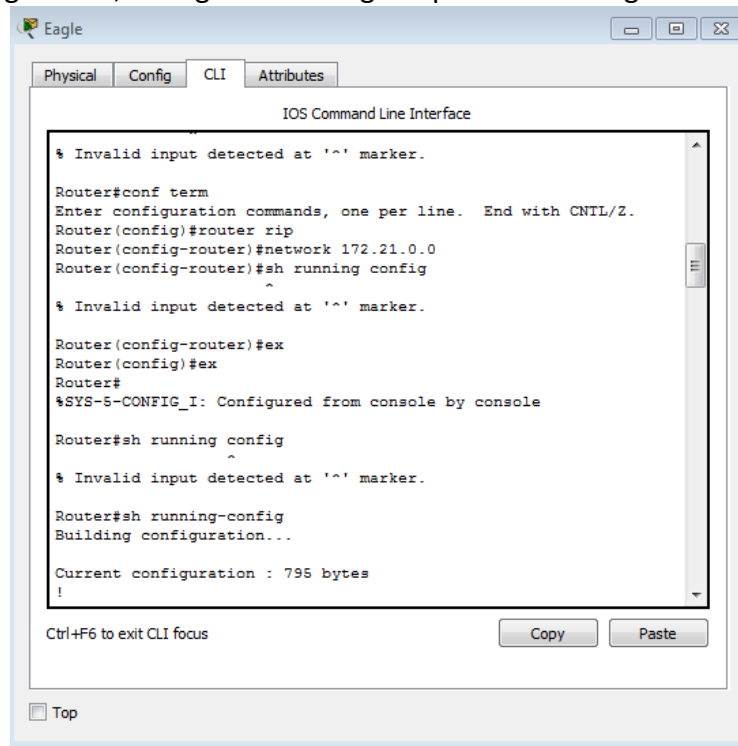

The screenshot shows the Eagle simulator window with the 'CLI' tab selected. The 'IOS Command Line Interface' is active, displaying the following commands and output:

```
% Invalid input detected at '^' marker.

Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 172.21.0.0
Router(config-router)#sh running config
^
% Invalid input detected at '^' marker.

Router(config-router)#ex
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console


Router#sh running config
^
% Invalid input detected at '^' marker.

Router#sh running-config
Building configuration...

Current configuration : 795 bytes
!
```

At the bottom of the CLI window, there is a prompt 'Ctrl+F6 to exit CLI focus' and buttons for 'Copy' and 'Paste'. A 'Top' button is also visible at the bottom left of the simulator window.

4. Lihat konfigurasi routing RIP yang telah dibuat dengan perintah ***"Show running-config"*** pada mode user.

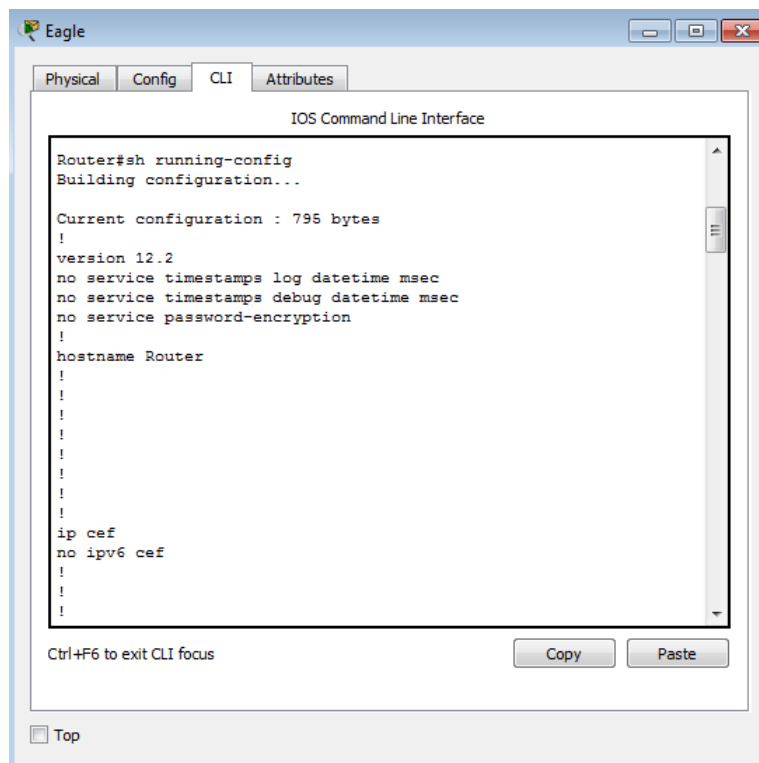

The screenshot shows the Eagle simulator window with the 'CLI' tab selected. The 'IOS Command Line Interface' is active, displaying the output of the 'show running-config' command:

```
Router#sh running-config
Building configuration...

Current configuration : 795 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
```

At the bottom of the CLI window, there is a prompt 'Ctrl+F6 to exit CLI focus' and buttons for 'Copy' and 'Paste'. A 'Top' button is also visible at the bottom left of the simulator window.

```

!
!
!
interface FastEthernet0/0
 ip address 172.21.10.10 255.255.255.0
 duplex auto
 speed auto
!
interface FastEthernet1/0
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Serial2/0
 ip address 172.21.1.1 255.255.255.0
 clock rate 2000000
!
interface Serial3/0
 ip address 172.21.2.1 255.255.255.0
 clock rate 2000000
!
interface FastEthernet4/0
 no ip address
 shutdown
!
interface FastEthernet5/0
 no ip address
 shutdown
!
router rip
 network 172.21.0.0
!
ip classless
!
ip flow-export version 9
!
!
!

```

Perhatikan konfigurasi pada bagian **“Router RIP”**.

```



Router#
Router#debug ip rip
RIP protocol debugging is on
Router#RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0 (172.21.10.10)
RIP: build update entries
      network 172.21.1.0 metric 1
      network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0 (172.21.1.1)
RIP: build update entries
      network 172.21.2.0 metric 1
      network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0 (172.21.2.1)
RIP: build update entries
      network 172.21.1.0 metric 1
      network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0 (172.21.10.10)
RIP: build update entries
      network 172.21.1.0 metric 1
      network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0 (172.21.1.1)
RIP: build update entries
      network 172.21.2.0 metric 1
      network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0 (172.21.2.1)
RIP: build update entries
      network 172.21.1.0 metric 1
      network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0 (172.21.10.10)
RIP: build update entries
      network 172.21.1.0 metric 1
      network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0 (172.21.1.1)
RIP: build update entries
      network 172.21.2.0 metric 1
      network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0 (172.21.2.1)
RIP: build update entries
      network 172.21.1.0 metric 1

```


5. Lihat proses update routing RIP pada router eagle dengan perintah ***“debug ip rip”*** pada mode user.

```
Router#
Router#debug ip rip
RIP protocol debugging is on
Router#RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0 (172.21.10.10)
RIP: build update entries
    network 172.21.1.0 metric 1
    network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0 (172.21.1.1)
RIP: build update entries
    network 172.21.2.0 metric 1
    network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0 (172.21.2.1)
RIP: build update entries
    network 172.21.1.0 metric 1
    network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0 (172.21.10.10)
RIP: build update entries
    network 172.21.1.0 metric 1
    network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0 (172.21.1.1)
RIP: build update entries
    network 172.21.2.0 metric 1
    network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0 (172.21.2.1)
RIP: build update entries
    network 172.21.1.0 metric 1
    network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0 (172.21.10.10)
RIP: build update entries
    network 172.21.1.0 metric 1
    network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0 (172.21.1.1)
RIP: build update entries
    network 172.21.2.0 metric 1
    network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0 (172.21.2.1)
RIP: build update entries
    network 172.21.1.0 metric 1
```

6. Lakukan konfigurasi routing RIP pada router puma dan tiger. Perhatikan proses update routing RIP pada router eagle ketika konfigurasi router puma dan tiger dilakukan.

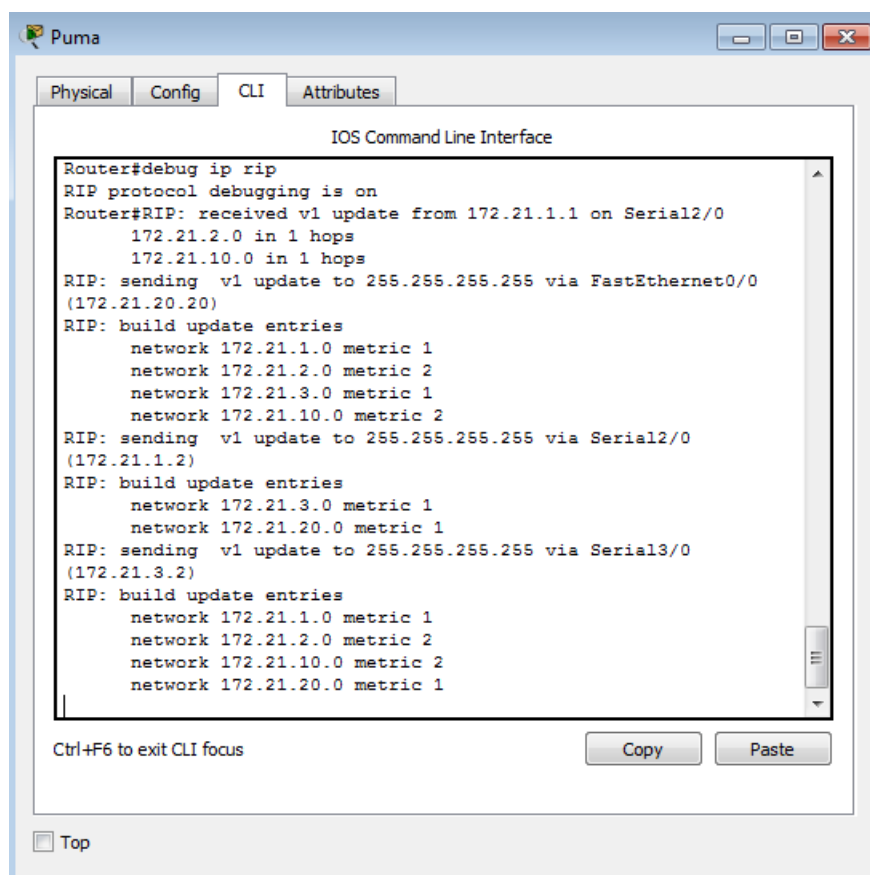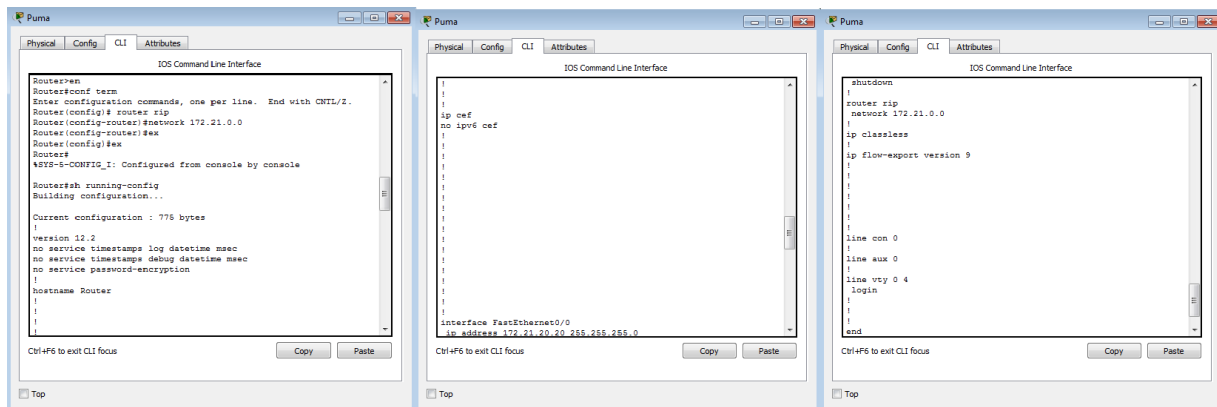

7. Dari PC leo lakukan trace ke PC aries.

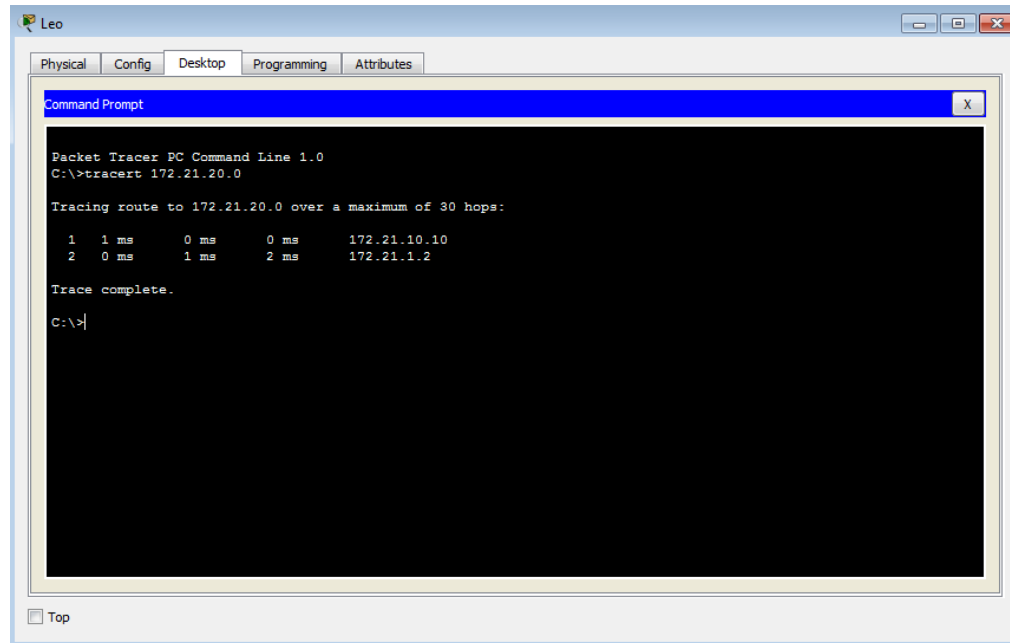

8. Buat hubungan antara router eagle dan puma terputus dan perhatikan proses update routing RIP yang terjadi.

Langkah pengoperasian

-Masuk ke router puma

-Masuk ke mode interface s0

-Ketik shutdown

```
Router(config-if)#shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to
administratively down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to down
RIP: received v1 update from 172.21.3.3 on Serial3/0
      172.21.1.0 in 16 hops
RIP: sending  v1 update to 255.255.255.255 via FastEthernet0/0
(172.21.20.20)
RIP: build update entries
      network 172.21.2.0 metric 16
      network 172.21.3.0 metric 1
      network 172.21.10.0 metric 16
      network 172.21.30.0 metric 2
RIP: sending  v1 update to 255.255.255.255 via Serial3/0
(172.21.3.2)
RIP: build update entries
```

9. Dari PC leo lakukan trace ke PC aries

```
C:\>tracert 172.21.20.2



Tracing route to 172.21.20.2 over a maximum of 30 hops:

  1  0 ms      0 ms      0 ms      172.21.10.10
  2  1 ms      2 ms      1 ms      172.21.2.3
  3  0 ms      2 ms      1 ms      172.21.3.2
  4  0 ms      0 ms      0 ms      172.21.20.2

Trace complete.

C:\>|
```

3. Pada mode configuration, konfigurasi routing RIP pada router eagle.

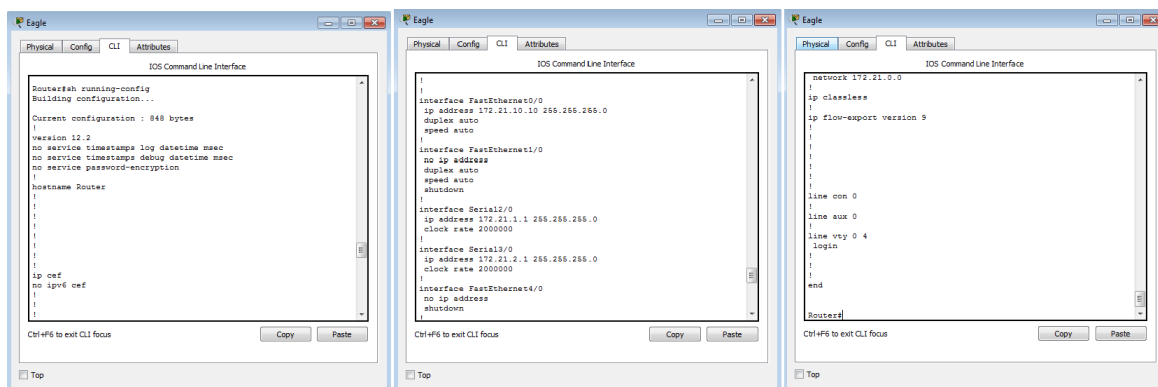

5. Lihat proses transaksi routing EIGRP pada router eagle dengan perintah "debug EIGRP transactions" pada mode user. Tunggu beberapa saat untuk melihat informasi transaksi routing EIGRP yang terjadi.

```
EIGRP: Sending HELLO on Serial2/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on FastEthernet0/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial3/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial2/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on FastEthernet0/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial3/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial2/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on FastEthernet0/0
  AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial3/0
```

6. Lihat proses transaksi routing EIGRP pada router eagle dengan perintah "**debug ip eigrp transactions**" pada mode user. Tunggu beberapa saat untuk melihat informasi transaksi routing EIGRP yang terjadi.

Catatan : Hasil tampilan perintah "debug ip eigrp transactions" memperlihatkan informasi update routing EIGRP secara detail. Untuk melihat informasi update routing EIGRP secara lebih ringkas digunakan perintah "debug ip eigrp events". (dengan lebih dahulu menonaktifkan "debug ip eigrp transactions" dengan perintah "no debug ip eigrp transactions").

7. Lakukan konfigurasi routing EIGRP pada router puma dan tiger. Perhatikan proses update routing EIGRP pada router eagle (secara detail) ketika konfigurasi router puma dan tiger dilakukan.

Router Puma :

- Konfigurasi routing EIGRP pada router puma :

```
changed state to up

Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router eigrp 100
Router(config-router)#network 172.21.0.0
Router(config-router)#
%DUAL-5-NBRCHANGE: IP-EIGRP 100: Neighbor 172.21.1.1 (Serial2/0)
is up: new adjacency
|
```

- Melihat konfigurasi routing EIGRP yang telah dibuat.

```
Router#show running-config
Building configuration...

Current configuration : 795 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
--More-- |
```

- Melihat proses transaksi routing EIGRP pada router puma.

```
Router#debug eigrp packets
EIGRP Packets debugging is on
(UPDATE, REQUEST, QUERY, REPLY, HELLO, ACK )
Router#
EIGRP: Received HELLO on Serial2/0 nbr 172.21.1.1
AS 100, Flags 0x0, Seq 6/0 idbQ 0/0

EIGRP: Sending HELLO on FastEthernet0/0
AS 100, Flags 0x0, Seq 6/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial3/0
AS 100, Flags 0x0, Seq 6/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial2/0
AS 100, Flags 0x0, Seq 6/0 idbQ 0/0 iidbQ un/rely 0/0
```

Router Tiger :

- Konfigurasi routing EIGRP pada router tiger.

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router eigrp 100
Router(config-router)#network 172.21.0.0
Router(config-router)#
%DUAL-5-NBRCHANGE: IP-EIGRP 100: Neighbor 172.21.3.2 (Serial3/0)
is up: new adjacency

%DUAL-5-NBRCHANGE: IP-EIGRP 100: Neighbor 172.21.2.1 (Serial2/0)
is up: new adjacency
```

- Melihat konfigurasi routing EIGRP yang telah dibuat.

```
Router#show running-config
Building configuration...

Current configuration : 775 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
--More--
```

- Melihat proses transaksi routing EIGRP pada router tiger.


```
Router#debug eigrp packets
EIGRP Packets debugging is on
(UPDATE, REQUEST, QUERY, REPLY, HELLO, ACK )
Router#
EIGRP: Received HELLO on Serial2/0 nbr 172.21.2.1
AS 100, Flags 0x0, Seq 9/0 idbQ 0/0

EIGRP: Sending HELLO on Serial3/0
AS 100, Flags 0x0, Seq 11/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Received HELLO on Serial3/0 nbr 172.21.3.2
AS 100, Flags 0x0, Seq 9/0 idbQ 0/0

EIGRP: Sending HELLO on FastEthernet0/0
AS 100, Flags 0x0, Seq 11/0 idbQ 0/0 iidbQ un/rely 0/0
```

8. Dari PC Leo lakukan trace ke PC aries

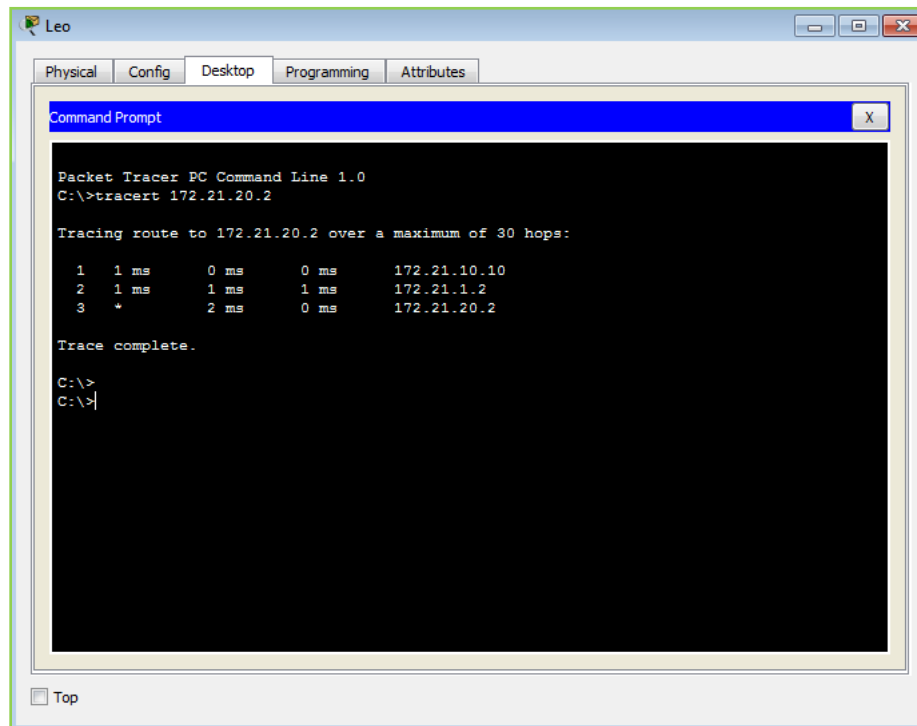

9. Buat hubungan antara router eagle dan puma terputus dan perhatikan proses update routing RIP yang terjadi.

Langkah pengoperasian:

- Masuk ke router puma
- Masuk mode interface s0
- Ketik shutdown

```
Router#no debug eigrp packets
EIGRP Packets debugging is off
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int se2/0
Router(config-if)#shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to
administratively down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to down

%DUAL-5-NBRCHANGE: IP-EIGRP 100: Neighbor 172.21.1.1 (Serial2/0)
is down: interface down
```

10. Dari pc leo lakukan trace ke PC Aries.

```
C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

  1  0 ms    0 ms    0 ms    172.21.10.10
  2  1 ms    1 ms    0 ms    172.21.2.3
  3  1 ms    2 ms    0 ms    172.21.3.2
  4  1 ms    0 ms    0 ms    172.21.20.2

Trace complete.

C:\>|
```