

# **Versions of RIP**


## **RIP Version 1 (RIPv1):**

- Classful protocol: Does not support subnetting, which means it doesn't send subnet mask information with its routing updates.
- Broadcasts updates to all hosts.

## **RIP Version 2 (RIPv2):**

- Classless protocol: Supports subnet masks and VLSM (Variable Length Subnet Mask).
- Uses multicast for sending updates to reduce unnecessary load on all hosts.
- Includes authentication for updates, which adds a layer of security.

# RIP V2 Configuration:

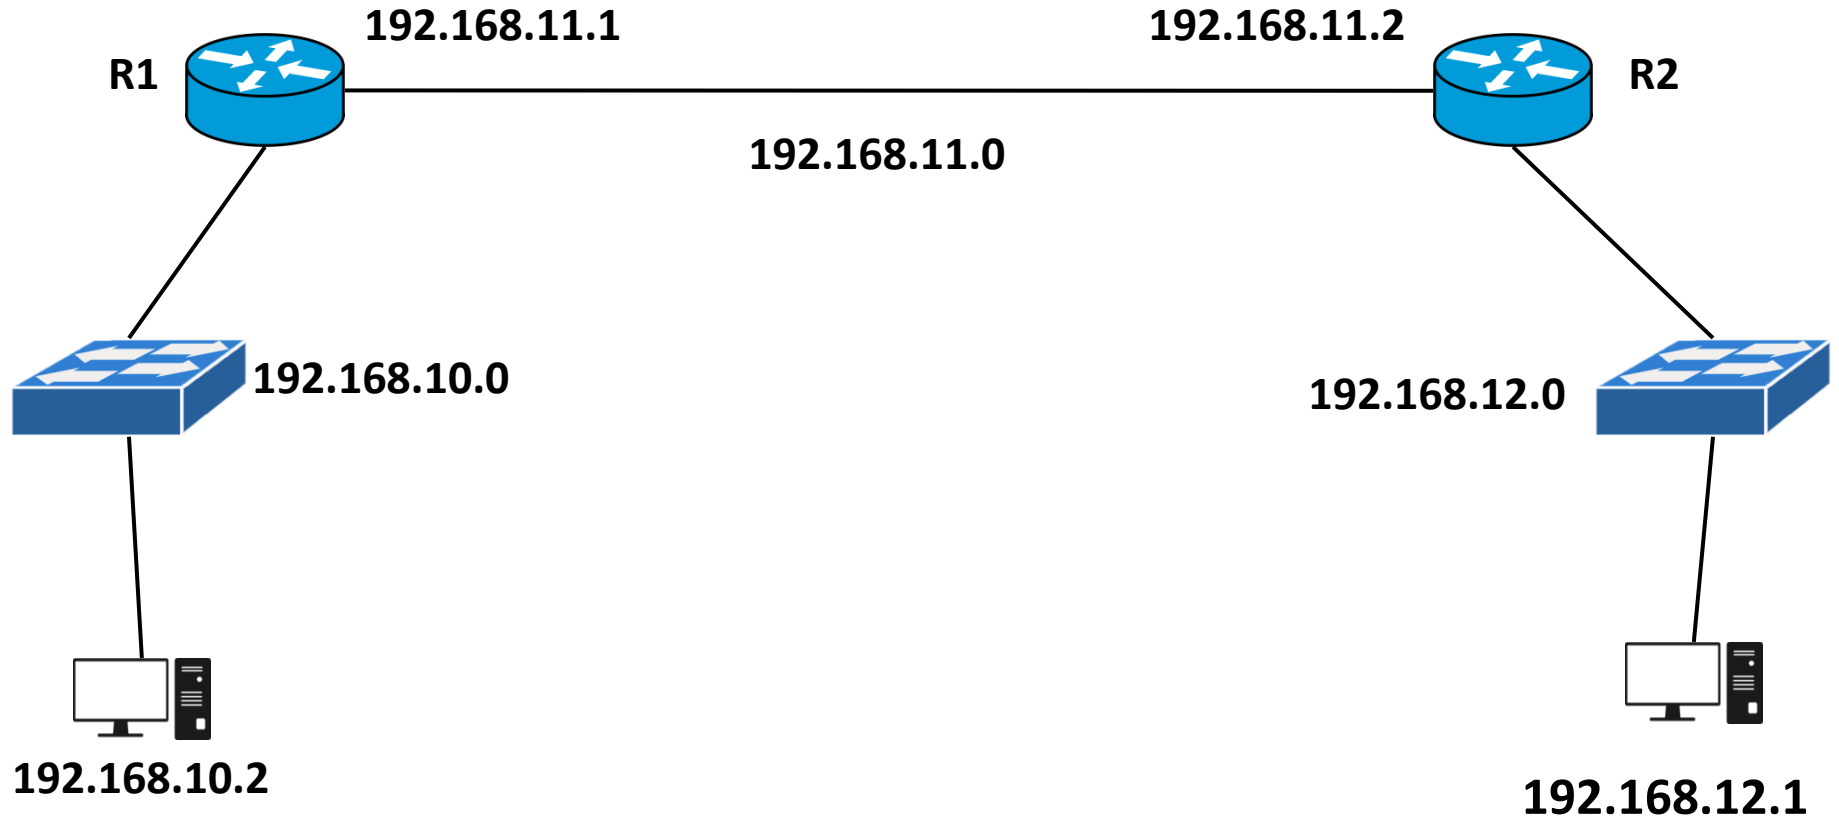

# Basic Configuration of RIPv2

## Enable RIP Routing Process:

```
Router> enable
```

```
Router# configure terminal
```

```
Router(config)# router rip
```

## Enable Version 2:

```
Router(config-router)# version 2
```

## Specify Networks:

```
Router(config-router)# network 192.168.10.0
```

```
Router(config-router)# network 192.168.11.0
```

```
Router(config-router)# exit
```