

Redistribution of OSPF and BGP:

Redistribution between **OSPF and BGP (Border Gateway Protocol)** is a common networking task that allows routes learned by one protocol to be advertised to another protocol. This is essential in complex networks where different routing protocols are used for different parts of the network.

Redistribution ensures seamless connectivity between different routing domains.

Redistribution:

Redistribution is the process of taking routes learned by one routing protocol (e.g., OSPF) and injecting them into another routing protocol (e.g., BGP).

Redistribution of OSPF and BGP:

Key Concepts:


OSPF (Open Shortest Path First):

- OSPF is an interior gateway protocol (IGP) used for routing within an autonomous system (AS).
- It uses link-state routing and builds a topology map to calculate the shortest path.

BGP (Border Gateway Protocol):

- BGP is an exterior gateway protocol (EGP) used for routing between autonomous systems on the Internet.
- BGP uses path vector routing, where each route is associated with a list of AS that it traverses.

OSPF – BGP Redistribution and ASBR Router

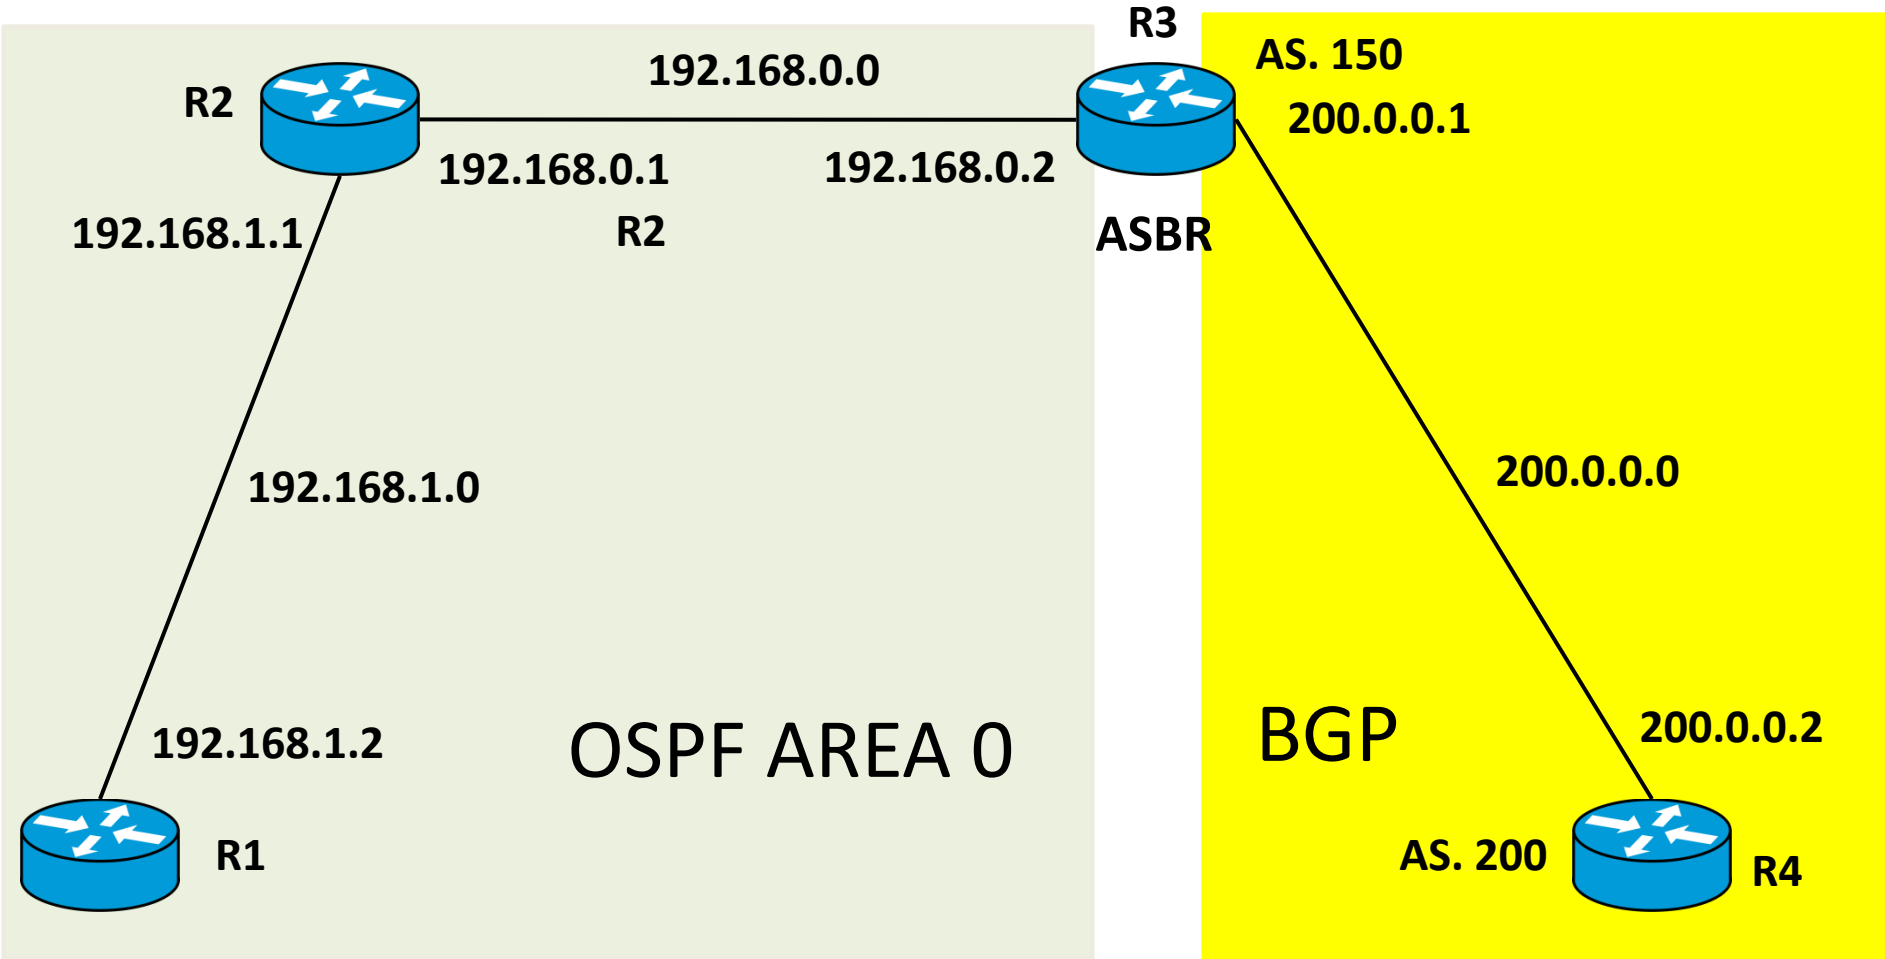

Commands/Configuration:

Redistribution Commands for OSPF:

Router>en

Router#conf t

Router(config)#router ospf 1

Router(config-router)#redistribute BGP 150 Subnets

Redistribution Commands for BGP:

Router(config)#router BGP 150

Router(config-router)#redistribute ospf 1

Commands/Configuration:

Redistribution Commands for OSPF:

Router>en

Router#conf t

Router(config)#router ospf 1

Router(config-router)#redistribute BGP 150 Subnets

Redistribution Commands for BGP:

Router(config)#router BGP 150

Router(config-router)#redistribute ospf 1

OSPF Commands:

Type 5 LSA or external route to OSPF:

Router#Show ip ospf database external

Best Cost for reaching the ASBR from internal:

Router#Show ip ospf database asbr-summary