




INTRODUCTION TO COLOR SENSOR

BY ARVIND SESHAN

LESSON OBJECTIVES

- Learn how to use the Color Sensor
- Learn how to use the Wait Until Block
- Note: Although images in this lessons may show a SPIKE Prime, the code blocks are the same for Robot Inventor

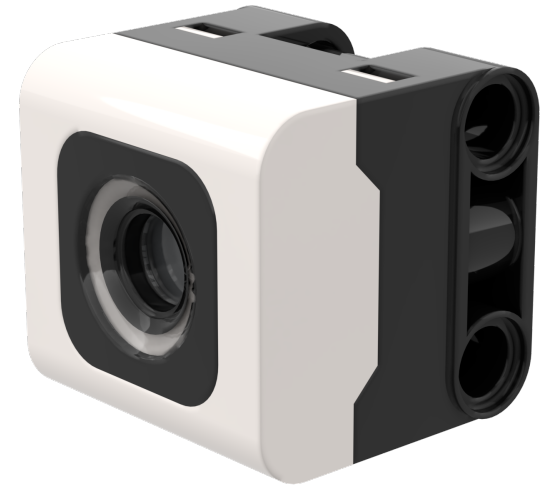


WHAT IS A COLOR SENSOR?

- In the software, the sensor can detect color or reflectivity
- Unlike the EV3, reflectivity is with white light, not a red light.
- The sensor can detect 8 colors and no color
- Optimal reading distance according to the specs: 16 mm (depending on object size, color, and surface)

'black'
'violet'
'blue'
'cyan'
'green'
'yellow'
'red'
'white'
None


NOTE: ADB AND SENSING COLOR

- *The color sensor on ADB is mounted at about 8mm off the ground, but the optimal distance for mounting the sensor according to the specs is 16mm.*
- When using this robot design, Black does not read correctly in Color Mode using electrical tape lines or a FIRST LEGO League challenge mat.
- See the next slide for modifications. The build instructions are also provided as a separate file on our site.

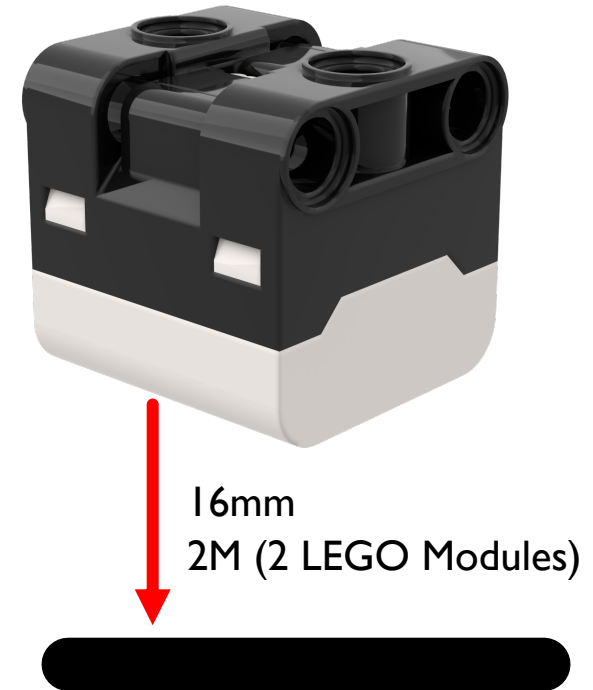


MODIFICATIONS TO ADB



- Build instructions for modifying the front bumper of ADB so that the color sensors are raised one LEGO module up are included on this website

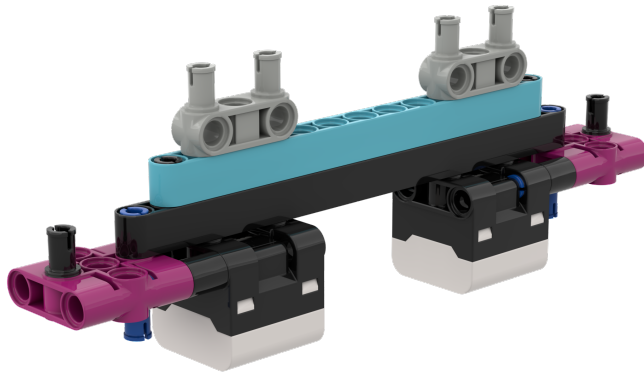


1




2

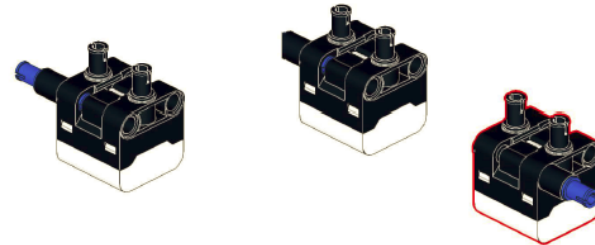


3

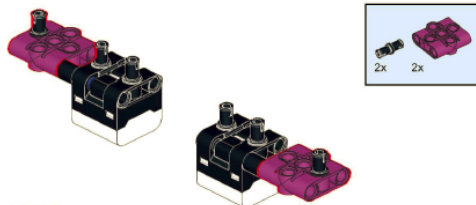

4

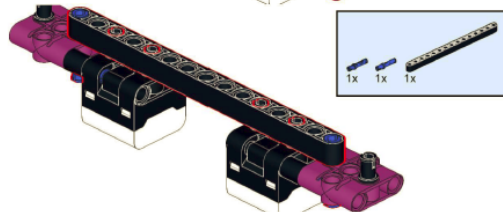

5

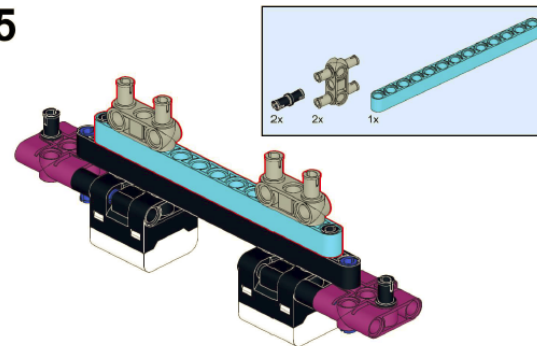

HOW DO YOU PROGRAM WITH A COLOR SENSOR?

- Before using the sensor, it must be initialized

```
color = ColorSensor('B')
```

↑
Name for
the sensor

↑
Port

- The two modes you can program the color sensor in: Color Mode and Reflected light mode
- We will use color mode in this lesson

```
color.wait_until_color(color)
```

CHALLENGE I

- Program your robot to move straight until the color sensor sees black
- You will need to use the Wait For block and the Boolean block of the color sensor

```
color.wait_until_color('black')
```

■ Basic steps:

- Set the **movement motors** for your robot (A and E for Droid Bot IV and ADB robot)
- Set the **stop action** to brake
- Set the % **speed** for your robot
- **Initialize** the color sensor
- Start **moving straight**
- Use the **wait_until_color()** function to detect when the color sensor sees black
- **Stop moving**

CHALLENGE I: SOLUTION

In previous lessons, you learnt how to configure your robot. (See **Configuring Your Robot Lesson**)

```
motor_pair = MotorPair('A', 'E')
motor_pair.set_stop_action('brake')
motor_pair.set_default_speed(30)
color = ColorSensor('B')
motor_pair.start()
color.wait_until_color('black')
motor_pair.stop()
```

Configure robot

Start moving

Wait until the color sensor sees black

Stop moving

CREDITS

- This lesson was created by Arvind Seshan for SPIKE Prime Lessons
- More lessons are available at www.primelessons.org



This work is licensed under a [Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License](https://creativecommons.org/licenses/by-nc-sa/4.0/).