



Courses @35% Off

Full Stack Course

HTML

CSS

JavaScript

TypeScript

jQuery

AngularJS



What is web socket and how it is different from the HTTP?

Last Updated : 22 Aug, 2024



HTTP and WebSocket are both communication protocols used in client-server communication.

HTTP protocol


HTTP is unidirectional where the client sends the request and the server sends the response. Let's take an example when a user sends a request to the server this request goes in the form of HTTP or HTTPS, and after receiving a request server sends the response to the client, each request is associated with a corresponding response, and after sending the response the connection gets closed, each HTTP or HTTPS request establish a new connection to the server every time and after getting the response the connection gets terminated by itself.

HTTP protocols are important to learn if you are working with websites and if you wish to learn web development then you can check out our [Full Stack Web development course](#) in which we have covered all these points.

HTTP is a stateless protocol that runs on top of TCP which is a connection-oriented protocol it guarantees the delivery of data packet transfer using the three-way handshaking methods and re-transmits the lost packets.

HTTP can run on top of any reliable connection-oriented protocol such as TCP, or SCTP. When a client sends an HTTP request to the server, a TCP connection is open between the client and server and after getting the response the TCP connection gets terminated, each HTTP request opens a separate TCP connection to the server, e.g. if the client sends 10 requests to the server then all 10 separate TCP connection will be opened and will get close after getting the response/fallback.

HTTP message information encoded in ASCII, each HTTP request message is composed of HTTP protocol version(HTTP/1.1, HTTP/2), HTTP methods (GET/POST, etc.), HTTP headers (content type, content length), host information, etc. and the body which contain the actual message which is being transferred to the server. HTTP headers vary from 200 bytes to 2 KB in size, the common size of HTTP headers is 700-800 bytes. When a web application uses more cookies and other tools on the client side that expand the storage features of the agent it reduces the HTTP header payload.

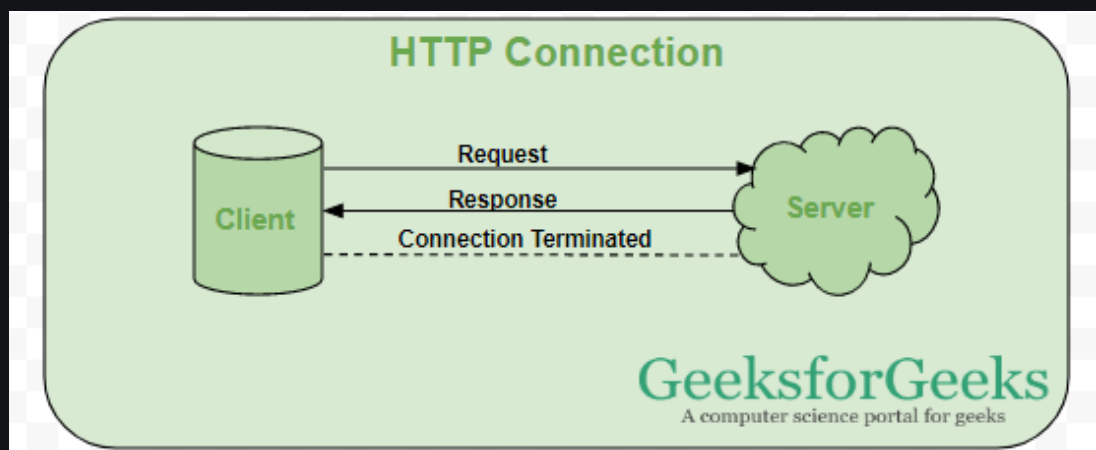


WebSocket

WebSocket is bidirectional, a full-duplex protocol that is used in the same scenario of client-server communication, unlike HTTP which starts from **ws://** or **wss://**. It is a stateful protocol, which means the connection between client and server will stay alive until it gets terminated by either party (client or server). After closing the connection by either of the client or server, the connection is terminated from both ends.

Let's take an example of client-server communication, there is the client which is a web browser, and a server, whenever we initiate the connection between client and server, the client-server makes the handshaking and decides to create a new connection and this connection will keep alive until terminated by any of them. When the connection is established and alive the communication takes place using the same connection channel until it is terminated.

This is how after client-server handshaking, the client-server decides to keep a new connection alive, this new connection will be known as

WebSocket. Once the communication link is established and the connections are opened, message exchange will take place in bidirectional mode until the connection persists between client-server. If anyone of them (client-server) dies or decide to close the connection then it is closed by both the party. The way in which the socket works is slightly different from how HTTP works, the status code 101 denotes the switching protocol in WebSocket.

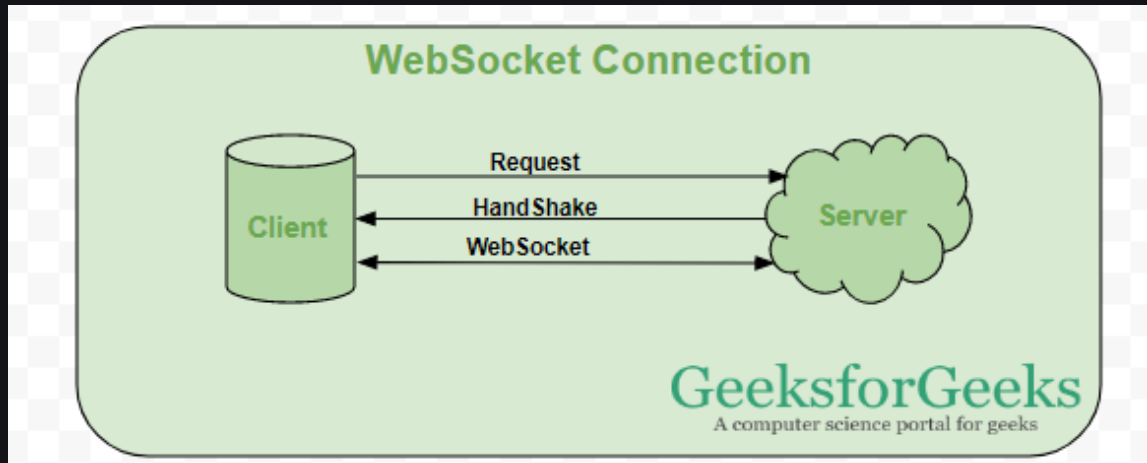

When can a web socket be used?

- **Real-time web application:** Real-time web application uses a web socket to show the data at client end, which is continuously being sent by the backend server. In WebSocket, data is continuously pushed/transmitted into the same connection which is already open, that is why WebSocket is faster and improves the application performance.
e.g. in a trading website or bitcoin trading, for displaying the price fluctuation and movement data is continuously pushed by the backend server to the client end by using a WebSocket channel.
- **Gaming application:** In a Gaming application, you might focus on that, data is continuously received by the server, and without refreshing the UI, it will take effect on the screen, UI gets automatically refreshed without even establishing the new connection, so it is very helpful in a Gaming application.

- **Chat application:** Chat applications use WebSockets to establish the connection only once for exchange, publishing, and broadcasting the message among the subscribers. It reuses the same WebSocket connection, for sending and receiving the message and for one-to-one message transfer.

When not to use WebSocket?

WebSocket can be used if we want any real-time updated or continuous streams of data that are being transmitted over the network but if we want to fetch old data, or want to get the data only once to process it with an application we should go with **HTTP protocol**, old data which is not required very frequently or fetched only once can be queried by the simple HTTP request, so in this scenario, it's better not use WebSocket.

***Note:** RESTful web services are sufficient to get the data from the server if we are loading the data only once.*

Differences between HTTP and WebSocket Connection

WebSocket Connection	HTTP Connection
WebSocket is a bidirectional communication protocol that can send the data from the client to the server or from the server to the client by reusing the established connection channel. The connection is kept alive until terminated by either the client or the server.	The HTTP protocol is a unidirectional protocol that works on top of TCP protocol which is a connection-oriented transport layer protocol, we can create the connection by using HTTP request methods after getting the response HTTP connection get closed.
Almost all the real-time applications like (trading, monitoring, notification) services use WebSocket to receive the data on a single communication channel.	Simple RESTful application uses HTTP protocol which is stateless.
All the frequently updated applications used WebSocket because it is faster than HTTP Connection.	It is used when we do not want to retain a connection for a particular amount of time or reuse the connection for transmitting data; An HTTP connection is slower than WebSockets.

Note: Depending on your project you have to choose where it will be WebSocket or HTTP Connection.

Want to be a Software Developer or a Working Professional looking to enhance your **Software Development Skills**? Then, master the concepts of Full-Stack Development. Our [Full Stack Development - React and](#)