

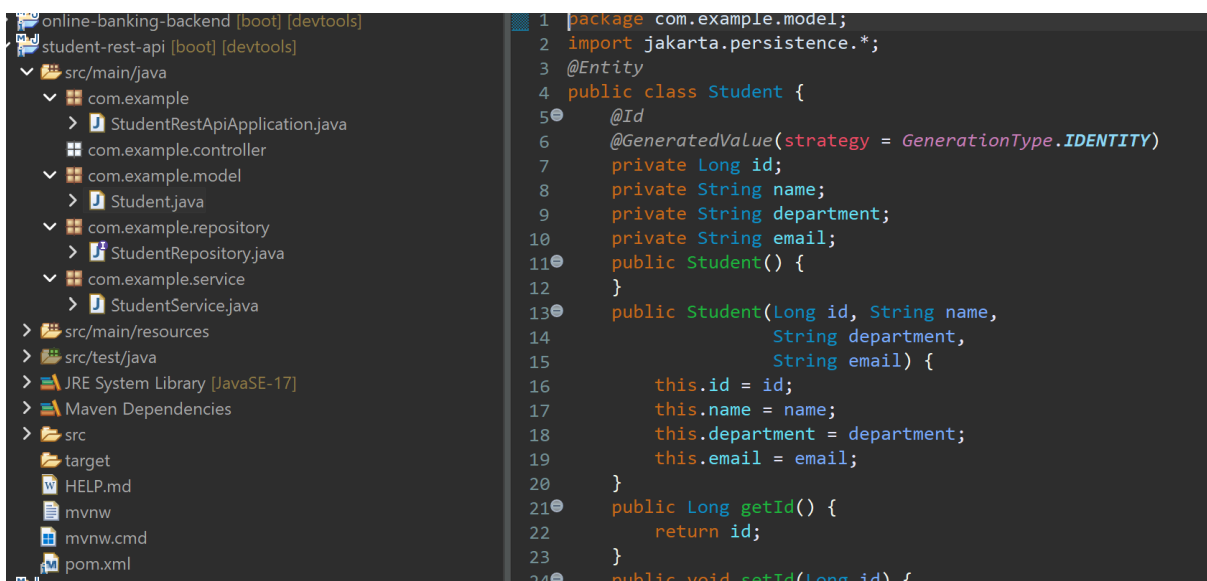


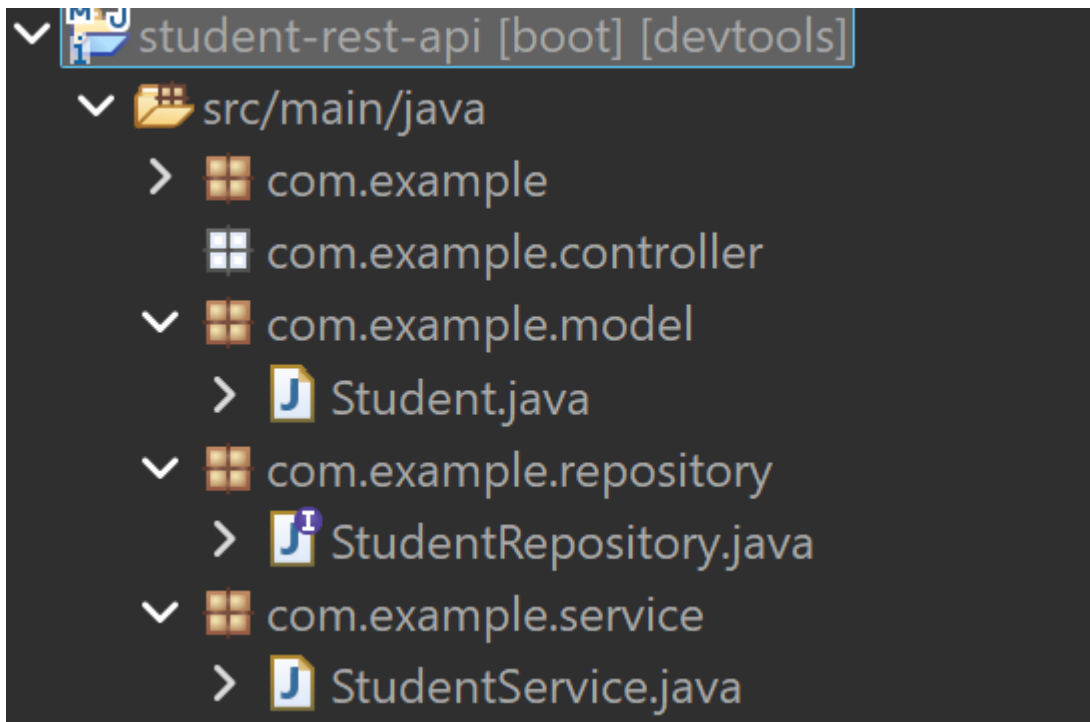

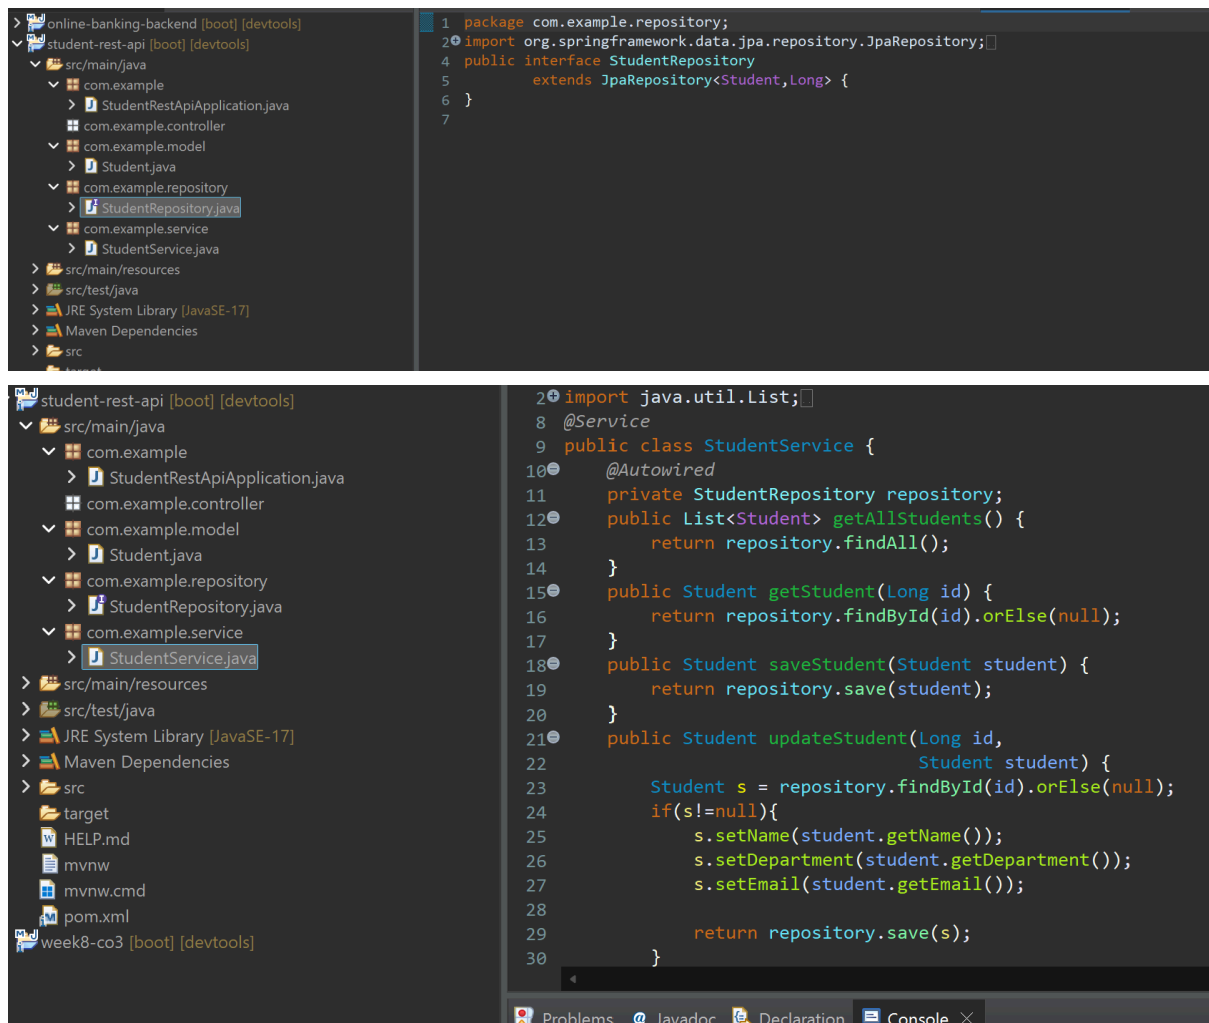

StudentService

```
package com.example.service;
import java.util.List;
```

```
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;
import com.example.model.Student;
import com.example.repository.StudentRepository;
```

```
@Service
```

```
public class StudentService {
```

```
    @Autowired
```

```
    private StudentRepository repository;
```

```
    public List<Student> getAllStudents() {
```

```
        return repository.findAll();
```

```
    }
```

```
    public Student getStudent(Long id) {
```

```
        return repository.findById(id).orElse(null);
```

```

    }
    public Student saveStudent(Student student) {
        return repository.save(student);
    }
    public Student updateStudent(Long id,
                                Student student) {
        Student s = repository.findById(id).orElse(null);
        if(s!=null){
            s.setName(student.getName());
            s.setDepartment(student.getDepartment());
            s.setEmail(student.getEmail());

            return repository.save(s);
        }
        return null;
    }
    public void deleteStudent(Long id) {
        repository.deleteById(id);
    }
}

```

studentRepository

```

package com.example.repository;
import org.springframework.data.jpa.repository.JpaRepository;
import com.example.model.Student;
public interface StudentRepository
    extends JpaRepository<Student,Long> {
}

```

Student.java

```

package com.example.model;
import jakarta.persistence.*;
@Entity
public class Student {
    @Id
    @GeneratedValue(strategy = GenerationType.IDENTITY)
    private Long id;
    private String name;
    private String department;
    private String email;
    public Student() {

```

```
}  
public Student(Long id, String name,  
               String department,  
               String email) {  
    this.id = id;  
    this.name = name;  
    this.department = department;  
    this.email = email;  
}  
public Long getId() {  
    return id;  
}  
public void setId(Long id) {  
    this.id=id;  
}  
public String getName() {  
    return name;  
}  
public void setName(String name) {  
    this.name=name;  
}  
public String getDepartment() {  
    return department;  
}  
public void setDepartment(String department) {  
    this.department=department;  
}  
public String getEmail() {  
    return email;  
}  
public void setEmail(String email) {  
    this.email=email;  
}  
}
```