
Question: Change directories, check the current directory, return to the previous directory, and test an invalid path

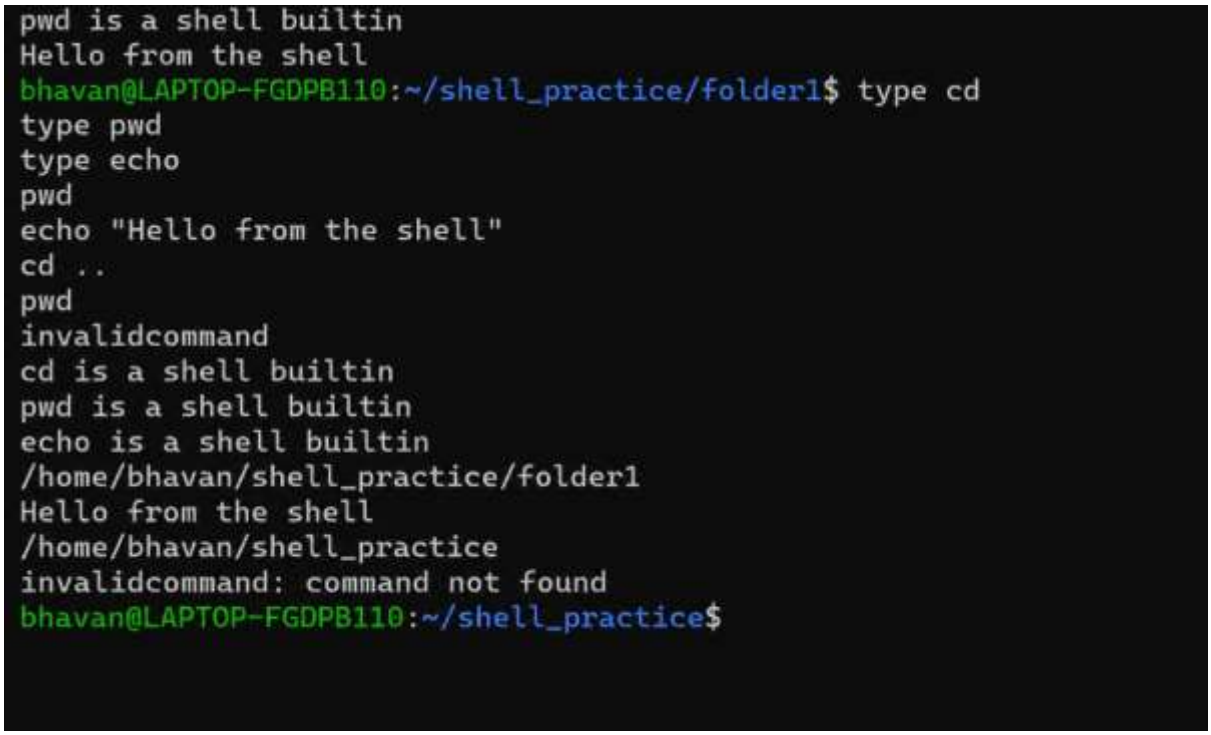


The cd command changes the current working directory. The pwd command shows the path of the current directory. We use cd .. to move to the parent directory and cd - to return to the previous directory.

Before changing directories, the shell checks whether the given path exists. If it does not exist, the shell displays "No such file or directory" and stays in the current directory.

Session 9 — Question 2

Question: Identify shell built-in commands, run them in the current shell, and check how the shell handles an invalid command.

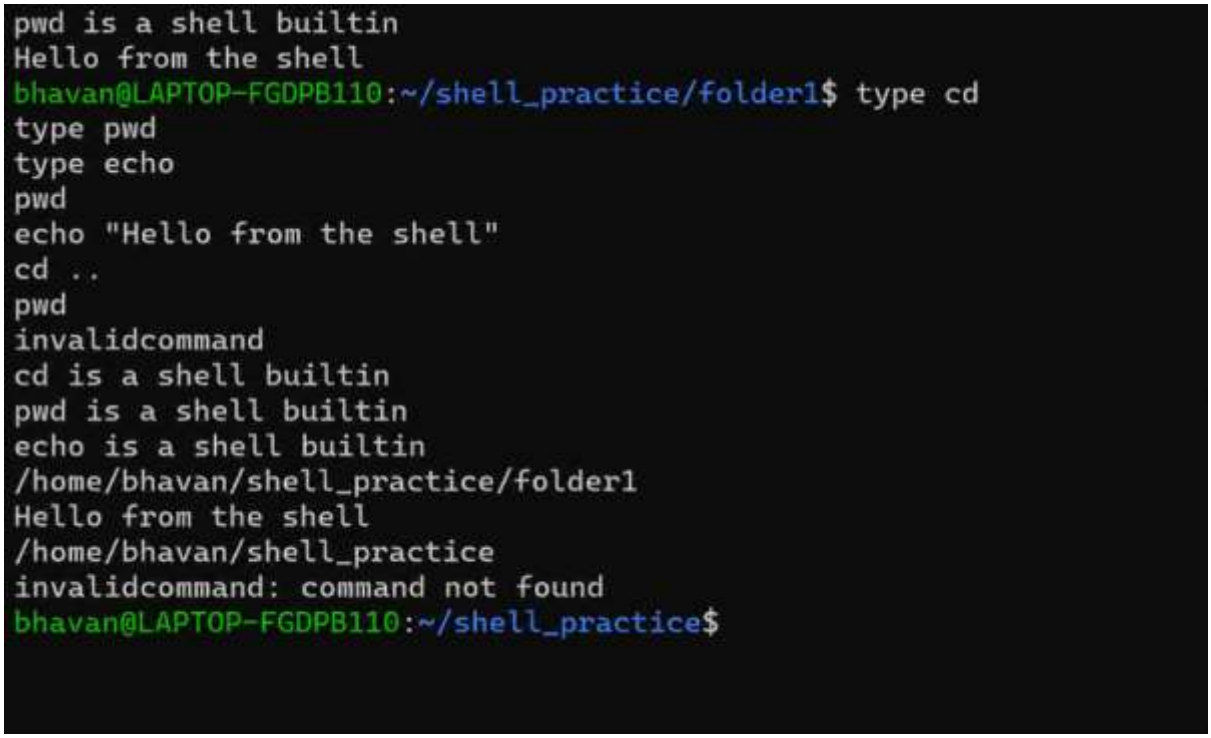

A shell built-in is a command that runs inside the shell itself. For example, cd is a built-in because it changes the current shell's working directory. The shell identifies the command and runs the correct built-in function. If the command name is invalid, it displays **"command not found"** and waits for the next command.