Message Implementation Guideline

D_TX_XE_SEUNIVAPKCV1xxSTSD00AOSD

based on

IFTSTA
International multimodal status report message

UN D.00A S3

Version: 1-DEV
Variant: EDIT0008412
Issue date: 24-07-2025
Author: ext.usha.penke

Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0000	1	**UNA**	C	1	0	Service string advice
0000	2	**UNB**	M	1	0	Interchange header
0010	3	**UNH**	M	1	0	Message header
0020	4	**BGM**	M	1	0	Beginning of message
0030	5	**DTM**	C	9	1	Date/time/period
0050		**SG1**	C	9	1	NAD
0060	6	**NAD**	M	1	1	Name and address
0160		**SG4**	C	99999	1	CNI-SG5
0170	7	**CNI**	M	1	1	Consignment information
0200		**SG5**	M	99	2	STS-SG10
0210	8	**STS**	M	1	2	Status
0470		**SG10**	C	99	3	GID-FTX-SG13
0480	9	**GID**	M	1	3	Goods item details
0520	10	**FTX**	C	9	4	Free text
0590		**SG13**	C	99	4	PCI-GIN
0600	11	**PCI**	M	1	4	Package identification
0610	12	**GIN**	C	9	5	Goods identity number
0620	13	**UNT**	M	1	0	Message trailer
0000	14	**UNZ**	M	1	0	Interchange trailer

Counter = Counter of segment/group within the standard
No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Branching Diagram of Used Segments/Groups

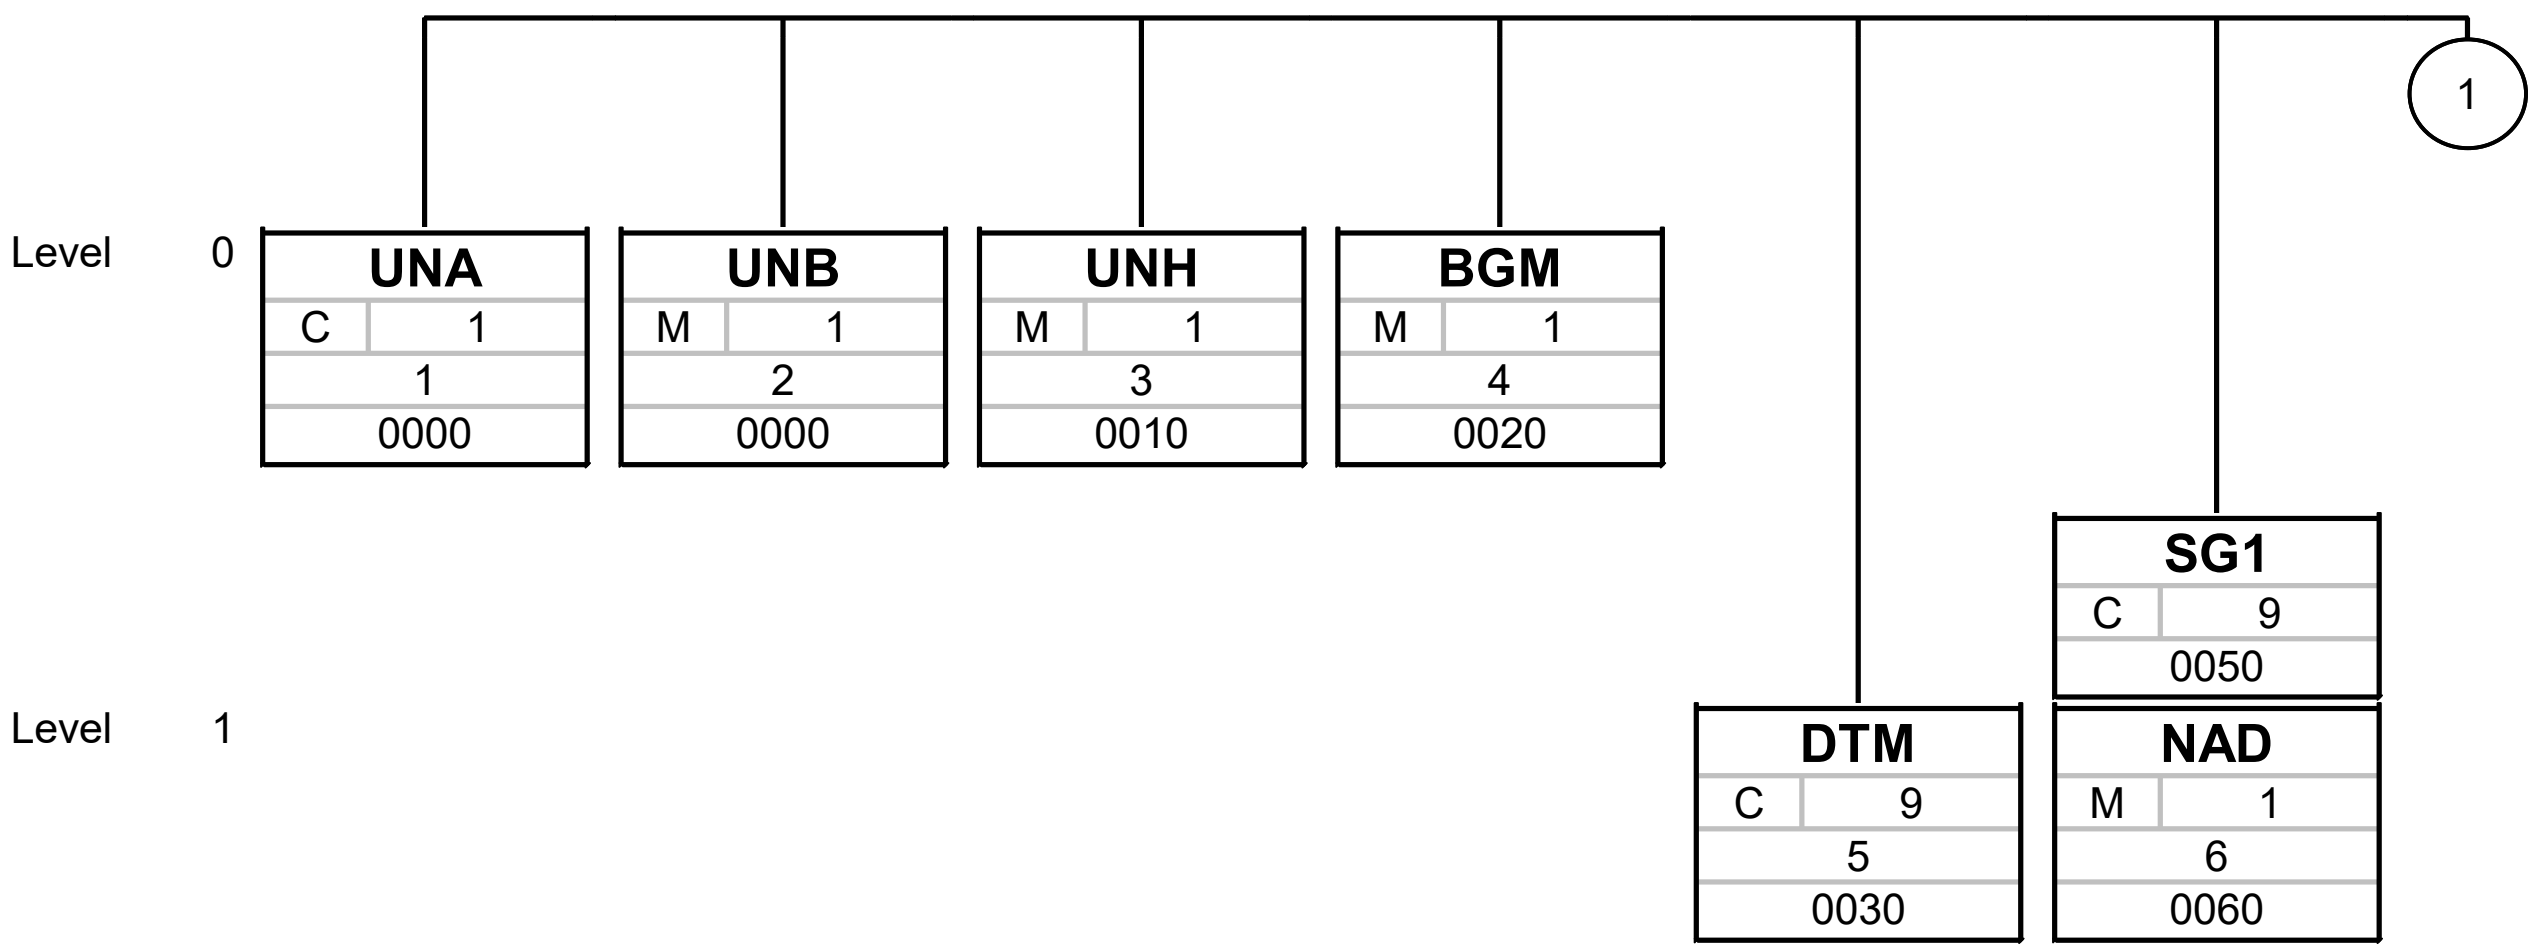

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

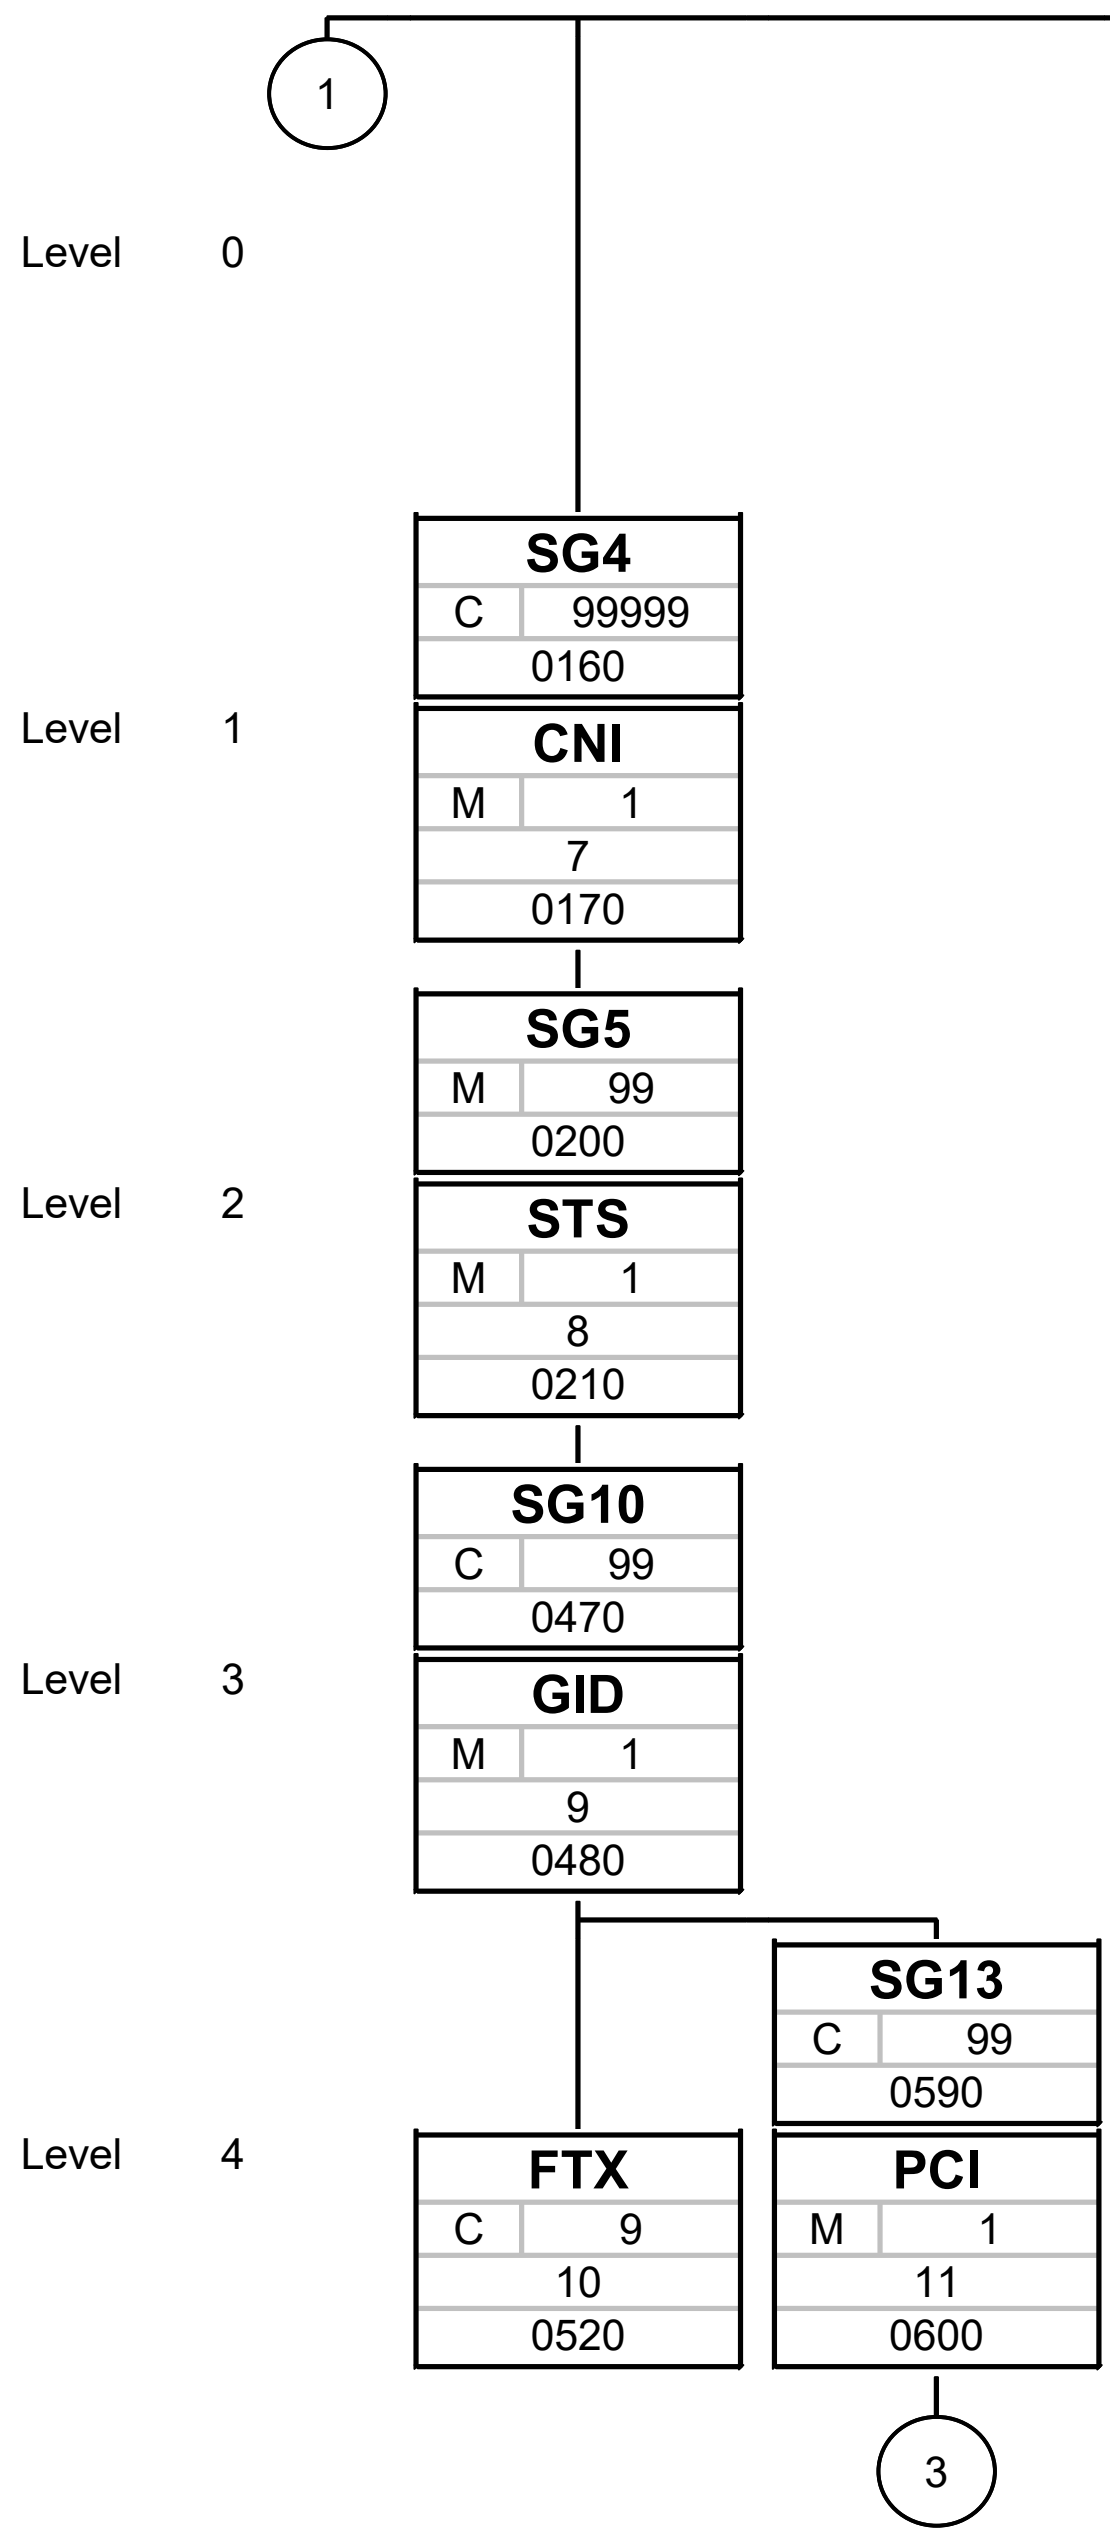

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

Level 5



Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

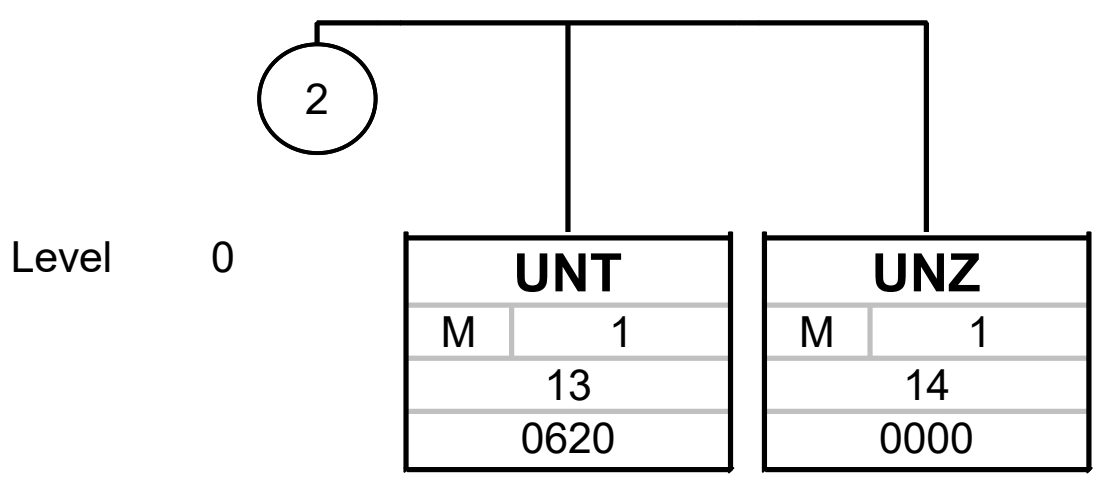

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0000	1	**UNA**	C	1	0	**Service string advice**

Tag	Name	Standard St Format	Implementation St Format	Usage / Remark
UNA				
UNA1	Component data element separator	M an1	M an1	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode ":"
UNA2	Data element separator	M an1	M an1	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "+"
UNA3	Decimal notation	M an1	M an1	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "."
UNA4	Release indicator	M an1	M an1	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "?"
UNA5	Reserved for future use	M an1	M an1	
UNA6	Segment terminator	M an1	M an1	

Segment Remarks:

Map Instructions

Instruction nr 1
Instruction Use /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/CustomerOrderNumber as LW reference
Use /DocumentMessage/Document/FileName as Alt Reference

Example:
```
UNA:+.? '
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0000	2	UNB	M	1	0	**Interchange header**

		Standard		Implementation		
Tag	**Name**	**St**	**Format**	**St**	**Format**	**Usage / Remark**
UNB						
S001	Syntax identifier	M		M		
0001	Syntax identifier	M	a4	M	a4	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "UNOC"
0002	Syntax version number	M	n1	M	n1	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "3"
S002	Interchange sender	M		M		
0004	Sender identification	M	an..35	M	an..35	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "CLICEDIBG61"
0007	Partner identification code qualifier	C	an..4	C	an..4	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "ZZZ"
0008	Address for reverse routing	C	an..14	C	an..14	
S003	Interchange recipient	M		M		
0010	Recipient identification	M	an..35	M	an..35	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "UNIVAR"
0007	Partner identification code qualifier	C	an..4	C	an..4	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "ZZZ"
0014	Routing address	C	an..14	C	an..14	
S004	Date/time of preparation	M		M		
0017	Date of preparation	M	n6	M	n6	**Map Instructions** **Instruction nr 1** *Instruction* Map SystemDate *Add. Info* Format - %y%m%d
0019	Time of preparation	M	n4	M	n4	**Map Instructions** **Instruction nr 1**

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

		Standard		Implementation		
Tag	Name	St	Format	St	Format	Usage / Remark
						Instruction Map SystemTime *Add. Info* Format - %H%M
0020	Interchange control reference	M	an..14	M	an..14	**Map Instructions** **Instruction nr 1** *Instruction* Create a counter starts with "1" and increment for each transaction and make it length of 14 digits by appending leading zeros to the counter and map the resultant value *Add. Info* Ex: 1 - 00000000000001 2 - 00000000082572 Interchange reference - should match the UNZe02/0020
S005	Recipient's reference, password	C		C		
0022	Recipient's reference/password	M	an..14	M	an..14	
0025	Recipient's reference/password qualifier	C	an2	C	an2	
0026	Application reference	C	an..14	C	an..14	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "LSC045"
0029	Processing priority code	C	a1	N		
0031	Acknowledgement request	C	n1	N		
0032	Communications agreement ID	C	an..35	N		
0035	Test indicator	C	n1	N		

Segment Remarks:

Example:

```
UNB+UNOC:3+X:1:X+X:1:X+250725:1248+X+X:AA+X'
```

Counter	No	Tag	St	MaxOcc	Level	Name
0010	3	**UNH**	M	1	0	**Message header**

Tag	Name	Standard St Format	Implementation St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	**Map Instructions** **Instruction nr 1** *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/ aPickReceiptHeadDoc/CustomerOrderNumber
S009	Message identifier	M	M	
0065	Message type	M an..6	M an..6	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "IFTSTA"
0052	Message version number	M an..3	M an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "D"
0054	Message release number	M an..3	M an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "00A"
0051	Controlling agency	M an..2	M an..2	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "UN"
0057	Association assigned code	C an..6	N	
0068	Common access reference	C an..35	N	
S010	Status of the transfer	C	N	
0070	Sequence of transfers	M n..2	N	
0073	First and last transfer	C a1	N	

Segment Remarks:

Example:

```
UNH+X+IFTSTA:D:00A:UN'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0020	4	**BGM**	M	1	0	**Beginning of message**

Tag	Name	Standard St	Standard Format	Implementation St	Implementation Format	Usage / Remark
BGM						
C002	Document/message name	C		C		
1001	Document name code	C	an..3	C	an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "351"
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		
1000	Document name	C	an..35	N		
C106	Document/message identification	C		C		
1004	Document identifier	C	an..35	C	an..35	**Map Instructions** **Instruction nr 1** *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/CustomerOrderNumber
1056	Version identifier	C	an..9	N		
1060	Revision identifier	C	an..6	N		
1225	Message function code	C	an..3	C	an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "9"
4343	Response type code	C	an..3	N		

Segment Remarks:

Example:

```
BGM+1+X+1'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0030	5	**DTM**	C	9	1	**Date/time/period**

Tag	Name	Standard St Format	Implementation St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "97"
2380	Date or time or period value	C an..35	C an..35	**Map Instructions** **Instruction nr 1** *Instruction* Map Systemdate *Add. Info* Format - %Y%m%d%H%M%s Ex Output - 20250502103402
2379	Date or time or period format code	C an..3	C an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "102"

Segment Remarks:

Example:
```
DTM+1:X:2'
```

Counter	No	Tag	St	MaxOcc	Level	Name
0050		**SG1**	C	9	1	**NAD**
0060	6	**NAD**	M	1	1	**Name and address**

Tag	Name	Standard St Format	Implementation St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "WH"
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "S068"
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country sub-entity details	C	N	
3229	Country sub-entity name code	C an..9	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country sub-entity name	C an..35	N	
3251	Postal identification code	C an..17	N	
3207	Country name code	C an..3	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segment Remarks:

Example:

```
NAD+AA+++X'
```

Counter	No	Tag	St	MaxOcc	Level	Name
0160		SG4	C	99999	1	**CNI-SG5**
0170	7	CNI	M	1	1	**Consignment information**

Tag	Name	Standard St	Standard Format	Implementation St	Implementation Format	Usage / Remark
CNI						
1490	Consolidation item number	C	n..4	C	n..4	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "1"
C503	Document/message details	C		C		
1004	Document identifier	C	an..35	C	an..35	**Map Instructions** **Instruction nr 1** *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/ aPickReceiptHeadDoc/CustomerOrderNumber
1373	Document status code	C	an..3	N		
1366	Document source description	C	an..70	N		
3453	Language name code	C	an..3	N		
1056	Version identifier	C	an..9	N		
1060	Revision identifier	C	an..6	N		
1312	Consignment load sequence identifier	C	n..4	N		

Segment Remarks:

Example:
```
CNI+9+X'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0200		SG5	M	99	2	**STS-SG10**
0210	8	STS	M	1	2	**Status**

Tag	Name	Standard St Format	Implementation St Format	Usage / Remark
STS				
C601	Status category	C	C	
9015	Status category code	M an..3	M an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "1"
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
C555	Status	C	N	
4405	Status description code	M an..3	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
4404	Status description	C an..35	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..3	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segment Remarks:

Example:

```
STS+1'
```

Counter	No	Tag	St	MaxOcc	Level	Name
0470		SG10	C	99	3	**GID-FTX-SG13**

Map Instructions

Instruction nr 1

Instruction Case 1:
if unique values of
/Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderNumber and (integer part of /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderLinePosition/10)*10 and /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity

then populate the SG10 loop

if duplicate values of /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderNumber and (integer part of /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderLinePosition/10)*10 and /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity

then only one SG10 loop will be populated

Counter	No	Tag	St	MaxOcc	Level	Name
0480	9	GID	M	1	3	**Goods item details**

Tag	Name	Standard St	Standard Format	Implementation St	Implementation Format	Usage / Remark
GID						
1496	Goods item number	C	n..5	C	n..5	**Map Instructions** **Instruction nr 1** *Instruction* 1. a = (/Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderLinePosition)/10 2. b = integer(a)*10 3. Map b *Add. Info* Ex: Input: <CustomerOrderLinePosition>18</CustomerOrderLinePosition> Output: 18/10 = 1.8 integer of (1.8) would be 1 1*10 = 10 Output = 10
C213	Number and type of packages	C		C		
7224	Package quantity	C	n..8	C	n..8	**Map Instructions** **Instruction nr 1** *Condition* Case 1 mentioned on SG10: if duplicate values then *Instruction* Map sum(/Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/PickQuantity)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

		Standard		Implementation		
Tag	Name	St	Format	St	Format	Usage / Remark
						Add. Info add decimal and 6 zeros Input - 7 Output - 7.000000 Input - 20 Output - 20.000000 **Instruction nr 2** *Condition* Case 1 mentioned on SG10: if unique values then *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/PickQuantity *Add. Info* add decimal and 6 zeros Input - 7 Output - 7.000000 Input - 20 Output - 20.000000
7065	Package type description code	C	an..17	C	an..17	**Map Instructions** **Instruction nr 1** *Condition* if /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/PackageIdentity = "CT" then *Instruction* Map "CAR" **Instruction nr 2** *Condition* else *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/PackageIdentity
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		
7064	Type of packages	C	an..35	N		
7233	Packaging related description code	C	an..3	N		
C213	Number and type of packages	C		C		
7224	Package quantity	C	n..8	C	n..8	**Map Instructions** **Instruction nr 1** *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/MeasuredQty
7065	Package type description code	C	an..17	N		
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		
7064	Type of packages	C	an..35	N		
7233	Packaging related description code	C	an..3	N		
C213	Number and type of packages	C		N		
7224	Package quantity	C	n..8	N		
7065	Package type description code	C	an..17	N		
1131	Code list identification code	C	an..3	N		

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

		Standard		Implementation		
Tag	Name	St	Format	St	Format	Usage / Remark
3055	Code list responsible agency code	C	an..3	N		
7064	Type of packages	C	an..35	N		
7233	Packaging related description code	C	an..3	N		
C213	Number and type of packages	C		N		
7224	Package quantity	C	n..8	N		
7065	Package type description code	C	an..17	N		
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		
7064	Type of packages	C	an..35	N		
7233	Packaging related description code	C	an..3	N		
C213	Number and type of packages	C		N		
7224	Package quantity	C	n..8	N		
7065	Package type description code	C	an..17	N		
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		
7064	Type of packages	C	an..35	N		
7233	Packaging related description code	C	an..3	N		

Segment Remarks:

Example:

```
GID+9+9:1A1+9'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0470		SG10	C	99	3	GID-FTX-SG13

Map Instructions

Instruction nr 1

Instruction Case 1:
if unique values of
/Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/
PickReceiptLineDoc/CustomerOrderNumber and (integer part of /Calls/Call/PickReceipts/PickReceipt/
aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderLinePosition/10)*10
and /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/
PickReceiptLineDoc/ProductionLotIdentity

then populate the SG10 loop

if duplicate values of /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/
aPickReceiptLineDocs/PickReceiptLineDoc/CustomerOrderNumber and (integer part of /Calls/Call/
PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/
CustomerOrderLinePosition/10)*10 and /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/
aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity

then only one SG10 loop will be populated

Counter	No	Tag	St	MaxOcc	Level	Name
0520	10	FTX	C	9	4	Free text

		Standard		Implementation		
Tag	Name	St	Format	St	Format	Usage / Remark
FTX						
4451	Text subject code qualifier	M	an..3	M	an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "LIN"
4453	Free text function code	C	an..3	N		
C107	Text reference	C		N		
4441	Free text value code	M	an..17	N		
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		
C108	Text literal	C		C		
4440	Free text value	M	an..512	M	an..512	**Map Instructions** **Instruction nr 1** *Condition* if /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity value exists then *Instruction* Use a counter 1. Increment the counter by 1 2. Format the counter value to 3 digit string (ex: 1->001, 11->011, 123->123) 3. Concat "900" with formatted counter value (ex: 900001, 900011, 900123)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Standard				Implementation		
Tag	**Name**	**St**	**Format**	**St**	**Format**	**Usage / Remark**
						Instruction nr 2 *Condition* if /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity value doesn't exists then *Instruction* Map "000"
4440	Free text value	C	an..512	N		
4440	Free text value	C	an..512	N		
4440	Free text value	C	an..512	N		
4440	Free text value	C	an..512	N		
3453	Language name code	C	an..3	N		
4447	Free text format code	C	an..3	N		

Segment Remarks:

Example:

```
FTX+AAA+++X'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0590		SG13	C	99	4	**PCI-GIN**
0600	11	PCI	M	1	4	**Package identification**

Tag	Name	Standard St	Standard Format	Implementation St	Implementation Format	Usage / Remark
PCI						
4233	Marking instructions code	C	an..3	C	an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "10"
C210	Marks & labels	C		C		
7102	Shipping marks description	M	an..35	M	an..35	**Map Instructions** **Instruction nr 1** *Condition* if /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity value exists then *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity **Instruction nr 2** *Condition* if /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity value doesn't exists then *Instruction* Map "UNIVAR"
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
7102	Shipping marks description	C	an..35	N		
8275	Container or package contents indicator code	C	an..3	N		
C827	Type of marking	C		N		
7511	Marking type code	M	an..3	N		
1131	Code list identification code	C	an..3	N		
3055	Code list responsible agency code	C	an..3	N		

Segment Remarks:

Example:

```
PCI+1+X'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0590		SG13	C	99	4	**PCI-GIN**
0610	12	GIN	C	9	5	**Goods identity number**

Tag	Name	Standard St	Standard Format	Implementation St	Implementation Format	Usage / Remark
GIN						
7405	Object identification code qualifier	M	an..3	M	an..3	**Map Instructions** **Instruction nr 1** *Instruction* Hardcode "PN"
C208	Identity number range	M		M		
7402	Object identifier	M	an..35	M	an..35	**Map Instructions** **Instruction nr 1** *Instruction* Map "000000000000" +/Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductIdentity
7402	Object identifier	C	an..35	C	an..35	**Map Instructions** **Instruction nr 1** *Condition* if /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/aPickReceiptLineDocs/PickReceiptLineDoc/ProductionLotIdentity exists then *Instruction* Hardcode "000011"
C208	Identity number range	C		N		
7402	Object identifier	M	an..35	N		
7402	Object identifier	C	an..35	N		
C208	Identity number range	C		N		
7402	Object identifier	M	an..35	N		
7402	Object identifier	C	an..35	N		
C208	Identity number range	C		N		
7402	Object identifier	M	an..35	N		
7402	Object identifier	C	an..35	N		
C208	Identity number range	C		N		
7402	Object identifier	M	an..35	N		
7402	Object identifier	C	an..35	N		

Segment Remarks:

Example:

```
GIN+AA+X:X'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0620	13	**UNT**	M	1	0	**Message trailer**

		Standard	Implementation	
Tag	**Name**	**St Format**	**St Format**	**Usage / Remark**
UNT				
0074	Number of segments in the message	M n..6	M n..6	**Map Instructions** **Instruction nr 1** *Instruction* Map number of segments between UNH and UNT *Add. Info* Include UNH and UNT
0062	Message reference number	M an..14	M an..14	**Map Instructions** **Instruction nr 1** *Instruction* Map /Calls/Call/PickReceipts/PickReceipt/aPickReceiptHeadDoc/CustomerOrderNumber

Segment Remarks:

Example:

```
UNT+49+X'
```

Counter	No	Tag	St	MaxOcc	Level	Name
0000	14	**UNZ**	M	1	0	**Interchange trailer**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNZ				
0036	Interchange control count	M n..6	M n..6	**Map Instructions** **Instruction nr 1** *Instruction* Map number of message(UNH-UNT) in the file *Add. Info* Input: UNB UNH . UNT UNZ Output: UNZ+1+00000000000001 Input: UNB UNH . UNT UNH . UNT UNZ Output: UNZ+2+00000000000001
0020	Interchange control reference	M an..14	M an..14	**Map Instructions** **Instruction nr 1** *Instruction* Map value which is generated in UNBe05/0020 *Add. Info* Interchange reference - should match the UNBe05/0020

Segment Remarks:

Example:

```
UNZ+0+X'
```

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Example Message

No	Tag	Example
01	UNA	`UNA:+.? '`
02	UNB	`UNB+UNOC:3+X:1:X+X:1:X+250725:1248+X+X:AA+X'`
03	UNH	`UNH+X+IFTSTA:D:00A:UN'`
04	BGM	`BGM+1+X+1'`
05	DTM	`DTM+1:X:2'`
	SG1	
06	NAD	`NAD+AA+++X'`
	SG4	
07	CNI	`CNI+9+X'`
	SG5	
08	STS	`STS+1'`
	SG10	
09	GID	`GID+9+9:1A1+9'`
10	FTX	`FTX+AAA+++X'`
	SG13	
11	PCI	`PCI+1+X'`
12	GIN	`GIN+AA+X:X'`
13	UNT	`UNT+49+X'`
14	UNZ	`UNZ+0+X'`

No = Consecutive segment number