NOC DASHBOARD

Feature Guide

Step-by-step instructions for alarm actions, interface exclusions, monitoring, filtering, exports, and report preparation.

Choose the right action

Acknowledge records handling and a note. Exclude Congestion saves an interface-specific visibility rule. Restore removes that rule. Clear Alarm manually changes the supported source alarm to cleared.

Read the selected device, IP, interface, and occurrence time before taking an action. The detailed card and calculation explanations are in the separate Detailed User Guide.

Contents

How to use | Acknowledge an alarm and modify its note 3

How to use | Exclude one congestion interface 6

How to use | Review Blacklist and restore an interface 8

How to use | Clear Alarm: source-status action 10

How to use | Filter, search, and read a drilldown 12

How to use | Add Mentor sites and import a CSV 14

How to use | Export records and check the result 16

How to use | Create, save, and complete an incident report 18

Quick action reference 20

How to use | Acknowledge an alarm and modify its note

Use Acknowledge to record that an operator is handling a supported alarm and to add a ticket reference or useful note. It does not mean the device recovered.

When to use this feature

Open the relevant supported IP/POP or IT NODE alarm table. Confirm the exact device, IP, interface, and occurrence time before opening its Action menu.

The action is available where that table exposes it. Historical congestion records do not expose the same Acknowledge/Clear actions as current supported alarm rows.

Step-by-step instructions

1. Click the three-dot Action button on the intended row.

2. Choose Acknowledge, or Modify Note if the row already has a note.

3. Enter a TT / INC-WOID when you have a related ticket. Enter a clear Note explaining the current handling state.

4. Review Your Name. The application can suggest the Windows operator name or reuse the name saved in that browser; an existing value can be locked.

5. Check the selected record and entered text, then click Submit. Use Cancel or close the dialog if you do not want to save.

6. After returning to the table, inspect the note on that row. If the expected change is absent, verify the record and source update rather than assuming the alarm recovered.

What the fields mean

Field or control	What it means
TT / INC-WOID	A reference to the related ticket; entering it does not create a new incident or WO.
Note	A useful handling update. Example: Investigating this interface; transmission team informed.
Your Name	The operator label recorded for acknowledgment or modification. It is not an application login.
Submit	Saves the supported source note/acknowledgment action; a name and a reference or note are required for the update.

What changes after saving

The supported action updates the source alarm note, then patches that record in the local cache.

If a ticket reference is entered, it is combined with the note for storage. First acknowledgment and later modification metadata are handled separately by the source update.

Scope and important distinctions

Acknowledge does not clear the source alarm, close its incident, resolve sibling WOs, or hide an interface through the blacklist.


Modify Note edits the note; it is not a recovery confirmation. Do not confuse the Action menu wording with the device's actual alarm state.

Worked example


A congestion record needs investigation. Add sample reference INC-DEMO-001 and note Investigating port 22; carrier informed. The alarm can remain visible because recording work is different from resolving the condition.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.

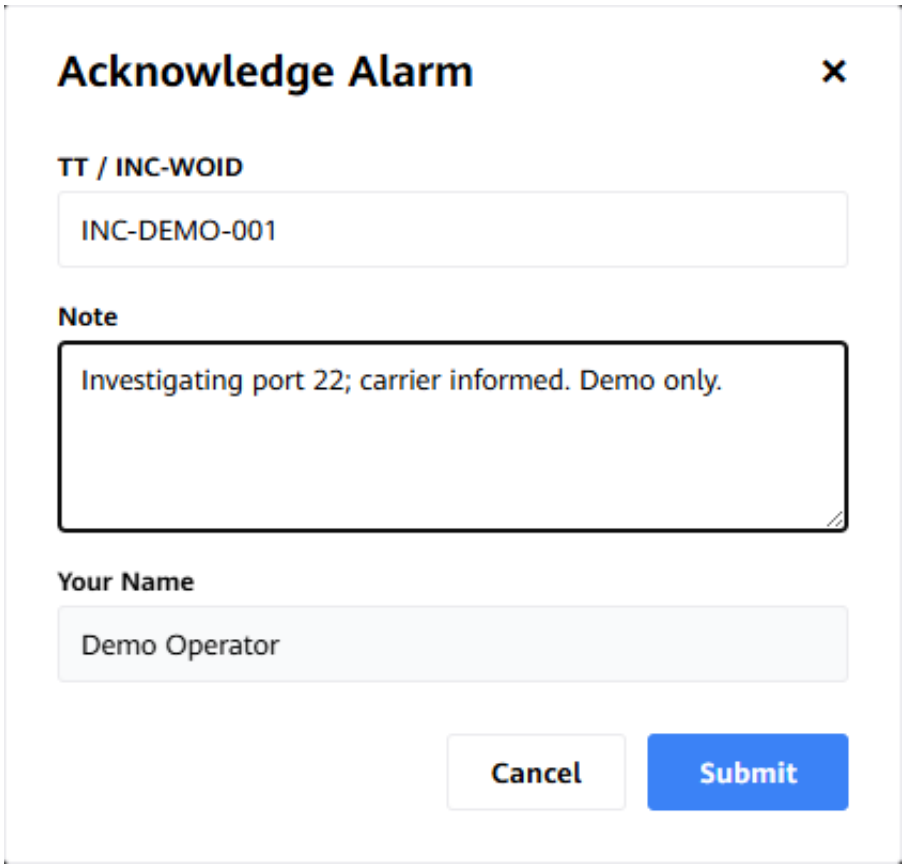

Demo: the real Acknowledge dialog with a sample ticket, note, and operator. No source update was submitted.

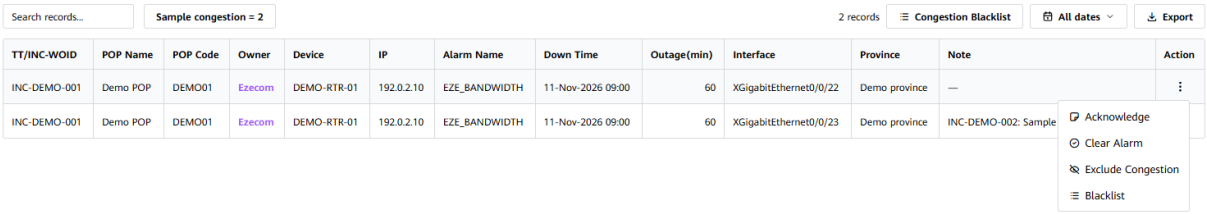

Demo: the current-alarm Action menu. Exclude appears only when the row qualifies for congestion actions.

How to use | Exclude one congestion interface

Exclude Congestion creates a saved local visibility rule for one interface on one identified device. It is different from clearing the source alarm.

When to use this feature

Use this action only on supported bandwidth/congestion records. Read the owner, device, IP, and interface together.

The interface must be recorded. A missing port cannot be treated as permission to hide a whole device. Prepare a useful remark describing the reason for the exclusion.

Step-by-step instructions

1. Find the intended congestion record and open its three-dot Action menu.

2. Choose Exclude Congestion.

3. Read the device and interface in the dialog subtitle. Confirm it is the port you intended.

4. Optionally enter a Remark explaining why it should remain excluded. The field accepts up to 1,000 characters.

5. Click Exclude Congestion to save the rule, or Cancel to leave it unchanged.

6. Check that the matching interface is hidden and other interfaces on the device remain visible. Open Blacklist to review the saved entry and remark.

What the fields mean

Field or control	What it means
Device / interface subtitle	Identifies the intended scope before saving.
Remark	Optional operational explanation retained with the rule.
Exclude Congestion	Saves the local rule; it does not update the source alarm to recovered.

What changes after saving

The rule uses the owner, device identity, and interface. Device IP is preferred when available, with device name used as a fallback.

Matching congestion records are filtered from the relevant current and historical dashboard views. The rule survives refresh and restart when the instance data is retained.

Scope and important distinctions

Other ports on the same device and non-congestion alarm types stay eligible for display.

Exclusion does not delete the source record, acknowledge the alarm, repair the port, close a ticket, or automatically expire at restart.

Worked example

Device DEMO-RTR-01 has congestion on XGigabitEthernet0/0/22 and XGigabitEthernet0/0/23. Exclude port 22 with an explanatory remark. Port 23 stays visible; another device's port 22 is not automatically excluded.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.



Demo: review the sample device/interface and add a remark before excluding. The example was not submitted.

How to use | Review Blacklist and restore an interface

Blacklist is the saved list of congestion interface exclusions. Restore removes an exclusion so a currently qualifying source record can become visible again.

When to use this feature

Open Congestion Blacklist from a supported table toolbar or the Blacklist action. Review the actual owner, device, IP, interface, and remark.

An excluded record is a visibility rule, not proof the physical device is no longer congested.

Step-by-step instructions

1. Open Congestion Blacklist and wait for its saved entries to load.

2. Locate the exact device and interface; read the Remark and any saved Note or Additional Info.

3. Check Excluded by and Added time to understand the saved decision. Added time is shown in Cambodia time.

4. Click Restore on the intended entry.

5. After the page returns, check the corresponding view and filters. If the source record still qualifies, the interface can appear again.

What the fields mean

Field or control	What it means
Owner, device, IP, interface	Identify the scope of the rule, not every port at the site.
Additional Info / Note	Saved context from the alarm when available.
Remark	The operator's reason for excluding.
Restore	Removes the saved exclusion rule.

What changes after saving

The chosen local rule is removed. Future matching congestion records are no longer hidden by that rule.

Other exclusions remain saved. Restoring one interface does not empty the entire blacklist.

Scope and important distinctions

Restore cannot recreate a source alarm that cleared or fell outside the reporting window.

If the device identity or interface differs, compare the new row before concluding the restored rule was ignored.

Worked example

Restore DEMO-RTR-01 port 22. If port 22 is still active, it can return to the current list. If it already cleared, the active list can remain empty even though restoration of visibility succeeded.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.



Demo: the saved interface fields in the actual Blacklist table.



Demo: the same sample table scrolled right to show the remark and Restore action. No exclusion was restored.

How to use | Clear Alarm: source-status action

Clear Alarm manually marks a supported source alarm as cleared. This is an operational source change, not a local hide or note.

When to use this feature

Confirm the actual condition has recovered and that the intended row is correct. Compare device, IP, port, and occurrence time.

Unlike Exclude, a manual clear cannot be automatically undone by Restore from Blacklist.

Step-by-step instructions

1. Open the intended current alarm row's Action menu.

2. Choose Clear Alarm and read its confirmation message.

3. Review Your Name and the selected record.

4. Confirm only when the issue is actually resolved. Otherwise choose Cancel.

5. After confirmation, check the active list and source state. A later new alarm occurrence is a separate observation, not proof the earlier manual clear never happened.

What the fields mean

Field or control	What it means
Confirmation message	Explains that the action changes the source alarm.
Your Name	Operator label recorded by the supported update.
Confirm clear	Marks the matching still-open source record cleared; the actual button label is shown in the dialog.

What changes after saving

The source update sets the alarm status to cleared and records a restoration timestamp and modification information.

The matching active-cache row is removed because cleared records no longer belong in that active list.

Scope and important distinctions

It does not close the parent incident or resolve all WOs. Those workflows have their own source states.


It is not the same as Exclude Congestion. Use the action matching the actual operational intention.

Worked example

The source issue was verified recovered but its current alarm needs a manual clear. After review, Clear Alarm changes that source record. Acknowledge would only document handling; Exclude would only change local congestion visibility.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.

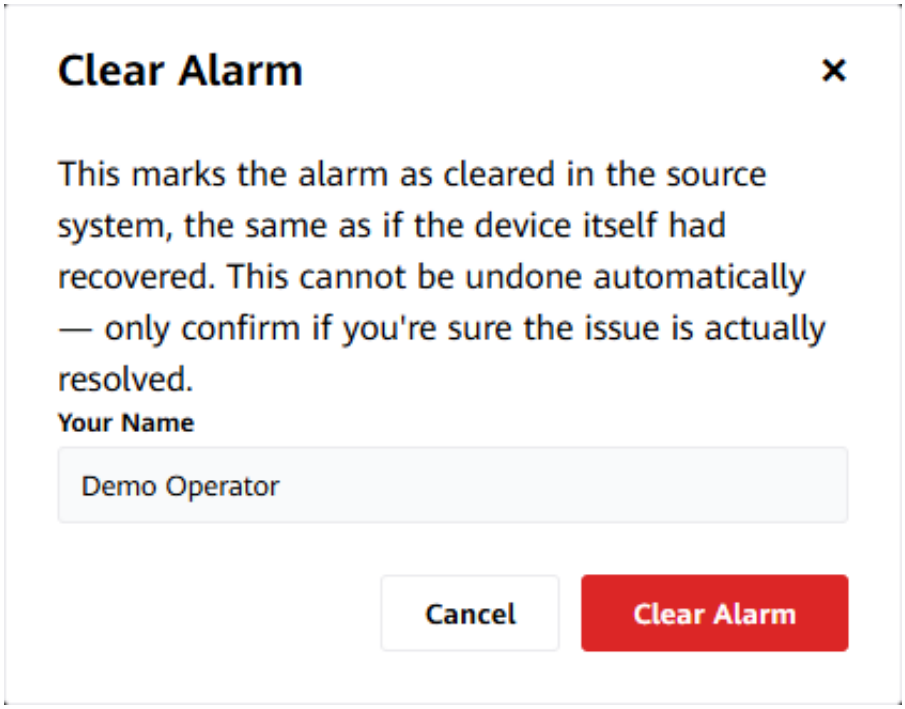

Demo: the real source-clear confirmation. It was opened for illustration only; no clear was submitted.

How to use | Filter, search, and read a drilldown

A filter chooses the population; table search helps find a record inside the loaded view. A badge can count distinct sites while the table lists multiple alarm rows.

When to use this feature

Read the card title and selected period before clicking its count. Decide whether you need incidents, WOs, sites, or alarm records.

Step-by-step instructions

1. Open the relevant badge or chart value.

2. Use the available date, category, or week control for that view. Apply the selection where an Apply button is shown.

3. Read the resulting title and record count, then search a known identifier in the table.

4. Inspect its status, timestamps, device or site, and relevant SLA columns.

5. Clear the table search and reset unwanted filters before comparing a different population.

What the fields mean

Field or control	What it means
Category / week / date filter	Narrows which source-backed records qualify.
Table search	Finds matching text in the displayed table; it is not a new source query.
Record count	Read the view's actual counting unit before comparing it to a card badge.

What changes after saving

The view shows the matching cohort and its detailed records. Opening a detail list does not change the operational state.

Scope and important distinctions

Search cannot reveal a record excluded by the current query, date range, saved congestion rule, or inventory requirements.


A browser refresh does not force every source sync.

Worked example

A site badge is 2 and its table has 5 alarm rows. Search site 0460 to inspect that site's rows. This narrows your inspection, not the definition of what the original site badge counted.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.

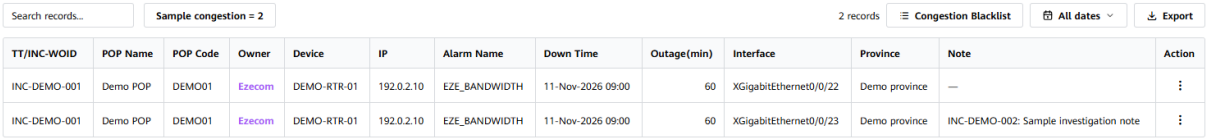

TT/INC-WOID	POP Name	POP Code	Owner	Device	IP	Alarm Name	Down Time	Outage(min)	Interface	Province	Note	Action
INC-DEMO-001	Demo POP	DEMO01	Ezecom	DEMO-RTR-01	192.0.2.10	EZE_BANDWIDTH	11-Nov-2026 09:00	60	XGigabitEthernet0/0/22	Demo province	—	⋮
INC-DEMO-001	Demo POP	DEMO01	Ezecom	DEMO-RTR-01	192.0.2.10	EZE_BANDWIDTH	11-Nov-2026 09:00	60	XGigabitEthernet0/0/23	Demo province	INC-DEMO-002: Sample investigation note	⋮

Demo: the real alarm table with a sample device search. All rows and identifiers are illustrative.

How to use | Add Mentor sites and import a CSV

Save specific site inventory codes for focused monitoring. The selected list persists separately from the regularly refreshed alarm and incident caches.

When to use this feature

Use site inventory codes, not a POP name or a device IP. Preserve leading zeroes and use the downloadable template for a CSV.

Step-by-step instructions

1. Open Mentor Site. For a small list, enter the exact codes in the input area.

2. For a file import, download the template and fill its site-code column without changing the expected header.

3. Select or drop the CSV into the import control and wait for file validation.

4. Read the success or failure result. A progress bar reaching its end does not turn a failed validation into an accepted file.

5. Correct unknown codes or a wrong template, then complete the add/import action when the validation allows it.

6. Check the configured-site list and use its View action to inspect a particular site's alarms.

What the fields mean

Field or control	What it means
Site code	The inventory identifier, including meaningful leading zeroes.
Validation result	Explains whether the input can be accepted.
Configured sites	The saved monitoring selection, not a new source inventory.

What changes after saving

Valid accepted codes are added to the saved Mentor list. The live badges then use matching cached alarm and incident data.

Scope and important distinctions

Unknown codes are not automatically invented as new inventory sites. POP monitoring is not enabled simply by entering a POP code.


Removing a Mentor selection does not delete the site or its incidents from the source systems.

Worked example

Add sample codes 0460 and 1002. If a spreadsheet changes 0460 to 460, review the actual identifier before importing. The sample screenshot shows the interface only; use real valid inventory codes when operating the dashboard.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.

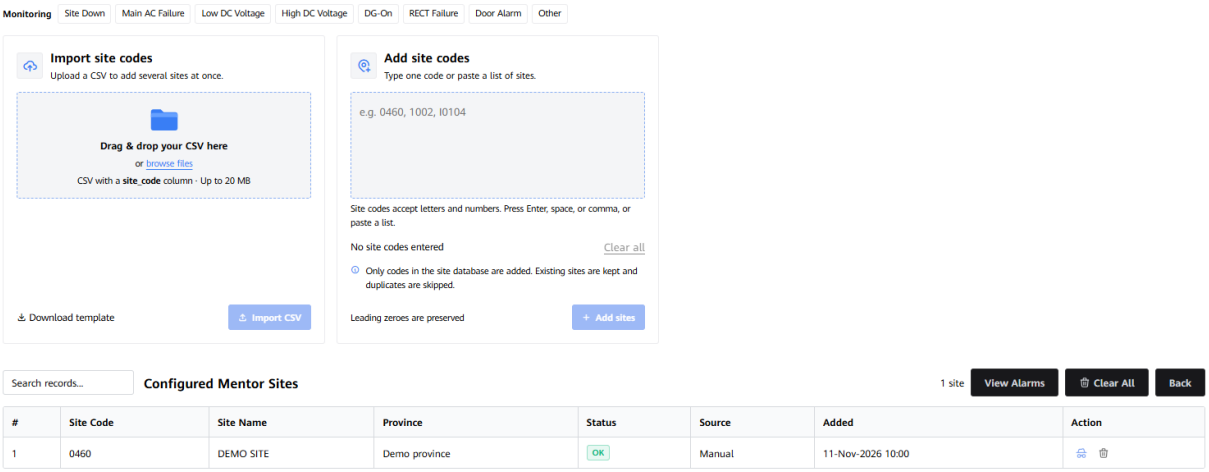

Demo: the real Mentor page with a sample configured site. The capture did not import or save any site.

How to use | Export records and check the result

Use Export to take records out of the selected view. An export is a snapshot, not a live spreadsheet that updates when the source changes.

When to use this feature

Choose the intended incident, alarm, map, or report view. Review its date and category selections before exporting.

Step-by-step instructions

1. Apply the desired view filters and confirm the heading and record scope.

2. Use the view's Export control. The output format depends on the page: table exports, map sheets, and document exports have different formats.

3. Open the downloaded file and inspect a few known identifiers and the date columns.

4. Compare the same counting unit. A table of alarm events need not have the same row count as a distinct-site badge.

5. If you need a new snapshot later, export again after the relevant data update.

What the fields mean

Field or control	What it means
View filters	Choose the cohort before downloading.
Export	Downloads the supported representation of that view.
Browser table search	Do not assume client-side search always controls a server export; verify the downloaded records.

What changes after saving

A downloadable file is produced by the supported page. The source alarms, incidents, and saved exclusions are not changed by exporting.

Scope and important distinctions

A file already shared does not automatically change when the source later updates.


Export format and exact filter handling are page-specific; verify the resulting file rather than assuming every export behaves identically.

Worked example

Export five alarm rows belonging to two sites. The sheet can contain five rows even when the badge says two affected sites. State whether your shared report describes sites or alarm records.

Screenshot demonstration

Real interface captures with isolated sample data. No operational action was submitted.

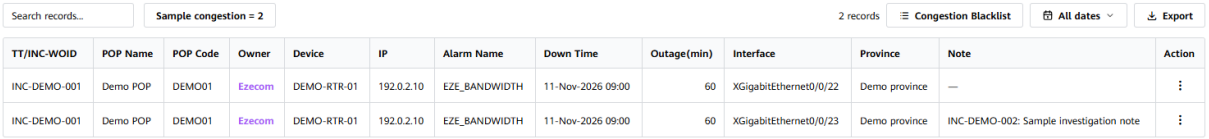

TT/INC-WOID	POP Name	POP Code	Owner	Device	IP	Alarm Name	Down Time	Outage(min)	Interface	Province	Note	Action
INC-DEMO-001	Demo POP	DEMO01	Ezecom	DEMO-RTR-01	192.0.2.10	EZE_BANDWIDTH	11-Nov-2026 09:00	60	XGigabitEthernet0/0/22	Demo province	—	⋮
INC-DEMO-001	Demo POP	DEMO01	Ezecom	DEMO-RTR-01	192.0.2.10	EZE_BANDWIDTH	11-Nov-2026 09:00	60	XGigabitEthernet0/0/23	Demo province	INC-DEMO-002: Sample investigation note	⋮

Demo: the actual drilldown toolbar and Export control, shown with sample records.

How to use | Create, save, and complete an incident report

The report editor prepares a document. A draft or completed report is separate from the operational incident's New, In Progress, Resolved, or Closed status.

When to use this feature

Confirm the intended incident reference and source details. Review the chronology, impacted service, and circuit information before finalizing a document.

Step-by-step instructions

1. Open Incident Report and choose the intended saved report or start a new one.

2. Enter the incident details and impact information. Keep each event's date and time accurate, especially across midnight.

3. Add, insert, or remove chronology rows as needed, then review their order.

4. Use Save as Draft while information is incomplete. Use Save & Complete when the required fields and content are ready.

5. Save the latest changes and export the supported PDF or Word document.

6. Review the exported document before sharing, including the reference, chronology, circuit selection, and pictures.

What the fields mean

Field or control	What it means
Save as Draft	Preserves work in progress without treating all required fields as final.
Save & Complete	Checks the required report fields and marks the document final.
Chronology	Preserves the correct date as well as time for each event.
Circuit selection	Review dependent records when the available inventory contains several circuits.

What changes after saving

The report data is saved or exported according to the chosen control. Your document can be reviewed independently of the source ticket workflow.

Scope and important distinctions

Completing a report does not automatically close the operational incident or resolve its WOs.

An exported file is not automatically rewritten by later source changes.

Worked example

Detection is Monday 23:40, investigation Tuesday 00:10, and recovery Tuesday 01:20. Keep both dates in the chronology; entering every event as Monday would misstate the incident.

Quick action reference

Action	What it changes
Acknowledge / Modify Note	Source acknowledgment or note on the supported alarm
Exclude Congestion	Saved local visibility for one device/interface
Restore	Removes one saved congestion visibility rule
Clear Alarm	Source alarm status and restoration timestamp
Filter / Search	The records being inspected; not source status
Export	Produces a file snapshot; not a source update