

INTERFACE DESIGN

What

The Interface Design phase focuses on creating a user-friendly ServiceNow interface through which users can submit Network Request service requests.

The interface consists of:

- A dedicated Network Request Service Catalog item.
- Request-specific variables.
- Multiple-choice and text-based inputs.
- A reusable Variable Set for requester information.
- Auto-population of user information where applicable.
- Mandatory and read-only controls to improve data quality.

The design is intended to make request submission simple while ensuring that the information required for downstream approval and fulfilment is captured consistently.

Why

A well-designed request interface reduces incomplete or incorrect submissions and improves the overall user experience.

The interface is designed to:

- Provide a standardized network-request submission process.
- Capture all required request information.
- Reduce repetitive data entry.
- Automatically populate known user information.
- Improve consistency of request data.
- Support subsequent approval and fulfilment automation.

Activity 1 – Creation of Service Catalog Item

What

Create a Service Catalog item named Network Request that acts as the primary entry point for users requesting network services.

Why


A dedicated catalog item gives users a centralized and standardized method for submitting network requests instead of relying on informal or manual communication.

How

1. Open the Application Navigator.

2. Navigate to:

All → Service Catalog → Maintain Items

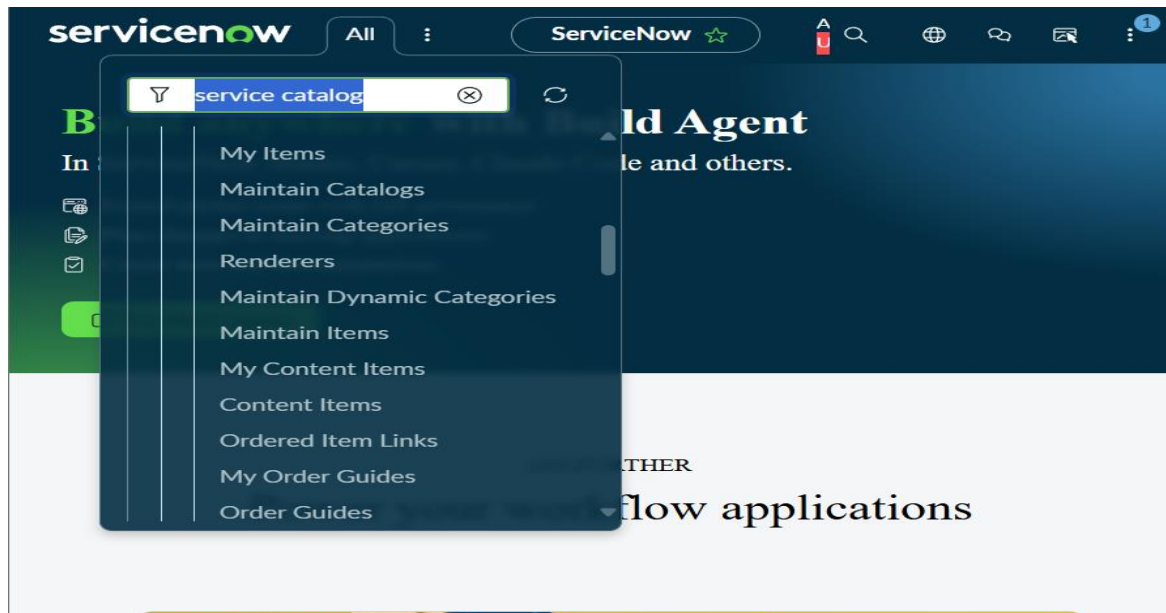

3. Click New.

4. Enter:

Field	Value
Name	Network Request
Catalog	Service Catalog
Category	Network
Short Description	Network request Management

5. Review the information.

6. Click **Save**.

servicenow All Favorites History Workspaces Admin Relationships Application scope: Global Update set: Default [Global]									
Relationships Name Search Actions on selected rows... New									
All	Name	Advanced	Apply to	Applies to table	Queries from table	Insert callback	Query from	Query with	Updated
☐	Access Controls	false		Script Include [sys_script_include]	Access Control [sys_security_ac]			(function refineQuery(current, parent) [...])	2024-08-08 14:30:24
☐	Access Controls	false		Action Type [sys_hub_action_type_definition]	Access Control [sys_security_ac]			(function refineQuery(current, parent) [...])	2025-06-05 13:57:04
☐	Access Controls	false		UI Page [sys_ui_page]	Access Control [sys_security_ac]			(function refineQuery(current, parent) [...])	2022-07-06 11:26:04
☐	Access Controls	false		Dictionary Entry [sys_dictionary]	Access Control [sys_security_ac]			//Use ONE IN to make sure table name get...	2014-08-08 16:00:13
☐	Access Controls	false		Flow [sys_hub_flow]	Access Control [sys_security_ac]			(function refineQuery(current, parent) [...])	2025-06-05 13:56:49
☒	ACL Tables Field Audit	false		ACL Trail [acl_trail]	Security field audit [sys_security_field_audit]			(function refineQuery(current, parent) [...])	2023-09-22 04:42:15
☐	Action Bar Actions	false		UX Actions Configuration [sys_ux_action_config]	M2m Action Assign Ux Action Config [sys_ux_m2m_action_assignment_action_config]			(function refineQuery(current, parent) [...])	2021-07-26 15:46:55
☐	Action Model Fields	false		Action Assignment [sys_declarative_action_assignment]	Action Model Field [sys_declarative_action_model_field]			(function refineQuery(current, parent) [...])	2019-03-06 10:13:59

Capture the catalog item configuration showing:

- Name
- Catalog
- Category
- Short Description

servicenow
All
Catalog Item ...
A U
Catalog Item Network Request
Copy Try It Update Edit in Catalog Builder Delete

Build and modify items faster with the improved Catalog Builder.

Name
Network Request

Catalogs
Service Catalog

Category
Network Standard Changes

State
-- None --

Checked out
-- None --

Owner
System Administrator

Secondary owners

Application
Global

Active
☒

Roles

Fulfillment automation level
Unspecified

Item Details Process Engine Picture Pricing Portal Settings

Short description
Network request Management

Outcome

The Network Request catalog item is created and is available as the foundation for the network request submission interface.

Activity 2 – Variables Configuration

What

Configure variables within the Network Request catalog item to collect information from the requester.

Why

Variables define the fields displayed to users when they submit the catalog item. Properly configured variables ensure that the request contains the information required for processing.

How

1. Open the Network Request catalog item.
2. Scroll to the Variables related list.
3. Click **New**.
4. Select the appropriate variable type, such as:
 - Single Line Text
 - Multi Line Text
 - Reference
 - Multiple Choice
5. Enter the variable configuration.

Important properties include:

Property	Purpose
Order	Controls the sequence in which variables appear
Question	User-visible label
Name	Internal variable name used by scripts/automation
Tooltip	Provides additional information when the user hovers over the field
Example Text	Provides guidance about expected input
Mandatory	Requires the user to provide a value

Property	Purpose
Read-only	Prevents users from modifying the value
Auto-populate	Automatically retrieves information from another variable/record

6. Configure the required properties.
7. Click **Save** or **Submit**.
8. Repeat the procedure for all required variables.

The screenshot shows the ServiceNow interface for configuring a Catalog Item. The breadcrumb trail is "Catalog Item ...". The page title is "Catalog Item Network Request". The top navigation bar includes "Copy", "Try It", "Update", "Edit in Catalog Builder", and "Delete". A blue banner at the top states: "Build and modify items faster with the improved Catalog Builder." The form is divided into two columns. The left column contains fields for "Name" (Network Request), "Catalogs" (Service Catalog), "Category" (Network Standard Changes), "State" (-- None --), "Checked out" (-- None --), "Owner" (System Administrator), and "Secondary owners". The right column contains fields for "Application" (Global), "Active" (checked), "Roles" (empty), and "Fulfillment automation level" (Unspecified). At the bottom, there are tabs for "Item Details", "Process Engine", "Picture", "Pricing", and "Portal Settings". The "Item Details" tab is active, showing a "Short description" field with the text "Network request Management".

Capture one representative variable configuration showing properties such as Question, Name, Type, Order, Mandatory, and other relevant settings.

Outcome

The catalog item contains structured input fields that allow users to provide the information necessary to process their network request.

Activity 3 – Network Request Variables

What

Create the required variables for the Network Request catalog item.

Why

These variables capture the specific information required to process a network connection request and support subsequent automation.

Variable Configuration

S.No.	Variable Name	Type	Choices / Values
1	Requested For	Single Line Text	—
2	Mobile Number	Single Line Text	—
3	Type of Connection	Multiple Choice	New / Existing
4	Enter your Existing ID	Single Line Text	—
5	Total Amount	Single Line Text	—
6	Mode of Payment	Multiple Choice	UPI / CARD
7	Address	Single Line Text	—

How

For each variable:

1. Open the Network Request catalog item.
2. Scroll to Variables.
3. Click New.
4. Enter the variable name/question.
5. Select the appropriate Type.
6. Configure choices where applicable.
7. Set the appropriate Order.
8. Configure Mandatory or Read-only as required.
9. Save the variable.
10. Repeat until all seven variables have been created.

Related Links
[Item Diagnostic](#)
[Run Point Scan](#)
[\[SN Utils\] Versions \(14\)](#)

Variables (7) | Variable Sets | Catalog UI Policies | Catalog Client Scripts | Available For | Not Available For | Categories (1) | Catalogs (1) | Catalog Data Lookup Definitions | Related Articles | Related Catalog Items

Assigned Topics

for text Search

Catalog item = Network Request

Type	Question	Order
Single Line Text	Address	700
Multiple Choice	Mode of Payment	600
Single Line Text	Total Amount	500
Single Line Text	Enter your existing id	400
Multiple Choice	Type of Connection	400
Single Line Text	Mobile Number	200
Single Line Text	Requested for	100

1 to 7 of 7

Outcome

The Network Request catalog item provides users with a standardized form for entering connection, requester, payment, and address information.

Activity 4 – Variable Set Configuration

What

Create a reusable Variable Set containing common requester information and associate it with the Network Request catalog item.

The variable set contains:

1. Opened on behalf of
2. Email ID
3. User Name
4. Phone Number

Why

Requester information is commonly required across service requests. Using a variable set makes the configuration reusable and reduces duplicate configuration across catalog items.

The auto-population capability also minimizes repetitive data entry and improves data accuracy.

How

Step 1 – Create the Variable Set

1. Open the Network Request catalog item.
2. Navigate to the Variable Sets related list.

3. Click New.
4. Create the required variable set.
5. Save the variable set.

Step 2 – Create "Opened on behalf of"

Configure:

Property	Configuration
Variable Name	Opened on behalf of
Type	Reference
Reference	User [sys_user] table

This allows the user to select a ServiceNow user.

Step 3 – Create "Email ID"

Configure:

Property	Configuration
Variable Name	Email ID
Type	Single Line Text
Population	Auto-populate from Opened on behalf of

Step 4 – Create "User Name"

Configure:

Property	Configuration
Variable Name	User Name
Type	Single Line Text
Population	Auto-populate from Opened on behalf of

Step 5 – Create "Phone Number"


Configure:

Property	Configuration
Variable Name	Phone Number



Property	Configuration
Type	Single Line Text
Population	Auto-populate from Opened on behalf of

Auto-Population Concept

The relationship can be represented as:

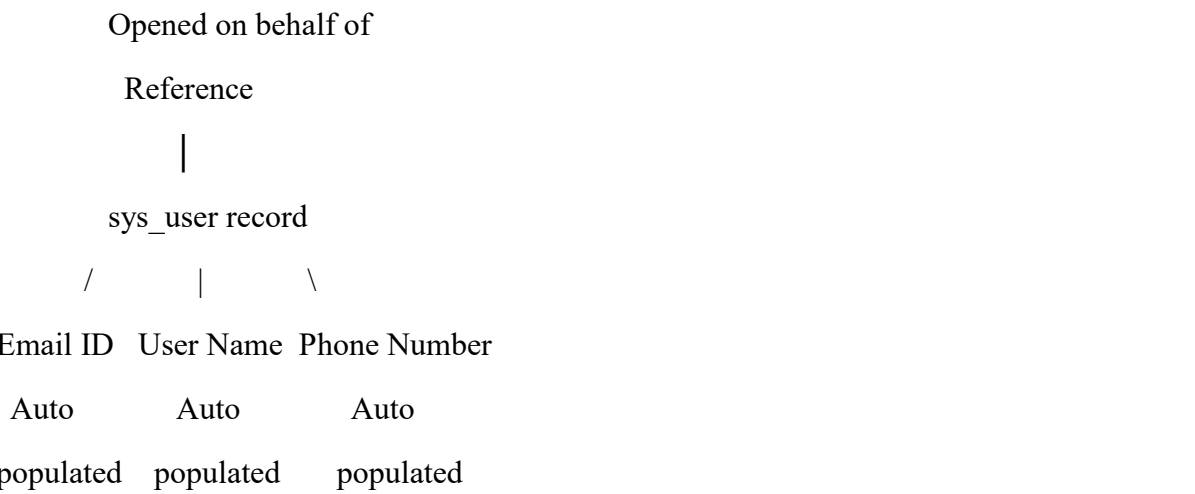

The exact auto-population configuration should follow the fields available in your ServiceNow instance and the instructions/screenshots supplied by the capstone.

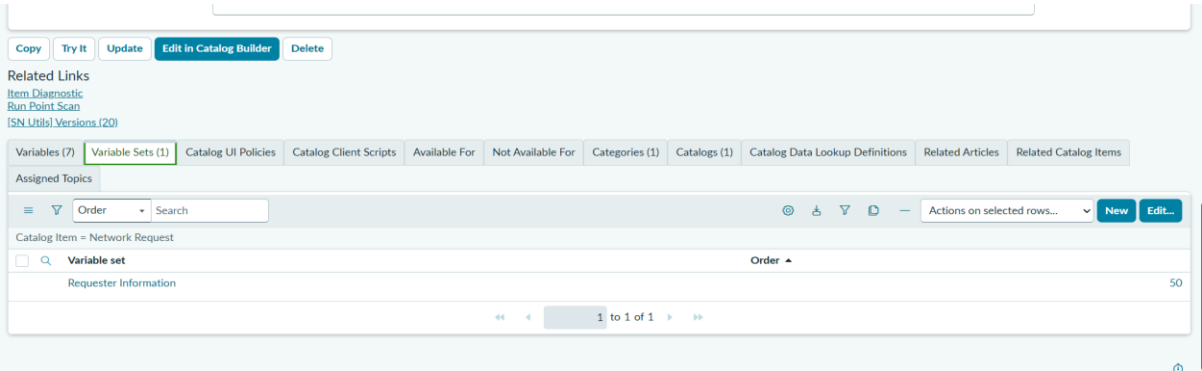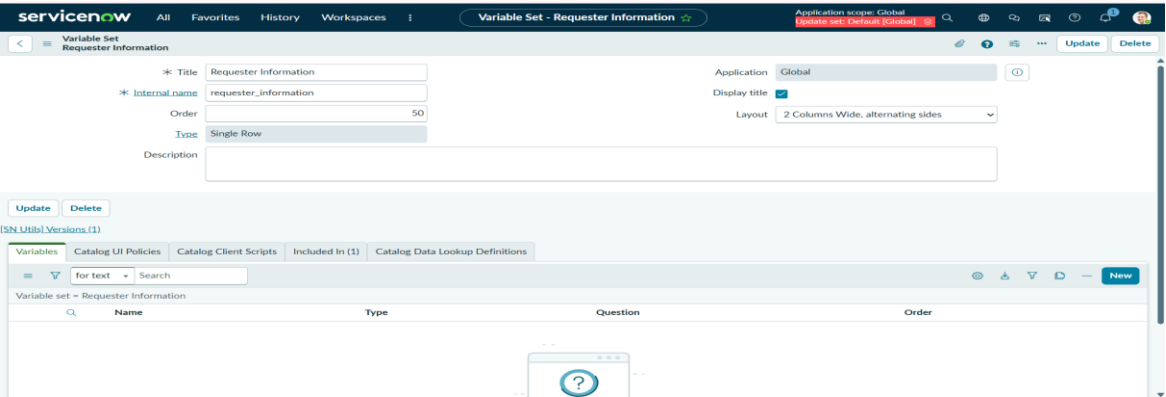

Variable
Opened on behalf of

ApplicationGlobal

TypeReference

Order100

Variable setRequester Information

Active☒

Mandatory☐

Read only☐

Hidden☐

Disable automatic slot fill based on user context☐

QuestionAnnotationType SpecificationsDefault ValueAuto-populatePermissionAvailability

Specify the **Question** that explains the options available to the end user when ordering the item

* QuestionOpened on behalf of

* Nameopened_on_behalf_of

Conversational label

Tooltip

Variable Set
Requester Information

OrderSU

TypeSingle Row

Description

Layout2 Columns Wide, alternating sides

UpdateDelete

SN Utils | Versions (5)

Variables (4)Catalog UI PoliciesCatalog Client ScriptsIncluded In (1)Catalog Data Lookup Definitions

for textSearch

Actions on selected rows...New

Variable set = Requester Information

Name	Type	Question	Order
phone_number	Single Line Text	Phone Number	400
user_name	Single Line Text	User Name	300
email	Single Line Text	Email	200
opened_on_behalf_of	Reference	Opened on behalf of	100

1 to 4 of 4

Variable Set
Requester Information

OrderSU

TypeSingle Row

Description

Layout2 Columns Wide, alternating sides

UpdateDelete

SN Utils | Versions (5)

Variables (4)Catalog UI PoliciesCatalog Client ScriptsIncluded In (1)Catalog Data Lookup Definitions

for textSearch

Actions on selected rows...New

Variable set = Requester Information

Name	Type	Question	Order
phone_number	Single Line Text	Phone Number	400
user_name	Single Line Text	User Name	300
email	Single Line Text	Email	200
opened_on_behalf_of	Reference	Opened on behalf of	100

1 to 4 of 4

The screenshot shows the 'Variable Email' configuration page in ServiceNow. The top navigation bar includes a back arrow, a menu icon, the title 'Variable Email', and action buttons: 'Copy', 'Update', 'Delete', and arrows for navigation. The main configuration area is divided into two columns. The left column contains: 'Application' set to 'Global' with an info icon; 'Type' set to 'Single Line Text' with a dropdown arrow; 'Order' set to '200'; and 'Variable set' set to 'Requester Information' with a search icon and an info icon. The right column contains: 'Active' checked; 'Mandatory' unchecked; 'Read only' unchecked; 'Hidden' unchecked; and 'Disable automatic slot fill based on user context' unchecked. Below this is a tabbed interface with tabs: 'Question', 'Annotation', 'Type Specifications', 'Default Value', 'Auto-populate' (which is highlighted in green), 'Permission', and 'Availability'. The 'Auto-populate' tab is active, showing a 'Dependent question' set to 'Opened on behalf of' with a search icon and an info icon. Below this, 'Reference' is set to 'User [sys_user]' with a dropdown arrow. 'Dot walk path' is set to 'Email' with a dropdown arrow and a green border.

Outcome

The Interface Design phase establishes a standardized and user-friendly network request submission interface in ServiceNow.

After completing this phase:

- Users can access the Network Request catalog item.
- Required network-request information can be captured through variables.
- Connection type and payment mode provide predefined choices.
- Common requester information is maintained through a reusable variable set.
- User information can be automatically populated from the sys_user record.
- The resulting request contains structured information suitable for subsequent approval, workflow automation, fulfilment, and reporting.

Replicability Note

Note: When documenting the implementation, capture both the configuration screen and the resulting user-facing form. The configuration screenshot proves how the interface was built, while the final form screenshot demonstrates what the end user actually sees.