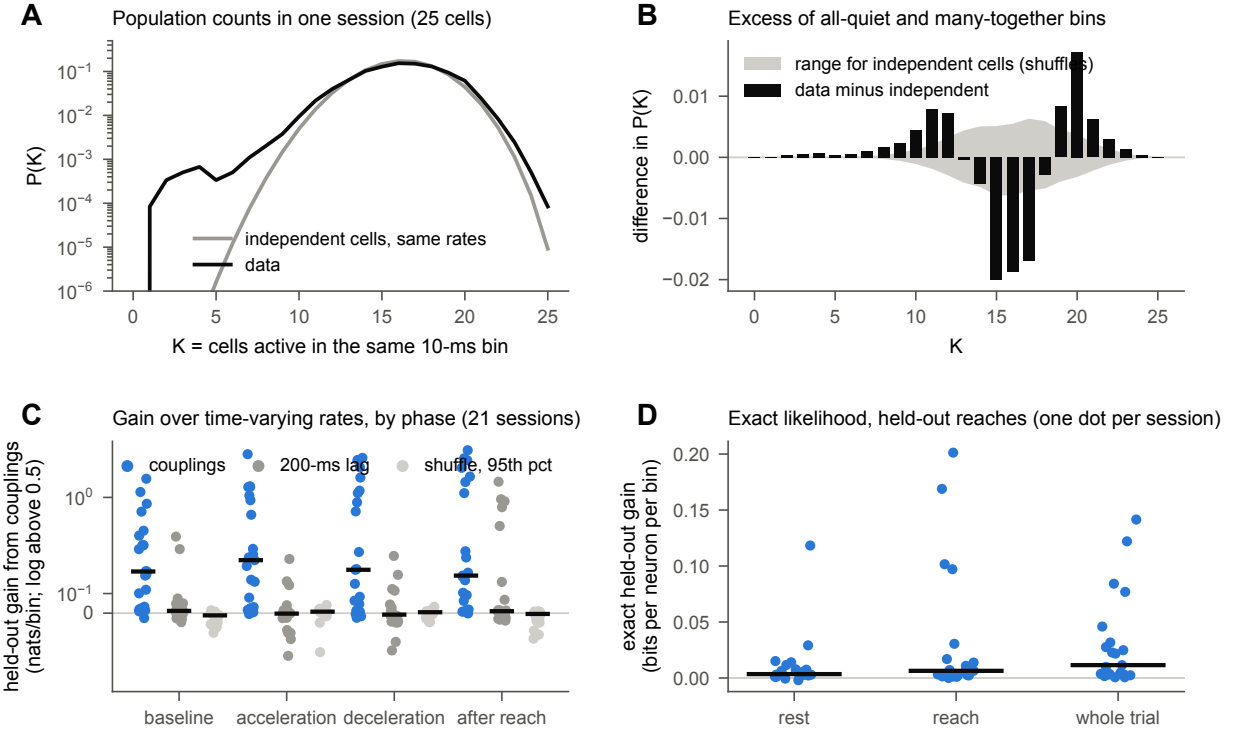
A
Population counts in one session (25 cells)
P(K)
independent cells, same rates
data
K = cells active in the same 10-ms bin
B
Excess of all-quiet and many-together bins
range for independent cells (shuffles)
data minus independent
difference in P(K)
K
C
Gain over time-varying rates, by phase (21 sessions)
held-out gain from couplings (nats/bin; log above 0.5)
couplings
200-ms lag
shuffle, 95th pct
baseline
acceleration
deceleration
after reach
D
Exact likelihood, held-out reaches (one dot per session)
exact held-out gain (bits per neuron per bin)
rest
reach
whole trial