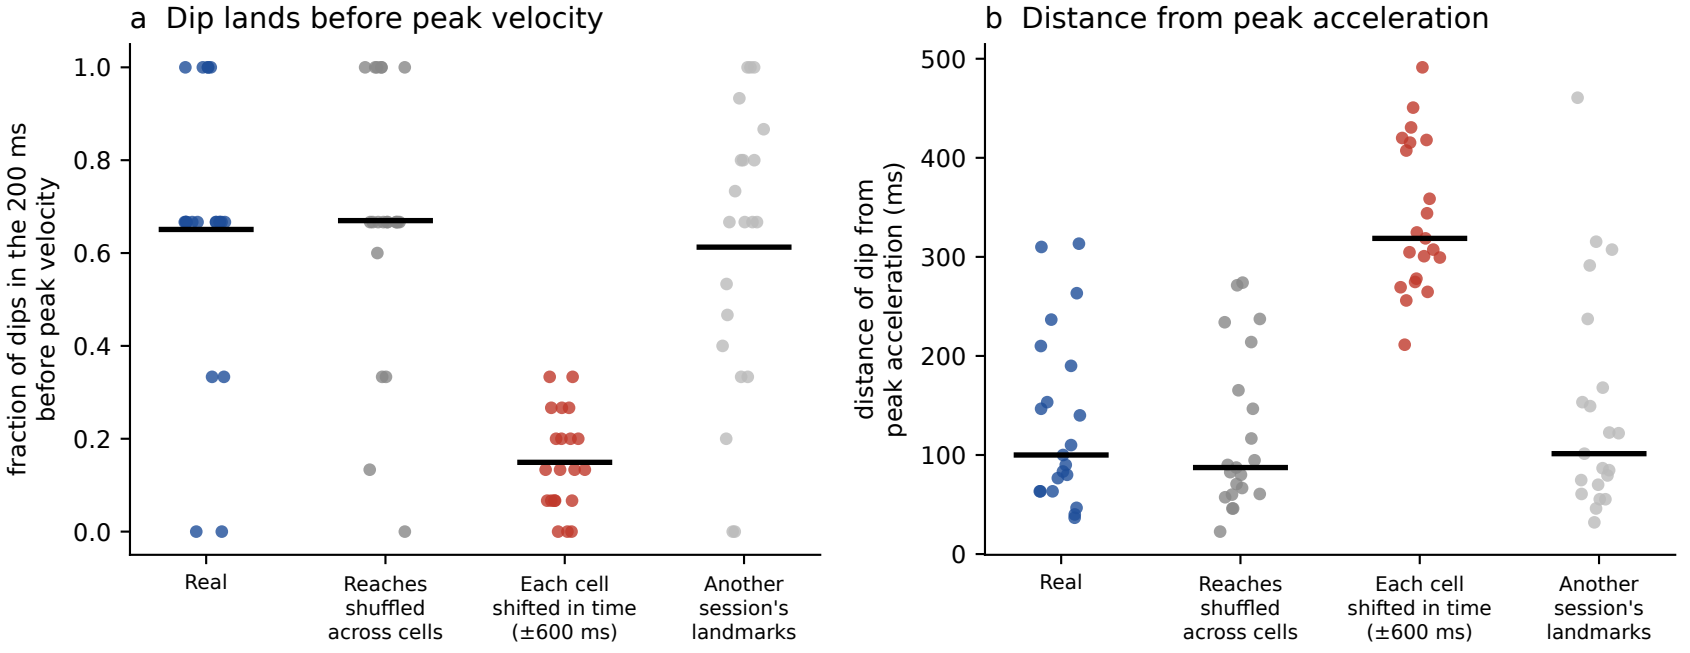

EXPLORATORY. Field-term dip timing (E12 search) for real data and 5 shuffles of each type per block; one dot per session. Landmark shuffle is weak because peak acceleration sits at nearly the same bin in every session.