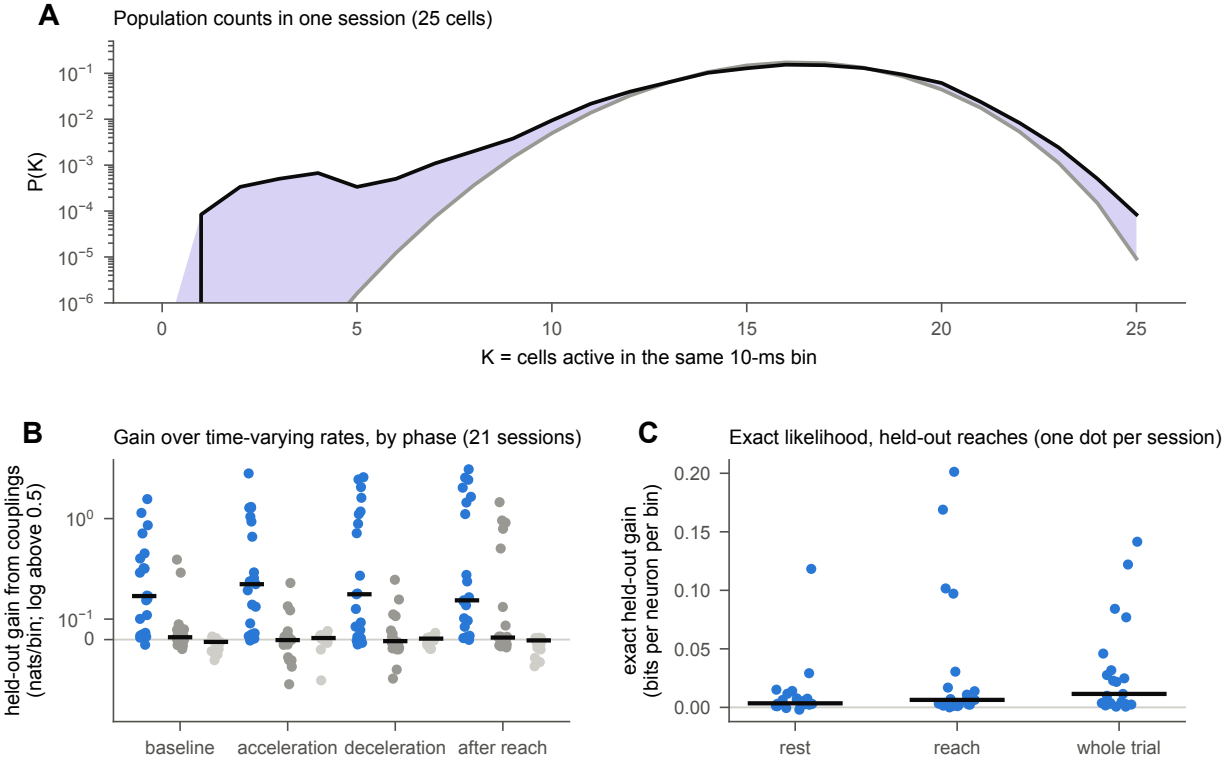
A
Population counts in one session (25 cells)
P(K)
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
0
5
10
15
20
25
K = cells active in the same 10-ms bin
B
Gain over time-varying rates, by phase (21 sessions)
held-out gain from couplings
(nats/bin; log above 0.5)
10^{0}
10^{-1}
0
baseline
acceleration
deceleration
after reach
C
Exact likelihood, held-out reaches (one dot per session)
exact held-out gain
(bits per neuron per bin)
0.20
0.15
0.10
0.05
0.00
rest
reach
whole trial