tqdm: four independent nanolize runs

Saved-candidate trajectory: source + configuration

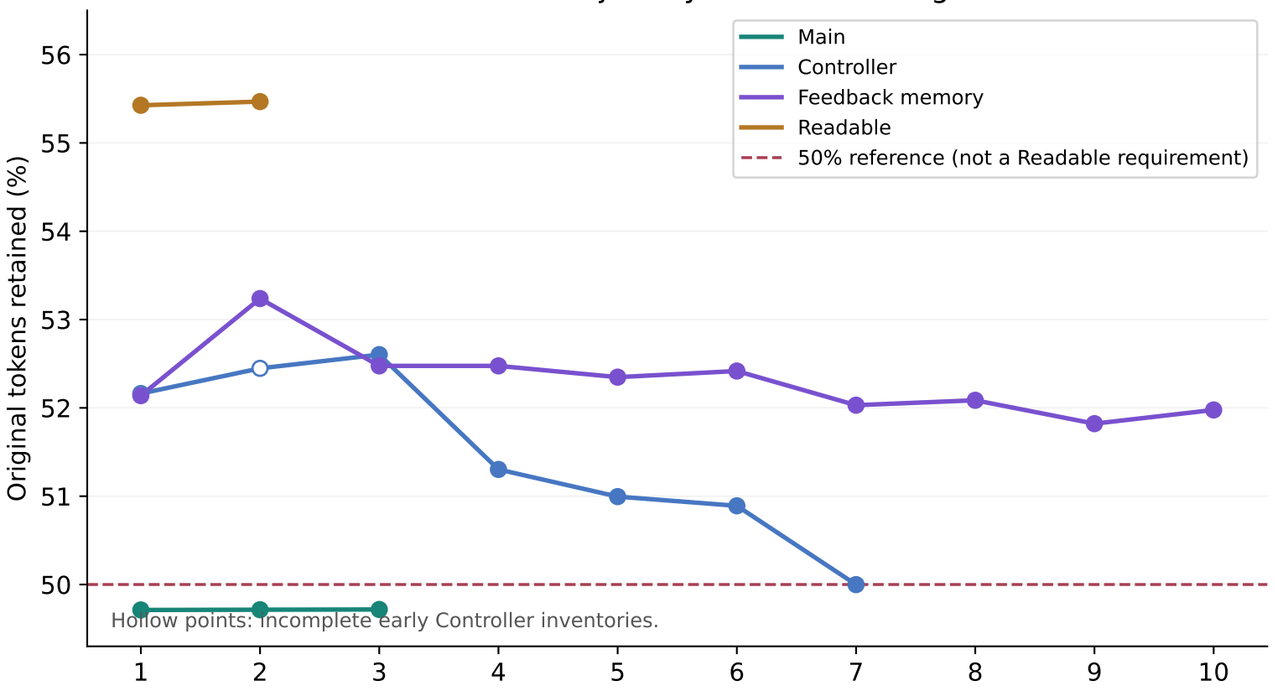

Final size: Readable has no mandatory ratio

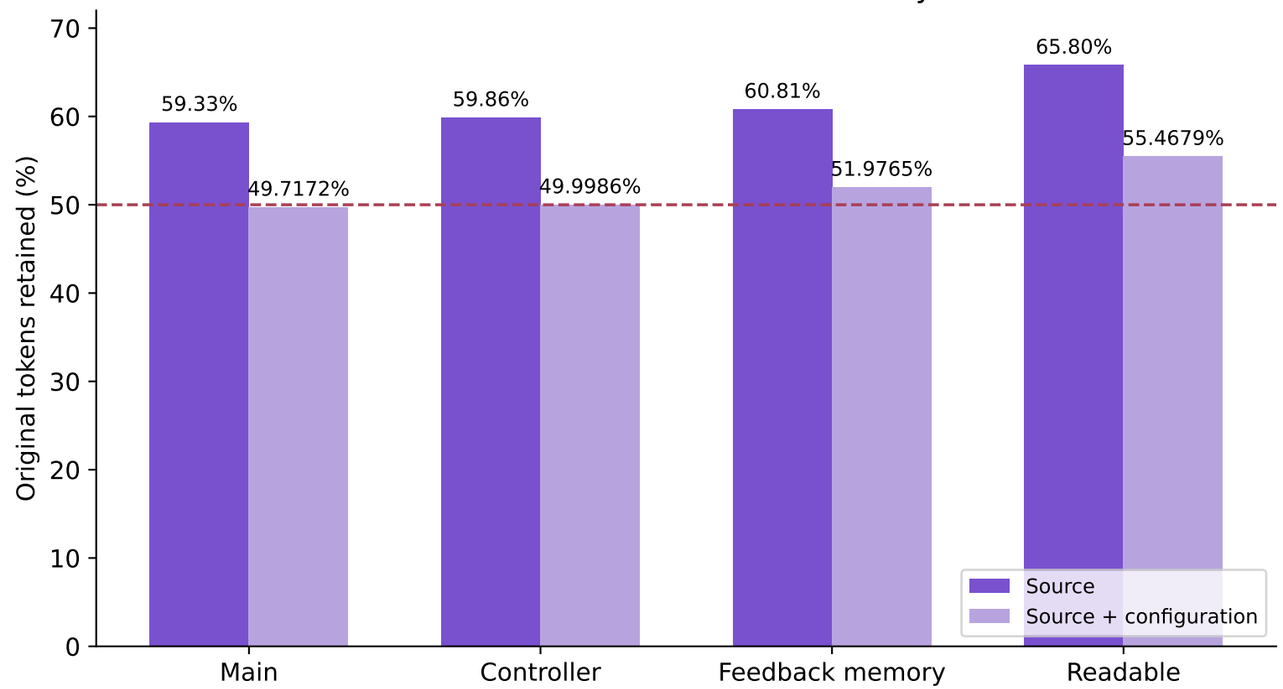

Observed model tokens, including cached input once

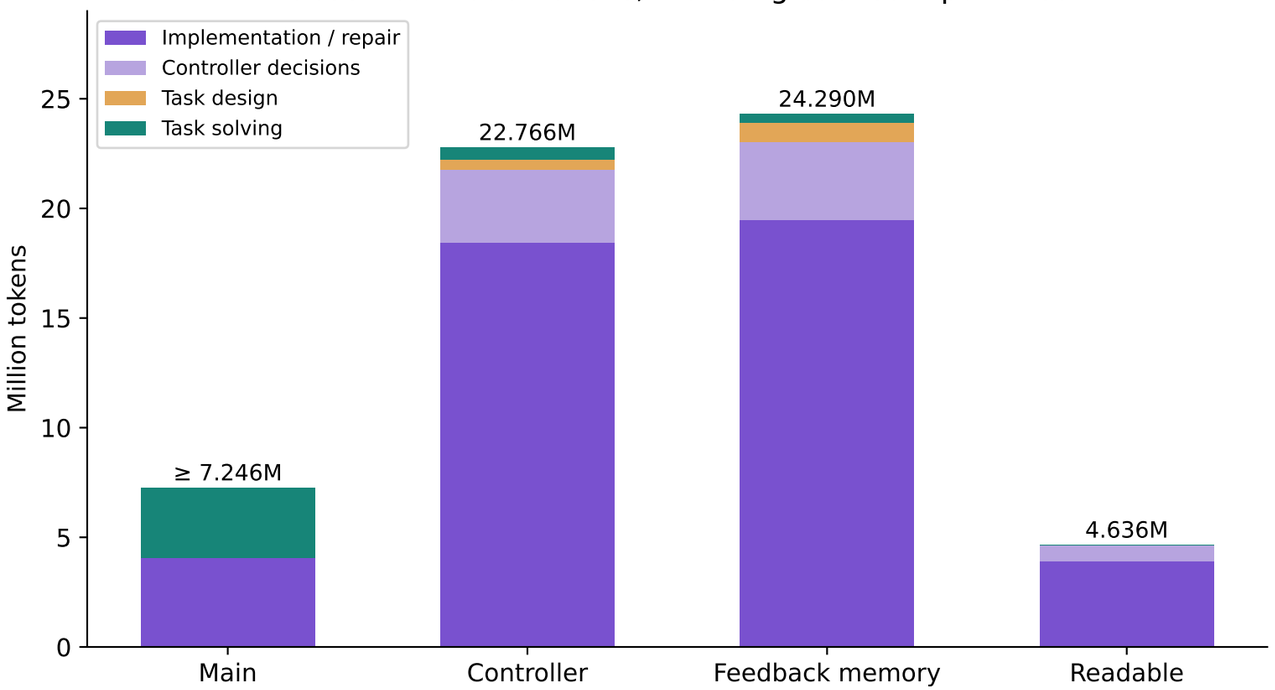

Wall time: submission to final harness outcome

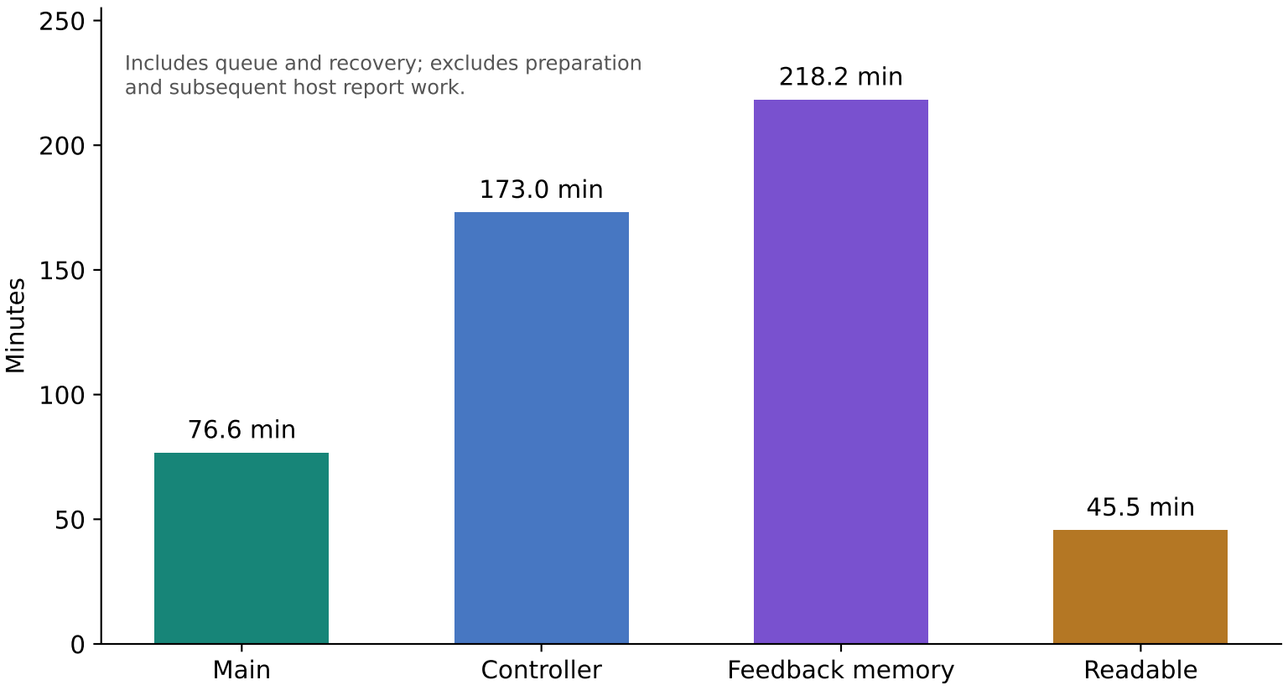

Different goals, task settings and owner interventions: observational comparison, not a controlled ablation.
Readable: no size quota, no task assessment, zero optimization calls. Main includes an unmetered interrupted call.