Entanglement Classification using Knots

PH3203 Term Project

Sagnik Seth 22MS026 Jessica Das 22MS157 Sayan Karmakar 22MS163

Instructor: Prof. Sourin Das

Department of Physics, IISER Kolkata

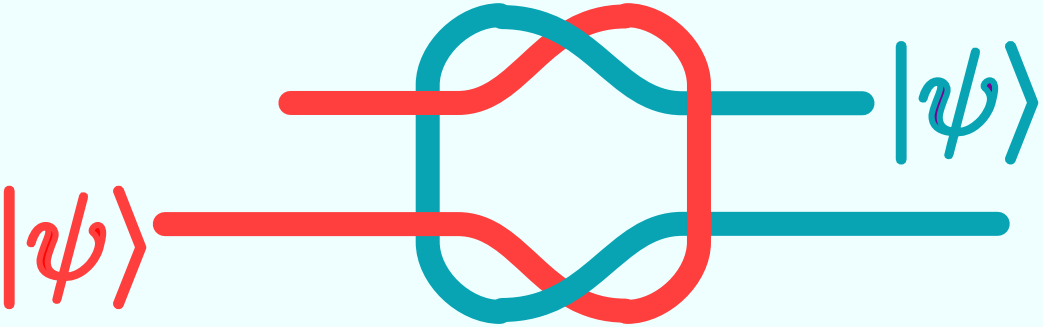

IISER KOLKATA

Basic Theoretical Background

Introduction to Quantum Information

Introduction to Quantum Information

- **Pure State** $\rightarrow$ described by a single vector in Hilbert space.

Introduction to Quantum Information

- **Pure State** $\rightarrow$ described by a single vector in Hilbert space.
- When a system is in a statistical ensemble of many pure states $\{|\psi_i\rangle\}$, with respective *classical* probabilities p_i, such a state is called a **Mixed State**. We represent such states using the density operator:

$$\rho = \sum_i p_i |\psi_i\rangle \langle\psi_i|$$

where $p_i \geqslant 0$, $\sum_i p_i = 1$, and $|\psi_i\rangle$ are pure states.

Introduction to Quantum Information

- **Pure State** $\rightarrow$ described by a single vector in Hilbert space.
- When a system is in a statistical ensemble of many pure states $\{|\psi_i\rangle\}$, with respective *classical* probabilities p_i, such a state is called a **Mixed State**. We represent such states using the density operator:

$$\rho = \sum_i p_i |\psi_i\rangle \langle\psi_i|$$

  where $p_i \geqslant 0$, $\sum_i p_i = 1$, and $|\psi_i\rangle$ are pure states.
- If one of the p_i equals 1, the state is a pure state, with the properties $\rho^2 = \rho$ and $\mathrm{Tr}(\rho^2) = 1$.

Introduction to Quantum Information

- **Pure State** $\rightarrow$ described by a single vector in Hilbert space.
- When a system is in a statistical ensemble of many pure states $\{|\psi_i\rangle\}$, with respective *classical* probabilities p_i, such a state is called a **Mixed State**. We represent such states using the density operator:

$$\rho = \sum_i p_i \, |\psi_i\rangle \, \langle\psi_i|$$

where $p_i \geqslant 0$, $\sum_i p_i = 1$, and $|\psi_i\rangle$ are pure states.
- If one of the p_i equals 1, the state is a pure state, with the properties $\rho^2 = \rho$ and $\mathrm{Tr}(\rho^2) = 1$.
- A quantum state ρ_{AB} is **separable** if it can be written as:

$$\rho_{AB} = \sum_i p_i \, \rho_A^{(i)} \otimes \rho_B^{(i)}$$

where $p_i \geqslant 0$, $\sum_i p_i = 1$, and $\rho_A^{(i)}$ and $\rho_B^{(i)}$ are density matrices of subsystems A and B respectively.

Introduction to Quantum Information

- **Pure State** $\rightarrow$ described by a single vector in Hilbert space.
- When a system is in a statistical ensemble of many pure states $\{|\psi_i\rangle\}$, with respective *classical* probabilities p_i, such a state is called a **Mixed State**. We represent such states using the density operator:

$$\rho = \sum_i p_i \, |\psi_i\rangle \, \langle\psi_i|$$

  where $p_i \geqslant 0$, $\sum_i p_i = 1$, and $|\psi_i\rangle$ are pure states.
- If one of the p_i equals 1, the state is a pure state, with the properties $\rho^2 = \rho$ and $\mathrm{Tr}(\rho^2) = 1$.
- A quantum state ρ_{AB} is **separable** if it can be written as:

$$\rho_{AB} = \sum_i p_i \, \rho_A^{(i)} \otimes \rho_B^{(i)}$$

  where $p_i \geqslant 0$, $\sum_i p_i = 1$, and $\rho_A^{(i)}$ and $\rho_B^{(i)}$ are density matrices of subsystems A and B respectively.
- A state is **entangled** if it is not separable.

Peres-Horodecki Criterion

Peres-Horodecki Criterion

- This criterion (also called PPT test) is used to decide the separability of mixed states.

Peres-Horodecki Criterion

- This criterion (also called PPT test) is used to decide the separability of mixed states.
- Let the quantum system be represented by ρ. Compute the partial transpose of ρ with respect to one subsystem (say, B), call it ρ^{T_B}, i.e, you transpose the matrix elements corresponding only to subsystem B, leaving A untouched.

.

.

Peres-Horodecki Criterion

- This criterion (also called PPT test) is used to decide the separability of mixed states.
- Let the quantum system be represented by ρ. Compute the partial transpose of ρ with respect to one subsystem (say, B), call it ρ^{T_B}, i.e, you transpose the matrix elements corresponding only to subsystem B, leaving A untouched.

$$\sum_{ijkl} p^{ij}_{kl} \left|i\right\rangle \left\langle i\right| \otimes \left|k\right\rangle \left\langle l\right| \to \sum_{ijkl} p^{ij}_{kl} \left|i\right\rangle \left\langle i\right| \otimes \left|l\right\rangle \left\langle k\right|$$

.

.

Peres-Horodecki Criterion

- This criterion (also called PPT test) is used to decide the separability of mixed states.
- Let the quantum system be represented by ρ. Compute the partial transpose of ρ with respect to one subsystem (say, B), call it ρ^{T_B}, i.e, you transpose the matrix elements corresponding only to subsystem B, leaving A untouched.

$$\sum_{ijkl} p_{kl}^{ij} \left|i\right\rangle \left\langle i\right| \otimes \left|k\right\rangle \left\langle l\right| \to \sum_{ijkl} p_{kl}^{ij} \left|i\right\rangle \left\langle i\right| \otimes \left|l\right\rangle \left\langle k\right|$$

- Calculate the eigenvalues of ρ^{T_B}.

.

Peres-Horodecki Criterion

- This criterion (also called PPT test) is used to decide the separability of mixed states.
- Let the quantum system be represented by ρ. Compute the partial transpose of ρ with respect to one subsystem (say, B), call it ρ^{T_B}, i.e, you transpose the matrix elements corresponding only to subsystem B, leaving A untouched.

$$\sum_{ijkl} p_{kl}^{ij} \left|i\right\rangle \left\langle i\right| \otimes \left|k\right\rangle \left\langle l\right| \rightarrow \sum_{ijkl} p_{kl}^{ij} \left|i\right\rangle \left\langle i\right| \otimes \left|l\right\rangle \left\langle k\right|$$

- Calculate the eigenvalues of ρ^{T_B}.
- If at least one eigenvalue $\lambda_j < 0$, this will ensure that the two subsystems are entangled.

Peres-Horodecki Criterion

- This criterion (also called PPT test) is used to decide the separability of mixed states.
- Let the quantum system be represented by ρ. Compute the partial transpose of ρ with respect to one subsystem (say, B), call it ρ^{T_B}, i.e, you transpose the matrix elements corresponding only to subsystem B, leaving A untouched.

$$\sum_{ijkl} p_{kl}^{ij} \left|i\right\rangle \left\langle i\right| \otimes \left|k\right\rangle \left\langle l\right| \to \sum_{ijkl} p_{kl}^{ij} \left|i\right\rangle \left\langle i\right| \otimes \left|l\right\rangle \left\langle k\right|$$

- Calculate the eigenvalues of ρ^{T_B}.
- If at least one eigenvalue $\lambda_j < 0$, this will ensure that the two subsystems are entangled.
- If all eigenvalues positive, then, in 2×2 or 2×3 systems, this implies the state is separable.

Classifying Entanglement using Knots

How it all began...

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.

.

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

Observations

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis

Observations

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state $\rightarrow$ separable$\rightarrow$

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state $\rightarrow$ separable$\rightarrow$ modelled by Borromean ring

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis
- $|\Psi\rangle = \frac{|+\rangle}{\sqrt{2}}\left(\frac{|00\rangle - |11\rangle}{\sqrt{2}}\right) + \frac{|-\rangle}{\sqrt{2}}\left(\frac{|00\rangle + |11\rangle}{\sqrt{2}}\right)$ in X basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state $\rightarrow$ separable$\rightarrow$ modelled by Borromean ring

How it all began...

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis
- $|\Psi\rangle = \frac{|+\rangle}{\sqrt{2}}\left(\frac{|00\rangle-|11\rangle}{\sqrt{2}}\right) + \frac{|-\rangle}{\sqrt{2}}\left(\frac{|00\rangle+|11\rangle}{\sqrt{2}}\right)$ in X basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state $\rightarrow$ separable$\rightarrow$ modelled by Borromean ring
- Measuring in X basis: first particle measured, then remaining collapses to an entangled state $\rightarrow$ remains entangled

How it all began. . .

- Aravind, 1997 $\rightarrow$ modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis
- $|\Psi\rangle = \frac{|+\rangle}{\sqrt{2}}\left(\frac{|00\rangle-|11\rangle}{\sqrt{2}}\right) + \frac{|-\rangle}{\sqrt{2}}\left(\frac{|00\rangle+|11\rangle}{\sqrt{2}}\right)$ in X basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state $\rightarrow$ separable$\rightarrow$ modelled by Borromean ring
- Measuring in X basis: first particle measured, then remaining collapses to an entangled state $\rightarrow$ remains entangled$\rightarrow$ modelled by 3-Hopf rings

How it all began . . .

How it all began ...

- Sugita, 2007 $\rightarrow$ rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.

How it all began ...

- Sugita, 2007 $\rightarrow$ rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state (for two qubit systems)

How it all began . . .

- Sugita, 2007 $\rightarrow$ rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state (for two qubit systems)

Concurrence of a density operator:

How it all began ...

- Sugita, 2007 $\rightarrow$ rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state (for two qubit systems)

Concurrence of a density operator:

$$\mathrm{C}(\rho) = \max\{0, \lambda_1 - \lambda_2 - \lambda_3 - \lambda_4\}$$

Here λ_i are the square root of the eigenvalues, in decreasing order, of the non-Hermitian matrix $\tilde{\rho}\rho$ where $\tilde{\rho}$ is defined by:

$$\tilde{\rho} = (\sigma_y \otimes \sigma_y)\rho^*(\sigma_y \otimes \sigma_y)$$

How it all began ...

- Sugita, 2007 $\rightarrow$ rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state (for two qubit systems)

Concurrence of a density operator:

$$\mathrm{C}(\rho) = \max\{0, \lambda_1 - \lambda_2 - \lambda_3 - \lambda_4\}$$

Here λ_i are the square root of the eigenvalues, in decreasing order, of the non-Hermitian matrix $\tilde{\rho}\rho$ where $\tilde{\rho}$ is defined by:

$$\tilde{\rho} = (\sigma_y \otimes \sigma_y)\rho^*(\sigma_y \otimes \sigma_y)$$

According to the Concurrence test, a state represented by the density operator ρ is separable iff $C(\rho) = 0$.

Polynomial Approach to Entanglement

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.
- Product of the variables is associated with a link between them.

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.
- Product of the variables is associated with a link between them.

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.
- Product of the variables is associated with a link between them.
- Link polynomial is made by summing up individual contributions.

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.
- Product of the variables is associated with a link between them.
- Link polynomial is made by summing up individual contributions.
- **Ring cut:** Making the variable 0 in the polynomial

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.
- Product of the variables is associated with a link between them.
- Link polynomial is made by summing up individual contributions.
- **Ring cut:** Making the variable 0 in the polynomial
- Each polynomial has a link class represented by n^i where n is the number of rings and i is the index of the class.

Polynomial Approach to Entanglement

- Each linked ring is associated with a variable.
- Product of the variables is associated with a link between them.
- Link polynomial is made by summing up individual contributions.
- **Ring cut:** Making the variable 0 in the polynomial
- Each polynomial has a link class represented by n^i where n is the number of rings and i is the index of the class.

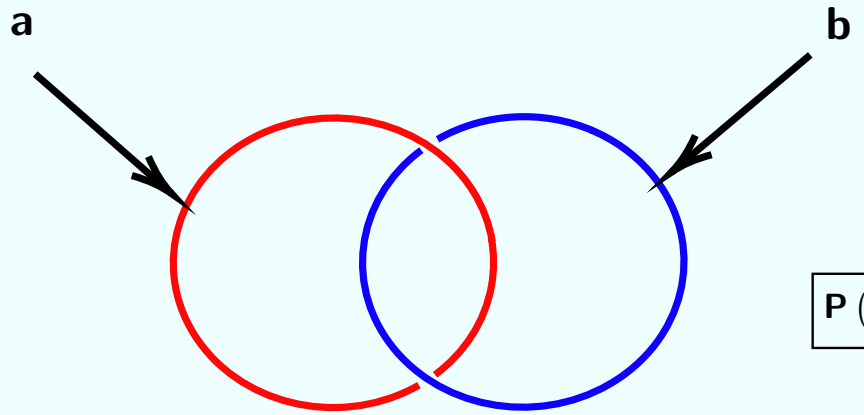

$$\boxed{\mathbf{P}\left(\mathbf{2^1}\right) \;=\; \mathbf{ab}}$$

Obtaining a Link from given State

Obtaining a Link from given State

- Given a state $|\psi\rangle$, we first check the entanglement property of the entire system using the Peres-Horodecki criterion.

Obtaining a Link from given State

- Given a state $|\psi\rangle$, we first check the entanglement property of the entire system using the Peres-Horodecki criterion.
- We then calculate the partials traces of the density operator with respect to each system and then apply the PPT test.

Obtaining a Link from given State

- Given a state $|\psi\rangle$, we first check the entanglement property of the entire system using the Peres-Horodecki criterion.
- We then calculate the partials traces of the density operator with respect to each system and then apply the PPT test.
- From this, we can construct a link polynomial which is characterised by the given state.

Obtaining State from a given Link

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots |2^N - 1\rangle$

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

1. Take a term t of the link polynomial $P(\{t\})$

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

1. Take a term t of the link polynomial $P(\{t\})$
2. t mapped to a state: $|\mathrm{E_q}\rangle \otimes |\mathrm{S_q}\rangle \otimes |\mathrm{Q_d}\rangle$

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

1. Take a term t of the link polynomial $P(\{t\})$
2. t mapped to a state: $|\mathrm{E_q}\rangle \otimes |\mathrm{S_q}\rangle \otimes |\mathrm{Q_d}\rangle$
    - $|\mathrm{E_q}\rangle \longrightarrow$ entangled qubit of GHZ type, associated to ring variables in t.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

1. Take a term t of the link polynomial $P(\{t\})$
2. t mapped to a state: $|\mathrm{E_q}\rangle \otimes |\mathrm{S_q}\rangle \otimes |\mathrm{Q_d}\rangle$
   - $|\mathrm{E_q}\rangle \longrightarrow$ entangled qubit of GHZ type, associated to ring variables in t.
   - $|\mathrm{S_q}\rangle \longrightarrow$ separable qubit associated with ring variables not in t. Generally, large number of possibilities for this separable qubit.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots \left|2^N - 1\right\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

1. Take a term t of the link polynomial $P(\{t\})$
2. t mapped to a state: $|\mathrm{E_q}\rangle \otimes |\mathrm{S_q}\rangle \otimes |\mathrm{Q_d}\rangle$
   - $|\mathrm{E_q}\rangle \longrightarrow$ entangled qubit of GHZ type, associated to ring variables in t.
   - $|\mathrm{S_q}\rangle \longrightarrow$ separable qubit associated with ring variables not in t. Generally, large number of possibilities for this separable qubit.
   - $|\mathrm{Q_d}\rangle \longrightarrow$ qudit state associated with *artifically* introduced ring variable (alphabetical successor of the largest ring variable present). To be traced out later, hence is of less significance. Can be a random state, hence it becomes **mixed**.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \ldots |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only ☹ !

Algorithm:

1. Take a term t of the link polynomial $P(\{t\})$
2. t mapped to a state: $|\mathrm{E_q}\rangle \otimes |\mathrm{S_q}\rangle \otimes |\mathrm{Q_d}\rangle$
   - $|\mathrm{E_q}\rangle \longrightarrow$ entangled qubit of GHZ type, associated to ring variables in t.
   - $|\mathrm{S_q}\rangle \longrightarrow$ separable qubit associated with ring variables not in t. Generally, large number of possibilities for this separable qubit.
   - $|\mathrm{Q_d}\rangle \longrightarrow$ qudit state associated with *artifically* introduced ring variable (alphabetical successor of the largest ring variable present). To be traced out later, hence is of less significance. Can be a random state, hence it becomes **mixed**.
3. Full state $|\psi\rangle \longrightarrow$ sum of individual such states. Trace out d and obtain density matrix of reduced system.

Demonstration of Algorithm

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a,b,c) = ab + ac}$$

- Choose the term $t = ab$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ab$
- Two ring variables a and b, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \equiv \left|2^1\right\rangle_{ab}$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ab$
- Two ring variables a and b, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right) \equiv \left|2^1\right\rangle_{ab}$
- Separable qubit associated with c, keep it general $|\mathrm{S_q}\rangle = |q_1\rangle_c$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ab$
- Two ring variables a and b, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \equiv \left|2^1\right\rangle_{ab}$
- Separable qubit associated with c, keep it general $|\mathrm{S_q}\rangle = |q_1\rangle_c$
- Qudit state, take $|\mathrm{Q_d}\rangle = |0\rangle_d$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ab$
- Two ring variables a and b, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \equiv \left|2^1\right\rangle_{ab}$
- Separable qubit associated with c, keep it general $|\mathrm{S_q}\rangle = |q_1\rangle_c$
- Qudit state, take $|\mathrm{Q_d}\rangle = |0\rangle_d$
- **Full state becomes**:

$$|\psi_1\rangle = \left|2^1\right\rangle_{ab} \otimes |q_1\rangle_c \otimes |0\rangle_d$$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ac$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ac$
- Two ring variables a and c, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right) \equiv \left|2^1\right\rangle_{ac}$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ac$
- Two ring variables a and c, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right) \equiv \left|2^1\right\rangle_{ac}$
- Separable qubit associated with b, keep it general $|\mathrm{S_q}\rangle = |q_1\rangle_b$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ac$
- Two ring variables a and c, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right) \equiv \left|2^1\right\rangle_{ac}$
- Separable qubit associated with b, keep it general $|\mathrm{S_q}\rangle = |q_1\rangle_b$
- Qudit state, take $|\mathrm{Q_d}\rangle = |1\rangle_d$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$\mathrm{P(a, b, c) = ab + ac}$$

- Choose the term $t = ac$
- Two ring variables a and c, so 2 qubit GHZ state assigned to entangled part. $|\mathrm{E_q}\rangle = \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right) \equiv \left|2^1\right\rangle_{ac}$
- Separable qubit associated with b, keep it general $|\mathrm{S_q}\rangle = |q_1\rangle_b$
- Qudit state, take $|\mathrm{Q_d}\rangle = |1\rangle_d$
- **Full state becomes**: $|\psi_2\rangle = \left|2^1\right\rangle_{ac} \otimes |q_2\rangle_b \otimes |1\rangle_d$

Demonstration of Algorithm

- **Mixed state characterising the link**: $|\psi\rangle = c_1 |\psi_1\rangle + c_2 |\psi_2\rangle$

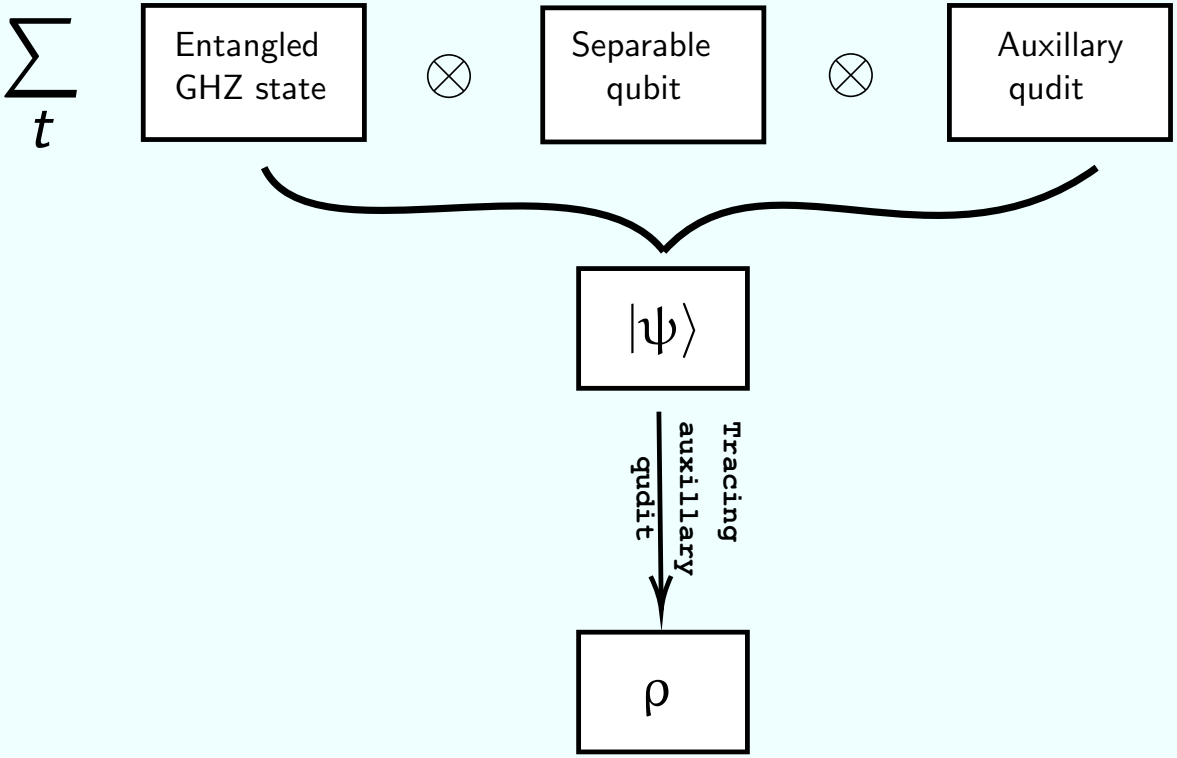

Figure: Schematic representation of the algorithm.

Demonstration of Algorithm

- **Mixed state characterising the link**: $|\psi\rangle = c_1 |\psi_1\rangle + c_2 |\psi_2\rangle$
- Then construct the density matrix accordingly for the state.

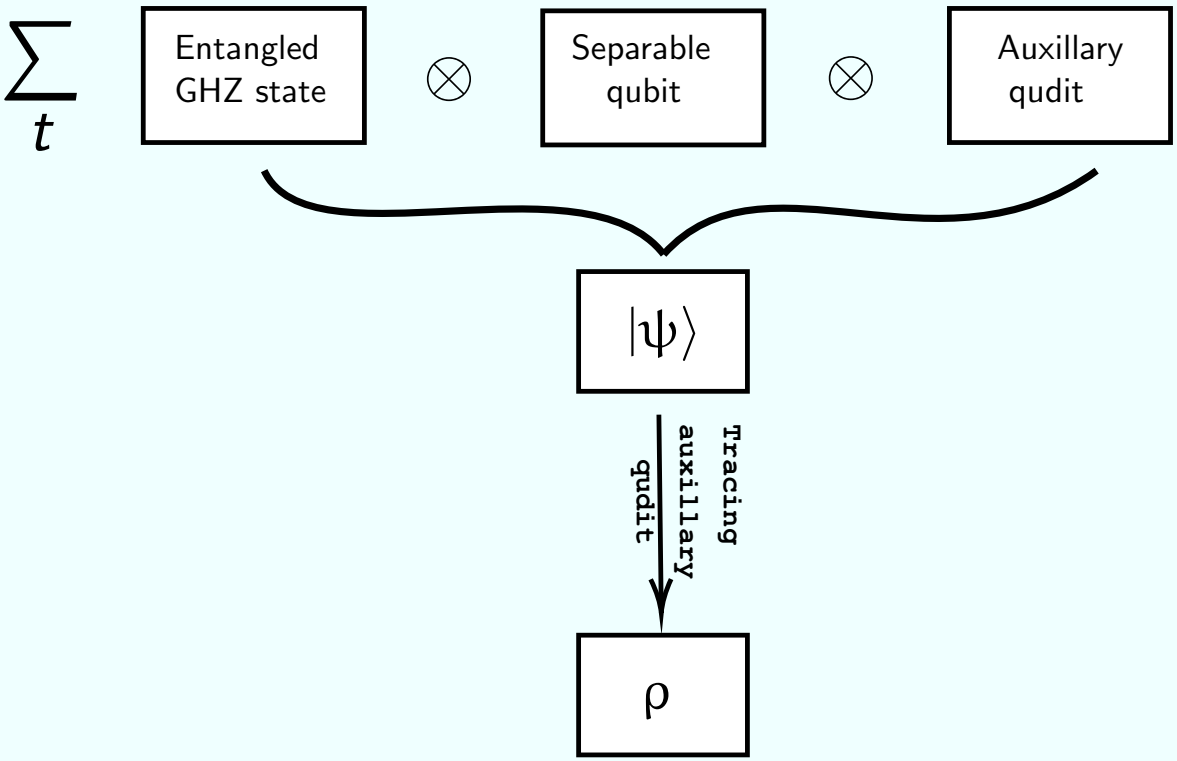

Figure: Schematic representation of the algorithm.

Some Examples...

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

- **Eigenvalues:**
  0.0, 0.5, -0.5

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

- **Eigenvalues:** 0.0, 0.5, -0.5
- One eigenvalue is negative $\rightarrow$ **Tripartite Entanglement**

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{ab} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{ab} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{ab}^{Ta} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{ab} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{ab}^{Ta} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

- **Eigenvalues:**
  $0.0,\ 0.5 \geqslant 0$

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{ab} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{ab}^{Ta} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

- **Eigenvalues:** $0.0,\ 0.5 \geqslant 0$

- All eigenvalues are positive.

Three Qubit System: 3^1 class

Pure State: $\left|3^1\right\rangle_{abc} = \frac{1}{\sqrt{2}}\left(|000\rangle_{abc} + |111\rangle_{abc}\right)$



$$\rho_{ab} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{ab}^{Ta} \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

- **Eigenvalues:** $0.0,\ 0.5 \geqslant 0$

- All eigenvalues are positive.
- System completely **separable** after cut.

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

- **Eigenvalues:**

$\mathbf{-0.471}, 0.0, 0.333, 0.471, 0.666$

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



- **Eigenvalues:**

$-\mathbf{0.471}, 0.0, 0.333, 0.471, 0.666$

$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_c} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



- **Eigenvalues:**

$-\mathbf{0.471}, 0.0, 0.333, 0.471, 0.666$

$-\mathbf{0.333}, 0.0, 0.127, 0.333, 0.872$

$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_c} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_c} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

- **Eigenvalues:**

  $-\mathbf{0.471}, 0.0, 0.333, 0.471, 0.666$

  $-\mathbf{0.333}, 0.0, 0.127, 0.333, 0.872$

- One eigenvalue is negative → **Tripartite Entanglement**

Three Qubit System: 3^2 class: cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$

Three Qubit System: 3^2 class: cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



Three Qubit System: 3^2 class: cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{ab}^{T_a} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.333 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{ab}^{T_a} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.333 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

- **Eigenvalues:**
  0.333, $-\mathbf{0.333}$, 0.666

Three Qubit System: 3^2 class: cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{ab}^{T_a} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.333 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

- **Eigenvalues:**
  0.333, $-\mathbf{0.333}$, 0.666
- One eigenvalue is negative $\rightarrow$ **Tripartite Entanglement**

Three Qubit System: 3^2 class: another cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$

Three Qubit System: 3^2 class: another cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



Three Qubit System: 3^2 class: another cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: another cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{bc}^{T_b} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: another cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{bc}^{T_b} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

- **Eigenvalues:**
  0.0, 0.333, 0.666

Three Qubit System: 3^2 class: another cut

Pure State: $\left|3^2\right\rangle_{abc} = \frac{1}{\sqrt{3}}\left(|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc}\right)$



$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{bc}^{T_b} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

- **Eigenvalues:**
  0.0, 0.333, 0.666
- No eigenvalue is negative $\rightarrow$ **Separable**

Four Qubit System

Link Class: 4^{20}

Link polynomial: $abc + abd + ac$

$$|\psi_{20}\rangle = \left|3^1\right\rangle_{abc} |0\rangle_d |0\rangle_e + \left|3^1\right\rangle_{abd} |0\rangle_c |1\rangle_e + \left|2^1\right\rangle_{ac} |10\rangle_{bd} |2\rangle_e .$$



a: green b: black c: red d: blue

Four Qubit System

$$\hat{\rho}_{abcd} = \frac{\mathrm{Tr}_e(|\psi_{20}\rangle\langle\psi_{20}|)}{\sqrt{\langle\psi_{20}|\psi_{20}\rangle}}.$$

We need to check for Four-partite entanglement. So we have to compute the eigenvalues of the partial transpose with respect to each subsystem.

$\hat{\rho}_{abcd}^{T_a}$: Eigenvalues: $-0.270, -0.103, 0.000, 0.103, 0.270, 0.333$

$\hat{\rho}_{abcd}^{T_b}$: Eigenvalues: $-0.186, 0.000, 0.167, 0.209, 0.333, 0.477$

$\hat{\rho}_{abcd}^{T_c}$: Eigenvalues: $-0.236, 0.000, 0.064, 0.167, 0.236, 0.333, 0.436$

$\hat{\rho}_{abcd}^{T_d}$: Eigenvalues: $-0.167, 0.000, 0.033, 0.167, 0.259, 0.541$

Four Qubit System

$$\hat{\rho}_{abcd} = \frac{\mathrm{Tr}_e(|\psi_{20}\rangle\langle\psi_{20}|)}{\sqrt{\langle\psi_{20}|\psi_{20}\rangle}}.$$

We need to check for Four-partite entanglement. So we have to compute the eigenvalues of the partial transpose with respect to each subsystem.

$$\begin{aligned}
\hat{\rho}_{abcd}^{T_a} &: \text{ Eigenvalues: } -0.270, -0.103, 0.000, 0.103, 0.270, 0.333 \\
\hat{\rho}_{abcd}^{T_b} &: \text{ Eigenvalues: } -0.186, 0.000, 0.167, 0.209, 0.333, 0.477 \\
\hat{\rho}_{abcd}^{T_c} &: \text{ Eigenvalues: } -0.236, 0.000, 0.064, 0.167, 0.236, 0.333, 0.436 \\
\hat{\rho}_{abcd}^{T_d} &: \text{ Eigenvalues: } -0.167, 0.000, 0.033, 0.167, 0.259, 0.541
\end{aligned}$$

As the eigenvalues are negative, it has **FOUR PARTITE ENTANGLEMENT**.

Four Qubit System

All Possible Partial Traces:

Partial Trace with respect to system a :

$$\hat{\rho}_{bcd} = \begin{bmatrix} 0.333 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0.166 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0.166 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0.333 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}.$$

As this is a diagonal matrix, we can say directly that after measuring a, the rest of the system b,c,d becomes **separable**.

Four Qubit System

Partial Trace with respect to system b :

Four Qubit System

Partial Trace with respect to system b :

- $\hat{\rho}_{acd}^{T_a}$:

$$\text{Eigenvalues:} \quad -0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$$

Four Qubit System

Partial Trace with respect to system b :

- $\hat{\rho}_{acd}^{T_a}$:

$$\text{Eigenvalues:} \quad -0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$$

- $\hat{\rho}_{acd}^{T_c}$:

$$\text{Eigenvalues:} \quad -0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$$

Four Qubit System

Partial Trace with respect to system b :

- $\hat{\rho}_{acd}^{T_a}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$

- $\hat{\rho}_{acd}^{T_c}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$

- $\hat{\rho}_{acd}^{T_d}$:

  Eigenvalues: $0.000, 0.000, 0.000, 0.167, 0.230, 0.603.$

Four Qubit System

Partial Trace with respect to system b :

- $\hat{\rho}_{acd}^{T_a}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$

- $\hat{\rho}_{acd}^{T_c}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$

- $\hat{\rho}_{acd}^{T_d}$:

  Eigenvalues: $0.000, 0.000, 0.000, 0.167, 0.230, 0.603.$

Negative eigenvalues suggest, *a* **and** *cd* **are entangled**, and *c* **and** *ad* **are entangled.**

Four Qubit System

Partial Trace with respect to system b :

- $\hat{\rho}_{acd}^{T_a}$:

  $$\text{Eigenvalues: } -0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$$

- $\hat{\rho}_{acd}^{T_c}$:

  $$\text{Eigenvalues: } -0.167, 0.000, 0.167, 0.167, 0.333, 0.500.$$

- $\hat{\rho}_{acd}^{T_d}$:

  $$\text{Eigenvalues: } 0.000, 0.000, 0.000, 0.167, 0.230, 0.603.$$

Negative eigenvalues suggest, a **and** cd **are entangled**, and c **and** ad **are entangled.** We can not say anything about the subsystem d and ac.

Four Qubit System

Partial Trace with respect to system b :

$\mathbb{Q}$. How to conclude anything about the separability of the subsystem d and ac?

.

Four Qubit System

Partial Trace with respect to system b :

$\mathbb{Q}$. How to conclude anything about the separability of the subsystem d and ac?

Computing eigenstates of ρ_{acd}:

$$\begin{bmatrix} 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ -1.0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1.0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0.525 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ -0.850 \\ 0 \end{bmatrix}, \begin{bmatrix} 0.850 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0.525 \\ 0 \end{bmatrix}$$

.

Four Qubit System

Partial Trace with respect to system b :

$\mathbb{Q}$. How to conclude anything about the separability of the subsystem d and ac?

Computing eigenstates of ρ_{acd}:

$$\begin{bmatrix} 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ -1.0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1.0 \end{bmatrix}, \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \end{bmatrix}, \begin{bmatrix} 0.525 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ -0.850 \\ 0 \end{bmatrix}, \begin{bmatrix} 0.850 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0.525 \\ 0 \end{bmatrix}$$

If we can show that these vectors are separable as $|v_{ac}\rangle \otimes |v_d\rangle$, then that will show that the ac and d are separable.

Four Qubit System

Partial Trace with respect to system b :

Consider,

$$\begin{bmatrix} 0 \\ 0 \\ 1.0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} = |0\rangle_a |0\rangle_c |0\rangle_d .$$

So this vector is separable in this form $|v_{ac}\rangle \otimes |v_d\rangle$.

Similarly, we can say all the vectors of this form are separable.

Four Qubit System

Partial Trace with respect to system b :

Consider,

$$\begin{bmatrix} 0.525 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ -0.850 \\ 0 \end{bmatrix} = 0.525\,|0\rangle_a \otimes |0\rangle_c \otimes |0\rangle_d - 0.850\,|1\rangle_a \otimes |1\rangle_c \otimes |0\rangle_d$$

This can be written as,

$$(0.525\,|0\rangle_a \otimes |0\rangle_c - 0.850\,|1\rangle_a \otimes |1\rangle_c) \otimes |0\rangle_d\,.$$
$$= |v_{ac}\rangle \otimes |v\rangle_d$$

So, ac and d are separable.

Four Qubit System

Partial Trace with respect to system c :

Four Qubit System

Partial Trace with respect to system c :

- $\hat{\rho}_{abd}^{T_a}$:

$$\text{Eigenvalues:} \quad -0.167, 0.000, 0.167, 0.167, 0.167, 0.333.$$

Four Qubit System

Partial Trace with respect to system c :

- $\hat{\rho}_{abd}^{T_a}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.167, 0.167, 0.333.$

- $\hat{\rho}_{abd}^{T_b}$:

  Eigenvalues: $-0.103, 0.000, 0.167, 0.270, 0.333, 0.333.$

Four Qubit System

Partial Trace with respect to system c :

- $\hat{\rho}_{abd}^{T_a}$:

  $$\text{Eigenvalues:} \quad -0.167, 0.000, 0.167, 0.167, 0.167, 0.333.$$

- $\hat{\rho}_{abd}^{T_b}$:

  $$\text{Eigenvalues:} \quad -0.103, 0.000, 0.167, 0.270, 0.333, 0.333.$$

- $\hat{\rho}_{abd}^{T_d}$:

  $$\text{Eigenvalues:} \quad -0.069, 0.000, 0.167, 0.167, 0.333, 0.402.$$

.

Four Qubit System

Partial Trace with respect to system c :

- $\hat{\rho}_{abd}^{T_a}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.167, 0.167, 0.333.$

- $\hat{\rho}_{abd}^{T_b}$:

  Eigenvalues: $-0.103, 0.000, 0.167, 0.270, 0.333, 0.333.$

- $\hat{\rho}_{abd}^{T_d}$:

  Eigenvalues: $-0.069, 0.000, 0.167, 0.167, 0.333, 0.402.$

Negative eigenvalues suggest, a **and** bd **are entangled**, b **and** ad **are entangled.** and d **and** ab **are entangled**.

Four Qubit System

Partial Trace with respect to system d :

Four Qubit System

Partial Trace with respect to system d :

- $\hat{\rho}_{abc}^{T_a}$:

$$\text{Eigenvalues:} \quad -0.208, 0.000, 0.074, 0.167, 0.300, 0.333,$$

Four Qubit System

Partial Trace with respect to system d :

- $\hat{\rho}_{abc}^{T_a}$:

  Eigenvalues: $-0.208, 0.000, 0.074, 0.167, 0.300, 0.333,$

- $\hat{\rho}_{abc}^{T_b}$:

  Eigenvalues: $-0.122, 0.000, 0.167, 0.167, 0.333, 0.455.$

Four Qubit System

Partial Trace with respect to system d :

- $\hat{\rho}_{abc}^{T_a}$:

  $$\text{Eigenvalues:}\quad -0.208, 0.000, 0.074, 0.167, 0.300, 0.333,$$

- $\hat{\rho}_{abc}^{T_b}$:

  $$\text{Eigenvalues:}\quad -0.122, 0.000, 0.167, 0.167, 0.333, 0.455.$$

- $\hat{\rho}_{abc}^{T_c}$:

  $$\text{Eigenvalues:}\quad -0.167, 0.000, 0.167, 0.333, 0.333, 0.333.$$

.

Four Qubit System

Partial Trace with respect to system d :

- $\hat{\rho}_{abc}^{T_a}$:

  Eigenvalues: $-0.208, 0.000, 0.074, 0.167, 0.300, 0.333,$

- $\hat{\rho}_{abc}^{T_b}$:

  Eigenvalues: $-0.122, 0.000, 0.167, 0.167, 0.333, 0.455.$

- $\hat{\rho}_{abc}^{T_c}$:

  Eigenvalues: $-0.167, 0.000, 0.167, 0.333, 0.333, 0.333.$

Negative eigenvalues suggest, a **and** bc **are entangled**, b **and** ac **are entangled.** and c **and** ab **are entangled**.

Four Qubit System

Partial Trace with respect to system ab :

$$\hat{\rho}_{cd} = \begin{bmatrix} 0.5 & 0 & 0 & 0 \\ 0 & 0.166 & 0 & 0 \\ 0 & 0 & 0.333 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}.$$

So, c **and** d **are separated.**

Four Qubit System

Partial Trace with respect to system bc **:**

$$\hat{\rho}_{ad} = \begin{bmatrix} 0.5 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0.333 & 0 \\ 0 & 0 & 0 & 0.166 \end{bmatrix}.$$

So, a **and** d **are separated.**

Four Qubit System

Partial Trace with respect to system cd :

$$\hat{\rho}_{ab} = \begin{bmatrix} 0.333 & 0 & 0 & 0 \\ 0 & 0.166 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0.5 \end{bmatrix}.$$

So, a **and** b **are separated.**

Four Qubit System

Partial Trace with respect to system *ad* :

$$\hat{\rho}_{bc} = \begin{bmatrix} 0.333 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0.333 & 0 \\ 0 & 0 & 0 & 0.333 \end{bmatrix}.$$

So, b **and** c **are separated.**

Four Qubit System

Partial Trace with respect to system bd :

$$\hat{\rho}_{ac} = \begin{bmatrix} 0.5 & 0 & 0 & 0.166 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0.166 & 0 \\ 0.166 & 0 & 0 & 0.333 \end{bmatrix}.$$

Four Qubit System

Partial Transpose with respect to a:

$$\hat{\rho}_{ac}^{T_a} = \begin{bmatrix} 0.5 & 0 & 0 & 0 \\ 0 & 0 & 0.166 & 0 \\ 0 & 0.166 & 0.166 & 0 \\ 0 & 0 & 0 & 0.333 \end{bmatrix}.$$

Eigenvalues are : -0.103, 0.270, 0.333, 0.500.
So, a **and** c **are entangled**.

Four Qubit System

Partial Trace with respect to system ac :

$$\hat{\rho}_{bd} = \begin{bmatrix} 0.333 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0.5 & 0 \\ 0 & 0 & 0 & 0.166 \end{bmatrix}.$$

So, b **and** d **are separated.**

Four Qubit System

Result:

- After tracing out a, rest of the system b, c, d becomes separable.
- After tracing out b, a and cd remain entangled, c and ad remain entangled, and ac and d are separable.
- After tracing out c, a and bd, b and ad, and d and ab remain entangled.
- After tracing out d, a and bc, b and ac, and c and ab remain entangled.
- After tracing out ab, c and d are separable.
- After tracing out bc, a and d are separable.
- After tracing out cd, a and d are separable.
- After tracing out ad, b and c are separable.
- After tracing out bd, a and c are entangled.
- After tracing out ac, b and d are separable.

So, **the polynomial is** $abc + abd + ac$**.**

Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.

Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.



Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.
- If density operator of the subsystem consisting the parties wanting to perform the protocol is separable, then the protocol cannot be performed successfully.



Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.
- If density operator of the subsystem consisting the parties wanting to perform the protocol is separable, then the protocol cannot be performed successfully.
- If another party (not participating in the protocol) does not divulge information about their local operations, then results of the protocol cannot be correlated.



Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie



Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie



We can easily see that the polynomial describing this network is
$\mathrm{P(a, b, c, d) = abc + abd + ac} \longrightarrow$

.

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie



We can easily see that the polynomial describing this network is $\mathrm{P(a, b, c, d) = abc + abd + ac} \longrightarrow$ a state can immediately be constructed from the algorithm.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.
- We then saw some examples demonstrating the procedures for obtaining the links and the states.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.
- We then saw some examples demonstrating the procedures for obtaining the links and the states.
- We also observed some potential use cases of such an analogy between entanglement and links in qubit networks.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.
- We then saw some examples demonstrating the procedures for obtaining the links and the states.
- We also observed some potential use cases of such an analogy between entanglement and links in qubit networks.

Thank you!