

Entanglement Classification using Knots

PH3203 Term Project


Sagnik Seth 22MS026

Jessica Das 22MS157

Sayan Karmakar 22MS163

Instructor: Prof. Sourin Das

Department of Physics, IISER Kolkata

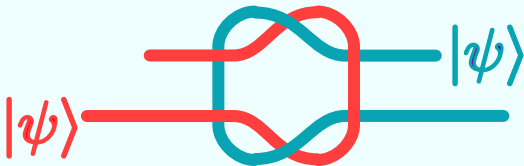

Basic Theoretical Background

Introduction to Knots

Introduction to Quantum Information

Peres-Horodecki Criterion

Classifying Entanglement using Knots

How it all began...

How it all began...

- Aravind, 1997 → modelled entanglement using knots.

How it all began...

- Aravind, 1997 \rightarrow modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

How it all began...

- Aravind, 1997 → modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

Observations

How it all began...

- Aravind, 1997 \rightarrow modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis

Observations

How it all began...

- Aravind, 1997 → modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state → separable→

How it all began...

- Aravind, 1997 → modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state → separable → modelled by Borromean ring

How it all began...

- Aravind, 1997 → modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis
- $|\Psi\rangle = \frac{|+\rangle}{\sqrt{2}} \left(\frac{|00\rangle - |11\rangle}{\sqrt{2}} \right) + \frac{|-\rangle}{\sqrt{2}} \left(\frac{|00\rangle + |11\rangle}{\sqrt{2}} \right)$ in X basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state → separable → modelled by Borromean ring

How it all began...

- Aravind, 1997 → modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis
- $|\Psi\rangle = \frac{|+\rangle}{\sqrt{2}} \left(\frac{|00\rangle - |11\rangle}{\sqrt{2}} \right) + \frac{|-\rangle}{\sqrt{2}} \left(\frac{|00\rangle + |11\rangle}{\sqrt{2}} \right)$ in X basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state → separable → modelled by Borromean ring
- Measuring in X basis: first particle measured, then remaining collapses to an entangled state → remains entangled

How it all began...

- Aravind, 1997 → modelled entanglement using knots.
- Used basis-dependent measurement as an analogy to 'cut the knots'.

Borromean Rings model:

- $|\Psi\rangle = \frac{1}{\sqrt{2}}(|000\rangle - |111\rangle)$ in computational basis
- $|\Psi\rangle = \frac{|+\rangle}{\sqrt{2}} \left(\frac{|00\rangle - |11\rangle}{\sqrt{2}} \right) + \frac{|-\rangle}{\sqrt{2}} \left(\frac{|00\rangle + |11\rangle}{\sqrt{2}} \right)$ in X basis

Observations

- Measuring in Z basis: first particle measured, then remaining collapses to separable state → separable → modelled by Borromean ring
- Measuring in X basis: first particle measured, then remaining collapses to an entangled state → remains entangled → modelled by 3-Hopf rings

How it all began ...

How it all began ...

- Sugita, 2007 → rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.

How it all began ...

- Sugita, 2007 → rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state

How it all began ...

- Sugita, 2007 → rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state

Concurrence of a density operator:

How it all began ...

- Sugita, 2007 \rightarrow rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state

Concurrence of a density operator:

$$C(\rho) = \max\{0, \lambda_1 - \lambda_2 - \lambda_3 - \lambda_4\}$$

Here λ_i are the square root of the eigenvalues, in decreasing order, of the non-Hermitian matrix $\tilde{\rho}\rho$ where $\tilde{\rho}$ is defined by:

$$\tilde{\rho} = (\sigma_y \otimes \sigma_y) \rho^* (\sigma_y \otimes \sigma_y)$$

How it all began ...

- Sugita, 2007 \rightarrow rectified Aravind's method of basis-dependent measurement by considering the partial trace as an analogy of cutting the knot.
- Used *Concurrence Test* to determine separability of the state

Concurrence of a density operator:

$$C(\rho) = \max\{0, \lambda_1 - \lambda_2 - \lambda_3 - \lambda_4\}$$

Here λ_i are the square root of the eigenvalues, in decreasing order, of the non-Hermitian matrix $\tilde{\rho}\rho$ where $\tilde{\rho}$ is defined by:

$$\tilde{\rho} = (\sigma_y \otimes \sigma_y) \rho^* (\sigma_y \otimes \sigma_y)$$

According to the Concurrence test, a state represented by the density operator ρ is separable iff $C(\rho) = 0$.

Polynomial Approach to Entanglement

Obtaining a Link from given State

Obtaining State from a given Link

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😞 !

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😞 !

Algorithm:

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😞 !

Algorithm:

- 1 Take a term t of the link polynomial $P(\{t\})$

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😞 !

Algorithm:

- 1 Take a term t of the link polynomial $P(\{t\})$
- 2 t mapped to a state: $|E_q\rangle \otimes |S_q\rangle \otimes |Q_d\rangle$

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😞 !

Algorithm:

- 1 Take a term t of the link polynomial $P(\{t\})$
- 2 t mapped to a state: $|E_q\rangle \otimes |S_q\rangle \otimes |Q_d\rangle$
 - $|E_q\rangle \longrightarrow$ entangled qubit of GHZ type, associated to ring variables in t .

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😊 !

Algorithm:

- 1 Take a term t of the link polynomial $P(\{t\})$
- 2 t mapped to a state: $|E_q\rangle \otimes |S_q\rangle \otimes |Q_d\rangle$
 - $|E_q\rangle \longrightarrow$ entangled qubit of GHZ type, associated to ring variables in t .
 - $|S_q\rangle \longrightarrow$ separable qubit associated with ring variables not in t .
Generally, large number of possibilities for this separable qubit.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😊 !

Algorithm:

- 1 Take a term t of the link polynomial $P(\{t\})$
- 2 t mapped to a state: $|E_q\rangle \otimes |S_q\rangle \otimes |Q_d\rangle$
 - $|E_q\rangle \rightarrow$ entangled qubit of GHZ type, associated to ring variables in t .
 - $|S_q\rangle \rightarrow$ separable qubit associated with ring variables not in t .
Generally, large number of possibilities for this separable qubit.
 - $|Q_d\rangle \rightarrow$ qudit state associated with *artificially* introduced ring variable (alphabetical successor of the largest ring variable present). To be traced out later, hence is of less significance. Can be a random state, hence it becomes **mixed**.

Obtaining State from a given Link

- In general, difficult to obtain state, given a link polynomial.
- Given N qubits, there are 2^N basis states, namely $|0\rangle, |1\rangle, \dots, |2^N - 1\rangle$
- An algorithm has been devised to obtain a general structure of the state from the link.
- But it only produces a mixed state only 😊 !

Algorithm:

- 1 Take a term t of the link polynomial $P(\{t\})$
- 2 t mapped to a state: $|E_q\rangle \otimes |S_q\rangle \otimes |Q_d\rangle$
 - $|E_q\rangle \rightarrow$ entangled qubit of GHZ type, associated to ring variables in t .
 - $|S_q\rangle \rightarrow$ separable qubit associated with ring variables not in t .
Generally, large number of possibilities for this separable qubit.
 - $|Q_d\rangle \rightarrow$ qudit state associated with *artificially* introduced ring variable (alphabetical successor of the largest ring variable present). To be traced out later, hence is of less significance. Can be a random state, hence it becomes **mixed**.
- 3 Full state $|\psi\rangle \rightarrow$ sum of individual such states. Trace out d and obtain density matrix of reduced system.

Demonstration of Algorithm

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ab$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ab$
- Two ring variables a and b , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) \equiv |2^1\rangle_{ab}$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ab$
- Two ring variables a and b , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) \equiv |2^1\rangle_{ab}$
- Separable qubit associated with c , keep it general $|S_q\rangle = |q_1\rangle_c$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ab$
- Two ring variables a and b , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \equiv |2^1\rangle_{ab}$
- Separable qubit associated with c , keep it general $|S_q\rangle = |q_1\rangle_c$
- Qudit state, take $|Q_d\rangle = |0\rangle_d$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ab$
- Two ring variables a and b , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) \equiv |2^1\rangle_{ab}$
- Separable qubit associated with c , keep it general $|S_q\rangle = |q_1\rangle_c$
- Qudit state, take $|Q_d\rangle = |0\rangle_d$
- **Full state becomes:**

$$|\psi_1\rangle = |2^1\rangle_{ab} \otimes |q_1\rangle_c \otimes |0\rangle_d$$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ac$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ac$
- Two ring variables a and c , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) \equiv |2^1\rangle_{ac}$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ac$
- Two ring variables a and c , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle) \equiv |2^1\rangle_{ac}$
- Separable qubit associated with b , keep it general $|S_q\rangle = |q_1\rangle_b$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ac$
- Two ring variables a and c , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \equiv |2^1\rangle_{ac}$
- Separable qubit associated with b , keep it general $|S_q\rangle = |q_1\rangle_b$
- Qudit state, take $|Q_d\rangle = |1\rangle_d$

Demonstration of Algorithm

Let us take a look at a demonstration of the algorithm. Take:

$$P(a, b, c) = ab + ac$$

- Choose the term $t = ac$
- Two ring variables a and c , so 2 qubit GHZ state assigned to entangled part. $|E_q\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle) \equiv |2^1\rangle_{ac}$
- Separable qubit associated with b , keep it general $|S_q\rangle = |q_1\rangle_b$
- Qudit state, take $|Q_d\rangle = |1\rangle_d$
- **Full state becomes:** $|\psi_2\rangle = |2^1\rangle_{ac} \otimes |q_2\rangle_b \otimes |1\rangle_d$

Demonstration of Algorithm

- **Mixed state characterising the link:** $|\psi\rangle = c_1 |\psi_1\rangle + c_2 |\psi_2\rangle$

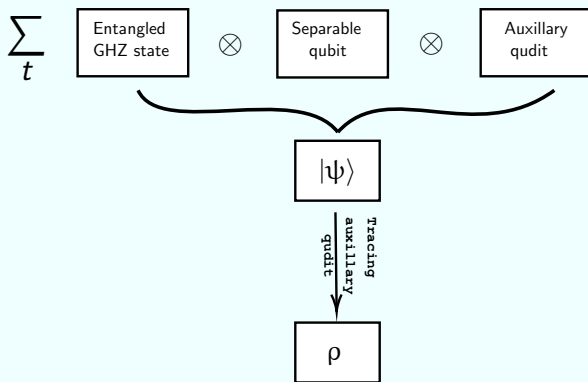


Figure: Schematic representation of the algorithm.

Demonstration of Algorithm

- **Mixed state characterising the link:** $|\psi\rangle = c_1 |\psi_1\rangle + c_2 |\psi_2\rangle$
- Then construct the density matrix accordingly for the state.

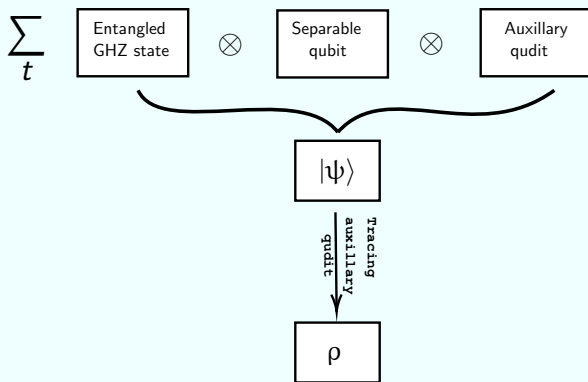


Figure: Schematic representation of the algorithm.


Some Examples...

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$


Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$

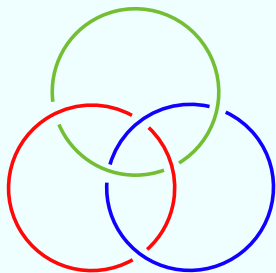

Three Qubit System: 3^1 class


Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$



$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$




$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$




• **Eigenvalues:**
0.0, 0.5, -0.5

$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$



- **Eigenvalues:**

0.0, 0.5, -0.5

- One eigenvalue is negative \rightarrow

**Tripartite
Entanglement**

$$\rho_{abc} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$


$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$


Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$

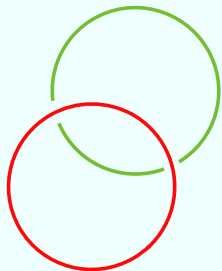

Three Qubit System: 3^1 class


Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$



$$\rho_{ab} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$

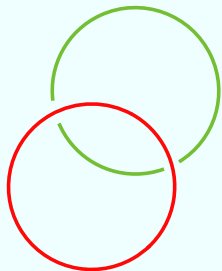


$$\rho_{ab} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{ab}^{Ta} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$



$$\rho_{ab} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$


$$\rho_{ab}^{Ta} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

● **Eigenvalues:**

$0.0, 0.5 \geq 0$

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$



$$\rho_{ab} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$


$$\rho_{ab}^{Ta} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

● **Eigenvalues:**
 $0.0, 0.5 \geq 0$

● All eigenvalues are positive.

Three Qubit System: 3^1 class

Pure State: $|3^1\rangle_{abc} = \frac{1}{\sqrt{2}} (|000\rangle_{abc} + |111\rangle_{abc})$



$$\rho_{ab} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

$$\rho_{ab}^{Ta} = \begin{bmatrix} 0.5 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.5 \end{bmatrix}$$

• **Eigenvalues:**
 $0.0, 0.5 \geq 0$


- All eigenvalues are positive.
- System completely **separable** after cut.

Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$


Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



Three Qubit System: 3^2 class


Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$




$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$




● Eigenvalues:

$-0.471, 0.0, 0.333, 0.471, 0.666$

$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$
$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



● Eigenvalues:

$-0.471, 0.0, 0.333, 0.471, 0.666$


$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_c} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



● Eigenvalues:

$-0.471, 0.0, 0.333, 0.471, 0.666$

$-0.333, 0.0, 0.127, 0.333, 0.872$


$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_c} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



$$\rho_{abc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_a} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{abc}^{T_c} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 & 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

● Eigenvalues:

−0.471, 0.0, 0.333, 0.471, 0.666

−0.333, 0.0, 0.127, 0.333, 0.872


- One eigenvalue is negative → **Tripartite Entanglement**

Three Qubit System: 3^2 class: cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$


Three Qubit System: 3^2 class: cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



Three Qubit System: 3^2 class: cut


Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$




$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{ab}^{T_a} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.333 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$




● **Eigenvalues:**
 $0.333, -0.333, 0.666$

$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{ab}^{T_a} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.333 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



- **Eigenvalues:**

$0.333, -0.333, 0.666$

- One eigenvalue is negative \rightarrow **Tripartite Entanglement**

$$\rho_{ab} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.333 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.333 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$
$$\rho_{ab}^{T_a} = \begin{bmatrix} 0.666 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.333 & 0.0 \\ 0.0 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: another cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$

Three Qubit System: 3^2 class: another cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



Three Qubit System: 3^2 class: another cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: another cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{bc}^{T_b} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: another cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



● **Eigenvalues:**
 $0.0, 0.333, 0.666$

$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{bc}^{T_b} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

Three Qubit System: 3^2 class: another cut

Pure State: $|3^2\rangle_{abc} = \frac{1}{\sqrt{3}} (|000\rangle_{abc} + |111\rangle_{abc} + |001\rangle_{abc})$



- **Eigenvalues:**

0.0, 0.333, 0.666

- No eigenvalue is negative \rightarrow **Separable**

$$\rho_{bc} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$

$$\rho_{bc}^{T_b} = \begin{bmatrix} 0.333 & 0.333 & 0.0 & 0.0 \\ 0.333 & 0.333 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.0 \\ 0.0 & 0.0 & 0.0 & 0.333 \end{bmatrix}$$


Four Qubit System

Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.


Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.

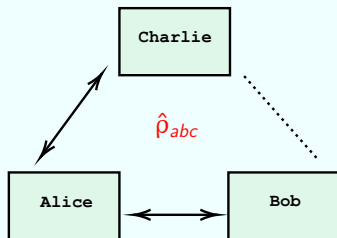


Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.
- If density operator of the subsystem consisting the parties wanting to perform the protocol is separable, then the protocol cannot be performed successfully.

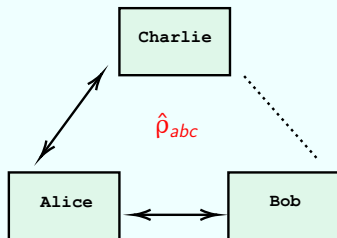

Application to Qubit Networks

- Different parties possessing entangled qubits, want to perform protocols with certain restrictions.
- If density operator of the subsystem consisting the parties wanting to perform the protocol is separable, then the protocol cannot be performed successfully.
- If another party (not participating in the protocol) does not divulge information about their local operations, then results of the protocol cannot be correlated.

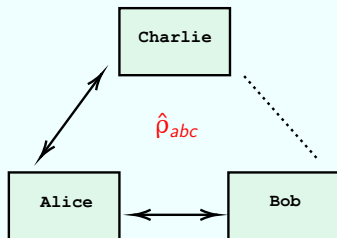

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana

Application to Qubit Networks


Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:


- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie

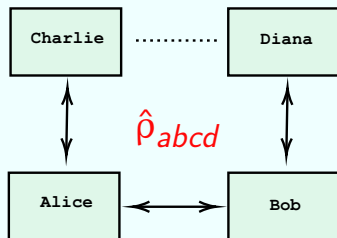

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie

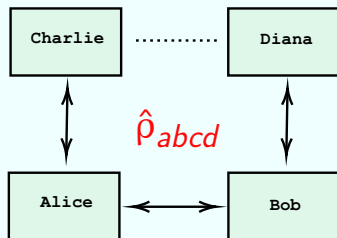


We can easily see that the polynomial describing this network is
 $P(a, b, c, d) = abc + abd + ac \longrightarrow$

Application to Qubit Networks

Let us consider a four qubit network, where Alice, Bob, Charlie and Diana are the parties such that only the following parties can communicate:

- Alice, Bob, and Charlie
- Alice, Bob, and Diana
- Alice and Charlie

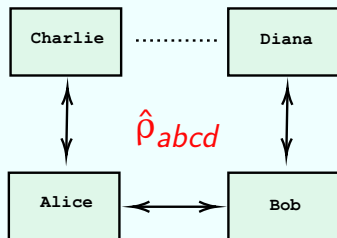

We can easily see that the polynomial describing this network is $P(a, b, c, d) = abc + abd + ac \rightarrow$ a state can immediately be constructed from the algorithm.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.
- We then saw some examples demonstrating the procedures for obtaining the links and the states.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.
- We then saw some examples demonstrating the procedures for obtaining the links and the states.
- We also observed some potential use cases of such an analogy between entanglement and links in qubit networks.

Conclusion

- We saw how preceding works have tried to use topological links to model entanglement and the problems with such analogies.
- We saw how the polynomial approach to entanglement could potentially reduce the ambiguities reflected in the previous works.
- We demonstrated a way to obtain a link polynomial from a given entangled state (using the PPT test to check for separability) and also find an entangled state (although mixed) from a given link polynomial.
- We then saw some examples demonstrating the procedures for obtaining the links and the states.
- We also observed some potential use cases of such an analogy between entanglement and links in qubit networks.



Thank you!