FPGA-based mix-precision Monte Carlo using high level synthesis tools

EGH490-1 Project Proposal

September 4, 2026

Author:

Luca Lubrano Lavadera

Under the supervision of:

Dr Jasmine Banks

Dr David J. Warne



1 General Objective

The primary objective of this project is to explore how reconfigurable computing can be used to reduce the total power consumption of heterogeneous computing environment, such as data centres. We will develop practical implementations of Monte Carlo algorithms to benchmark against theoretical techniques that have previously been explored in the literature. To do this, we will perform a case study utilising field programmable gate arrays (FPGAs) and high-level synthesis tools to understand the feasibility of adopting and utilising reconfigurable devices as accelerator hardware in these heterogeneous frameworks. A key focus of the project will be to understand whether mixed-precision algorithms on specialised hardware, such as FPGAs, can reduce the total power consumption for equivalent results.

1.1 Research Questions

1. To what extent can implementations of mixed-precision Monte Carlo on reconfigurable computing hardware improve the power efficiency of algorithms compared to graphical processing units?

2. To what extent can high-level synthesis tools and portable code frameworks be used to reduce the development time of algorithms in heterogeneous computing environments?

2 Key Finding from the Literature

The literature shows that heterogeneous computing environments, which consist of a variety of computer architectures such as general purpose devices (CPUs, GPUs) and accelerator hardware (ASICs, IPUs, and FPGAs), allow for the optimisation of algorithms to the most suitable device [1–4]. Within this, mixed-precision methods are shown to be able to exploit hardware registers via SIMD operations, allowing low precision data types to increase throughput per clock cycle, reducing total power consumption [5–7]. FPGAs extend this principle further than GPUs, as their reconfigurable fabric allow custom length precision data types rather than being restricted to fixed 16/32/64 bit precision, while reducing the overhead power costs associated with general purpose hardware [4, 8]. Advances in high level synthesis tools and compilation abilities of portable languages (e.g. HLS, OpenCL, HIP) have reduced the low-level hardware expertise previously required to make us of these devices, increasing their viability for scientific research outside of hardware prototyping [1, 3, 6, 9, 10].

3 Stakeholders & Resources

When conducting this research we will be considering several different end users who may use or add to the work completed. The first user that we will consider are the potential researchers who will be utilising the algorithms we develop. This is an important consideration as when researchers produce code to run experiments, development time of the code itself is a consideration in their choice of methods. Therefore, we consider the complexity of the code throughout the design cycle of our project to ensure that there is a clear benefit for the additional time cost for these methods in terms of power or time efficiency improvements.

We will also be working closely with the HPC DevOps team throughout the entirety of the project. This team will provide key support to the project in ensuring that progress can be made in the hardware development and application of methods on physical hardware. This collaboration will also provide an opportunity for this work to contribute to the HPC, as we will be assisting in validating software upgrades to the existing FPGA cluster.

To be able to complete this project there are several key resources that need to be secured. The most critical of these being access to an FPGA on the QUT high performance computer. This involves the coordination of appropriate software installation and hardware access permissions with Hamish Macintosh, DevOps Team Lead with HPC.

Item	Description	Cost
AMD U55C FPGA	The AMD U55C FPGA is a HPC accelerator card that is currently installed on the QUT HPC, *Aqua*. This FPGA has built-in bootloader and communication protocols which is dissimilar to development FPGAs which most commonly require the engineer to build the entire system from scratch.	$0.00
Intel CPU	A CPU cluster will be utilised on the HPC as the *host* for running simulation algorithms, where the FPGA or GPU is the compute device. The CPU cluster will also be used for hardware simulation and the generation of bitstream to offload work from personal computers and allow job queues to run consistently.	$0.00
AMD GPU	We will be utilising an AMD GPU to allow us to perform fair efficiency comparisons between a traditional heterogeneous computing environment and the FPGA accelerated cluster. By choosing AMD hardware for this we are also able to use extremely similar kernel code to minimise the risk of code optimisation being a factor in efficiency results.	$0.00
Xilinx Vivado Vitis	The Vivado Vitis software tool chain allows for the simulation of hardware components locally. This means we are able to test and validate methods extensively with a much lower time cost before compiling and sending to the FPGA cluster.	TBD

Table 1: List of resources required to complete the describe project.

4 Project Methodology

The main research approach that we will be taking in this thesis will be to first experimentally validate the thoeretical results in Haas and Giles [8] through virtualised hardware simulations and preliminary experiments on physical hardware. Key results that we aim to measure are mostly focused on the power consumption of the computational devices themselves. While the runtime of the simulations on the varying hardware can let us make preliminary investigations into efficiency. The true goal of the research is to understand if we are able to achieve an equivalent simulation result for a lower total energy cost. It is possible that the reconfigurable devices may take longer to process the same amount of computer but at this lower cost, which is why we focus on power consumption readings. We aim to utilise physical power monitoring of the cluster during jobs, as this will give the most accurate result. However, this can be difficult to correctly isolate and obtain results for, we therefore will also collect software derived power consumption readings.

Through the collection of these results, as well as understanding of the configuration of current HPC systems, we will make comment on how existing accelerator hardware can be used in-situ to reduce power consumption of data centres. We aim to develop a final outcome and answer our research questions by combining results from our simulated and physical hardware. This will allow us to test under ideal and more realistic conditions to gain further insight into the problem and how this approach may contribute to solving it.

5 Deliverables

The expected outcome of this project will be the development and verification of algorithms using high-level synthesis tools for FPGA devices. The main contribution of this work will be benchmarking results and analysis in how FPGAs and reconfigurable computing architectures can be implemented in heterogeneous computing environments to reduce power consumption for compute intensive tasks. This will include a detailed report on the usability of, and development time for complex algorithms using, these HLS tools to better understand the feasibility of adopting FPGAs into scientific computing.

Deliverable	Stakeholder	Due Date
EGH490-1 Project Proposal Draft	Supervisors	21/08/26
FPGA Simulation Example Simulation	Supervisors	04/09/26
EGH490-1 Project Proposal	Supervisors	04/09/26
Preliminary Simulation Development	Supervisors	11/09/26
Geometric Brownian Motion Simulation	Supervisors	02/10/26
EGH490-1 Progress Report Draft	Supervisors	09/10/26
EGH490-1 Progress Report	Supervisors	23/10/26

Table 2: Deliverable outcomes of EGH490-1

Deliverable	Stakeholder	Due Date
Hardware Implementation of Geometric Brownian Motion	Supervisors	TBD
Simulation Implementation of Simple BCRN	Supervisors	TBD
Hardware Implementation of Simple BCRN	Supervisors	TBD
HPC Power Studies	Supervisors	TBD
EGH490-2 Final Report Draft	Supervisors	TBD
EGH490-2 Final Report	Supervisors	TBD

Table 3: Preliminary deliverable outcomes plan for EGH490-2

6 Risks, Requirements & Constraints

Since this project has key dependencies that must be met in order to progress, specifically access and functionality of the FPGA on the QUT HPC. If access cannot be gained to this resource or there are issues with the installation of the appropriate software to run HLS tools on the card, implementation of algorithms will be limited. To mitigate this risk, development of the deliverable software will be done in parallel with simulation using the Xilinx Vitas tool-chain which can be used to generate estimated results for the FPGAs performance. Due to the complexity of algorithms being developed using the simulated hardware, the computational bandwidth required is unknown. As such, the QUT HPC will be used for the execution of simulations should it be too intense for a personal computer.

Secondary risks to the project are the compatibility of portable software kernels amongst devices, constrained by the availability of devices on the QUT HPC. A goal of the project is also to investigate the portability of software written in the OpenCL language as a way to reduce development time of algorithms. However, recently AMD have deviated the OpenCL standard to the Heterogeneous-computing Interface for Portability (HIP) framework. To reduce the impact of this on the project, the code base will written in HIP and bench marked on AMD compute device to provide comparable to an OpenCL implementation.

To ensure that we complete this project safely, we have conducted a risk assessment which can be seen in Appendix B.

Through this engineering project, we will dutifully uphold the Engineers Australia Code of Ethics. Since we will be working closely with methods in the literature, to maintain integrity we will verify that our methods appropriately deviate from existing work. The literature that we work with and build upon will be correctly referenced and cited throughout the project. We will practise competently by focusing heavily on the software engineering and computer science aspects of this project in which we have the most expertise. We follow from this with supporting diversity of knowledge through the acknowledgement of areas of less competency. Being advised by and communicating with external engineering practitioners, such as the project supervisors with expertise in electrical engineering and mathematical biology, as well as HPC experts with knowledge in computers science and program optimisation. We later detail how we promote sustainability within our project and practices in the following section.

7 Quality & Sustainability

To ensure that the quality of outcome from this research, we will structure the milestone deliverables such that the codebase and corresponding simulation outputs match existing literature and verified results. This is crucial in ensuring the validity of solutions, as this project aims to work closely with novel implementations of algorithms through the use of compilation pipelines that introduce significant abstraction. This is accompanied by the staged implementation of progressively more complex biological models. By ensuring the validity of algorithms initially on simple models — Geometric Brownian Motion [8] — with well understood analytical behaviour we can ascertain whether the algorithms are performing per their intention.

While validating the mathematical accuracy of models is important in ensuring the statistical usability of the research, the main focus of the work will be to explore the power usage of computation is impacted through the utilisation of reconfigurable hardware. Therefore, a key result that we will be looking to understand is the total power consumption of the device for an allotted amount of calculations. It is important to the outcomes of this research that these results are reflective of the conditions that this equipment will be used, i.e. in data centres. Hence, we will be targeting consumption readings directly from the equipment we use on the HPC. This will be accompanied by hardware simulations in preliminary findings to make initial comments on observed performance.

Sustainability is a key focus of this project, specifically we are exploring how reconfigurable devices in heterogeneous computing environments can lower the total power consumption for a HPC with equivalent computational performance. While this is the end goal, we are required to do significant testing on the QUT HPC. As such, it is important to consider the short-term impact this has on the environment through via power utilisation. We aim to mitigate this by ensuring all algorithms are validated through simulation testing before being executed on the HPC.

8 Timeline & Deliverables

The project will be split into three main phases, each with key deliverables that will flow on to the final outcome of the project. The first, and most critical, phase of the project will be making the FPGA cluster on the QUT HPC usable to submit interactive jobs. As previously discussed, this presents the most risk to the project and as such this phase will be accompanied with similar work on simulated hardware models. The goal of which being the execution of *Hello World* examples on hardware to develop understanding of the processes required to build more complex algorithms. To keep the project aligned with the critical path, it is essential that the development of simulation begin before the end of EGH490-1.

Following the success of this first phase will be when the main body of work is completed. This will be the creation of both simple and complex simulation algorithms, described in the literature, on the available FPGA card. To mitigate potential risks in the usage of the physical hardware on the HPC, simulation models will first be created. This mitigation is twofold as the creation of FPGA firmware is extremely time intensive, the simulation allows us to experiment with a lower time-cost model before transferring to hardware. Key deliverables in this phase are simulation algorithms written in the AMD portable language, as well as validity of outcome tests and preliminary efficiency measures. The prefered outcome of this phase is that by the mid point of EGH490-2, we have developed these simulated algorithms and have begun implementing on hardware. Should this not be able to be met, we will pivot to focus entirely on simulated hardware to ensure progress is consistently made.

To complete the work, the final phase of the project will be an in-depth analysis of the power efficiency of the simulation algorithms on the FPGA, compared to a CPU or GPU. This will be complemented by the specific programming language used, which will allow us to use almost identical code on each device to conduct fair analysis.

9 Management of Project Changes

Due to the several layers of dependency of external factors for this project to be completed, we have formulated the goals of the work to be flexible. Meaning that if we are unable to gain access to

Number	Focus	Deliverable	Dependency	Milestone
1	Literature Review	Literature review report	NA	1
2	Preliminary FPGA on HPC usage	*Hello World* program output	NA	
2.1	Querying FPGA resources on HPC	NA	NA	2
2.2	Understanding of HPC job allocation structure	TBD	NA	
2.3	Compilation and execution of *Hello World* program	Program output	2.1/2.2	2
3	Simulated hardware environment set-up	Working Xilinx Vitis simulation environment	NA	
3.1	Toolchain configuration and validation	Simulation environment configured	NA	3
3.2	Preliminary simulation development	Preliminary simulation results	3.1	3
4	Simple model implementation	Geometric Brownian Motion (GBM) simulation	2.3/3.2	
4.1	GBM simulation algorithm (HIP, software)	Validated simulation implementation	3.2	4
4.2	GBM hardware implementation (FPGA)	Hardware bitstream & program output	2.3/4.1	4
5	Complex model implementation	Simple BCRN simulation	4.1/4.2	
5.1	BCRN simulation algorithm (HIP, software)	Validated simulation implementation	4.1	5
5.2	BCRN hardware implementation (FPGA)	Hardware bitstream & program output	4.2/5.1	5
6	Power efficiency analysis	HPC power studies report	4.2/5.2	
6.1	Physical power monitoring (FPGA/GPU/CPU)	Power consumption dataset	5.2	6
6.2	Software-derived power monitoring	Power consumption dataset	5.2	6
6.3	Benchmark comparison & analysis	Efficiency benchmarking analysis	6.1/6.2	6

Table 4: Timeline of deliverable outcomes for EGH490

physical hardware on the HPC within a reasonable time frame to implement, and experiment with, the algorithms we will conduct the research only on simulated hardware. This project is also entirely academic with weekly meetings with the supervising staff and constant communication available. As such, should a request be made for the project, or issues arise from other dependencies, we will be able to quickly pivot the methodology of the research to continue relevant work. These changes will also be succinctly communicated to the supervisors of the project through email and discussed at the weekly meeting.

Sign off

Name	Signature	Date
Luca Lubrano	LL	04/09/2026

A Literature Review

Through this literature review we aim to summarise the key methodologies in mixed-precision Monte Carlo methods in the literature that are relevant to our work. In this report we work to understand how we can utilise and exploit reconfigurable hardware with mixed-precision to take advantage of unique features in the computing architectures of FPGAs over GPUs. We perform this research within the context of Mathematical Biology in which large quantities of statistical independent simulations are required to produce meaningful results. This presents a clear use case for these methods as there is potential for both the wall-time and power efficiency improvements over conventional computing frameworks.

A.1 Heterogeneous Computing

It is important to first understand heterogeneous computing as a framework to conceptualise how reconfigurable and accelerator hardware can be used to complement and improve existing computing ecosystems. Heterogeneous computing environments are those in which there are multiple different computer architectures, primarily central processing units (CPUs) and graphical processing units (GPUs). By doing this, we can allocate tasks in our program to these specific devices depending on the type of operations that are being done on them.

This key advantage provided by conducting our computations in a heterogeneous environment allows us to optimise the choice of device based on suitability to the task [1–3]. Meaning we are able to maximise the utilisation of hardware, which is beneficial since general purpose compute devices, such as CPUs and GPUs, carry high idle power costs. These systems often use a variety of these general purpose devices in combination with accelerator hardware, including application-specific integrated circuits (ASIC), intelligence processing units (IPU) and FPGAs [4].

To maximise the clock cycle efficiency in our computing, we wish to keep our computations to the size of the floating point registers available on the target hardware. For current GPUs, this is double 64-bit, single 32-bit, and half 16-bit. Working with these register sizes is critical in the efficiency of mixed-precision methods. By doing this, we can increase the throughput of our algorithm per clock cycle by using *Single Instruction Multiple Data* (SIMD) operations [5, 6].

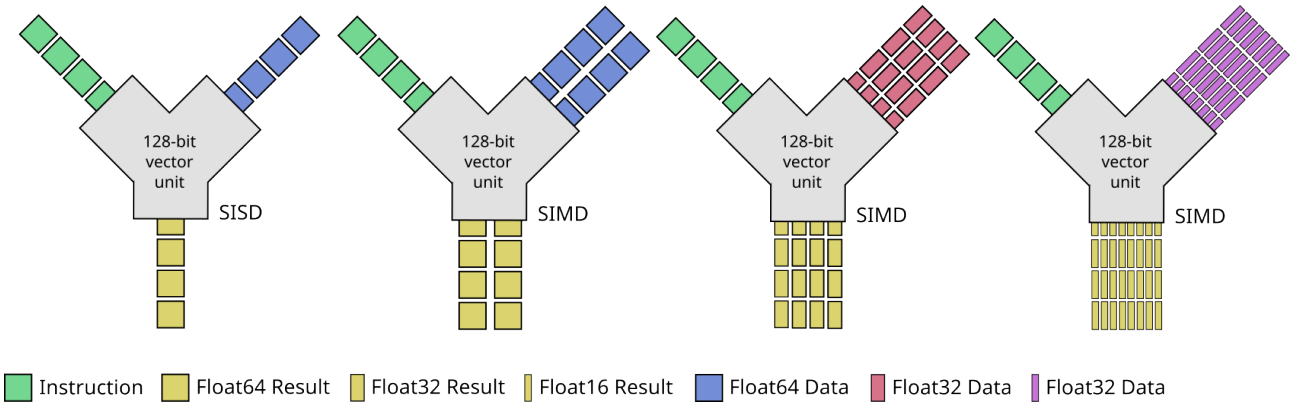


Figure 1: Schematic of vector unit operations in single instruction single data and single instruction multiple data configurations with varying precision levels.

This works as the register is of a fixed size, usually 64-bit, each clock cycle then pushes an instruction to the register where it completes the operation on the data held. If we reduce the bit width of our data to a less precise variable type, i.e. 32 bit, the register is able to perform the same operation on two independent sets of data [9–11], see diagram in Figure 1. Importantly, it is able to do this in the same clock cycle as if the data had been a single full precision width. This is a key part in how mixed-precision methods can provide significant speed up in high performance computing in lower precision levels [7].

Kimpson et al. [12] investigate methods for computing simulation estimates using mixed and reduced precision in the context of stochastic simulation algorithms (SSAs). These algorithms aim to minimise the error in approximation while using native 16-bit arithmetic. At a hardware-level,

this reduces the memory footprint while increasing the SIMD operations able to be computed. They specifically target GPU and tensor processing unit (TPU), which provides insight into how methods can be mapped between device hardware and the results they can achieve in heterogeneous environments.

A.2 Reconfigurable Computing

Reconfigurable computing is classified by a computer architecture that is able to change its logic programming [7]. The most common and popular example of which are FPGAs, built from 'reconfigurable fabric' which contains the configurable logic blocks, interconnections and BRAM that allow the hardware to change its logic functions [4]. Essentially, we can create reconfigurable circuitry at the logic-gate level, which gives the user the ability to accurately approximate the functions of a printed circuit board.

In computing, this means that we are able to construct programs not at a software level, but instead program them onto the architecture of the card. This is a key aspect of the power efficiency that these devices can provide. Unlike CPUs and GPUs, they have a significantly reduced overhead power cost related to unnecessary and always-active processes.

These devices have been traditionally used by electrical engineers for hardware prototyping and development, requiring users to understand low-level hardware description languages (HDLs). Hence, making them inaccessible to scientific researchers without the proper background to fully take advantage of their utility. Recent advancements in compilation software have lead to the ability for portable programming languages — OpenCL, HLS, and others — to be compiled into bit-stream, meaning they are now able to be used to program these devices. This has made them a target of active research in areas such as high-dimensional linear algebra [1, 3, 6, 9, 13], simulation problems [10] and time-critical safety operations [5].

As a result of the freedom provided by FPGA hardware, we are also able to increase computational efficiency in low precision settings through the creation of unique precision levels. Unlike modern GPUs, which can provide either double (64-bit), float (32-bit) or half-precision (16-bit), we are able to define custom bit length precision data types. This can be directly applied in areas such as mixed-precision Multilevel Monte Carlo methods, which optimise the fidelity of simulations while retaining an equivalent output approximation [8].

Intelligence processing units (IPUs) are an another emerging technology driven by the need for more specialised Artificial Intelligence computing capabilities [14]. Unlike traditional GPU architecture, which uses single-instruction multiple data (SIMD) vectorised parallelism to accelerate tasks, the IPU utilises multi-instruction multiple data (MIMD) [15]. This allows each thread to perform operations in a distinct flow, and irregular data access patterns without loss of efficiency [15]. Similarly to FPGAs, these devices are also able to define custom precision data types, which has made them extremely efficient processors in AI inference problems [16–18].

A.3 Systems Biology

To contextualise our problem we focus on the topic of systems biology, these models look to capture the complex behaviour of intracellular processes with the goal to better understand the functioning of cells as a whole [19–22]. The classical approach to describing biological systems are continuous-time deterministic models [22, 23]. Using deterministic models however, fails to explore the intrinsic randomness of biochemical reaction networks, and as such we lose valuable information about the true nature of the system [24, 25]. As a result of this, the development of stochastic methods have become popular to capture the variability among genetically identical cells [25].

Gene expression and regulation are fundamental applications of stochastic modelling methods in which research aims to understand the processes of cellular reproduction and phenotypic characteristics [21, 24]. It is well established that these processes are fundamentally stochastic. The nature of experimental data within whole cell modelling introduces substantial complication in generating and fitting stochastic models [22]. As such, it is common to instead generate stochastic simulations to produce meaningful data for analysis [23, 26].

Within systems biology, a primary computational challenges is the forwards problems [27]. This refers to the prediction of future state of a system. Namely we must consider the simulation of sample

paths of our biochemical reaction networks over time, and the expectation of average behaviour among all possible reaction events [27]. This is where Monte Carlo methods can be used to describe the summary statistics of the system.

A.4 Stochastic Simulation Algorithms

To understand the overall behaviour of biochemical reaction networks (BCRN), we concern ourselves with only the change in population over time of the molecular species [22, 23, 27, 28]. We consider a spatially homogeneous system for the purposes of this work [29]. Consider a BCRN with the N unique chemical species, that interact according to M distinct chemical reactions. The jth reaction is denoted by

$$\sum_{i=1}^{N} \nu_{i,j}^{-} X_i \rightarrow \sum_{i=1}^{N} \nu_{i,j}^{+} X_i, \tag{1}$$

where $\nu_{i,j}^{-}$ and $\nu_{i,j}^{+}$ are the reactant and product stoichiometries related to the ith chemical species in the jth reaction. We denote $X_i(t)$ as the copy number, that is the number of molecules in the system, of the ith chemical species at time $t > 0$. This leads to the system state vector, $\mathbf{X}(t) = [X_1(t), ..., X_n(t)]^{\intercal}$ In the event that the jth reaction occurs, the instantaneous system update is, $\mathbf{X}(t) = \mathbf{X}(t^{-}) + \boldsymbol{\nu}_j$, where $\mathbf{X}(t^{-})$ is the state of the system immediately preceding time t. The stoichiometric vector $\nu_j = \nu_{*,j}^{+} + \nu_{*,j}^{-}$ defines the net change in the system state as a result of the jth reaction event.

We set the kinetic rate parameters of the M chemical reactions to be the vector $\boldsymbol{\theta} = [k_1, k_2, \ldots, k_m]$, where the jth reaction is associated with parameter k_j. The occurrence of these reactions are based defined using the probability framework laid out in [28, 30]. For each reaction j, we have an associated *propensity function*, $a_j(\mathbf{X}(t); \boldsymbol{\theta})$. This gives the probability of reaction j occurring exactly once within the infinitesimal interval $[t, t+\mathrm{d}t)$ to be proportional to $a_j(\mathbf{X}(t); \boldsymbol{\theta})$, and $a_0(\mathbf{X}(t); \boldsymbol{\theta}) = \sum_{j=1}^{M} a_j(\mathbf{X}(t); \boldsymbol{\theta})$ [23, 27].

A.5 Monte Carlo Methods

Monte Carlo methods are a common first step in understanding the average behaviour of observed system states given some known parameter inputs [22, 27]. If one were to want to know the expectation of a function P at some time t given an observed state S it is intuitive to think that we can take repeated samples of the system to determine an average behaviour [31]. Formally, to approximate $\mathbb{E}[P]$ a Monte Carlo estimator is the average values $P(\mathbf{X}(t))$ for N i.i.d. samples $\mathbf{X}(t)$

$$\mathbb{E}[P(\mathbf{X}(t))] = \int P(\mathbf{x}) p(\mathbf{x}) \mathrm{d}x,$$

$$\lim_{N \to \infty} \sum_{n=1}^{N} P(\mathbf{X}(t)^{(n)}) = \mathbb{E}[P(\mathbf{X}(t))],$$

where $p(\mathbf{x})$ is the probability density function of the random variable $\mathbf{X}(t)$. With variance $V_N = \frac{1}{N}\mathbb{V}[P]$, therefore, in order to achieve a root mean squared error (RMSE) of ϵ we require $N = \mathcal{O}(\epsilon^{-2})$. This is where the Monte Carlo method becomes computationally unwieldy, as each of these simulations often involves the solution to an Itō stochastic differential equation (SDE) or a costly approximation.

$$X_i(t) = X_i(0) + \sum_{j=1}^{M} \nu_{i,j} \int_0^t a_j(\mathbf{X}(\eta(s)); \boldsymbol{\theta})\, ds + \sum_{j=1}^{M} \nu_{ij} \int_0^t \sqrt{a_j(\mathbf{X}(\eta(s)); \boldsymbol{\theta})}\, dW_j(s), \tag{2}$$

noting that $X_i(t)$ is the value of a random solution path at some time $t > 0$. When computing these estimates, we have a statistical error from the Monte Carlo and a bias introduced by the discretisation of the Itō SDE, thus we have,

$$\text{MSE} = \text{Var} + \text{Bias}^2.$$

If we want a RMSE less than ϵ we need $N = \mathcal{O}(\epsilon^{-2})$. However, we also need $\tau = \mathcal{O}(\epsilon)$ since Bias $= \mathcal{O}(\tau)$ for Euler Maruyama. As a result, the total cost of the estimator is $\mathcal{O}(\epsilon^{-3})$.

Due to this, we seek methods for generating more accurate results while minimising the number of Monte Carlo samples we need to take. Methods such as quasi-Monte Carlo in which each sample is chosen deterministically to reduce the error [32]. An alternative, the multilevel Monte Carlo method, uses a coupling scheme to apply *control variate reduction* to minimise simulation cost for some desired RMSE ϵ.

B Risk Assessment

Risk	Likelihood	Consequence	Control type	Control
Musculoskeletal strain/poor posture from prolonged sitting and computer use	Medium	Low	Administrative	Take regular breaks (15 minutes per hour), maintain correct posture, use an adjustable chair and monitor height in line to be in line with eye level with elbows at 90 degrees.
Eye strain and mental fatigue from extended screen exposure	Medium	Low	Administrative	Follow the 20-20-20 rule (every 20 minutes, look at something 20 feet away for 20 seconds), adjust screen brightness/contrast, ensure adequate ambient lighting
Loss of thesis work, code, or data due to hardware failure, corruption, or accidental deletion	Medium	High	Engineering & Administrative	Use git version control with a remote repository, push commits to remote repository daily
Electrical or trip hazard from computer equipment, chargers, and loose cabling	Low	Medium	Engineering	Ensure all equipment is electrical tested where required, route cables away from walkways, keep the desk area tidy and free of clutter
Burnout or stress from extended, isolated independent work under project deadlines	Medium	Medium	Administrative	Set realistic milestones and a project schedule, maintain regular check-ins with supervisors, schedule rest days and enforce reasonable working hours

Table 5: Project risk assessment

References

[1] H. J. Macintosh, J. E. Banks, and N. A. Kelson, "Implementing and Evaluating an Heterogeneous, Scalable, Tridiagonal Linear System Solver with OpenCL to Target FPGAs, GPUs, and CPUs," *International Journal of Reconfigurable Computing*, vol. 2019, pp. 1–13, Oct. 2019.

[2] D. J. Warne, K. Lindsay, and S. Hurn, "A Heterogeneous Computing Approach to Simulation of the Heston Stochastic Volatility Model," *ANZIAM Journal*, vol. 57, p. 364, Nov. 2016.

[3] H. J. Macintosh, D. J. Warne, N. A. Kelson, J. E. Banks, and T. W. Farrell, "Implementation of parallel tridiagonal solvers for a heterogeneous computing environment," *ANZIAM Journal*, vol. 56, p. 446, Feb. 2016.

[4] J. M. P. Cardoso, J. G. F. Coutinho, and P. C. Diniz, "Chapter 2 - High-performance embedded computing," in *Embedded Computing for High Performance*, J. M. P. Cardoso, J. G. F. Coutinho, and P. C. Diniz, Eds., Boston: Morgan Kaufmann, Jan. 2017, pp. 17–56.

[5] D. J. Warne, R. Hayward, N. Kelson, J. Banks, and L. Mejias, "Pulse-coupled neural network performance for real-time identification of vegetation during forced landing," *ANZIAM Journal*, vol. 54, p. 1, Mar. 2014.

[6] D. J. Warne, N. A. Kelson, and R. F. Hayward, "Solving Tri-Diagonal Linear Systems using Field Programmable Gate Arrays,"

[7] D. J. Warne, S. A. Sisson, and C. Drovandi, "Vector Operations for Accelerating Expensive Bayesian Computations – A Tutorial Guide," *Bayesian Analysis*, vol. 17, no. 2, Jun. 2022.

[8] I.-B. Haas and M. B. Giles, *A nested MLMC framework for efficient simulations on FPGAs*, Feb. 2025.

[9] D. J. Warne, N. A. Kelson, and R. F. Hayward, "Comparison of High Level FPGA Hardware Design for Solving Tri-diagonal Linear Systems," *Procedia Computer Science*, vol. 29, pp. 95–101, 2014.

[10] J. Banks et al., "CALCULATION OF ENGINE PARAMETERS USING RECONFIGURABLE HARDWARE," *International Journal of Computational Methods*, vol. 11, no. supp01, p. 1 344 011, Nov. 2014.

[11] C. De Schryver, Ed., *FPGA Based Accelerators for Financial Applications*. Cham: Springer International Publishing, 2015.

[12] T. Kimpson, M. B. Flegg, and J. A. Flegg, *Reduced-Precision Stochastic Simulation For Mathematical Biology*, May 2026.

[13] M. Qasaimeh, K. Denolf, J. Lo, K. Vissers, J. Zambreno, and P. H. Jones, "Comparing Energy Efficiency of CPU, GPU and FPGA Implementations for Vision Kernels," pp. 1–8, Jun. 2019.

[14] S. Kulkarni, A. Tsyplikhin, M. M. Krell, and C. Moritz, *Accelerating Simulation-based Inference with Emerging AI Hardware*. Dec. 2020, p. 132.

[15] Z. Jia, B. Tillman, M. Maggioni, and D. P. Scarpazza, *Dissecting the Graphcore IPU Architecture via Microbenchmarking*, Dec. 2019.

[16] A. Fitzgibbon and S. Felix, *On Stochastic Rounding with Few Random Bits*, Apr. 2025.

[17] P.-S. V. Sun et al., *Intelligence Processing Units Accelerate Neuromorphic Learning*, Nov. 2022.

[18] "Mixed-Precision Arithmetic for AI: A Hardware Perspective,"

[19] J. L. Abkowitz, S. N. Catlin, and P. Guttorp, "Evidence that hematopoiesis may be a stochastic process in vivo," *Nature Medicine*, vol. 2, no. 2, pp. 190–197, Feb. 1996.

[20] A. Arkin, J. Ross, and H. H. McAdams, "Stochastic kinetic analysis of developmental pathway bifurcation in phage lambda-infected Escherichia coli cells," *Genetics*, vol. 149, no. 4, pp. 1633–1648, Aug. 1998.

[21] M. Kærn, T. C. Elston, W. J. Blake, and J. J. Collins, "Stochasticity in gene expression: From theories to phenotypes," *Nature Reviews Genetics*, vol. 6, no. 6, pp. 451–464, Jun. 2005.

[22] D. J. Wilkinson, "Stochastic modelling for quantitative description of heterogeneous biological systems," *Nature Reviews Genetics*, vol. 10, no. 2, pp. 122–133, Feb. 2009.

[23] D. J. Higham, "Modeling and Simulating Chemical Reactions," *SIAM Review*, vol. 50, no. 2, pp. 347–368, Jan. 2008.

[24] M. B. Elowitz, A. J. Levine, E. D. Siggia, and P. S. Swain, "Stochastic Gene Expression in a Single Cell," *Science*, vol. 297, no. 5584, pp. 1183–1186, Aug. 2002.

[25] A. Raj and A. van Oudenaarden, "Nature, Nurture, or Chance: Stochastic Gene Expression and Its Consequences," *Cell*, vol. 135, no. 2, pp. 216–226, Oct. 2008.

[26] M. Sunnåker, A. G. Busetto, E. Numminen, J. Corander, M. Foll, and C. Dessimoz, "Approximate Bayesian Computation," *PLOS Computational Biology*, vol. 9, no. 1, e1002803, Jan. 2013.

[27] D. J. Warne, R. E. Baker, and M. J. Simpson, "Simulation and inference algorithms for stochastic biochemical reaction networks: From basic concepts to state-of-the-art," *Journal of The Royal Society Interface*, vol. 16, no. 151, p. 20 180 943, Feb. 2019.

[28] D. T. Gillespie, "Exact stochastic simulation of coupled chemical reactions," *The Journal of Physical Chemistry*, vol. 81, no. 25, pp. 2340–2361, Dec. 1977.

[29] M. Chen, F. Li, S. Wang, and Y. Cao, "Stochastic modeling and simulation of reaction-diffusion system with Hill function dynamics," *BMC Systems Biology*, vol. 11, no. Suppl 3, p. 21, Mar. 2017.

[30] D. T. Gillespie, "The chemical Langevin equation," *The Journal of Chemical Physics*, vol. 113, no. 1, pp. 297–306, Jul. 2000.

[31] N. Metropolis and S. Ulam, "The Monte Carlo Method," *Journal of the American Statistical Association*, vol. 44, no. 247, pp. 335–341, Sep. 1949.

[32] J. Dick, F. Y. Kuo, and I. H. Sloan, "High-dimensional integration: The quasi-Monte Carlo way," *Acta Numerica*, vol. 22, pp. 133–288, May 2013.