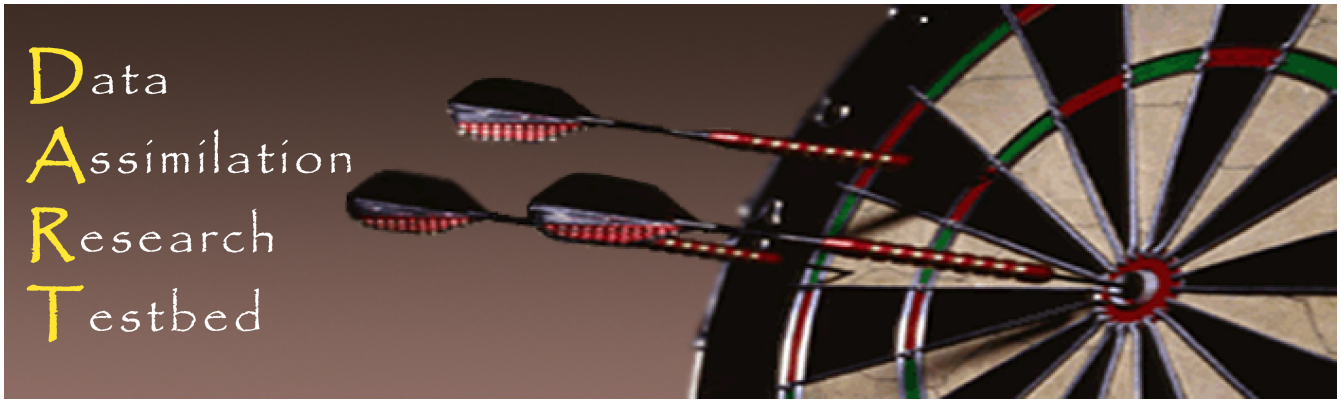

DART Tutorial Section 16: Diagnostic Output

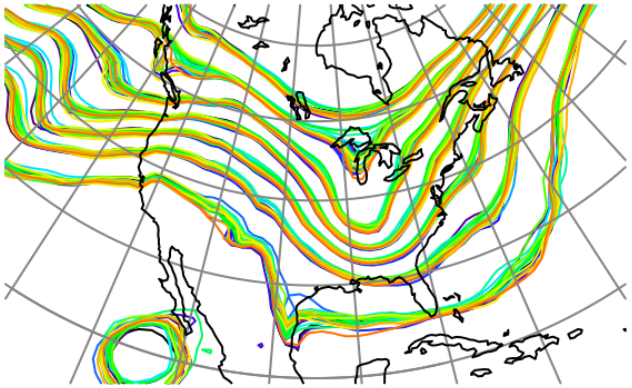

The National Center for Atmospheric Research is sponsored by the National Science Foundation. Any opinions, findings and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

NCAR | National Center for Atmospheric Research
UCAR

DART Diagnostic Output Categories:

- State-Space:
  Values of models state vector.
  Output using netCDF format.

- Observation-Space:
  Values of the observations.
  DART-specific *obs_sequence* format for now.

- Regression confidence factor:
  Values for state vector / observation pairs.
  Output as flat ASCII (soon to be netCDF).

- Program diagnostic output:
  Identification for source code version and namelist values.
  Error, warning, message output from modules.

State-Space Diagnostic Files:

Available in netCDF (a common data format)
http://www.unidata.ucar.edu/software/netcdf

1. Prior state (Prior_Diag.nc) : state before assimilation.
2. Posterior state (Posterior_Diag.nc) : state after assimilation.
3. Truth (True_State.nc) : truth for OSSEs.

Contents of prior and posterior controlled by *filter_nml*:

1. output_state_ens_mean = .true. (include ensemble mean);
2. output_state_ens_spread = .true. (include ensemble spread);
3. num_output_state_members = ## (include this many of the individual ensemble members)
4. output_interval = *N* (only output every N^{th} assimilation time)

Note: output_interval for True_State.nc is in the *perfect_model_obs_nml* namelist.

DART State-Space Diagnostic functions

ALL the DART Matlab state-space diagnostic functions are in <*dart*>/matlab
This **must** be in your *matlabpath*.

See the DART website section titled: "Configuring Matlab to work with DART"
www.image.ucar.edu/DAReS/DART/DART_Documentation.php#configure_matlab

Only focus on the functions/scripts that start with *plot_*

- plot_bins.m
- plot_correl.m
- plot_ens_err_spread.m
- plot_ens_mean_time_series.m
- plot_ens_time_series.m
- plot_phase_space.m
- plot_reg_factor.m
- plot_sawtooth.m
- plot_smoother_err.m
- plot_total_err.m
- plot_var_var_correl.m
- …

Some, but not all, described here.
All functions have a 'help' section
available in the standard Matlab way.

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   a. plot_bins: rank histograms,

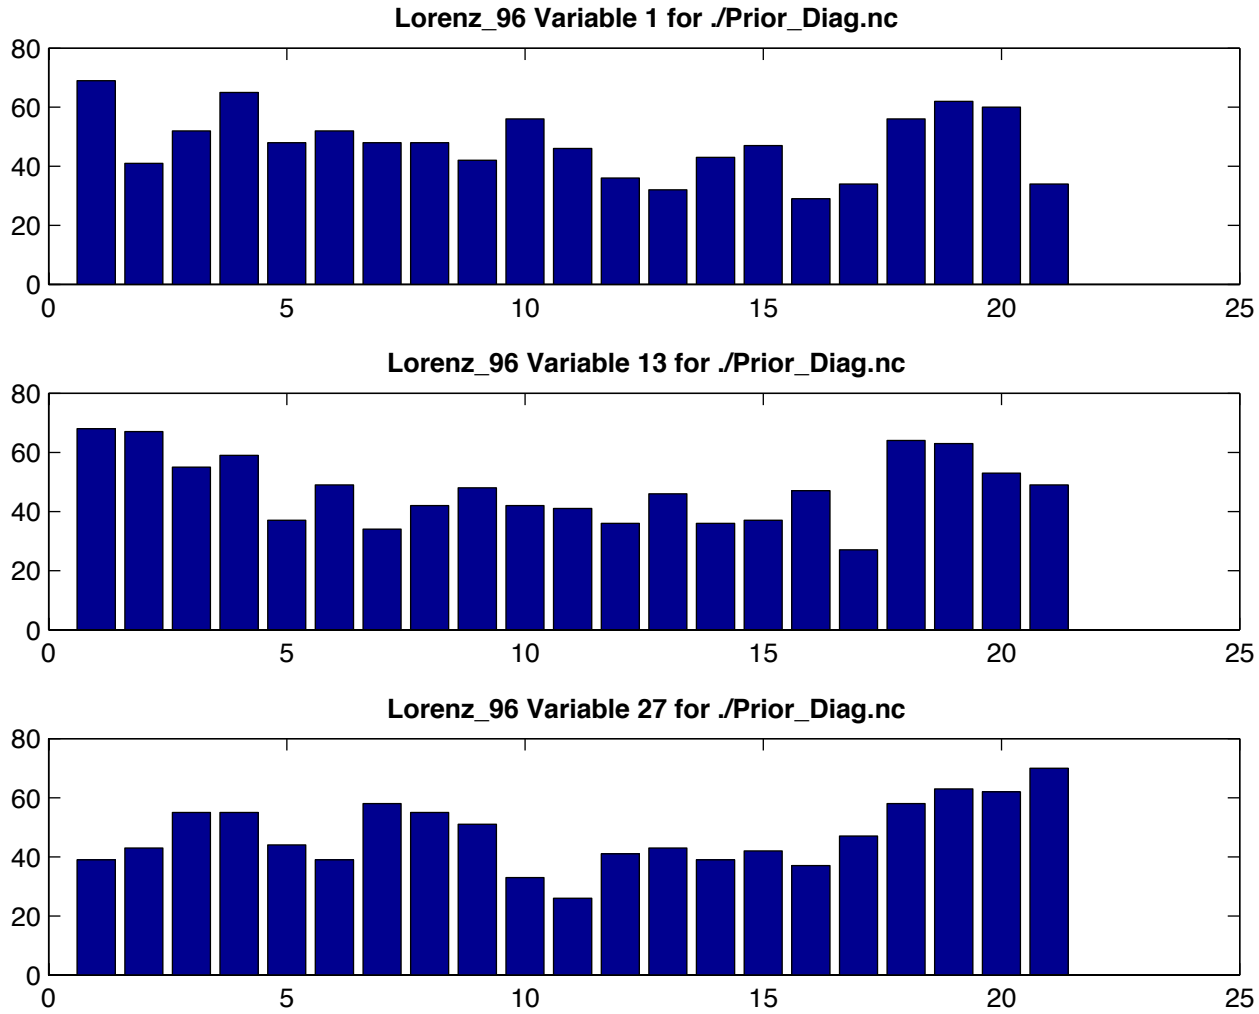

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   b. plot_correl: correlation x(t) with all other state vars at all times,

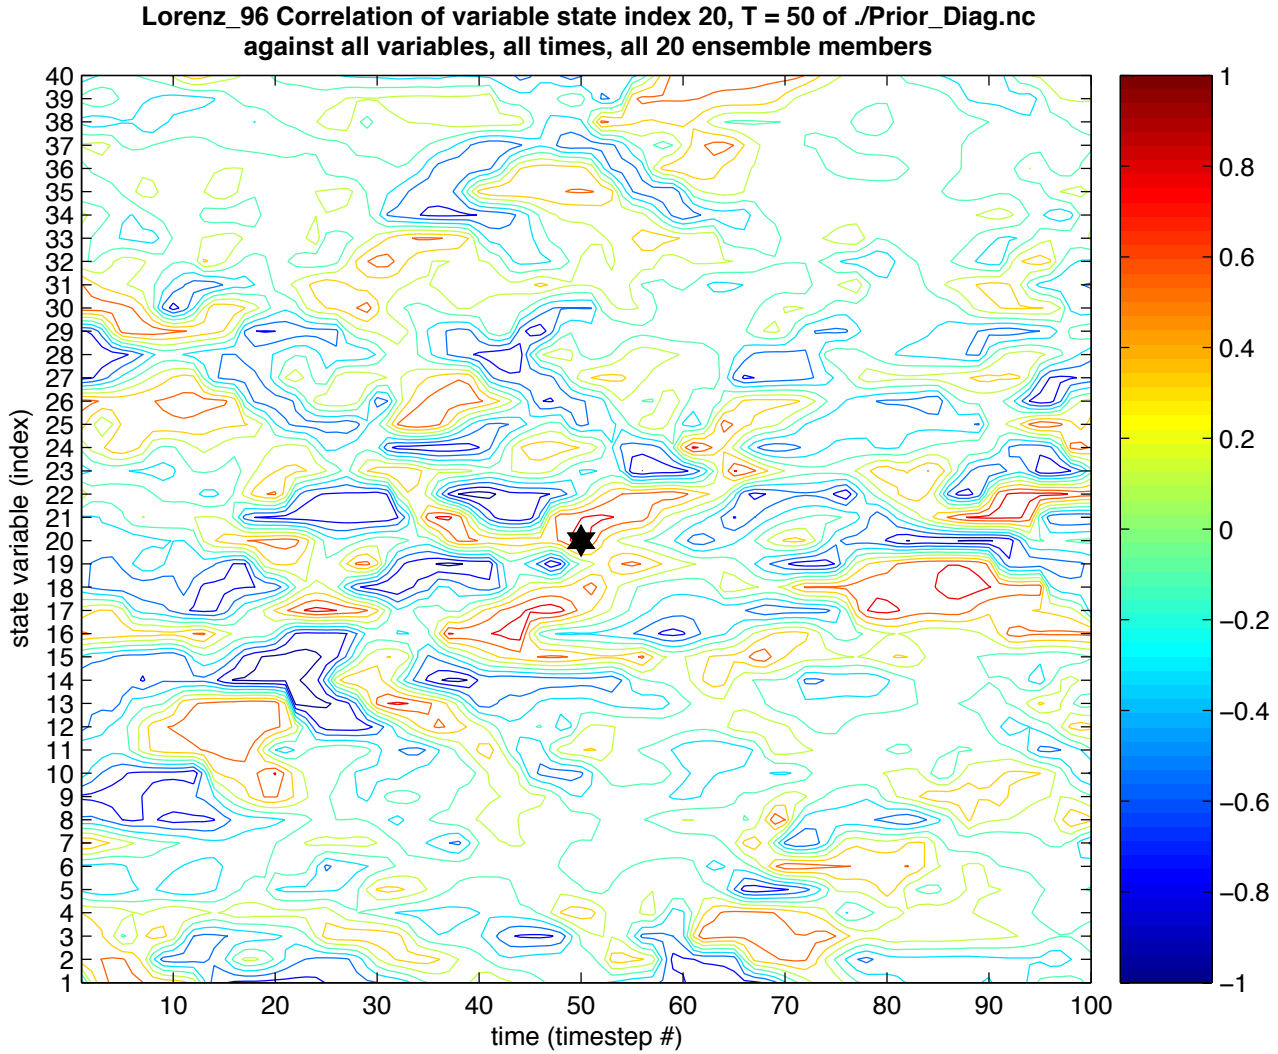

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   c. plot_ens_err_spread: rms error and spread,

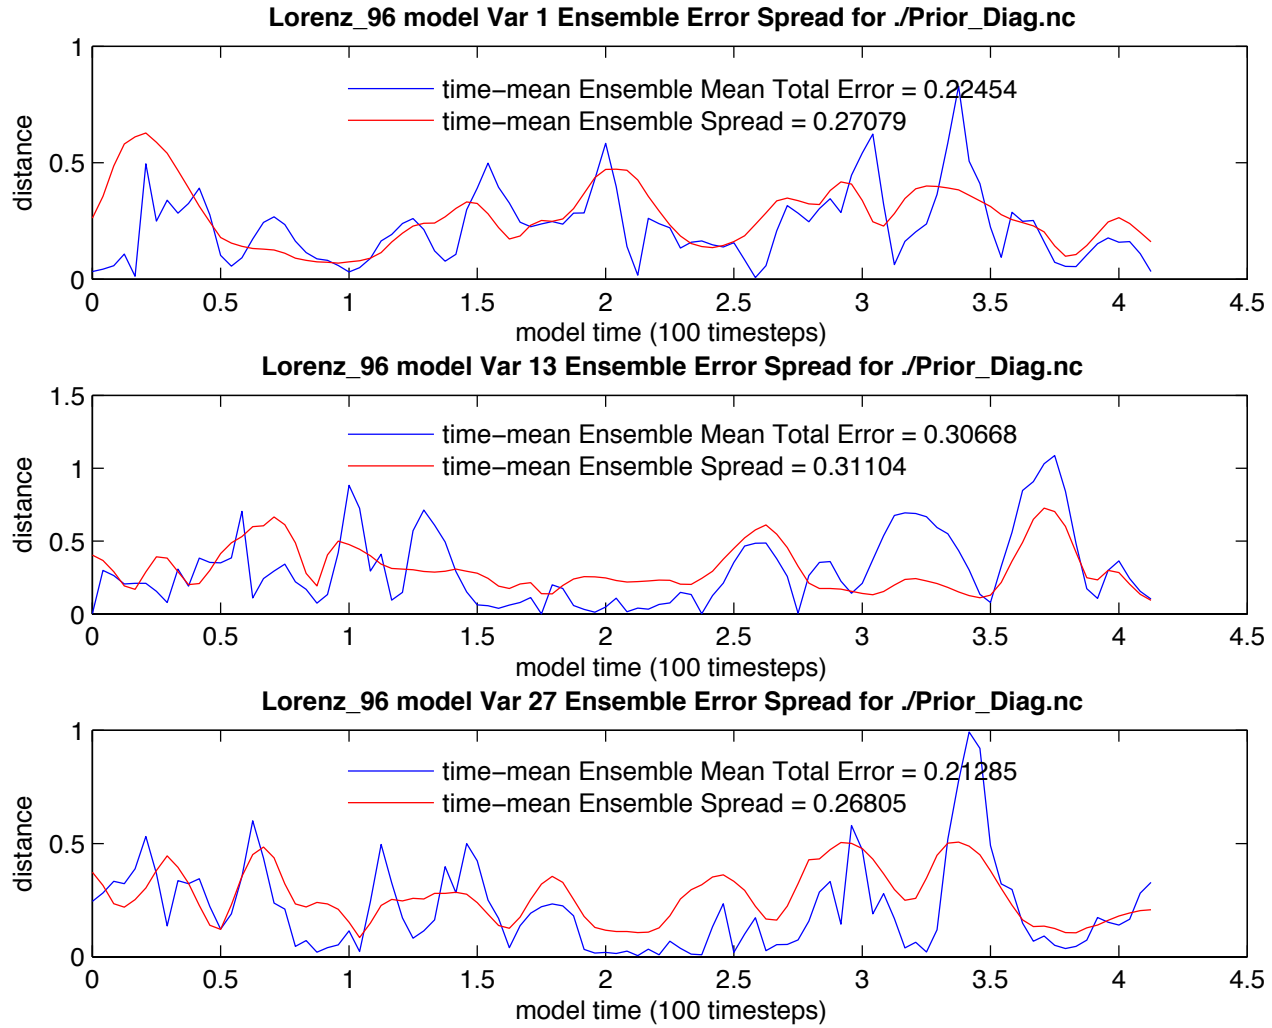

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   d. plot_ens_mean_time_series: just like the name says,

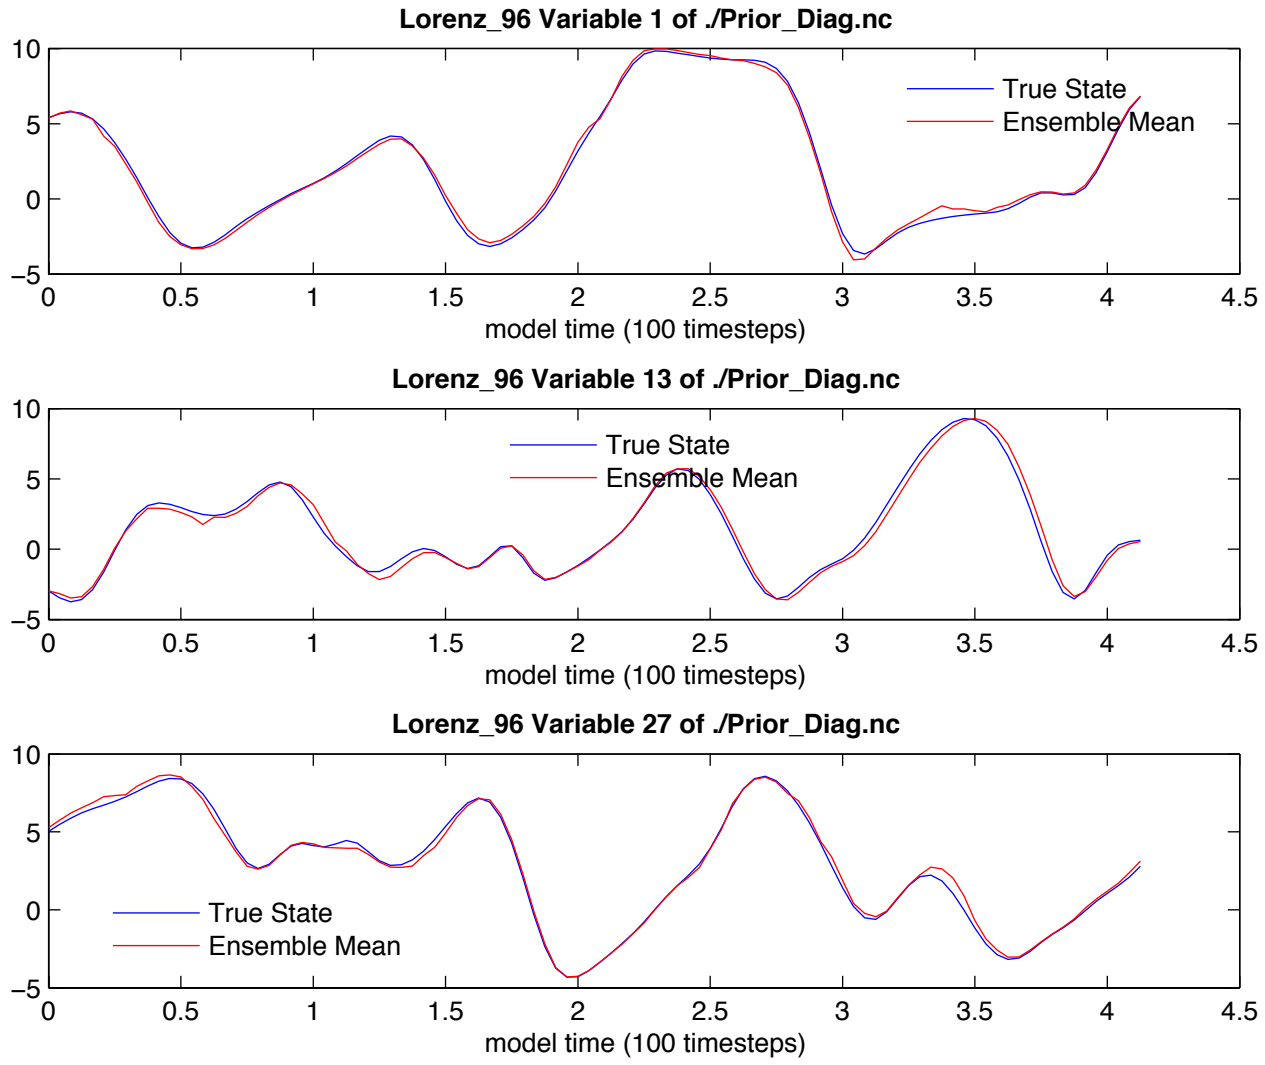

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   e. plot_ens_time_series: plots the ensemble
   (as available from *num_output_state_members*) ,

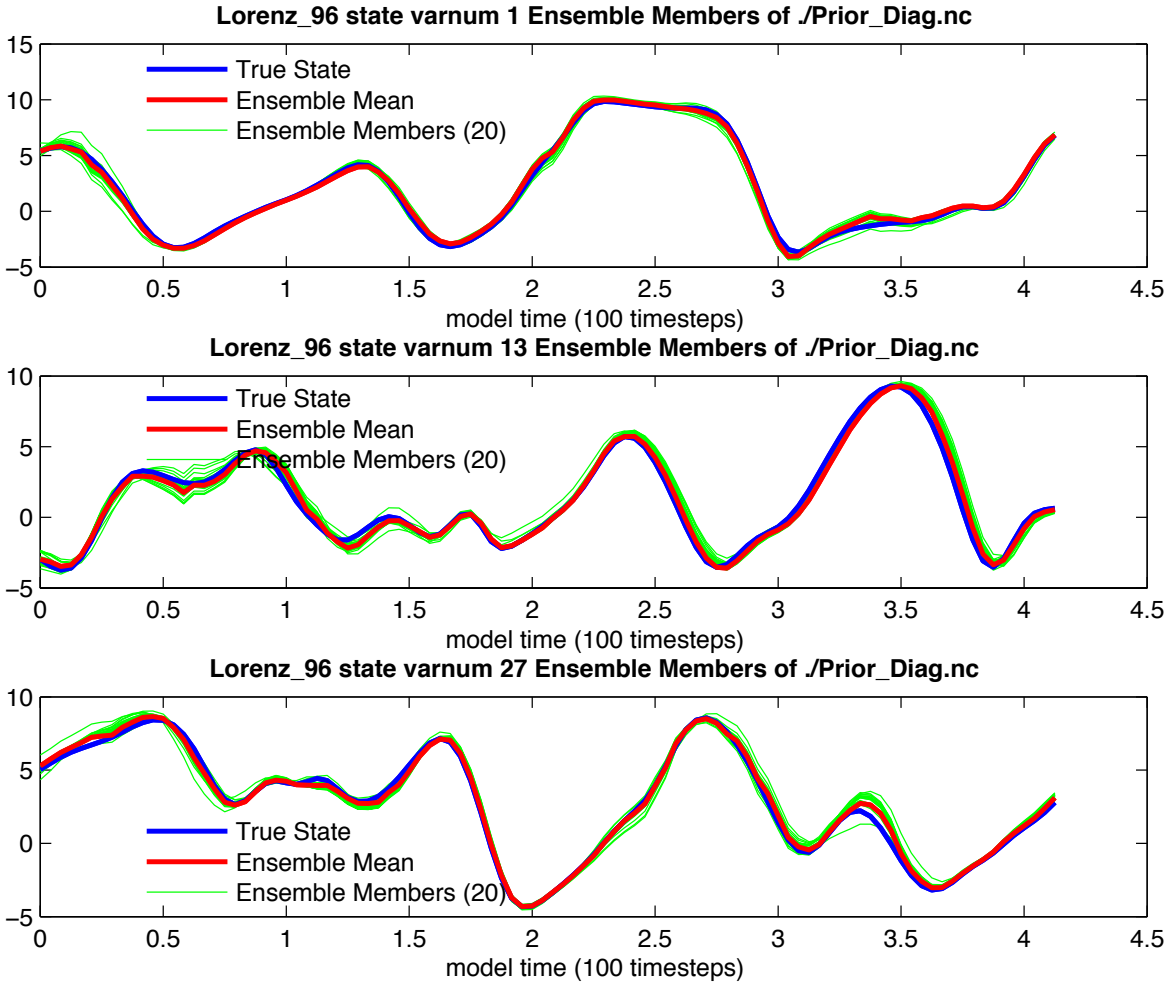

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   f. plot_phase_space: 3D phase space time evolution.

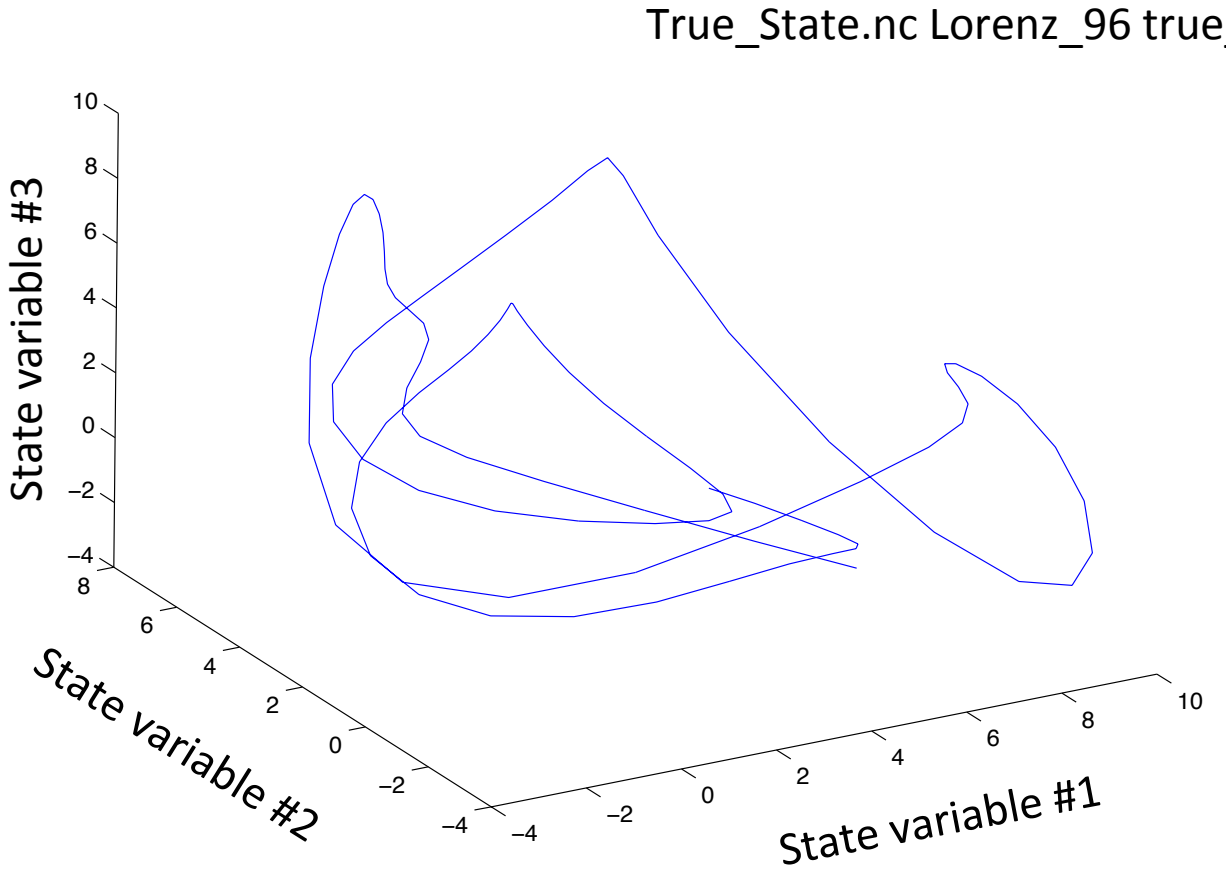

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   g. plot_sawtooth: truth, prior and posterior time series.

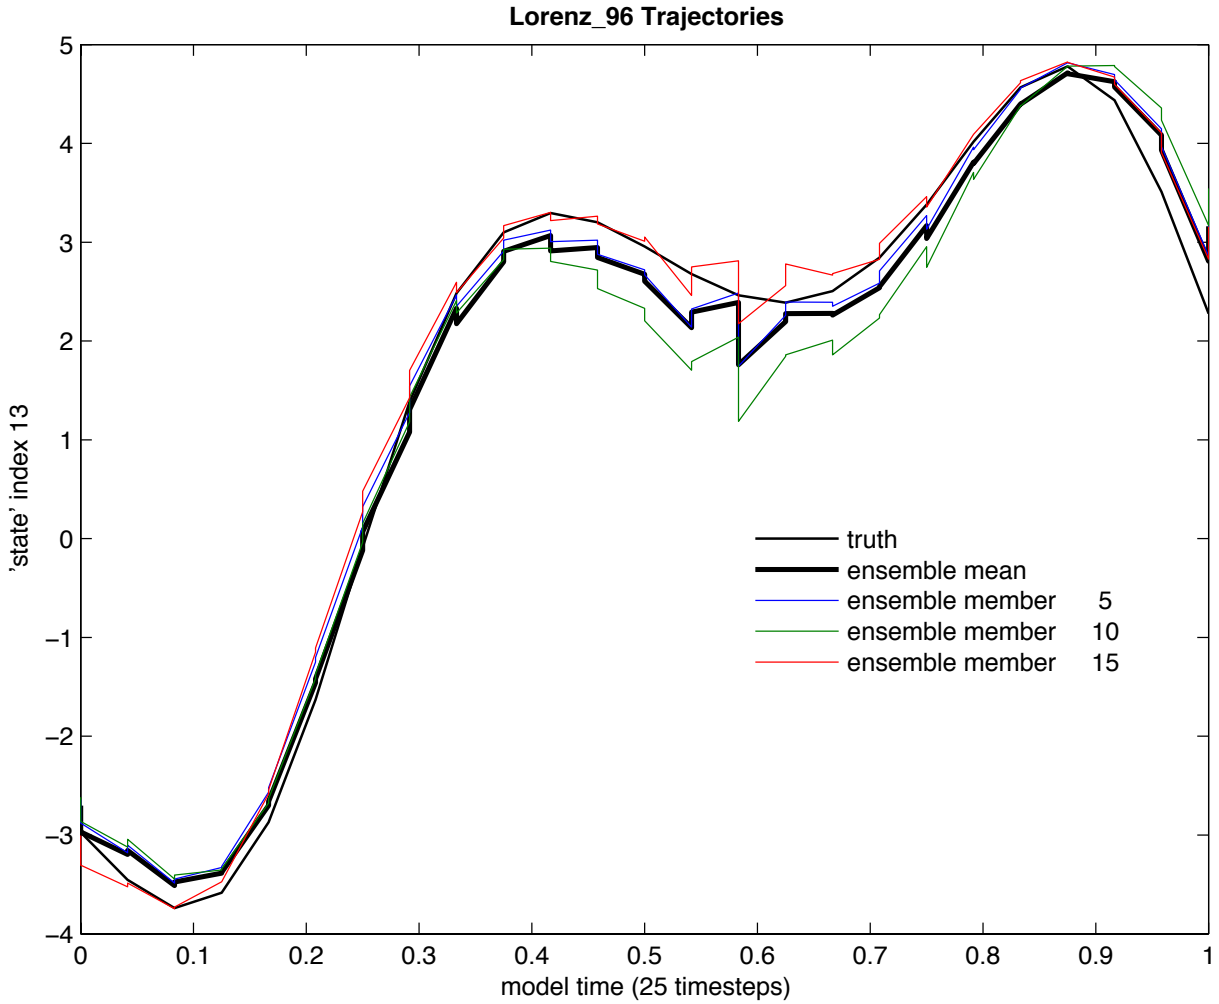

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   h. plot_total_err: total error for different fields,

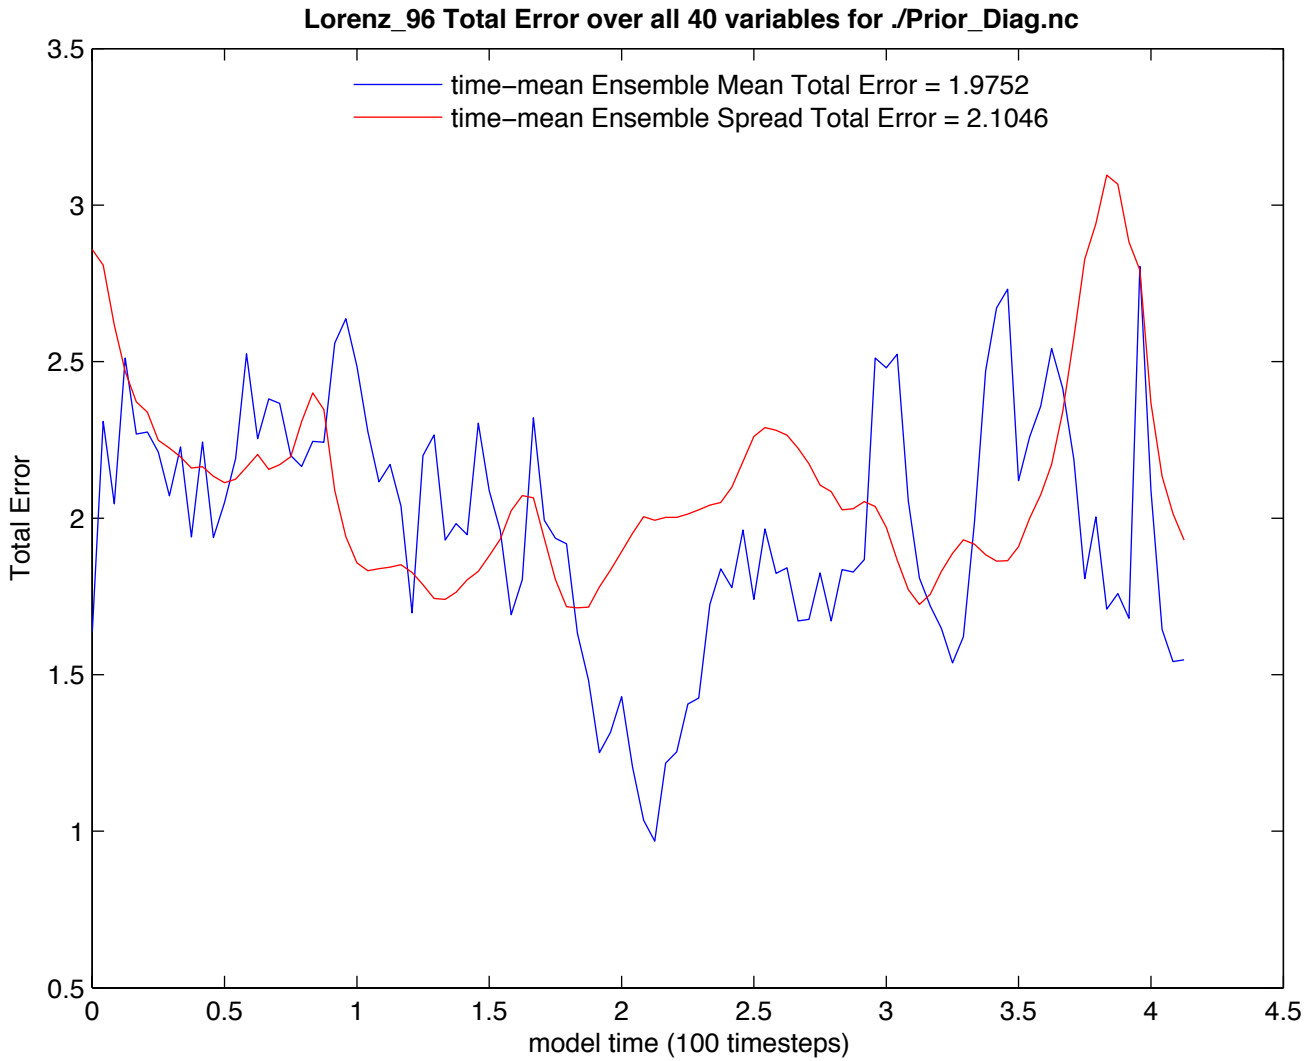

Viewing the State-Space netCDF files:

1. Standard DART matlab diagnostics:
   i. plot_var_var_correl: x(t) correlation to single variable, all times.

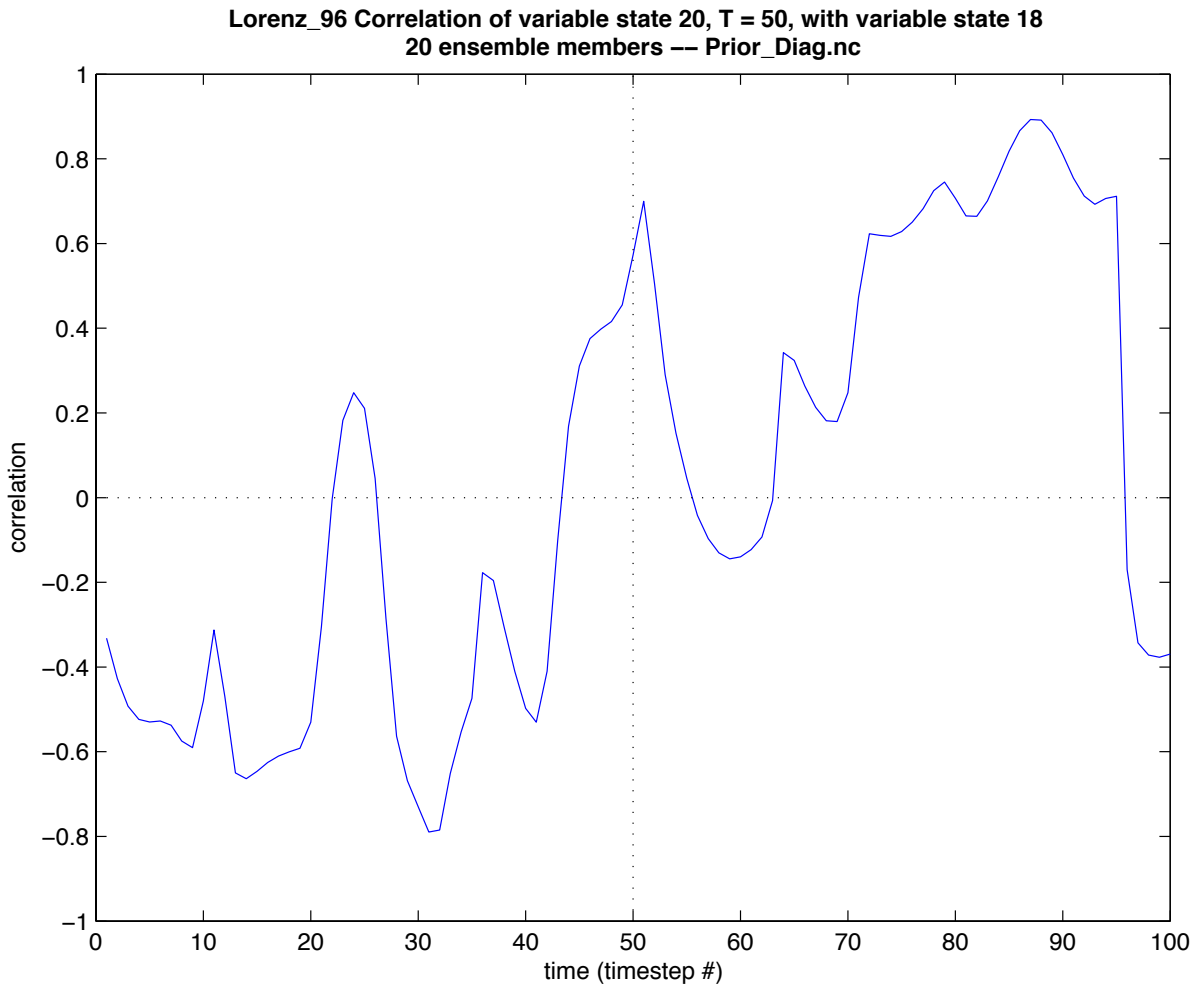

Viewing the State-Space netCDF files:

2. Ncview: a quick and surprisingly useful netCDF viewer.
   http://meteora.ucsd.edu/~pierce/ncview_home_page.html
   Displays spatial slices, animations, time series …

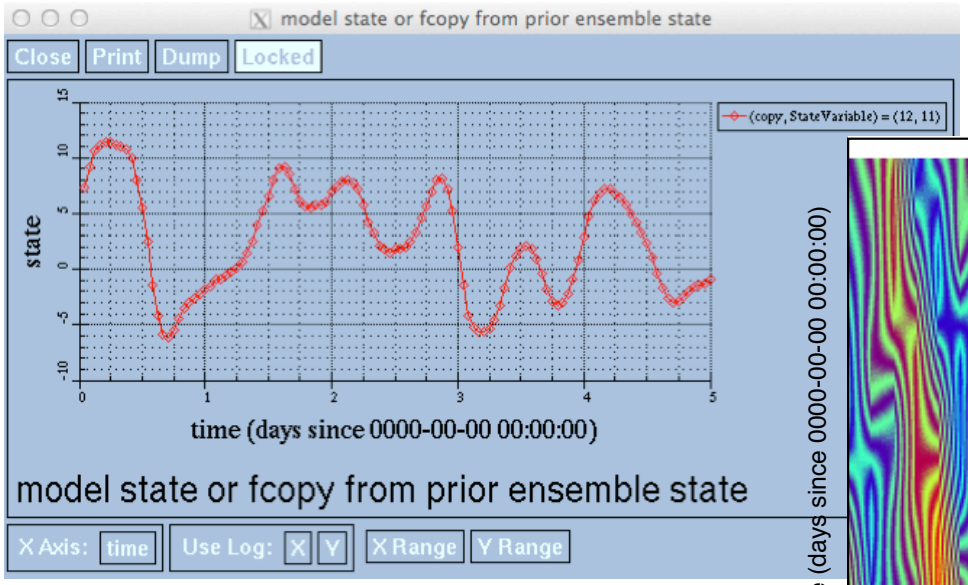

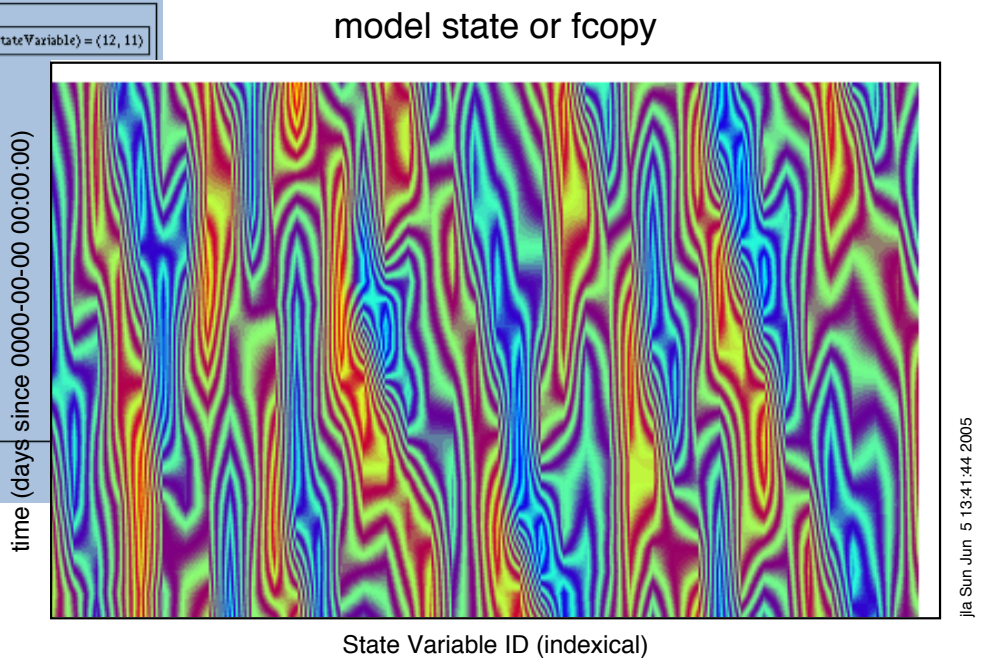

prior ensemble state
Range of model state or fcopy: -6.18328 to 11.6954 (null)
Range of State Variable ID: 1 to 40 indexical
Range of time: 0 to 1 days since 0000-00-00 00:00:00
Current ensemble member or copy: 1 nondimensional
Frame 1 in File Prior_Diag.nc

Viewing the State-Space netCDF files:

3. Many other graphical/analysis programs can read netCDF.
   (Note that we use *udunits* metadata convention.)

4. netCDF Operator (NCO) tools allow operations on netCDF files:
   (http://nco.sourceforge.net)
   Selecting hyperslices of fields,
   Differencing netCDF file,
   Averaging, etc.

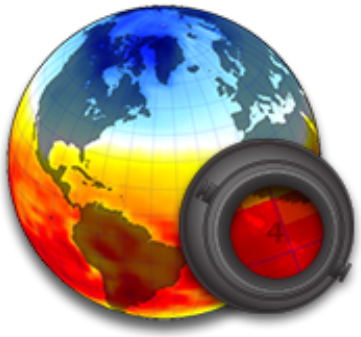

NASA GISS: Panoply

netCDF Operators (NCO) Software Stack

Observation-space files:

Quick recap of 'standard' observation sequence file names
(all names are actually specified in namelists):

- obs_seq.in — input to *perfect_model_obs*
- obs_seq.out — **output** from *perfect_model_obs*, also **input** to *filter*
- obs_seq.final — output from *filter*

Observation sequence file output by *filter* has prior, posterior, observed value (and truth for OSSEs). For an overview, check out the DART webpage section:
www.image.ucar.edu/DAReS/DART/DART_Observations.php#obs_seq_overview

Contents of *obs_seq.final* controlled by filter_nml:

1. Obs_sequence_in_name = 'obs_seq.out'
   Name of input observation sequence file.
2. Obs_sequence_out_name = 'obs_seq.final'
   Name of output observation sequence file.
3. Num_output_obs_members = ##
   Output this many individual ensemble estimates.

Observation-space diagnostics:

The observation sequence file is not in a particularly user-friendly format.
To aid in the evaluation and interpretation, a program named ***obs_diag*** must be run to produce a netCDF file with results that can be plotted in a manner of your choosing. DART has Matlab functions/scripts that create high-quality graphics.

See tutorial section 18 for full coverage of viewing / diagnosing obs sequences.
Also covered in:
http://www.image.ucar.edu/DAReS/DART/DART_Documentation.php#obs_diagnostics

Here are a few of the Matlab functions available in <*dart*>/diagnostics/matlab

- plot_rank_histogram.m
- plot_evolution.m
- plot_rmse_xxx_evolution.m
- two_experiments_evolution.m (works with more than two, actually)
- plot_profile.m
- plot_bias_xxx_profile.m
- plot_rmse_xxx_profile.m
- two_experiments_profile.m (works with more than two, actually)

Observation-space diagnostics:

SOME of the information in the observation sequence files can be converted to netCDF and easily plotted. A program named *obs_seq_to_netcdf* must be run to produce the netCDF.

Here are a few of the Matlab functions available in <*dart*>/diagnostics/matlab.

- link_obs.m
- plot_obs_netcdf.m
- plot_obs_netcdf_diffs.m
- plot_coverage.m

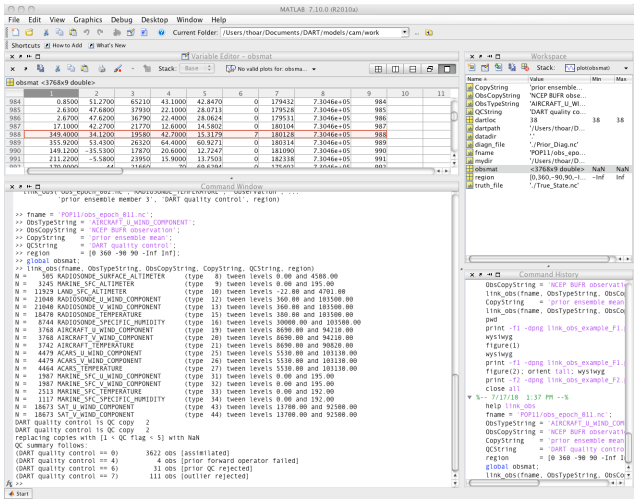

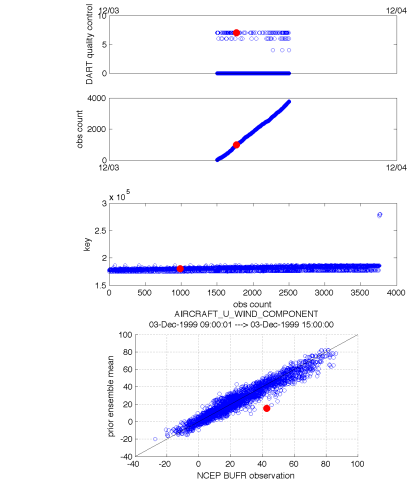

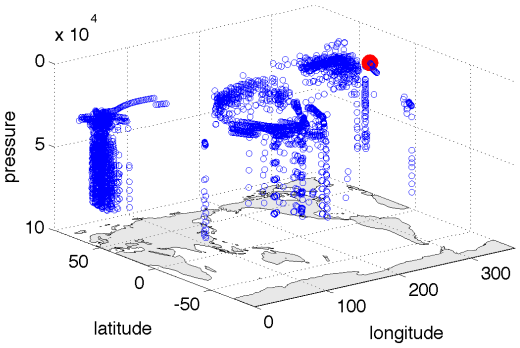

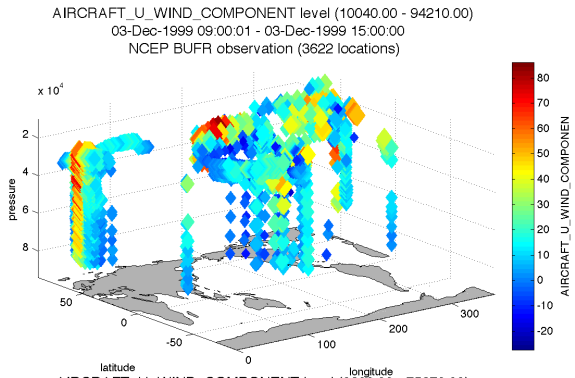

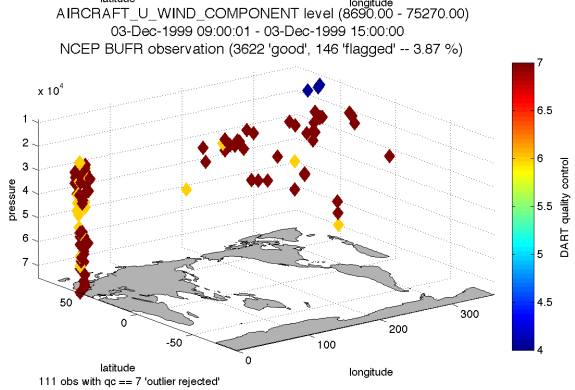

Regression confidence factor output:

Controlled by reg_factor_nml:

1. save_reg_diagnostics = .true. Should file be output?
2. reg_diagnostcs_file = 'reg_diagnostics' Name of output file.

File size could be (model size) X (number of obs.) X (number of assim times).

Very big, even for small models (only first 4 obs output default).

Normally, modify code in reg_factor_mod.f90 to control:

Output is at end of select_regression = 1 code block.

Format is ASCII:

time in days, time in seconds, obs_index, state_index, alpha

Plot with Matlab *plot_reg_factor*.

Program Diagnostic Output:

File *dart_log.out*

All DART executables ***append*** to this file!

Contains:

- registration information
- Program start time,
- version of code for each module used*
- Namelist values for each module**
- Names of output files,
- Diagnostic output for modules (through error_handler()),
- Warnings and fatal errors from DART code.

Fair Warning: This file is ***not*** cleared by DART. Can get very longgggggg …
You should feel free to delete/rename it before starting the next experiment.

*Hopefully

**may be in a separate file, depending on *utilities_nml* setting

DART Tutorial Index to Sections