



ALA-TOO INTERNATIONAL UNIVERSITY

BUSINESS ADMINISTRATION SOFTWARE

Spring Semester 2025-2026

Simplicity is prerequisite for reliability.

– Edsger W. Dijkstra


1C: Enterprise

1C SYSTEM



DESIGNER MODE

OUR PART

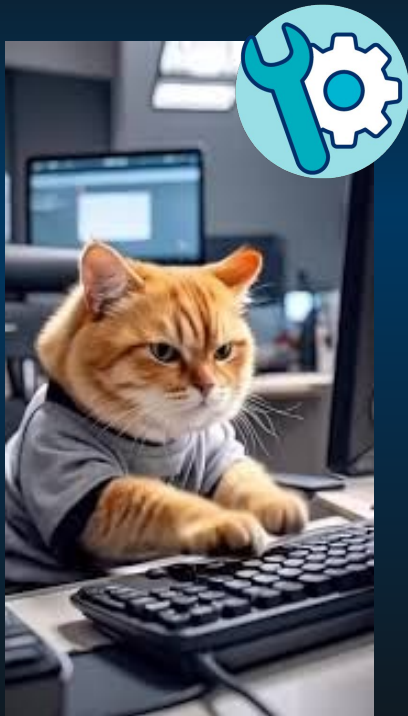

- Selecting and implementing algorithms
- Creating application's structure
- Setting up parameters
- Morfing sets of predefined elements

Creating apps + updating and customizing exiting

ENTERPRISE MODE

USER PART



Users input their own data to the applications using algorithms, parameters and settings implemented by developers. Users collaborate with each other and create reports.

DOWNLOAD AND INSTALL


STEP 0

<https://1c-dn.com/>

- Create an account, make sure you avoid all unnecessary ticks
- Login to your account
- Select “Free trial” at the top left
- Choose your platform version and start the download
- For the installation process just follow the installation wizard

CREATING FIRST INFOBASE

STEP 1

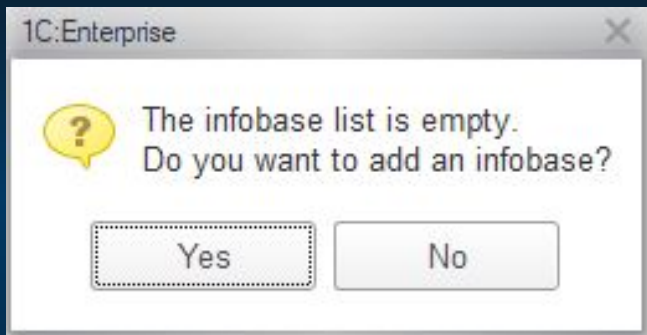


(SELECT **NO** OPTION)


Each infobase contains user's data and program itself which the platform executes, therefor creation of any 1C:Enterprise application starts from creating an infobase where the application and the data driven by it will be stored.

CREATING FIRST INFOBASE

STEP 2

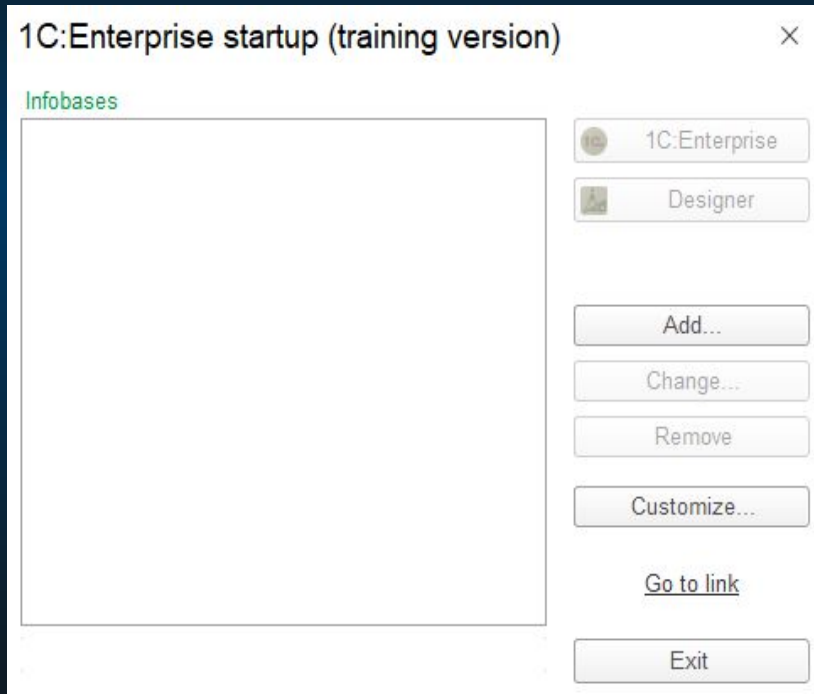

Select **Add** button

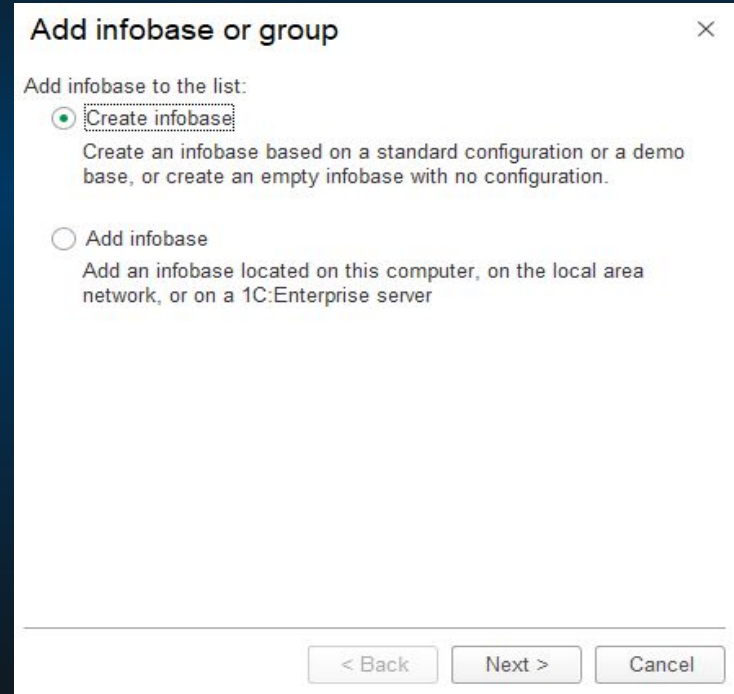

Select **Create infobase**

CREATING FIRST INFOBASE

STEP 3

Add infobase or group

☐ Create infobase from template

Select a standard configuration or a demo configuration:

☒ Create an infobase with no configuration to develop a new configuration or restore a previously dumped infobase

< Back Next > Cancel

Select **NEW infobase**



Add infobase or group

Infobase name:
Infobase0000

Select infobase location:

☒ This computer or LAN computer

☐ 1C:Enterprise server

< Back Next > Cancel

Name it and keep on this pc

CREATING FIRST INFOBASE

STEP 4

Add infobase or group ×

Infobase parameters:

Infobase directory:
 ...

Language (country):

< Back Next > Cancel



Add infobase or group ×

Startup options:

User authentication method:
☒ Select automatically
☐ Prompt for username and password

Connection speed:

Additional startup options:

☐ Deny local speech recognition

Default startup mode:
☒ Select automatically
☐ Thin client
☐ Web client
☐ Thick client

1C:Enterprise version:

Bitness:


< Back Finish Cancel

Select **NEW infobase**

Just select Finish

CREATING FIRST INFOBASE

STEP 5

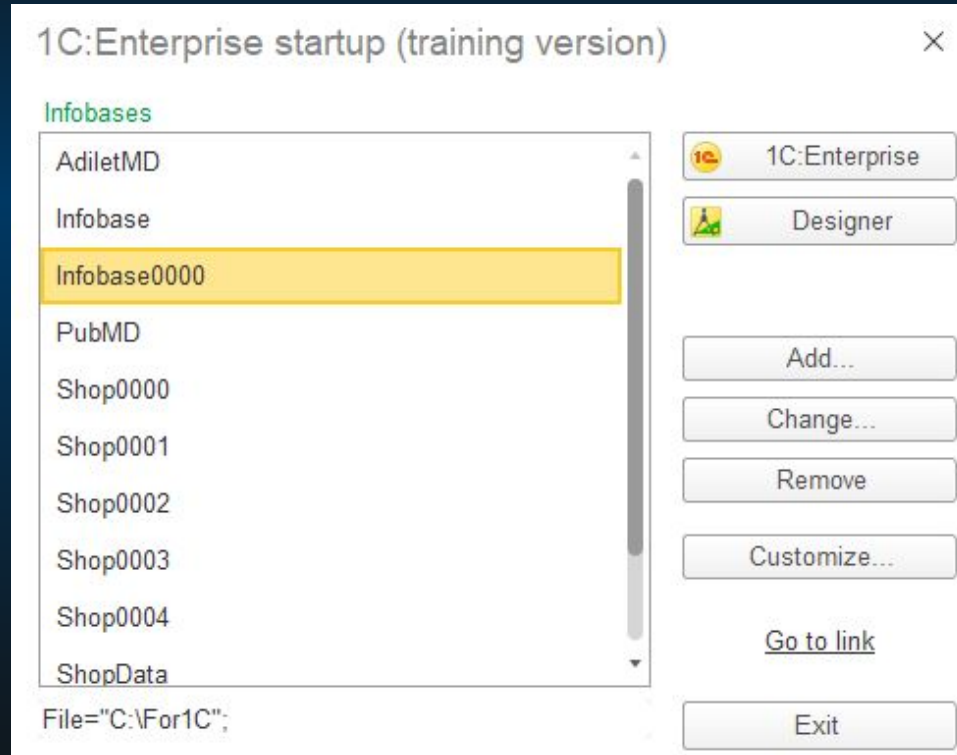


Select **your infobase** and press **Designer**

STEP 0



CONFIGURATIONS

STEP 1

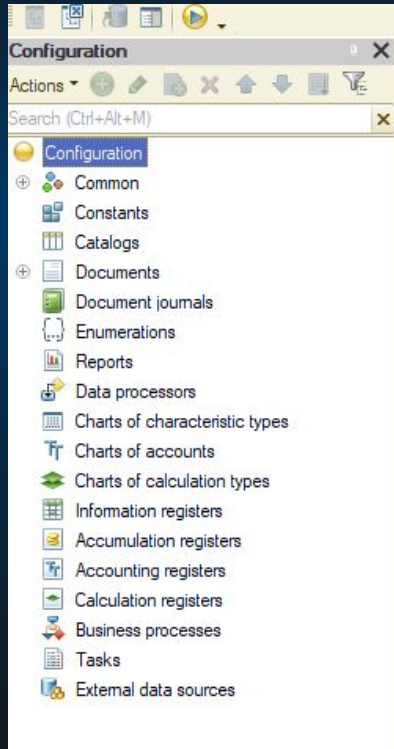

Make sure you get the configuration window with config tree

METADATA

CLASSES AND OBJECTS

Metadata classes are basically business components, they are predefined and visually configurable building blocks that are widely used in enterprise applications:

- Documents
- Catalogs
- Information registers
- Accumulation registers
- Accounting registers
- Calculation registers
- Business processes

ANALOGY

METADATA



METADATA CLASS

DOCUMENTS

Configuration

- Common
- Constants
- Catalogs
- Documents
 - Number generators
 - Sequences
 - Document 1**
 - Document journals
 - Enumerations
 - Reports
 - Data processors
 - Charts of characteristic types
 - Charts of accounts
 - Charts of calculation types
 - Information registers
 - Accumulation registers
 - Accounting registers
 - Calculation registers
 - Business processes
 - Tasks
 - External data sources

Document Document 1

Main

Subsystems

Functional options

Data

Numbering

Posting

Sequences

Journals

Forms

Input fields

Commands

Templates

Generation

Access rights

Data exchange

Other

Name:

Synonym:

Comment:

Object presentation:

Extended object presentation:

List presentation:

Extended list presentation:

Note:

Actions <Back Next> Close Help

METADATA CLASS

DOCUMENTS

Search (Ctrl+Alt+F)

Configuration

- Common
- Constants
- Catalogs
- Documents
 - Number generators
 - Sequences
 - Sales**
 - Document journals
 - Enumerations
 - Reports
 - Data processors
 - Charts of characteristic types
 - Charts of accounts
 - Charts of calculation types
 - Information registers
 - Accumulation registers
 - Accounting registers
 - Calculation registers
 - Business processes
 - Tasks
 - External data sources

Document Sales

Main

Subsystems

Functional options

Data

Numbering

Posting

Sequences

Journals

Forms

Input fields

Commands

Templates

Generation

Access rights

Data exchange

Other

Name:

Synonym:

Comment:

Object presentation:

Extended object presentation:

List presentation:

Extended list presentation:

Note:

Actions

METADATA CLASS

ATTRIBUTES

Configuration

Actions

Search (Ctrl+Alt+M)

- Configuration
 - Common
 - Constants
 - Catalogs
 - Documents
 - Number generators
 - Sequences
 - Sales
 - Attributes
 - Attribute1**
 - Tabular sections
 - Foms
 - Commands
 - Templates
 - Document journals
 - Enumerations
 - Reports
 - Data processors
 - Charts of characteristic types
 - Charts of accounts
 - Charts of calculation types
 - Information registers
 - Accumulation registers
 - Accounting registers
 - Calculation registers
 - Business processes
 - Tasks
 - External data sources

Properties: Attribute1

Search (Ctrl+Alt+I)

General:

Name: Product

Synonym:

Comment:

Type: String

Max length: 10

String type: Variable-length

Open-ended: ☐

Use:

Index: Do not index

Include in full-text index: Yes

Track versions: Yes

Presentation:

Conceal value: ☐

Tooltip:

Mask:

Multiline mode: ☐

Advanced edit: ☐

Autofill: ☐

Default value:

Required field: No

Show in drop-down list: Auto

Create items from drop-down list: Auto

Show choice history: Auto


Name of metadata object:

More: Attribute1

Properties: Attribute1


METADATA CLASS

ATTRIBUTES

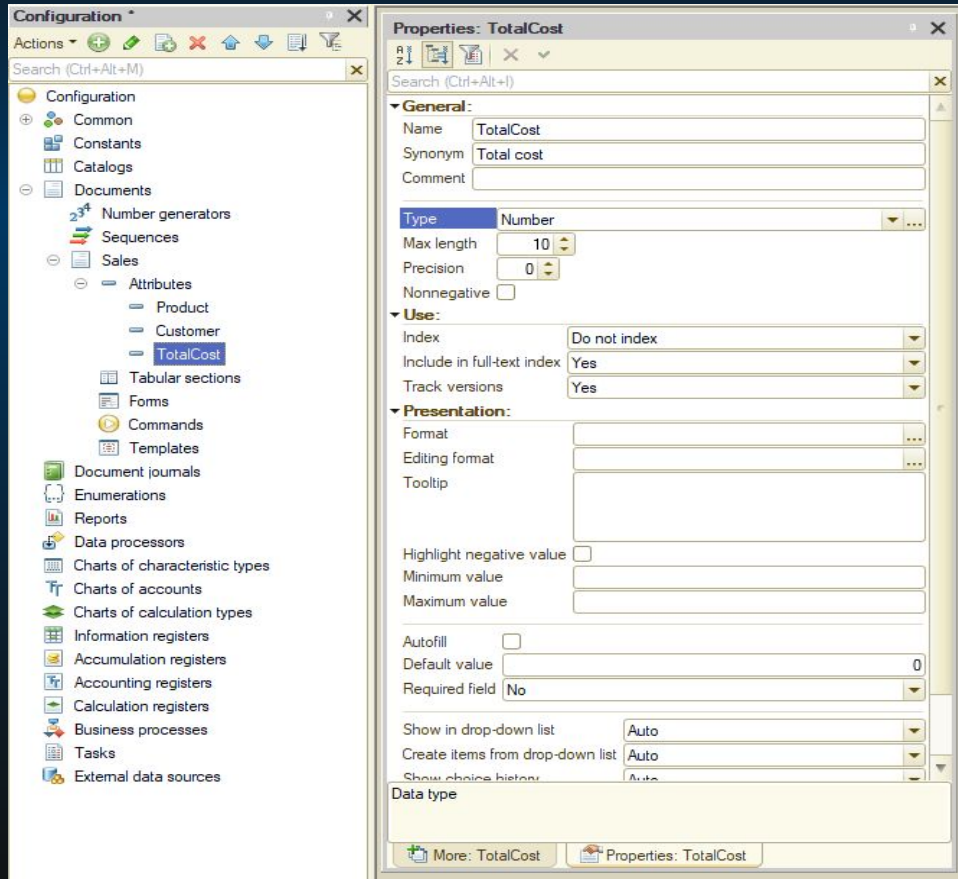


RESTRUCTURE DATA

TO OPEN ENTERPRISE MODE

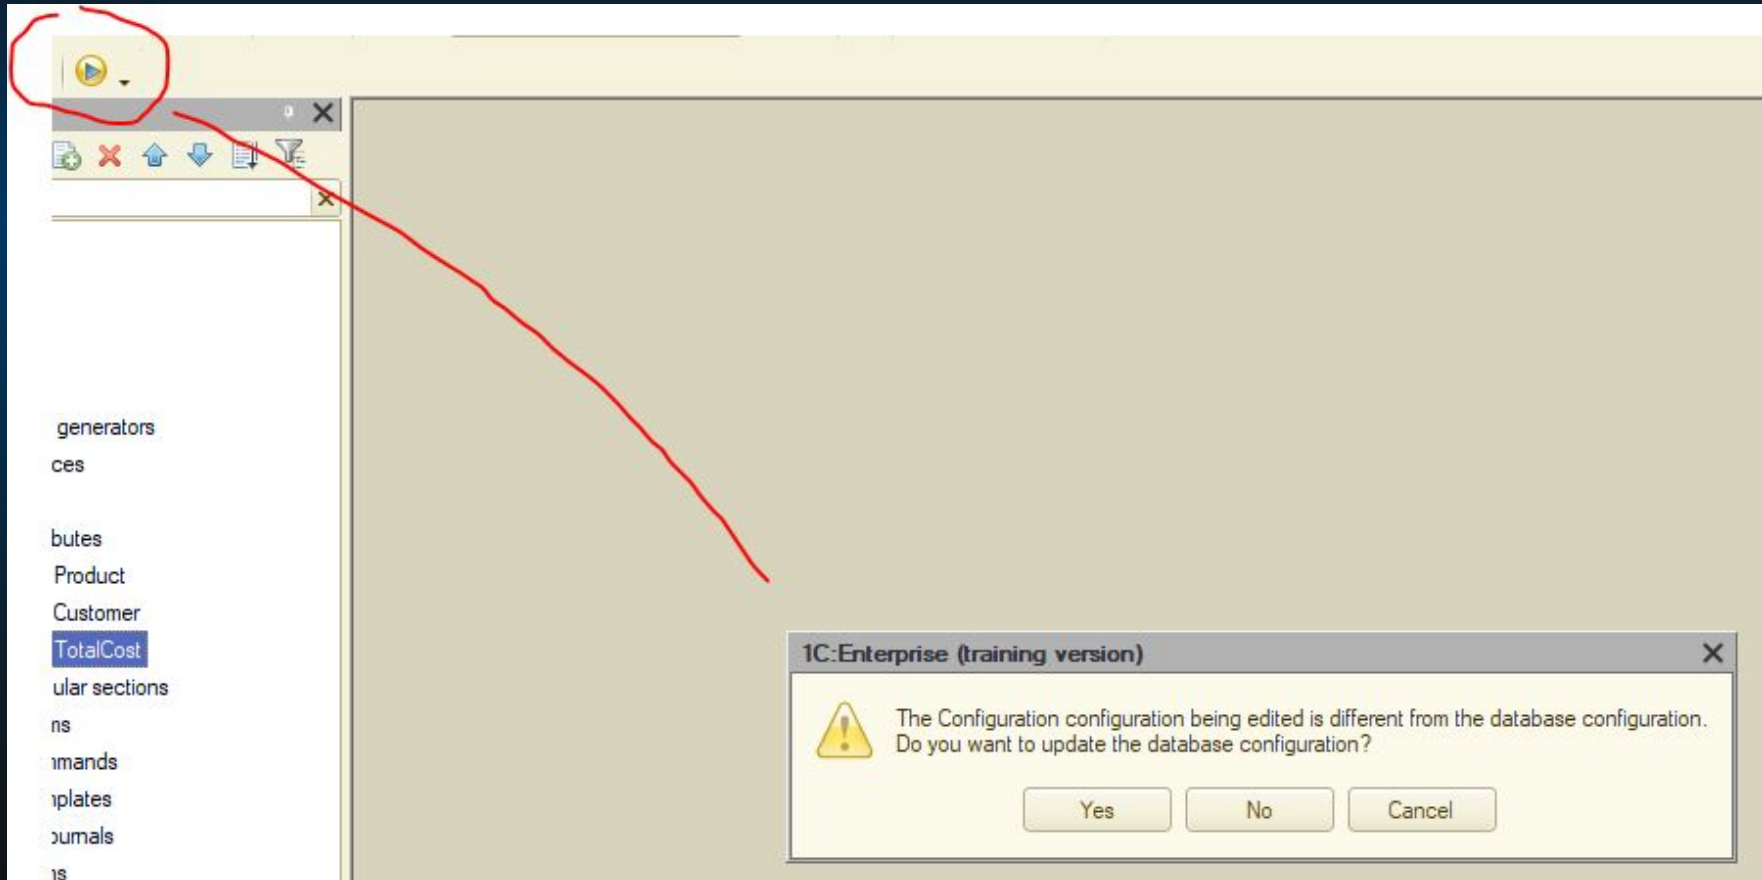

ENTERPRISE MODE

ENTERPRISE MODE

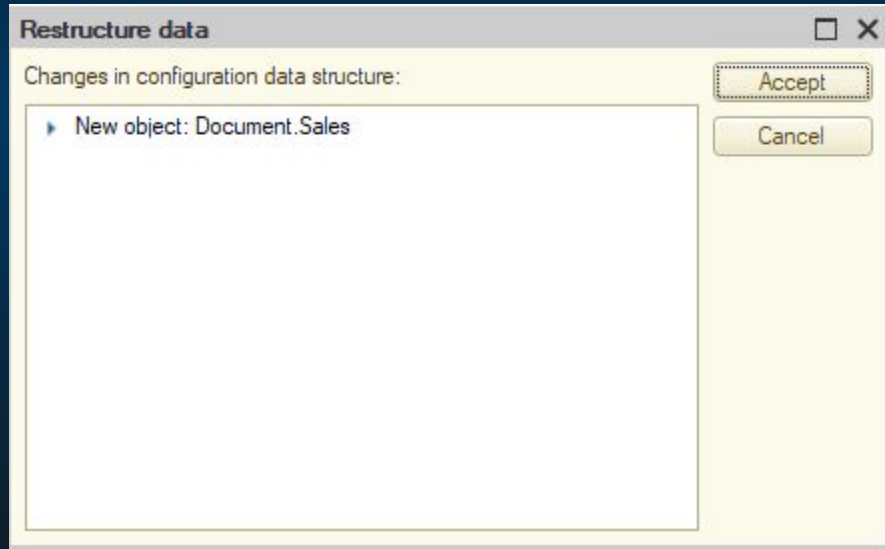

CONFIGURATIONS

ENTERPRISE MODE

  Configuration (1C:Enterprise, training version) 

Sales

 **Sales (create) ***

Post and close

Save

Post

Number:

Date: 

Product:

Customer:

Total cost:

CONFIGURATIONS

ENTERPRISE MODE

Sales

←

→

☆

Sales

🔗

⋮

×

Create

📄

+

Search (Ctrl+F)

×

🔍


▾

More actions ▾

Date ↓	Number	Product	Customer	Total cost
📄 07.01.2026 12:00:00	0000	Book	Mirlan	1 000


CATALOGS

CREATION

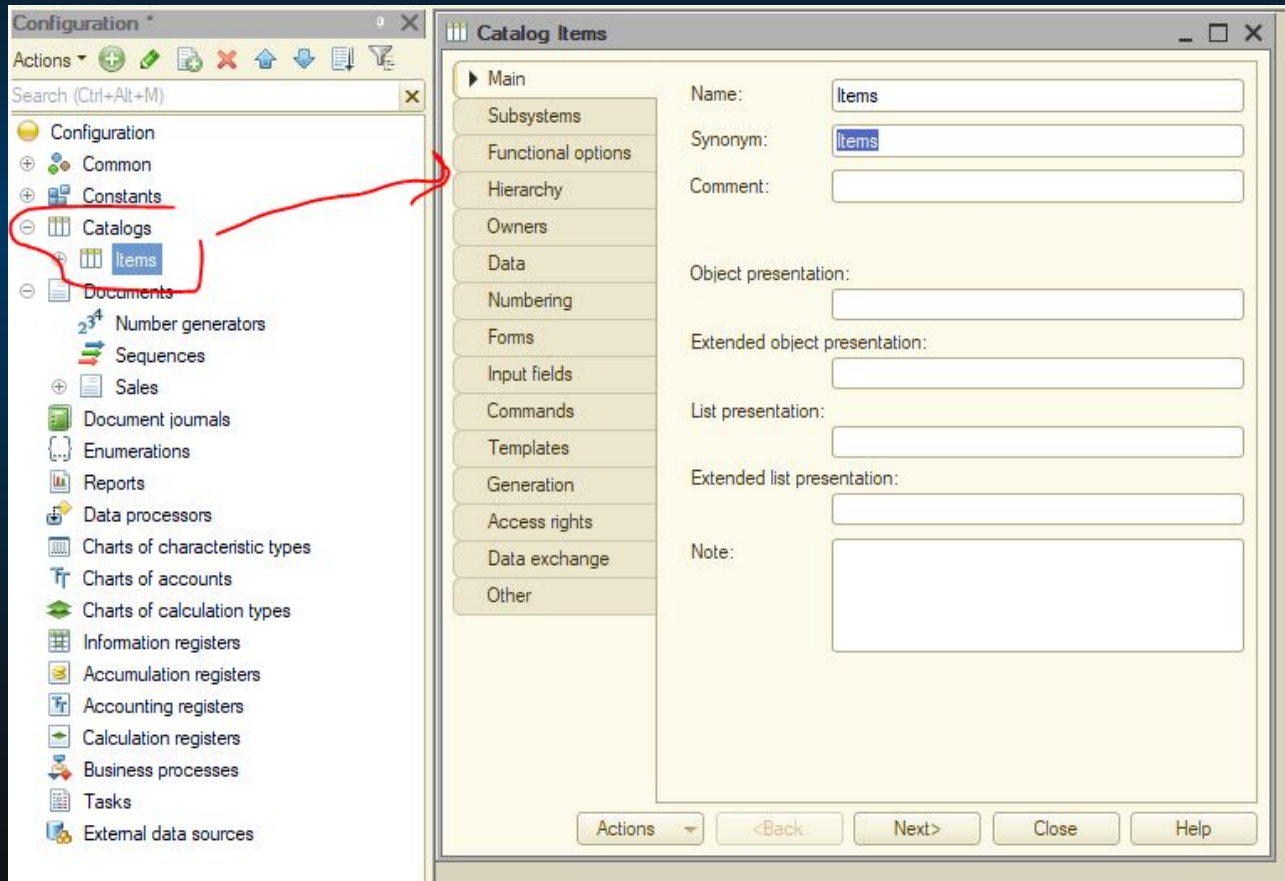

CATALOGS

CREATION

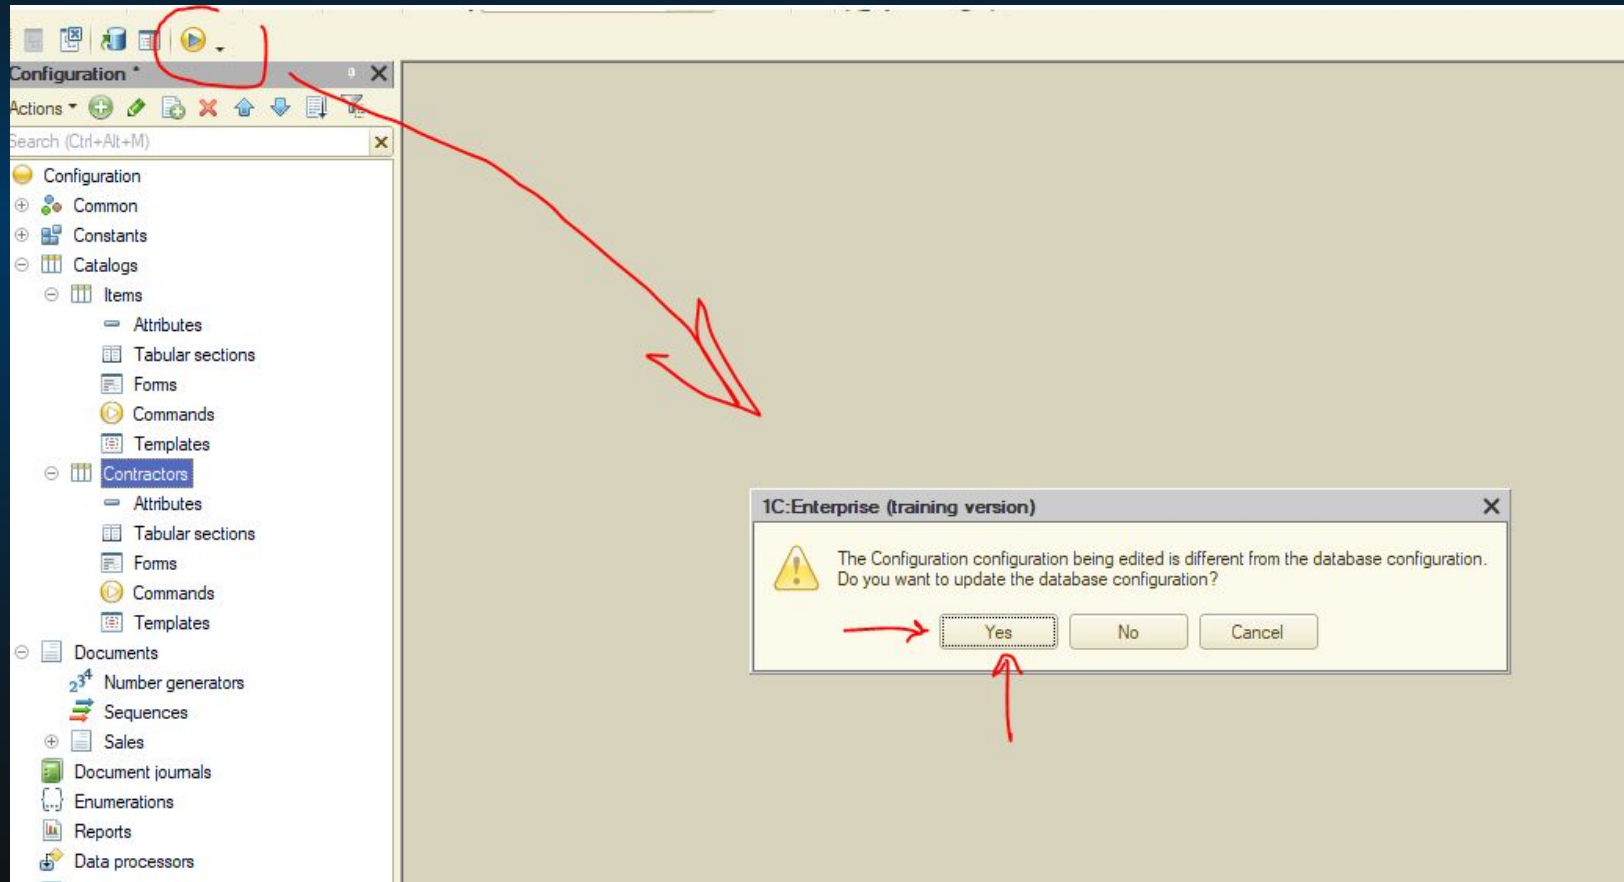

CATALOGS

ENTERPRISE MODE

☆ Contractors (create) *

Save and close

Save

More actions ▾

Code:

Description:

CATALOGS

ENTERPRISE MODE

  Configuration (1C:Enterprise, training version)

Contractors Items Sales

Tools ▾

← →

☆ Contractors

⌵ ⌵ ⌵ ⌵ ⌵

Create 

×  ▾

More actions ▾

Description ↓	Code
▢ Builders	0001

CATALOGS

ENTERPRISE MODE

  Configuration (1C:Enterprise, training version)

Contractors Items Sales

Tools ▾

←

→

 Items

Create






More actions ▾

Description	Code
Product 0000	000000001
Product 0001	000000002
Product 0002	000000003

CATALOG ATTRIBUTES

DESIGNER MODE

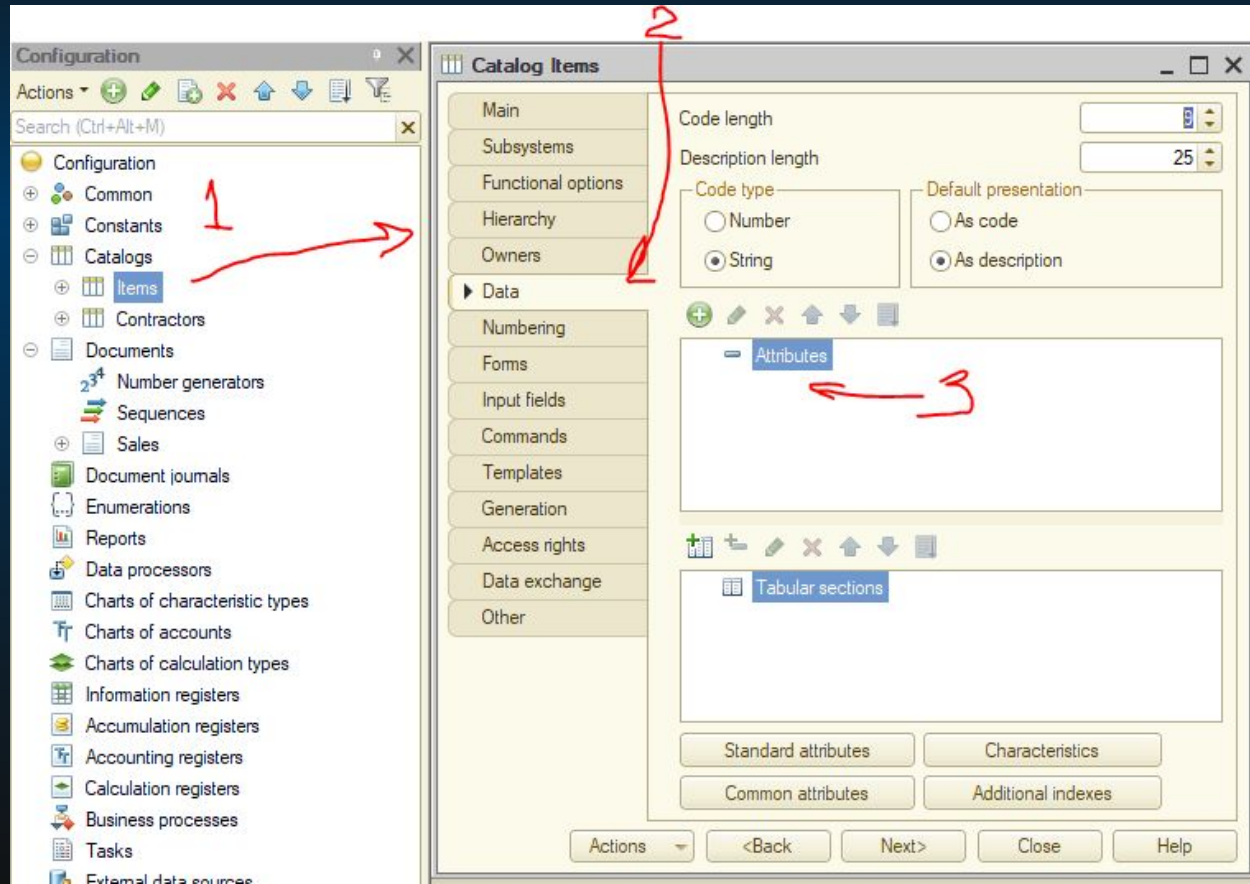

CATALOG ATTRIBUTES

DESIGNER MODE

Properties: Attribute1

Search (Ctrl+Alt+I)

General:

Name: Attribute1

Synonym:

Comment:

Type: String

Max length: 10

String type: Variable-length

Open-ended: ☐

Use:

Use: For item

Index: Do not index

Include in full-text index: Yes

Track versions: Yes

Presentation:

Conceal value: ☐

Tooltip:

Mask:

Multiline mode: ☐

Advanced edit: ☐

Autofill: ☐

Default value:

Required field: No

Show in drop-down list: Auto

Create items from drop-down list: Auto

Show choice history: Auto

Name of metadata object:

More: Attribute1 Properties: Attribute1

RULES:

- **DON'T** USE SPECIAL SYMBOLS
- **DON'T** START WITH A NUMBER
- **USE CAPITAL LETTERS(CAMEL CASE)**

CATALOG ATTRIBUTES

ENTERPRISE MODE

 **Product 0000 (Items)**    

Save and close

Save

More actions ▾

Code:

000000001

Description:

Product 0000

Mass:

100

Got damage:

☒

CATALOG ATTRIBUTES

ENTERPRISE MODE

 Configuration (1C:Enterprise, training version)       

Contractors Items Sales Tools ▾

← →

☆ Items

⌂ ⋮ ×

Create 

×  More actions ▾

Description ↓	Code	Mass	Got damage
Product 0000	000000001	100	✓
Product 0001	000000002		
Product 0002	000000003		

CATALOG ATTRIBUTES

ENTERPRISE MODE

 Configuration (1C:Enterprise, training version)       

Contractors Items Sales Tools ▾

 ☆ Items   

Create 

 More actions ▾

Description ↓	Code	Mass	Got damage
Product 0000	000000001	100	✓
Product 0001	000000002		
Product 0002	000000003		

STANDARD ATTRIBUTES

DESIGNER MODE

The screenshot shows the 'Catalog Items' dialog box in Designer Mode. The left sidebar contains a tree view with the following items: Main, Subsystems, Functional options, Hierarchy, Owners, Data (expanded), Numbering, Forms, Input fields, Commands, Templates, Generation, Access rights, Data exchange, and Other. The main area is divided into two sections: 'Attributes' and 'Tabular sections'. The 'Attributes' section is currently selected and shows a list of attributes: 'Mass' and 'GotDamage'. The 'Tabular sections' section is empty. A red arrow points to the 'Tabular sections' section. At the bottom of the dialog, there are four buttons: 'Standard attributes', 'Characteristics', 'Common attributes', and 'Additional indexes'. The 'Standard attributes' button is highlighted. The bottom of the dialog also contains a row of buttons: 'Actions', '<Back', 'Next>', 'Close', and 'Help'.

Catalog Items

Main
Subsystems
Functional options
Hierarchy
Owners
▶ Data
Numbering
Forms
Input fields
Commands
Templates
Generation
Access rights
Data exchange
Other

Code length

Description length

Code type
☐ Number
☒ String

Default presentation
☐ As code
☒ As description

+ - ✕ ↑ ↓

Attributes
- Mass
- GotDamage

+ - ✕ ↑ ↓


Tabular sections

Standard attributes Characteristics
Common attributes Additional indexes

Actions <Back Next> Close Help

STANDARD ATTRIBUTES

DESIGNER MODE

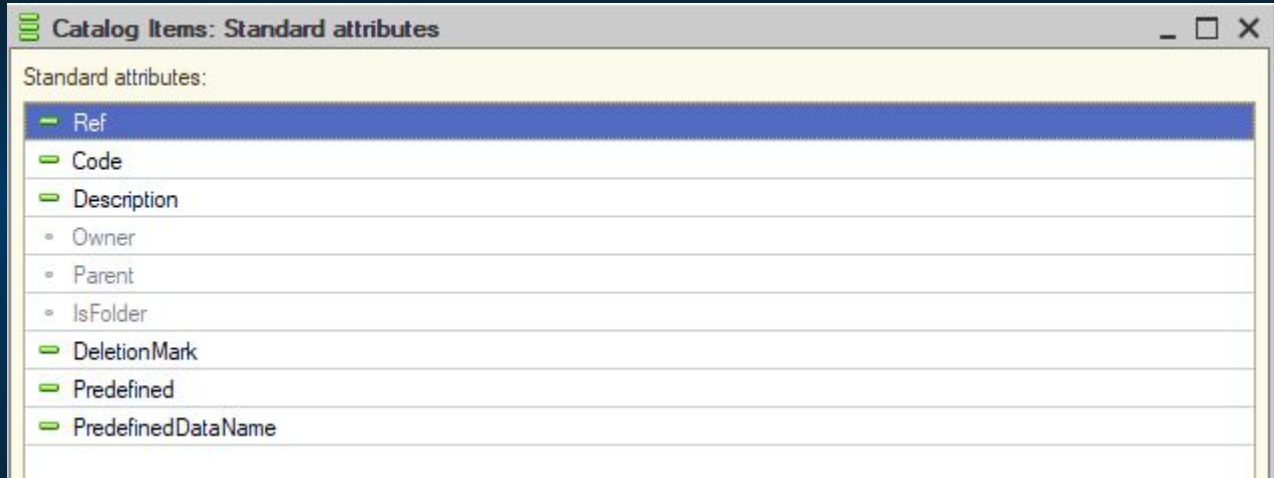

We **CAN** use standard attributes **BUT** we **CANNOT** change there name or type

STANDARD ATTRIBUTES


DESIGNER MODE



Ref - is a data type corresponding to a specific metadata object, but when we work with an object we can read, write and edit. Ref only gives us to read the data and use it somewhere else.

STANDARD ATTRIBUTES

DESIGNER MODE




Code is a unique value for any element system is using. Can change code manually but not the name or type.

STANDARD ATTRIBUTES

DESIGNER MODE



Description is an exact name of an attribute.

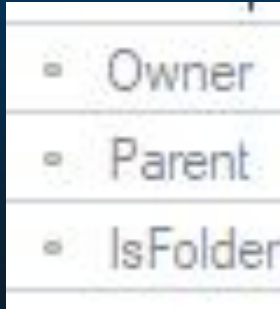

- is a marker for subordination mechanism (to filter information)
- is a name of a folder where the element is stored
- is a boolean marker to show if this element is a folder

STANDARD ATTRIBUTES

DESIGNER MODE



Description is an exact name of an attribute.

 DeletionMark

- to show if user decided to delete an element (mark for admin)

 Predefined

- to show if marker got any predefined value

 PredefinedDataName

- name of an exact element or field in which data is predefined

NEXT WEEK PREVIEW

WHAT'S COMING

MORE 1C LABS