

http://localhost/modo_carrera/api/api-jugadores.php?id=...

The screenshot shows the Postman interface with a GET request to `http://localhost/modo_carrera/api/api-jugadores.php?id=1`. The request is successful, returning a 200 OK status. The response body is a JSON object:

```
{
  "id": 1,
  "nombre": "Bruno Fernandes",
  "posicion": "MC",
  "valor_mercado": "75000000.00",
  "media_global": 88,
  "equipo_id": 1
}
```

The left sidebar shows the 'My Collection' with 'Get data' selected. The bottom status bar indicates 'Connect Git', 'Console', 'Terminal', and '0 0 0'.

http://localhost/modo_carrera/api/api-jugadores.php?nombre=...

The screenshot shows the Postman interface with a GET request to `http://localhost/modo_carrera/api/api-jugadores.php?nombre=Bruno Fernandes`. The request is successful, returning a 200 OK status. The response body is a JSON object:

```
{
  "id": 1,
  "nombre": "Bruno Fernandes",
  "posicion": "MC",
  "valor_mercado": "75000000.00",
  "media_global": 88
}
```

The left sidebar shows the 'My Collection' with 'Get data' selected. The bottom status bar indicates 'Connect Git', 'Console', 'Terminal', and '0 0 0'.

http://localhost/modo_carrera/api/api-jugadores.php?posicion=...

Overview GET Get data

URL: http://localhost/modo_carrera/api/api-jugadores.php?posicion=EI

Query Params

Key	Value	Description	Bulk Edit
posicion	EI		

Body

JSON

```
1 {
2   {
3     "id": 2,
4     "nombre": "Marcus Rashford",
5     "posicion": "EI",
6     "valor_mercado": "60000000.00",
7     "media_global": 85
8   },
9   {
10    "id": 3,
11    "nombre": "Vinicius Jr",
12    "posicion": "EI",
13    "valor_mercado": "150000000.00",
14    "media_global": 90
15  }
16 }
```

200 OK · 4 ms · 660 B · Save Response

Turn position into data-driven runner
Add tests for empty/invalid position
Save URL+posicion using variables

Describe what you need. Press @ for context, / for Skills.
Auto

(POST)http://localhost/modo_carrera/api/api-jugadores.php

Overview POST Get data

URL: http://localhost/modo_carrera/api/api-jugadores.php

Body

JSON

```
1 {
2   "nombre": "Erling Haaland",
3   "posicion": "DC",
4   "valor_mercado": 100000000,
5   "media_global": 91,
6   "equipo_id": 1
7 }
```

201 Created · 21 ms · 514 B · Save Response

Body


JSON

```
1 {
2   "mensaje": "Jugador creado exitosamente",
3   "id": 6
4 }
```


Save/clean up the Get data request
Verify the tests assertions
Set up a Runner dataset

Describe what you need. Press @ for context, / for Skills.
Auto


(DELETE)http://localhost/modo_carrera/api/api-jugadores.php?id=...

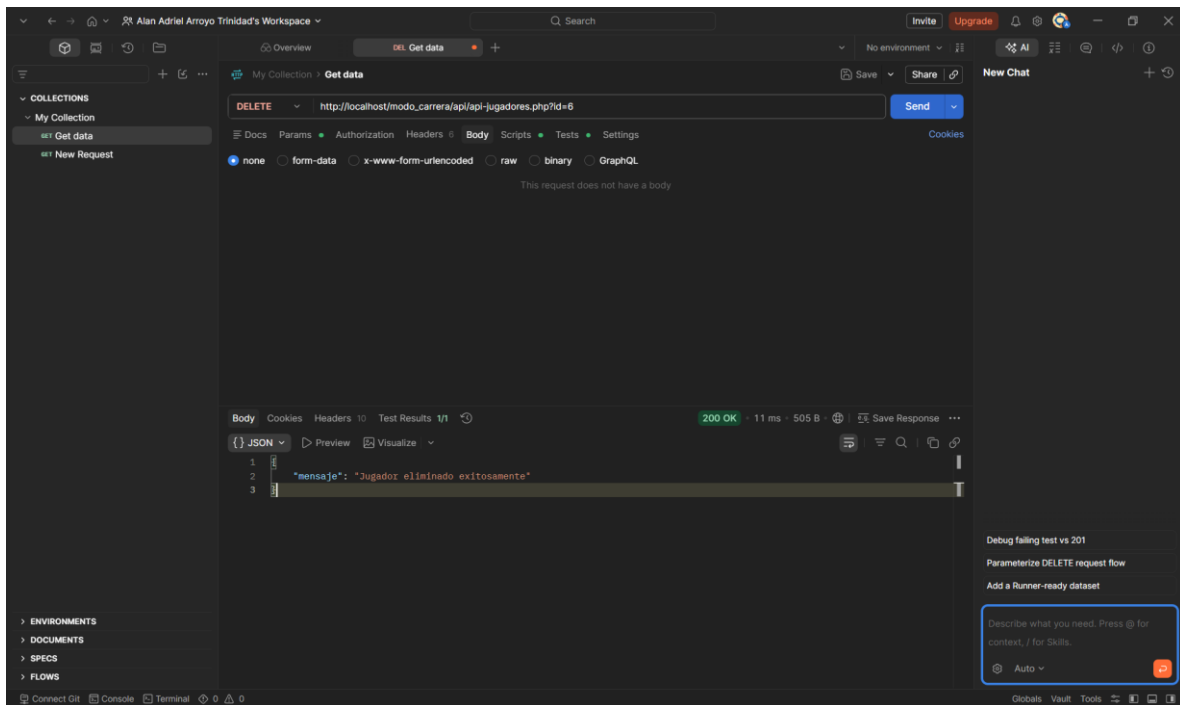


http://localhost/modo_carrera/api/api-equipos.php?id=...

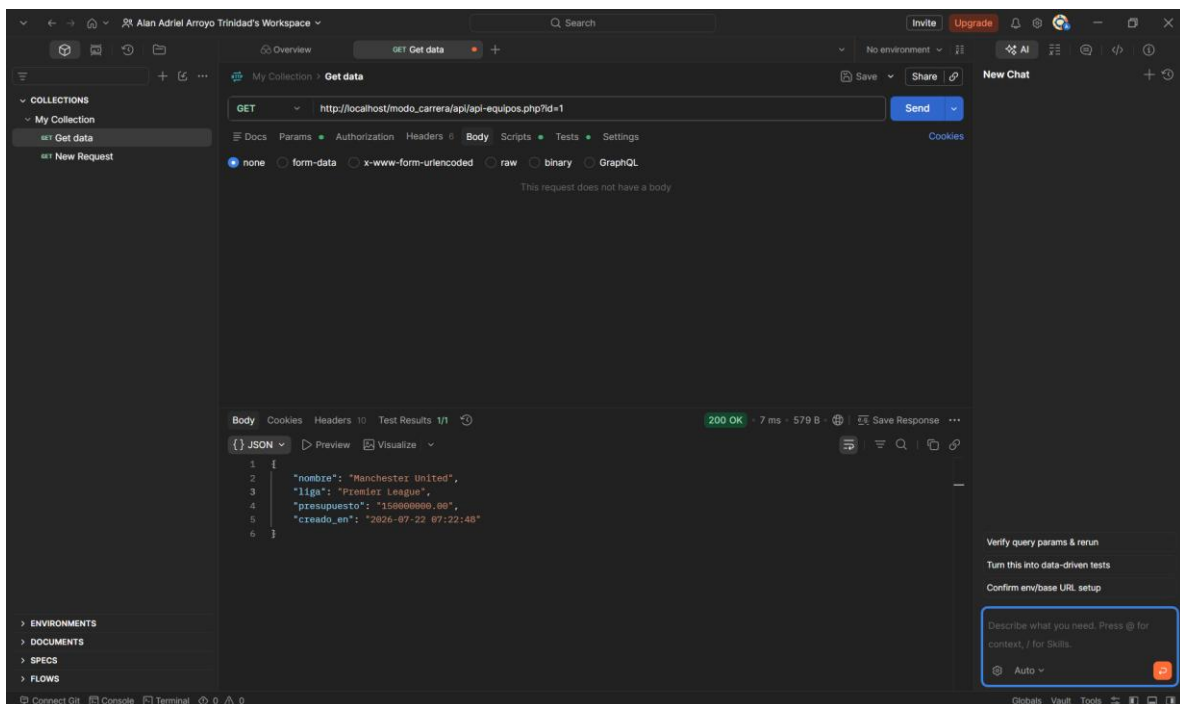


http://localhost/modo_carrera/api/api-equipos.php?nombre=...

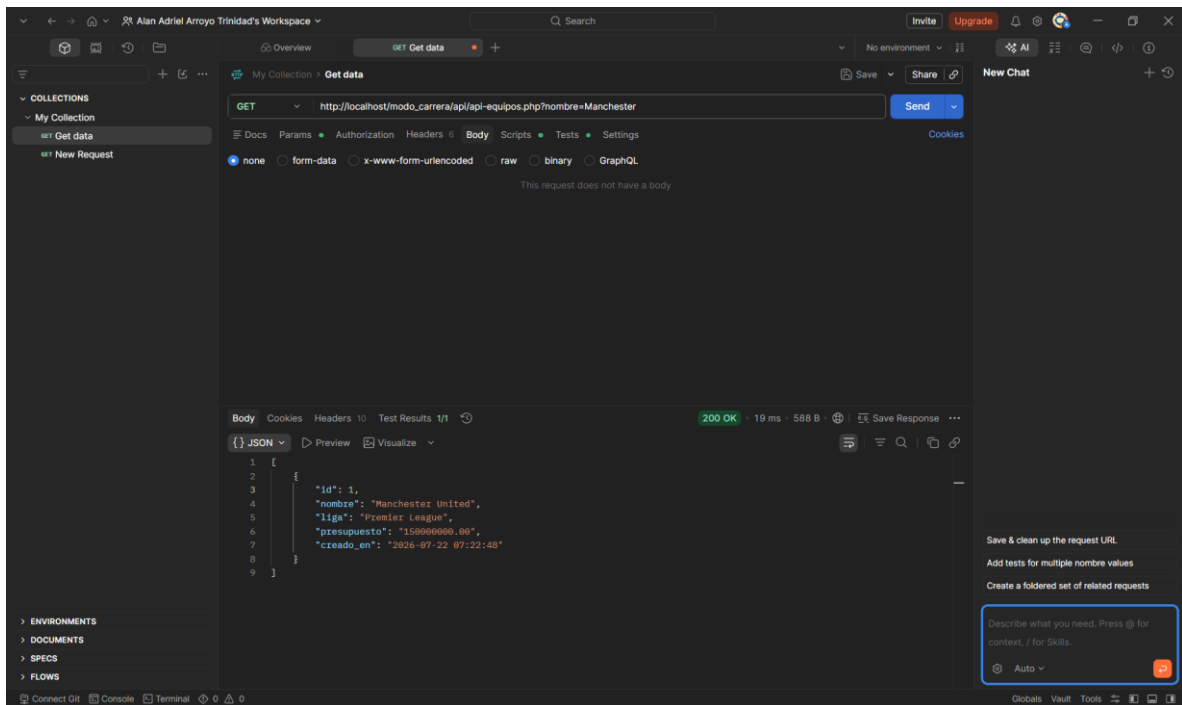

http://localhost/modo_carrera/api/api-equipos.php?liga=La Liga

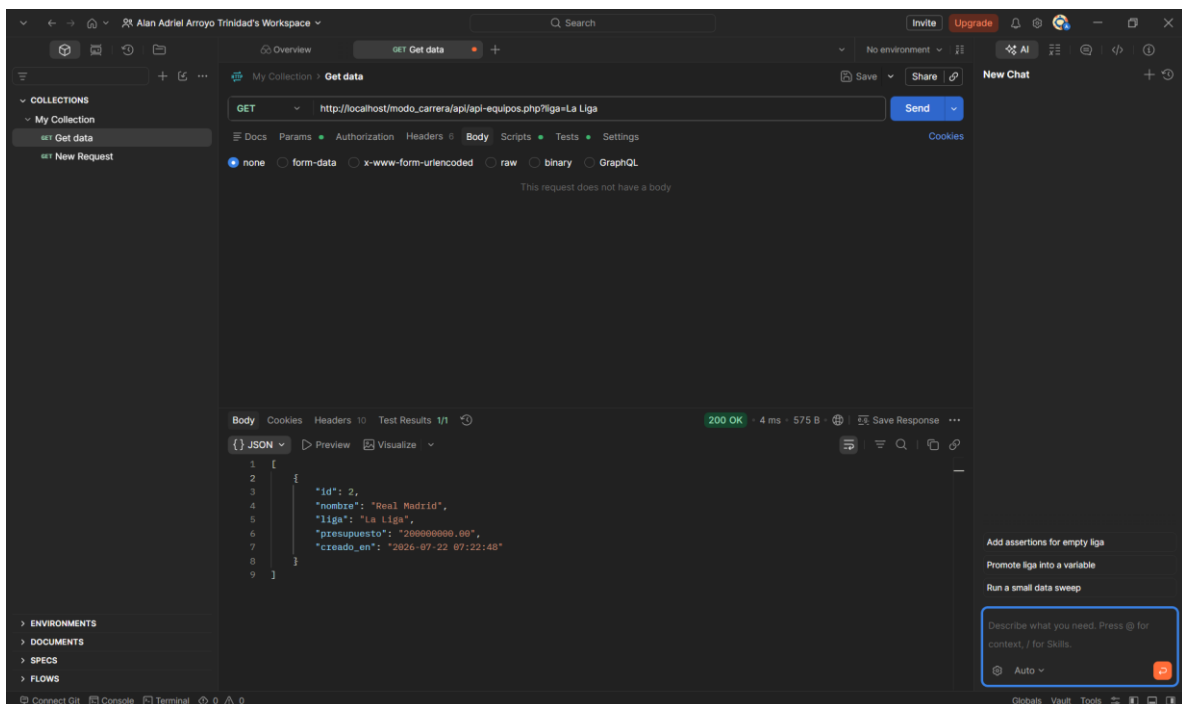

(POST)http://localhost/modo_carrera/api/api-equipos.php

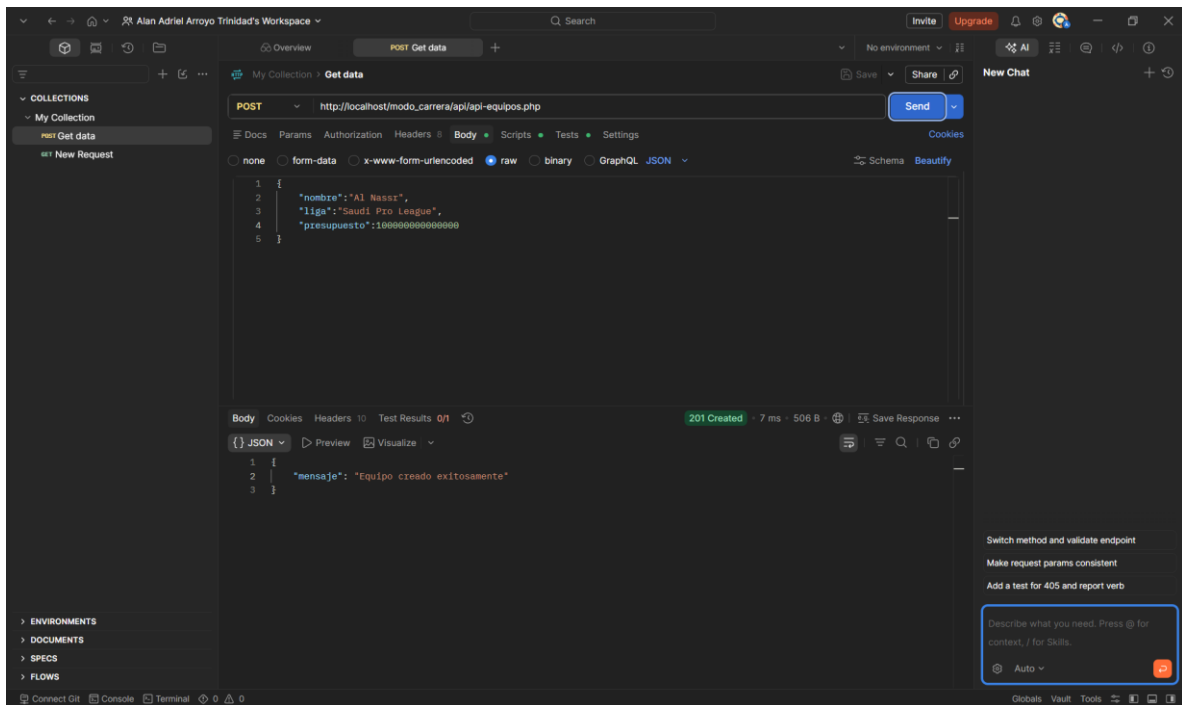

http://localhost/modo_carrera/api/api-equipos.php?id=...

