

MUST LEARN

KQL

THE SERIES

ROD TRENT
SENIOR MICROSOFT SECURITY ADVOCATE
MICROSOFT

This is part of an ongoing series to educate about the simplicity and power of the Kusto Query Language (KQL). If you'd like the 90-second post-commercial recap that seems to be a standard part of every TV show these days...

The full series index (including code and queries) is located here:

<https://aka.ms/MustLearnKQL>

This book is updated every time a new part of this series is posted. The most current edition of this book will always be located at: <https://cda.ms/3m1>

Book release ver. 1.06, December 8, 2021 8:30am EST

Contents

Must Learn KQL Part 1: Tools and Resources	5
Reference	5
Practice Environments	6
Actual Books	6
Tools	6
Blogs, Websites, and Social	7
Video	7
GitHub Query Examples	7
Must Learn KQL Part 2: Just Above Sea Level	8
Must Learn KQL Part 3: Workflow	12
A Common KQL Workflow	14
Must Learn KQL Part 4: Search for Fun and Profit	18
Must Learn KQL Part 5: Turn Search into Workflow	22
Must Learn KQL Part 6: Interface Intimacy	26
Filtering through the table elements	28
Sorting results	28
Grouping results	29
Selecting columns to display	30
Select a time range	30
Charts	31
EXTRA	32
Save search queries	32
Share Queries!	33
Format query	35
Queries Galore	36
Exporting Queries	37
New Alert Rule	37
Pin to Dashboard	37
Settings	38
In-UI Reference	39

Must Learn KQL Part 7: Schema Talk	41
Back to the UI.....	43
Schema Area Focus.....	45

Must Learn KQL Part 1: Tools and Resources

After hearing that our customers' largest barrier to using things like Defender, Microsoft Sentinel and even reporting for Intune is KQL, the query language, that was a wake-up call for me. And, of course, (if you know me) I want to do something about it. KQL is a beautifully simple query language to learn. And, believe me – if I can learn it, there's no question that you can learn it. I feel bad that there's just not enough knowledge around it because I've taken for granted that everyone already had the proper resources to become proficient. But, that's not the case.

Internally, plans are being developed now to make KQL learning a bigger focus and you'll see new education around this query language start to take shape in various areas on the Microsoft properties and elsewhere. So, that's good news for everyone.

There's bits and pieces already scattered about the Internet, but they are seemingly now difficult to identify and locate.

So, as a first step in a series that I'll be writing called “**Must Learn KQL**”, I want to supply some good resources that can be used to accomplish the other things I'll talk about going forward. Some of these I use everyday. Some I use only when the need arises, but they're valuable nonetheless. This is a working document, so expect updates over time. This is not a definitive list by any means, so if you have other resources not listed here that you find valuable and believe others would benefit, let me know and I'll add them in.

Stay tuned as I map out this series. Of course, since my area of forte at Microsoft is security, the series will be security focused. So, the knowledge you gain will help you with our security platforms but also anything data centric that utilizes KQL.

One last tidbit of a tip... I use Microsoft Edge's Collections feature quite a bit. This is an extremely useful tool for capturing and grouping topics. If you find any of the links below valuable, I suggest using Edge Collections so you can always come back to them later.

Reference

[The code repository for this series \(GitHub\)](#)

[Kusto Query Language Reference Guide](#)

[Azure Monitor Logs table reference](#)

[Marcus Bakker's Kusto Query Language \(KQL\) – cheat sheet](#)

[SQL to Kusto cheat sheet](#)

[Splunk to Kusto Query Language map](#)

Practice Environments

[Write your first query with Kusto Query Language \(Learn module\)](#)

[KQL Playground](#) – only need a valid Microsoft account to access.

[Data Explorer](#) – not security focused. Contains things like geographical data and weather patterns. Exercises for this can be found in the *Learn Azure Sentinel* book below.

Actual Books

[Learn Azure Sentinel: Integrate Azure security with artificial intelligence to build secure cloud systems](#) – this book uses Data Explorer (see above) for hands-on exercises.

[Azure Sentinel in Action: Architect, design, implement, and operate Azure Sentinel as the core of your security solutions](#) – this book is the next edition of the one just above and also used Data Explorer for hands-on examples.

Tools

[Kusto.Explorer](#) – a rich desktop application that enables you to explore your data using the Kusto Query Language in an easy-to-use user interface.

[Kusto CLI](#) – a command-line utility that is used to send requests to Kusto, and display the results.

[Visual Studio Code](#) with the [Kusto extensions pack](#)

[Real-Time KQL](#) – eliminates the need to ingest data first before querying by processing event streams with KQL queries as events arrive, in real-time

[getschema operator](#) – As I noted in [Part 5](#) of this series: this is *the Rosetta stone of KQL operators*. When used, getschema displays the Column Name, Column Ordinal, Data Type, and Column Type for a table. This is important information for filtering data. [Part 5 talks about this.](#)

Blogs, Websites, and Social

[#MustLearnKQL](#) – the official Twitter hashtag of this series

[The #KQL hashtag on Twitter](#)

[The #365daysofkql hashtag on Twitter](#)

[Kusto King](#)

[The KQL Cafe](#) = podcast and community

Video

[TeachJing's KQL Tutorial Series](#)

[Recon your Azure resources with Kusto Query Language \(KQL\)](#)

[How to start with KQL?](#)

[Azure Sentinel webinar: KQL part 1 of 3 – Learn the KQL you need for Azure Sentinel](#)

[Azure Sentinel webinar: KQL part 2 of 3 – KQL hands-on lab exercises](#)

[Azure Sentinel webinar: KQL part 3 of 3 – Optimizing Azure Sentinel KQL queries performance](#)

[Querying Azure Log Analytics \(with KQL\)](#)

GitHub Query Examples

[My GitHub repo for Microsoft Sentinel KQL](#)

[The official Microsoft Sentinel repo](#)

[Wortell's KQL queries](#)

[Clive Watson's KQL queries and workbooks](#)

[Matt Zorich's \(the originator of the #365daysofkql Twitter hashtag\) KQL queries](#)

Must Learn KQL Part 2: Just Above Sea Level

To start the journey learning KQL in this *Must Learn KQL* series, it's helpful to understand where the name KQL came from and why the reference makes so much sense. Once you understand the idea behind the query language, a lightbulb should go off and prepare you for the rest of the series through an expanded scope of learning capability.

Plus, not everyone knows about this, so you'll be the cool kid. And, if you ever play *Trivial Pursuit* and this question comes up, you'll win the pie piece and possibly the entire game. How can that not be good knowledge?

The question?


Where does the name *Kusto* come from? (from **K**usto **Q**uery **L**anguage)

To help explain this, I harken back to my childhood. Bear with me for a minute...

Growing up, my family was *one-of-those-families* that attended church anytime the church doors were open. As such, the majority of my parents' friends were at church. This meant that they would spend time before and after church services catching up with their friends, sometimes in a local restaurant where they'd all gather to have pie and coffee. Of course, Facebook didn't exist then, so in-person connections were even more important. Well...and there was pie. My mom, in particular, wanted to catch up with everyone she hadn't seen in a few days so this meant that our round-trip from home to church and back could take 3-4 hours.

On Sunday nights this was particularly problematic for me in that I wanted to rush home to catch TV shows like the [Six Million Dollar Man](#), [The Magical World of Disney](#), [Mutual of Omaha's Wild Kingdom](#), and the TV show that's the topic of our discussion here: [The Undersea World of Jacques Cousteau](#)...

That's right. KQL is named after the undersea pioneer, Jacques Cousteau.

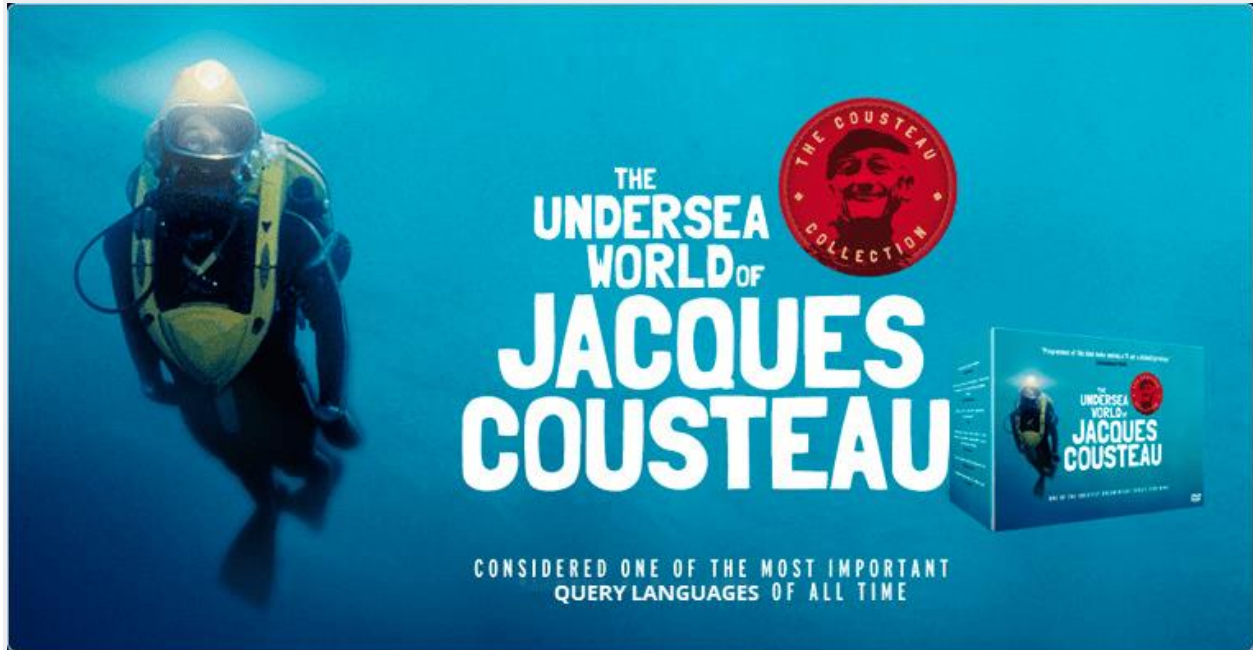

I loved this TV series. It was absolutely enthralling to me to understand that an entire world existed beneath the ocean waves and this unknown world was being brought to me by this wonderful, thick-accented explorer each week who dedicated his life to discovering what existed beneath the surface depths.

So, as you can imagine, I tried my dead-level best every Sunday night to rush my mom along. It didn't always work and was mostly just annoying, and you can bet I caught a few groundings from my insistence. But, still, this topic of discovering the undiscoverable drove me to concoct every type of machination imaginable to get home sooner on Sunday nights. I can't tell you the number of times I faked illness on Sunday afternoon in attempt to stay home Sunday night. And, as you can imagine my mom quickly caught on and instituted a policy that if I stayed home on Sunday nights, I couldn't go to school on Monday. Which...at the time...I truly loved school, so that halted that plan. Give me a few years, and that wouldn't have worked. Timing is everything.

So, KQL is named after Jacques Cousteau. Even today, you can find evidence of this in our own Azure Monitor Docs. If you go to the [datatable operator page](#) right now, you'll still find a reference to Mr. Cousteau in an example that lists his date of birth, the date he entered the naval academy, when he published his first book entitled "[The Silent World: A Story of Undersea Discovery and Adventure](#)," and the date of his passing.



So, I hope you're catching on to this. If not, what is it that we are trying to accomplish when we query data tables for security purposes? What is that we're trying to accomplish though Hunting exercises and operations?

The answer? We are exploring the depths of our data. We are attempting to *surface* the critical and necessary security information that will tell us about potential exposure through simple, powerful queries.

Much like the story of the failed voyage of the Titanic. It wasn't the beautiful, pristine, easy-to-see and avoid iceberg mass that existed above the surface of the ocean that sunk the unsinkable ship and sent over 1,500 people to their grave. No, it's was the huge mass under the surface that the captain and crew couldn't see and couldn't swerve to avoid that doomed the luxury passenger liner.



And, like that, it's the information that exists underneath the viewable rows and columns of data in our tables that we need to expose to identify threats and compromise and use to guard the gates. Just the initial rows and columns of exposed data isn't enough. We must delve into the depths of the data to find actionable information. And we need to do it quickly.

I hope all this makes sense.

It's as important to know *why* we do things, sometimes, as *how* to do them. Like Jacques Cousteau, security folks are explorers. We are mining the depths of the data no one sees to protect the environment against ever-growing and constantly evolving threats. We are discovering the undiscoverable.

KQL is an amazing and important piece of this capability. KQL was developed to take advantage of the power of the cloud through clustering and compute. Using this capability, KQL is designed as a well-performing tool to help surface critical data quickly. This is a big part of why it works so well and outshines many other query languages like it. KQL was built for the cloud and to be used against large data sets.

As a security person, you know that if a threat exists in the environment, you are on the clock to discover it, report it, investigate it, and remediate. A poorly performing query language can be the biggest barrier to that and become a security flaw. I've sat with customers who use other query languages and other SIEM-like tools that thought it was status quo that query results would take hours or sometimes days. When I showed that KQL produced those same results in seconds, they were astonished. So, the technology and infrastructure behind the query language is also critically important.

In the next post, I'll talk about the actual structure of a query. Even though the structure can deviate, understanding a common workflow of a KQL query can have powerful results and help you develop the logic needed to build your own workflows when it's time to create your own queries. In addition to being well-performing to enhance efficiency, the query language itself is simple to use and learn which, in turn, makes for more efficiency.

So, while we're *Just Above Sea Level* in this post (I hope you now appreciate the reference), we'll be using KQL as the sonar and diving bell to search the depths of our data.

Must Learn KQL Part 3: Workflow

As I noted in [Part 2](#) of this *Must Learn KQL* series...

Even though the structure can deviate, understanding a common workflow of a KQL query can have powerful results and help you develop the logic needed to build your own workflows when it's time to create your own queries.

Rod Trent, November 18, 2021

The workflow (some folks call it *logic*, others call it *anatomy*, even others call it something else) is a big step into wrapping your mind around how to produce a KQL query. Just like a developer, assigning uniform, repeatable steps ensure you're not missing something and that your query results will produce the information you are looking to capture.

I tell customers all the time that it's not necessary to be a pro at creating KQL queries. It's OK not to be a pro on day 1 and still be able to use tools like Microsoft Sentinel to monitor security for the environment. If you understand the workflow of the query and can comprehend it line-by-line, you'll be fine. Because ultimately, the query is unimportant. Seriously. What's important for our efforts as security folks is the *results* of the query. The results contain the critical information we need to understand if a threat exists and then – if it does exist – how that threat occurred from compromise to impact.

Now, those that go on to develop their own queries and own Sentinel Analytics Rules after becoming a KQL pro will be much more capable. And that should be your goal, too. BUT don't get hung up on that. Again, it's about the results.

We've made it so crazily easy to share KQL queries that it's quite possible you may never have to create your own KQL query (*aside: I highly doubt it but COULD BE possible*).

In a future post in this series, I'll go over the actual interface you use to write and run the KQL queries in-depth but suffice to say that almost every service in Azure has a Logs *blade* (option in the Azure portal interface/menu) to accommodate querying that service's logs. This area provides for saving your queries, but also to *share* your queries.

```
1 SecurityEvent
2 | where EventID == "4688"
3 | project Computer, Account
4 | where Account == "WORKGROUP\Windows365Sentinel\..."
5 | summarize count() by Account
6
7
```

Account	count_
WORKGROUP\Windows365S...	4,335

Share your queries

Because of this built-in capability, many of our customers regularly share their creations with each other, other colleagues, to their own blogs and GitHub repos, and even to the official Microsoft Sentinel GitHub repository (<https://aka.ms/ASGitHub>). In **Part 1** of this series, I supplied links to these and more. So, to prove my point...yes, it's absolutely possible you might not have to write your own KQL query for a long time.

So, because of that, it becomes even more critical that you at least understand the workflow. Again, if you can read a query line-by-line and determine that the results will produce what you are looking for, you're golden. If, through your newfound understanding, the query can't produce your requirements, you can modify it by line instead of a wholesale adaption. This should be your first KQL goal: read queries.

Through this series, I'll provide queries for you to use and get hands-on experience because I believe in learning by doing. We'll be using the links in the **Practice Environments** section in **Part 1** for the hands-on. But focus initially more on the structure and logical workflow.


And, with that...

A Common KQL Workflow

To get started on the journey to learning KQL, let's look at the standard workflow of a common search query. Not the *search operator* (I'll talk about in the next post), but the search query. This is the query structure we use to search, locate information, and produce results.

The following represents the common workflow of a KQL search query.

P.S. I've enabled image linking in this post so you can click or tap to open the image in a larger view. So, you can open the image in a new window or new tab to better follow along.

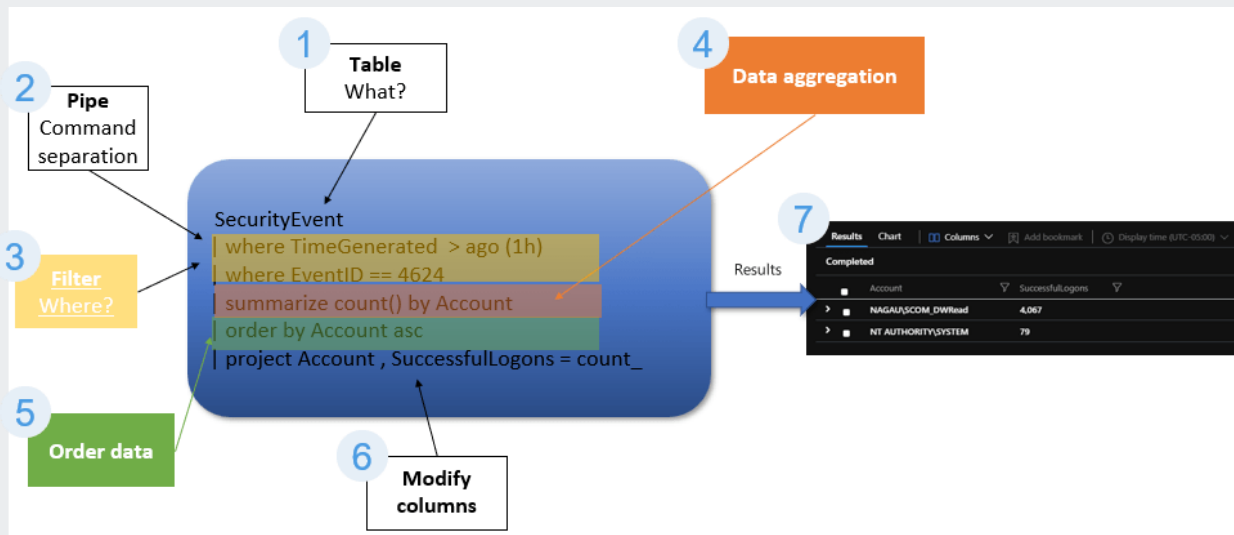

Let's break this query down by the steps.

1. The first step is to identify the table we want to query against. This table will contain the information that we're looking for. In our example here, we're querying the `SecurityEvent` table. The `SecurityEvent` table contains security events collected from windows machines by Microsoft Defender for Cloud or Microsoft Sentinel. For a full list of all services tables, see the [Azure Monitor Logs table reference](#) (also available in [Part 1](#)).
2. The **pipe** (`|`) character (the shifted key above the Enter key on most keyboards) is used to separate commands issued to the query engine. You can see here that each command is on its own line. It doesn't have to be this way. A KQL query can be all one single line. For our efforts, and as a recommendation, I prefer each command on its own line. For me, it's just neater and more organized which makes it easier to troubleshoot when a query fails or when I need to adjust the query to produce different results.

3. Next, we want to filter the data in some way. If I simply entered the table and ran that as its own, single query, it will run just fine. Doing that returns all rows and columns (up to a limit – which I believe is now 50,000 rows) of the data stored in the table. But our goal is get exact data back. As an analyst looking for threats, we don't want to have to sift through 50,000 rows of data. No, we want to look for specific things. The **Where operator** is one of the best ways to accomplish this. You can see here in the example that I'm filtering first by when the occurrence happened (*TimeGenerated*) and then (remember the pipe character – *another line, another command*) by a common Windows Event ID (4624 – successful login).
4. The next step in our workflow is to provide data aggregation. What do we want to do with this filtered data? In our case in the example, we want to create a count of the Accounts (*usernames*) that produced a successful login (*EventID 4624*) in the last 24 hours (*TimeGenerated*).
5. Next let's tell the query engine how we want to order the results. Using the **Order operator**, I'm telling the query engine that when the results are displayed, I want it shown in alphabetical order by the Account column. The 'asc' in the query in the Order Data step is what produces this ordering. If we wanted descending order we'd use 'desc'. Don't worry, we'll dig deeper into each of these operators as we go along in the series.
6. Generally, the last thing that I'll do with this search query is tell the query engine exactly what data I want displayed. The **Project operator** is a powerful command. We'll dig deeper into this operator later in this series, but for our step here, I'm telling the query engine that after all my filtering, data aggregation, and ordering, I only want to display two columns in my results: Account and SuccessfulLogins

So, let's recap what this query accomplished...

It searched our stored security events in the *SecurityEvent* table for all Accounts that had a successful login in the last hour and chose to display only the Account and number of successful logins per Account in alphabetical order.

7. Our search query output is exactly that:

Results		Chart	Columns ▾	Add bookmark	Display time (UTC-05:00) ▾
Completed					
	Account	SuccessfulLogons			
>	NAGAU\SCOM_DWRead	4,067			
>	NT AUTHORITY\SYSTEM	79			

Search query output

See that? The Account column is in alphabetical order *ascending* and the SuccessfulLogons column shows how many times each Account successfully logged in.

If you need to, jump back through each step above until you get a good understanding of the workflow. Again, this is very common, and you'll see this structure many times working with Microsoft Sentinel and Defender products. Remember, it's about the results. If you can look at this example and get a good feel that you understand how the results were accomplished, line-by-line, you're on your way.

I invite you, though, to take this example and copy/paste it into a Logs environment to test. You can have this query to play with it in your own Microsoft Sentinel environment, or using the [KQL Playground](#) I provided as a resource in [Part 1](#).

```
SecurityEvent
| where TimeGenerated > ago (1h)
| where EventID == 4624
| summarize count() by Account
| order by Account asc
| project Account , SuccessfulLogons = count_
```

This query is also available from the GitHub repository for this blog series: <https://cda.ms/3fS>

I'd like to share one extra tidbit with you that you might find helpful as you start testing this KQL query example in your own, or our, environment.

Every language (scripting, coding, querying) has the capability to add comments or comment-out code through special characters. When the query, scripting, or development engine locates these characters, it just skips them. KQL has this same type of character. The character for KQL is the double forwardslash, or `//`

When you start testing this post's KQL query example, comment-out a line or two (put the double forwardslash at the beginning of the line) and rerun the query just to see how eliminating a single line can alter the results. You'll find that this is an important technique as you start developing your own KQL queries. I'll talk about this more later, too.

In the next post (Part 4) I'll talk through another, yet just as powerful, way to search for information using KQL that is a top pocket tool for Threat Hunters.

And, then I'll come back for Part 5 and show how to tie together both search methods to create the full operation of hunting to Analytics Rule. But don't worry, that's not the end. I have no clue how many parts this series be. A lot of it depends on you.

Must Learn KQL Part 4: Search for Fun and Profit

Now that we have some understanding of the workflow (from [Part 3](#)) under our belts, I'm going to deviate from that for a brief minute in this post and then I'll bring it back together in Part 5 and combine Parts 4 and 5 to provide something extra meaningful to show you how it all fits together like an unsolved [Hardy Boys mystery novel](#). Hopefully, you're starting to see that my efforts here are logical and designed to accumulate enough knowledge that is necessary to move to the next plane of understanding.

What I want to do in this post, is give you something you can use today. When I'm done here, you should be able to take the knowledge and the query snippets to do your own hunting – or, rather, look inside your own environment to get an understanding of what is happening that's worth exposing and investigating.

One of the easiest ways to get started with KQL is the **search operator**. In [Part 3](#), I talked through the structure and workflow of a *search query*. In this post, I'll talk about the search *operator* (or command) and how it could be the most powerful KQL operator in the universe but will always be the best tool in the toolbelt to start any search operation.

Search is the first operator I reach for when trying to verify if something exists within the environment. In fact, our whole goal for using KQL as a security tool is to answer the following questions:

1. Does it exist?
2. Where does it exist?
3. Why does it exist?
4. *BONUS: There's a final question to this that's not part of this KQL series, but one that's important to the total equation and one that should be part of your SOC processes. That question is: How do we respond?*

If you click or tap the image to open it in a larger view, you'll see how the power of the search operator enables you to answer these questions.

It starts with an idea or theory that "something" exists in the environment. You may have gotten this idea from a dream or nightmare that someone in your organization is performing nefarious activities. But, most likely, the idea came from a news report or a post on social media from a trusted source about a nation-state actor being active with a new kind of ransomware.

Once these reports are available, someone (like Microsoft) will supply the Indicators of Compromise (IOCs) so you can search your environment to see if they exist. IOCs could be a number of things including filenames, file hashes, IP addresses, domain names, and more.

If they don't exist, you move on. If any of them do exist, you start to dig deeper to figure out where they exist, so you can, for example, quarantine systems or users, or block IP addresses or domains.

And, then you need to determine why they exist. Did a specific user click on something they shouldn't have clicked on in an email? Or did a threat actor successfully compromise a Domain Controller through control over a service or

elevate user account? Could it be that there is more impact on your environment than you originally thought?

All of this can be exposed through the simple process of search using the [search operator](#).

Let's walk through this together with a few simple queries that you can take and use to test your own environment. (click or tap the image to open the larger version in a new browser tab to following along)

The image displays three overlapping screenshots of the Microsoft Sentinel search interface, illustrating a search process:

- Step 1:** The search bar contains the query `search "rodtrent"`. The results table shows five entries, all with the value `rodtrent` in the `Source` column.
- Step 2:** The search bar contains the query `search "rodtrent" | distinct Source`. The results table shows a single entry with the value `rodtrent` in the `Source` column.
- Step 3:** The search bar contains the query `search in (OfficeActivity) "rodtrent"`. The results table shows five entries, all with the value `rodtrent` in the `Source` column.

Who, What, When, Where?

In *step 1* in the image, I'm performing a simple search for a username. In this case, it's an ego search – I'm searching in my own environment for my own activity. This could be an IOC that you want to search for. Just replace my name with the string of text you want to expose in the results.

```
search "rodtrent"
```

As you can see in the image, my search produced results, telling me that this *thing* I searched for *does* exist in my environment.

Since it does exist, I want to understand where it exists. I do this by making a simple adjustment to my original query by adding a line that tells the query engine to just show me the specific tables that my IOC exists in. This will give me a good indication of what type of activity it was. *Step 2* shows...

```
search "rodtrent"

| distinct $table
```

Let’s assume that I’m looking for user activity because the reported threat is malware. I know that user activity is most generally recorded and contained in a few places including Microsoft Office and Defender for Endpoint.

In my example in *Step 3* in the image, I’ve adjusted my search operator query to focus only on the OfficeActivity table. Here what that looks like:

```
search in (OfficeActivity) "rodtrent"
```

Now that I have my results of rodtrent’s activity in the OfficeActivity table, I can begin sifting through the rows and columns of data to learn more about the occurrence and to start to tune my query even more.

	TimeGenerated [Local Time]	\$table	RecordType	Operation	OrganizationId	OrganizationId_
>	11/22/2021, 7:27:07.000 AM	OfficeActivity	ExchangeItem	MailItemsAccessed	f70d46d0-7fd7-48a5-8586-e6a8199d...	f70d46d0-7fd7-48a5-
>	11/22/2021, 7:27:21.000 AM	OfficeActivity	ExchangeItem	MailItemsAccessed	f70d46d0-7fd7-48a5-8586-e6a8199d...	f70d46d0-7fd7-48a5-
>	11/22/2021, 7:27:20.000 AM	OfficeActivity	ExchangeItem	MailItemsAccessed	f70d46d0-7fd7-48a5-8586-e6a8199d...	f70d46d0-7fd7-48a5-
▼	11/22/2021, 7:27:21.000 AM	OfficeActivity	ExchangeItem	MailItemsAccessed	f70d46d0-7fd7-48a5-8586-e6a8199d...	f70d46d0-7fd7-48a5-
...						
	\$table	OfficeActivity				
	TenantId	e73fcae6-0260-4da5-9d56-f9e36d6db671				
	RecordType	ExchangeItem				
	TimeGenerated [UTC]	2021-11-22T12:27:21Z				
	Operation	MailItemsAccessed				
	OrganizationId	f70d46d0-7fd7-48a5-8586-e6a8199d4de5				
	OrganizationId_	f70d46d0-7fd7-48a5-8586-e6a8199d4de5				
	UserType	Regular				

Results from the OfficeActivity table

When we come back for [Part 5](#), I'll show you how to turn your search query into a workflow like I talked about in [Part 3](#).

One last thing for this post. I mentioned that user activity is generally reported from the Microsoft Office and Defender for Endpoint tables. I've given you examples for searching the OfficeActivity table. But Defender for Endpoint is more than one table. In fact, Defender for Endpoint consists of the following 10 tables:

DeviceEvents, DeviceFileCertificateInfo, DeviceFileEvents, DeviceImageLoadEvents, DeviceInfo, DeviceLogonEvents, DeviceNetworkEvents, DeviceNetworkInfo, DeviceProcessEvents, and DeviceRegistryEvents.

Fortunately, the KQL [search operator](#) supports the wildcard character. So, you can search for those IOCs across the entire Defender for Endpoint solution by doing the following:

```
search in (Device*) "rodtrent"
```

I've given you examples for searching the OfficeActivity table. But Defender for Endpoint is more than one table. In fact, Defender for Endpoint consists of the following 10 tables: DeviceEvents, DeviceFileCertificateInfo, DeviceFileEvents, DeviceImageLoadEvents, DeviceInfo, DeviceLogonEvents, DeviceNetworkEvents, DeviceNetworkInfo, DeviceProcessEvents, and DeviceRegistryEvents.

And, incidentally, if you have the Defender for 365 Data Connector enabled for Microsoft Sentinel and you enable the Microsoft Defender for Office 365 logs, the OfficeActivity table isn't the only Microsoft Office data you can query. Enabling these logs gives you access to EmailEvents, EmailUrlInfo, EmailAttachmentInfo, and EmailPostDeliveryEvents tables which means you can take advantage of the search operator's wildcard capability here, too.

All the query code in this post is contained in the series' GitHub repo here: <https://cda.ms/3gG>

P.S. Enjoying this series? Share it with someone!

Must Learn KQL Part 5: Turn Search into Workflow

Now, that we've talked about using the [Search operator in Part 4](#) to answer those three basic SOC analyst questions of: 1) Does it exist? 2) Where does it exist? and, 3)

Why does it exist?, we can take that learning and the results of that type of query and meld it with the standard search query structure I talked about in [Part 3](#).

In [part 4](#), I ended with a query to locate activity by a user called “*rodtrent*”. I found that this *rodtrent* person had performed potentially strange activity in the OfficeActivity table (the table for Office 365 activity) that needs to be checked out. As shown, the [search operator](#) is a powerful tool to find things of interest. The results of the search operator query were thousands of rows of data. That’s inefficient.


So, now that we’ve found something interesting, we want to use the structure of the Search Query to pare down the results to minimize the effort and workload to identify that that *something interesting* is something notable and worth investigating.

If you need to, open up [Part 3](#) in a new Window or browser Tab to review the Search Query Workflow as I walk through the next section.

In the following example, note that this is a non-issue situation, but I want to start with a basic Search query before we start building toward more complex queries in future posts to get a fully rounded understanding of the “why” behind why we do this. The one below is even simpler than the one discussed in [Part 3](#) where I also talk about aggregating and ordering data. I’ll come back to those concepts later, particularly when I get into creating your own in-query visualizations like pie and bar charts. No, for our efforts in this post, I want to focus on how easy it is to filter the data. Again, KQL isn’t hard, and some of your most powerful queries may only be a few lines of code.

Turning your hunting operations into more formal Search structure queries is the building blocks for creating your own Analytics Rules in Microsoft Sentinel. Analytics Rules should be precise logic to enable your operations to focus exactly where it needs to focus; and because, capturing data outside of what was intended is both inefficient and problematic for isolating actual security events.

The example (*available from the series’ GitHub repo at: <https://cda.ms/3jd>*):

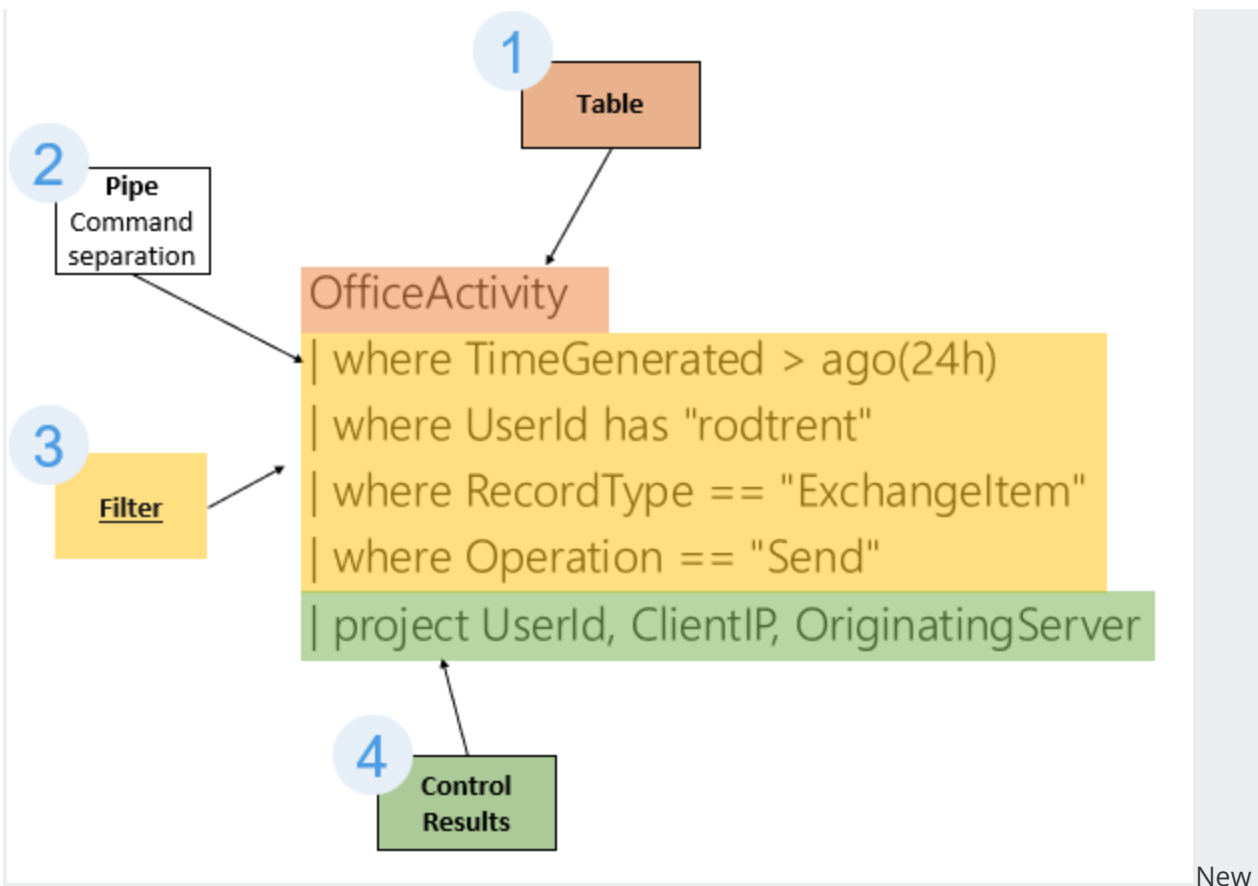

search query

New

Let's break this new Search query down together like was done in [Part 3](#). This one, again, is even a tad bit simpler than when describing the Search workflow, but as you'll see, it's the [where operator](#) that is sometimes our biggest, most powerful, and best workhorse and pal for tuning efficient results.

1. The first step in our workflow is to query the OfficeActivity table. If you remember, from our time together in [Part 4](#), we're looking for user activity (in our case the user "rodtrent") in Microsoft Office.
2. As per the discussion in [Part 3 on workflow](#), I want to highlight the importance of the pipe command once again. I don't rehash the importance here. If you missed it, jump to [Part 3](#) to catch up.
3. In step 3 of the new Search query, I'm filtering how the query engine searches. I'm first telling to only look at data in the last 24 hours (TimeGenerated), then only looking through a column called UserId for the string "rodtrent", then telling the query engine to only capture Exchange activity from the RecordType data column, and finally

pinpointing the search to only Send operations. So, essentially, I'm looking for any emails that rodrent sent in the last 24 hours.

- Filtering the data is the key to everything. <= Read that again. Filtering the data that is returned produces exact, actionable data. It also improves the results performance of our queries. Where the search operator may return thousands of rows of data in 15 seconds (or less), by properly filtering the data to return exactly what is necessary returns just the number of rows of data we asked for which greatly improves the processing time. Where the search operator may have taken 15 seconds, our new Search structure query will take 5 seconds or less. The Where operator is the key to this operation. Learn it. Know it. Keep the Where operator reference page handy: <https://cda.ms/3jh>.

4. Finally, I'm using the [project operator](#) to control exactly what is show in the results window. In this case, I only want to show the user, the user's IP address, and the server where the email originated from.

The results?

The screenshot shows a search interface with a query editor at the top and a results table below. The query is as follows:

```
1 OfficeActivity
2 | where TimeGenerated > ago(24h)
3 | where UserId has "rodrent"
4 | where RecordType == "ExchangeItem"
5 | where Operation == "Send"
6 | project UserId, ClientIP, OriginatingServer
7
```

The results table is titled "Completed" and has three columns: "UserId", "ClientIP", and "OriginatingServer". It contains two rows of data:

UserId	ClientIP	OriginatingServer
rodrent@sixmilliondollarman.onmicrosoft.com	40.114.40.132	CH2PR04MB7000 (15.20.4200.000)
rodrent@sixmilliondollarman.onmicrosoft.com	40.114.40.132	CH2PR04MB7000 (15.20.4200.000)

Search query results

As you can plainly see in the query results, this matches exactly what my query proposed.

EXTRA: We saw in [Part 4](#) with our Search operator, how results from our queries are in named rows and columns of data. And, you see here in this post, how I'm constantly filtering against known column names in the tables. Some might wonder how I come up with those schema names. Of course, it helps that I work with these tables constantly, but I do have a couple secrets to share. First off, as noted in [Part 1](#), I use the [Azure Monitor Logs table reference](#) quite a bit. However, there's also the Rosetta stone of KQL operators: [getschema](#)

Running a simple...

```
OfficeActivity
| getschema
```

...will produce a list of all the named columns of a specific table. The example above displays all the named columns of the OfficeActivity table. Each of these columns can be used in your [where operator](#) filtering efforts.

...

In this post, I've given you a simple query to practice with. In [Part 6](#), I'll come back and dig into the actual interface for developing your own queries (instead of just running the ones I've given).

Must Learn KQL Part 6: Interface Intimacy

I preface this post by saying this: everything discussed in this post about the User Interface (UI) can be done (and *should* be done, eventually) in the KQL query itself.

When you're just starting with KQL, the UI can be a blessing. As you get further in your learning and comfortability with the query language, it can be a crutch – particularly when you need to find something quickly because of a perceived security threat and view it in a way that's most meaningful. Still, understanding the UI's capabilities is important.

In this post, I'll give you a whirlwind tour of the UI, but again with the assumption that, eventually, every action it provides I'll cover on how to accomplish it using KQL as we get further and further along in this series.

The Logs blade exists in almost every Azure service, allowing you to query the activity logs for that service. For our purposes for Microsoft Sentinel, since all of those services' (and more) logs are consolidated in the Log Analytics workspace for Microsoft Sentinel, we get to use the UI to query everything. It can be a bit of a power rush.

For those that already have deep-level experience with the Logs UI in Azure services, this may not be your favorite part of this series, but you also may learn something you missed or that's been updated recently, so make sure not to overlook anything important. And, please, please, **PLEASE** – if you're the expert in the UI and with KQL, pass this along to someone who needs it.

Like everything in Azure, there's updates and enhancements constantly, so I'll try to keep this part of the series up-to-date continually. My youngest son is the epitome of FOMO (fear of missing out) and I feel like him sometimes when I've been away from the Azure portal or the Microsoft Sentinel console for even a day. Every day can be a new adventure. As a customer, you might think, or even become frustrated that it's hard to keep up with all the changes going on in the Azure services and other products. But, believe me, those of us that work at Microsoft are faced with the exact same scenario and the same difficulties in keeping up-to-date. So, we can help each other in this respect. See something in this part of the series that's slightly off or maybe improved? Or, maybe I've chosen not to cover an area or feature that you need more knowledge about. Let me know and I'll get it updated toot sweet.




HANDS-ON: If you'd like to follow along yourself with the UI areas and descriptions in this post (instead of just reading through them in the text), use the [KQL Playground](#) that is referenced as a **Practice Environment** in the resources list of [Part 1](#).

I'll start this part of the series talking about those areas in the UI that are most important to our efforts in learning how to manipulate the KQL query data, and then follow up with the rest of the interface in the **Extras** section below, so you get the full intimate affair. And don't forget to come back for Part 7 for the **Schema Talk** (see the [TOC](#)) where I'll finish up covering the UI with those areas of the UI that pertain to working with the tables.

OK...so let's dig in...

Filtering through the table elements

To focus on a specific column, select the Filter icon, then select values to adjust the results display.

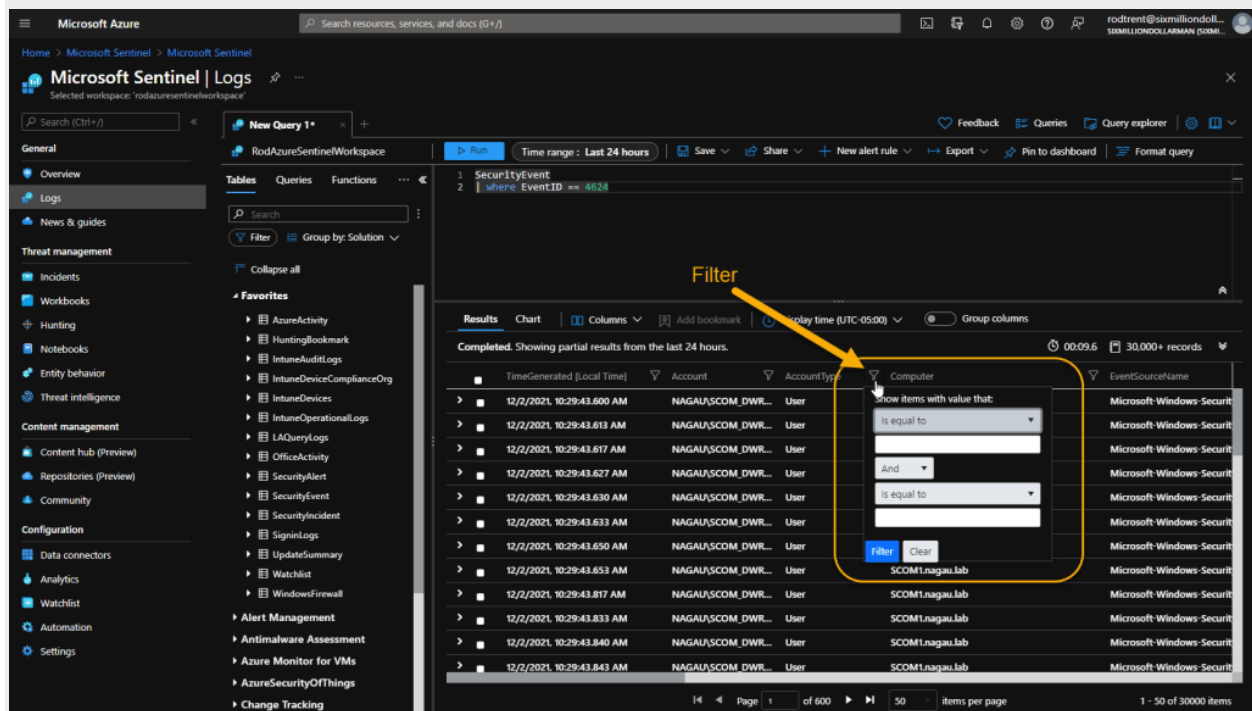

The screenshot shows the Microsoft Sentinel Logs interface. A KQL query is entered in the query bar: `SecurityEvent | where EventID == 4624`. The results table displays columns: TimeGenerated (Local Time), Account, AccountType, Computer, and EventSourceName. A filter is applied to the 'Computer' column, showing a dropdown menu with the text 'Show items with value that:' and a selection of 'is equal to'. The results table shows 30,000+ records, with the first 10 items displayed. The 'Computer' column values are SCOM1.nagau.lab.

The example query in the above and following images is located here: <https://cda.ms/3mD>

Sorting results

To sort the results by a specific column, such as timestamp, click the column title. One click sorts in ascending order while a second click will sort in descending. An arrow will display in the column next to the column title to show which direction the results are sorted.

Microsoft Azure

Microsoft Sentinel | Logs

Selected workspace: 'rodazuresentinelworkspace'

Search (Ctrl+F)

New Query 1*

RodAzureSentinelWorkspace

Time range: Last 24 hours

1 SecurityEvent
2 where EventID == 4624

Sort by ascending and descending order

Results Chart Columns Add bookmark Display time (UTC-05:00) Group columns

Completed. Showing partial results from the last 24 hours.

TimeGenerated [Local Time]	Account	AccountType	Computer	EventSourceName
12/2/2021, 10:58:06.157 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.097 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.093 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.053 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.050 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.047 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.043 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.027 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.023 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:05.017 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:04.983 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...
12/2/2021, 10:58:04.950 AM	NAGAU\SCOM_DWR...	User	SCOMLnagau.lab	Microsoft-Windows-Secur...

Page 1 of 600 50 items per page 1 - 50 of 30000 items

Grouping results

To group the results, first toggle the *Group Columns* option, then simply click and hold and drag the column header above the other columns.

Microsoft Azure

Microsoft Sentinel | Logs

Selected workspace: 'rodazuresentinelworkspace'

Search (Ctrl+F)

New Query 1*

RodAzureSentinelWorkspace

Time range: Last 24 hours

1 SecurityEvent
2 where EventID == 4624

Group columns


Completed. Showing partial results from the last 24 hours.

AccountType	TimeGenerated [Local Time]	Account	AccountType	Computer	EventSourceName
Machine	12/2/2021, 10:57:20.790 AM	NT AUTHORITY\SYSTEM	Machine	SCOMLnagau.lab	Microsoft-Windows-S...
Machine	12/2/2021, 10:57:15.063 AM	NT AUTHORITY\SYSTEM	Machine	CPC-rodrent-E2	Microsoft-Windows-S...
Machine	12/2/2021, 10:57:07.047 AM	NT AUTHORITY\SYSTEM	Machine	SCOMLnagau.lab	Microsoft-Windows-S...
Machine	12/2/2021, 10:56:24.487 AM	NT AUTHORITY\SYSTEM	Machine	MININT-Q648E9.northamerica.corp.micros...	Microsoft-Windows-S...
Machine	12/2/2021, 10:56:07.007 AM	NT AUTHORITY\SYSTEM	Machine	SCOMLnagau.lab	Microsoft-Windows-S...
Machine	12/2/2021, 10:55:50.103 AM	NT AUTHORITY\SYSTEM	Machine	MININT-Q648E9.northamerica.corp.micros...	Microsoft-Windows-S...
Machine	12/2/2021, 10:55:21.213 AM	NT AUTHORITY\SYSTEM	Machine	SCOMLnagau.lab	Microsoft-Windows-S...
Machine	12/2/2021, 10:55:08.433 AM	NT AUTHORITY\SYSTEM	Machine	CPC-rodrent-E2	Microsoft-Windows-S...
Machine	12/2/2021, 10:55:07.437 AM	NT AUTHORITY\SYSTEM	Machine	SCOMLnagau.lab	Microsoft-Windows-S...
Machine	12/2/2021, 10:54:44.172 AM	NT AUTHORITY\SYSTEM	Machine	CPC-rodrent-E2	Microsoft-Windows-S...

Page 1 of 600 50 items per page 1 - 50 of 30000 items

Selecting columns to display

To add and remove a column that is displayed select the Columns button.

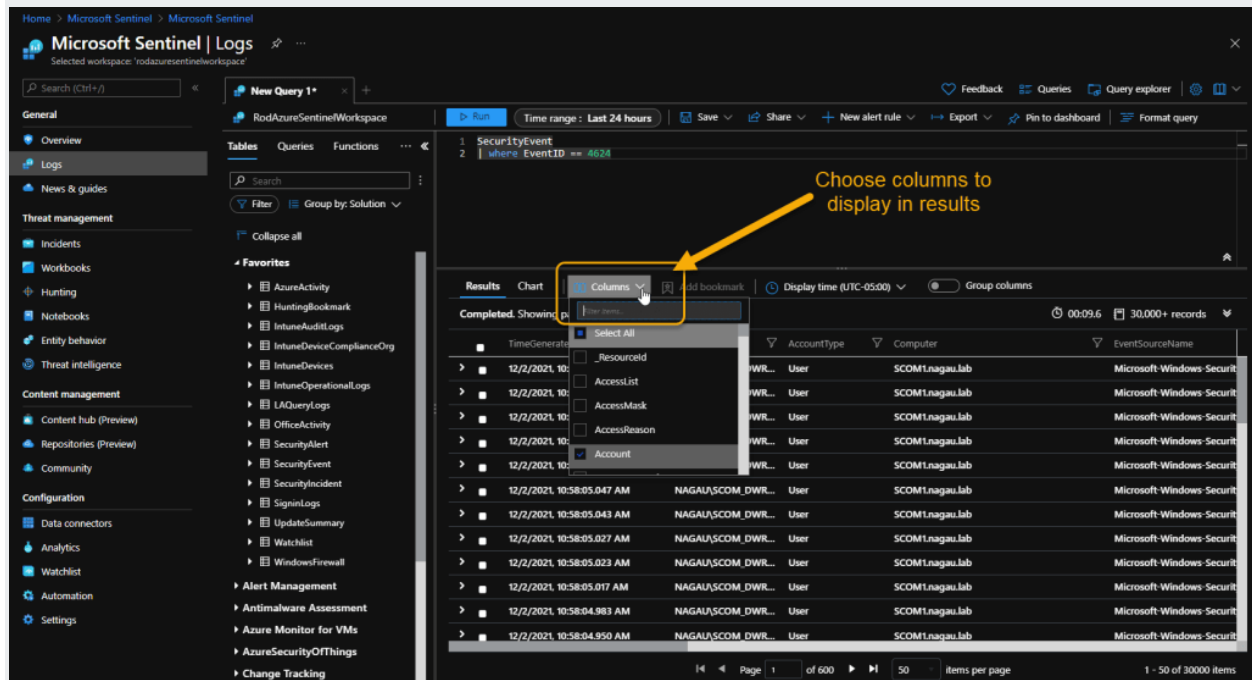


The screenshot shows the Microsoft Sentinel Logs interface. A yellow arrow points to the 'Columns' button in the top right of the results table. The 'Columns' dropdown menu is open, showing a list of columns with checkboxes. The 'Account' column is checked. The table below shows a list of security events with columns for TimeGenerated, AccountType, Computer, and EventSourceName.

TimeGenerated	AccountType	Computer	EventSourceName
12/2/2021, 10:58:05.047 AM	User	SCOM1.nagau.lab	Microsoft-Windows-Security...
12/2/2021, 10:58:05.043 AM	User	SCOM1.nagau.lab	Microsoft-Windows-Security...
12/2/2021, 10:58:05.027 AM	User	SCOM1.nagau.lab	Microsoft-Windows-Security...
12/2/2021, 10:58:05.023 AM	User	SCOM1.nagau.lab	Microsoft-Windows-Security...
12/2/2021, 10:58:04.983 AM	User	SCOM1.nagau.lab	Microsoft-Windows-Security...
12/2/2021, 10:58:04.950 AM	User	SCOM1.nagau.lab	Microsoft-Windows-Security...

You will notice when you work with this UI feature, there's a number of columns that are omitted from the results display. There's some intelligence built in that looks at the table data and only shows results that it deems pertinent to the operation – in our case, that operation is security monitoring. It also locates columns that contain no data and omits these from the display. All of these measures are intended functions to help build efficiency and eliminate unnecessary data, but also to improve query results performance. But, using this feature (and actual KQL operators like *project* we'll talk about later on), you can use the UI to pick and choose what to review.

Select a time range


To add a custom time range, select the *Time range* option.

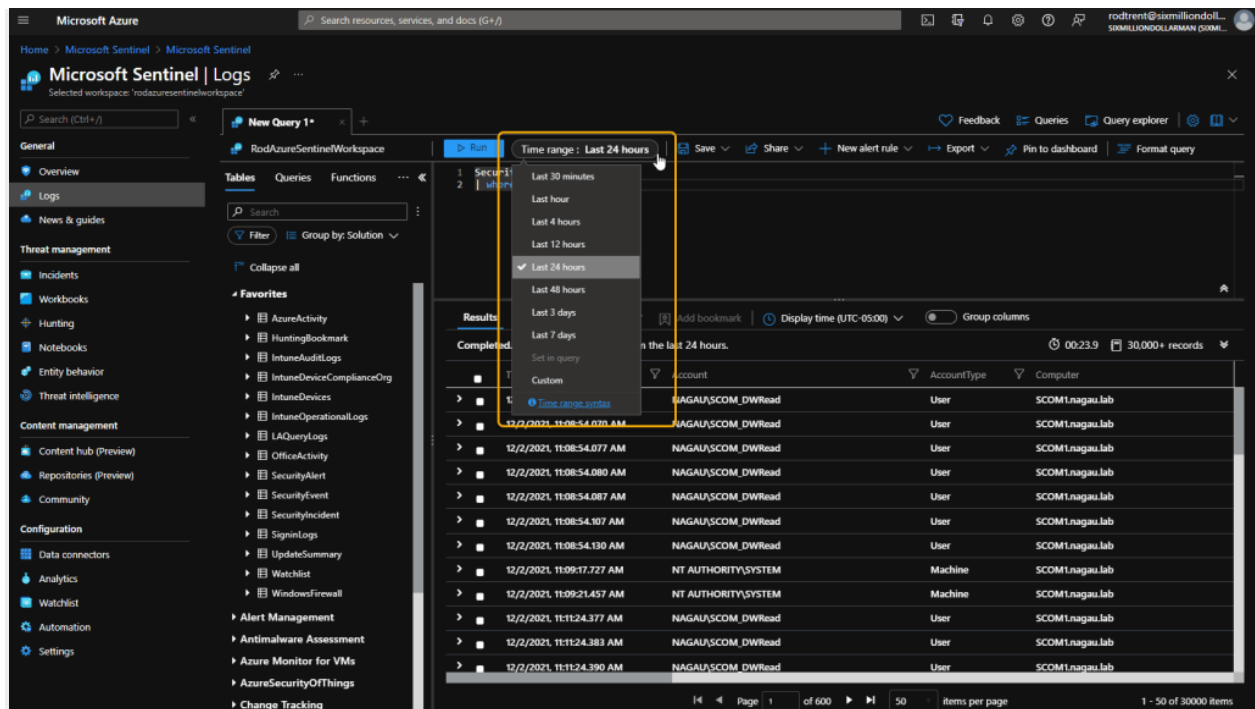

Incidentally, 24 hours is the default for Microsoft Sentinel. Each time you enter the console or attempt to work with KQL in the Logs blade, it will default to this time value. This is based on security principles that a SOC or security teams should be focused on the most current data. Responsibilities, tasks, policies, and procedures of a well-tuned security team should ensure that all current events are monitored and managed in some way at the end of each day so that they are ready for the next round of events. That's not always the case, of course, but that's one reason why Microsoft Sentinel always defaults to 24 hours.

Charts

To add a chart as a visual format you can select the CHART option just about the results window at the bottom of the UI. On the right-hand side you have many options for manipulating the visual aspect the data.

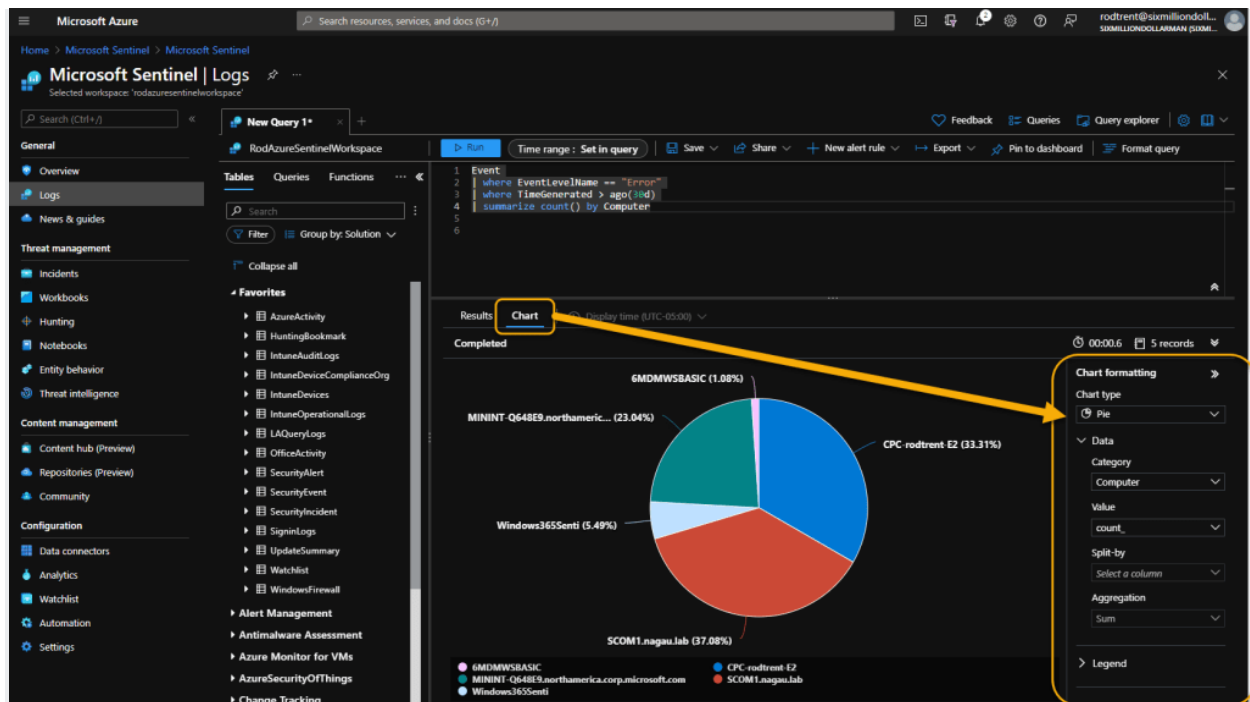

The example query in the image above is available from here: <https://cda.ms/3mF>

Note that charting is dependent on tabular data. I'll talk about this when we get to the summarize, render, and bin operators in this series. (See the [TOC](#))

EXTRA

In the previous section, I've discussed those areas in the UI that are going to help you manipulate the results. Again, while those are important areas, I'll show how to accomplish each of those using actual KQL query operators, so you don't have to rely on the UI.

You might notice I didn't spend any time talking about the *Tables*, *Queries*, and *Functions* areas in the Logs blade. I'll actually come back to those in Part 7 when I talk about the schema. (See the [TOC](#))

But before closing out this part of the series, I do want to also highlight some other cool areas of the UI that you might enjoy and have fun with.

Save search queries

You can save your queries to *Query Packs* and then look them up and use them later. For more information on Query Packs, see: [Query packs in Azure Monitor Logs](#) and [How to Save an Azure Sentinel Query to a Custom Query Pack](#)

The screenshot shows the Microsoft Sentinel Logs interface. A query is being executed, and the results are displayed in a table. A yellow box highlights the 'Save' button in the top right corner of the query editor. An arrow points from this button to a 'Save as query' dialog box that is open on the right side of the screen. The dialog box has fields for 'Query name', 'Description', and 'Path'. The 'Path' field is checked, indicating that the query will be saved to the default query pack. The 'Tags' section is also visible, showing 'Resource type' as 'Log Analytics workspaces' and 'Category' as '0 selected'.

TimeGenerated (Local Time)	Account	AccountType	Computer
12/2/2021 11:08:54.037 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.070 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.077 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.080 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.087 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.107 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.130 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:09:17.727 AM	NT AUTHORITY\SYSTEM	Machine	SCOM1.nagau.lab
12/2/2021 11:09:21.457 AM	NT AUTHORITY\SYSTEM	Machine	SCOM1.nagau.lab
12/2/2021 11:11:24.377 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:11:24.383 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:11:24.390 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab

Share Queries!


Sharing your fabulous query creations is an important capability for a number of reasons and not just for an ego boost or pat on the back when bragging to friends and colleagues.

The screenshot shows the Microsoft Sentinel Logs interface. A query is being executed, and the results are displayed in a table. A yellow box highlights the 'Share' button in the top right corner of the query editor. A dropdown menu is open, showing options: 'Copy link to query', 'Copy query text', 'Copy results', and 'Share to community'. The 'Copy link to query' option is selected. The results table shows a list of security events with columns for TimeGenerated, Account, AccountType, and Computer.

TimeGenerated (Local Time)	Account	AccountType	Computer
12/2/2021 11:08:54.037 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.070 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.077 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.080 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.087 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.107 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:08:54.130 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:09:17.727 AM	NT AUTHORITY\SYSTEM	Machine	SCOM1.nagau.lab
12/2/2021 11:09:21.457 AM	NT AUTHORITY\SYSTEM	Machine	SCOM1.nagau.lab
12/2/2021 11:11:24.377 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:11:24.383 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab
12/2/2021 11:11:24.390 AM	NAGAU\$SCOM_DWRead	User	SCOM1.nagau.lab

There are four sharing options:


1. **Copy link to query:** Since the Azure portal and Microsoft Sentinel console is web-based, you can share the direct URL to the query you created by pasting it somewhere (email, Teams chat or channel, etc.). When you share the link and someone with proper access clicks on it, they are taken directly to the Logs blade and the query is run, so they can review the same results. This is an awesome team activity where you can get an extra set of eyeballs on a potential situation.
2. **Copy query text:** This function just copies the query itself so you can send that somewhere (to a team member, to a GitHub repo, etc.)
3. **Copy results:** Right now, this function literally does the exact same thing as the *Copy link to query* option. So, we'll put a pin here for when this changes in the future.
4. **Share to community:** This option is super-fantastic! By utilizing this sharing feature, the query you've created is copied and placed into an email template that is addressed to the Azure Monitor team at Microsoft. By submitting this after entering the requested information in the email template fields, your creation will be vetted and published to the GitHub repository for the Azure Monitor community! Imagine your name in lights, idolized for your contributions that helped solve the latest global security threat!

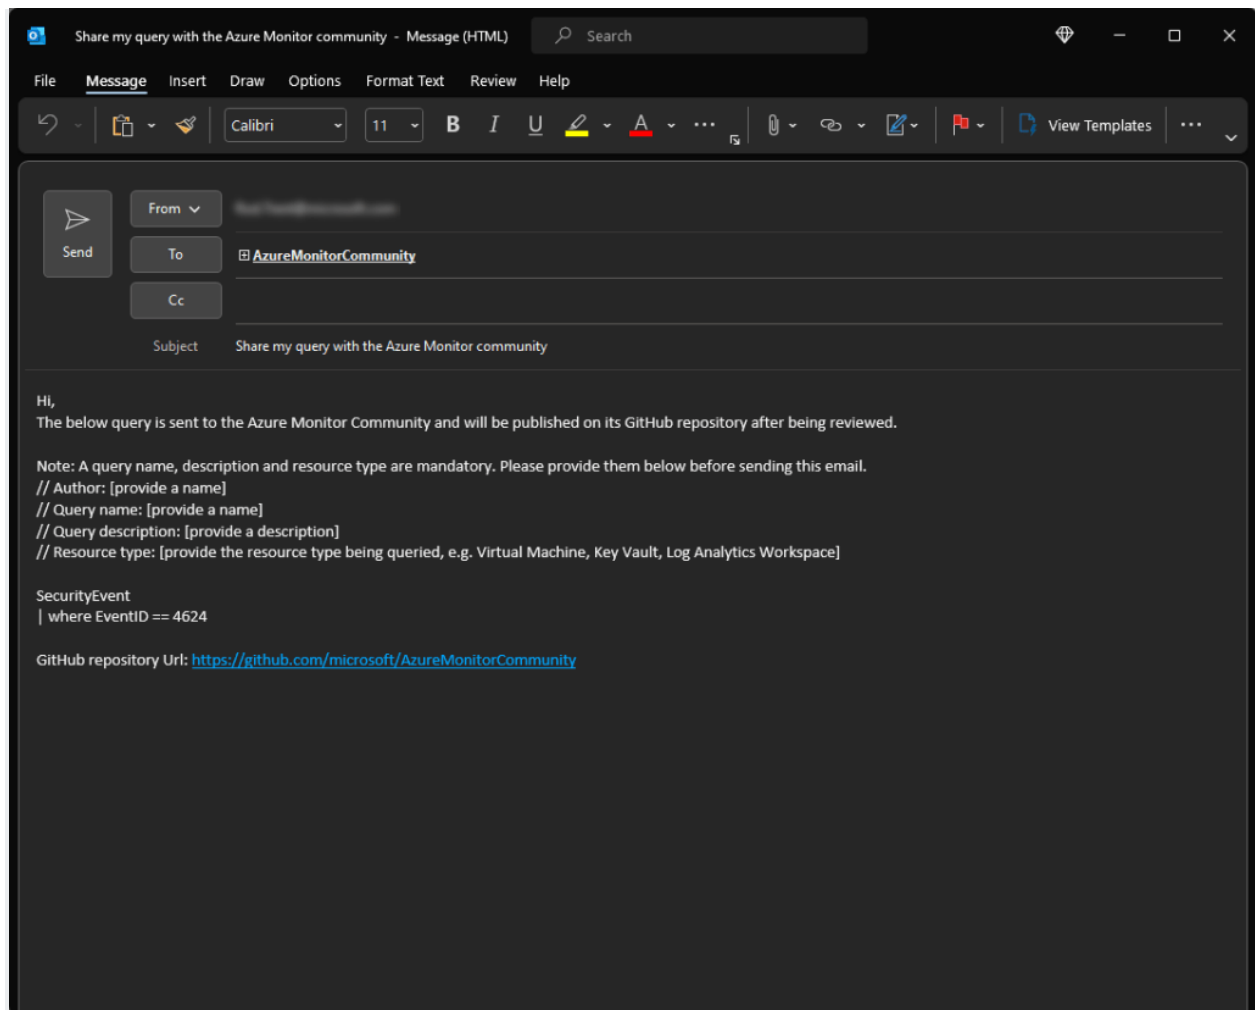

And, by the way, you can also submit your KQL creations to the official GitHub repository for Microsoft Sentinel. See **Add in your new or updated contributions to GitHub** for steps on how to accomplish that.

Format query


A super-cool, super-useful tool is the Format button in the UI. This button takes a badly formatted query and reformats it so it a) works, or b) is in a more uniform, more readable format.

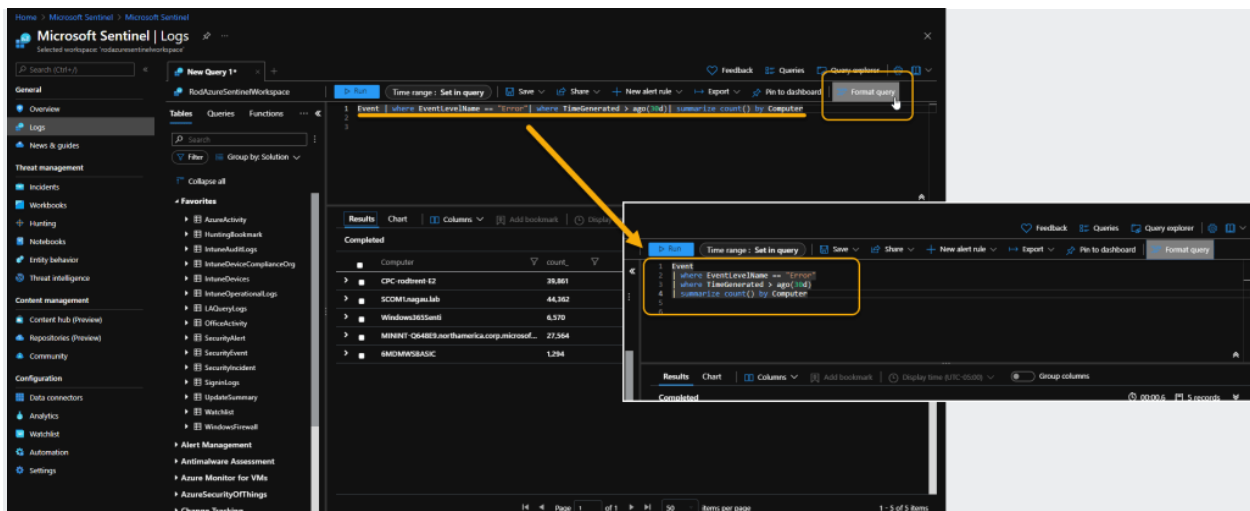

As I noted in [Part 3](#) about Workflow, because of the power of the pipe (|) command separator, a KQL query can be a single line of code. But that's a bit useless if you want to be able to determine what the query's intent is or need to debug it. This option turns it into a better format.

Queries Galore


In addition to all the awesome KQL query goodness available from all over the Internet, there's a slew of example KQL queries available to access in the Logs blade itself. Just tap or click the Queries button to gain access.

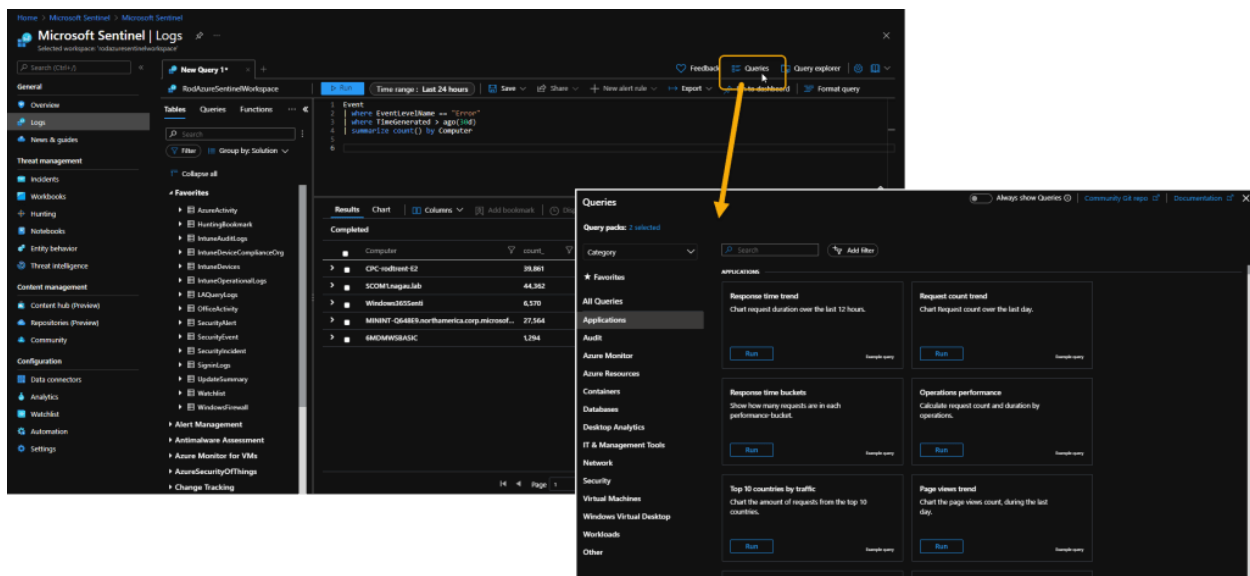

Exporting Queries

The Export option in the UI gives you the ability to export the query results in a number of ways.

You can export all data to a csv, export only the data in the displayed results, generate an M query for use in creating a Power BI dashboard, and export and open immediately in Microsoft Excel.

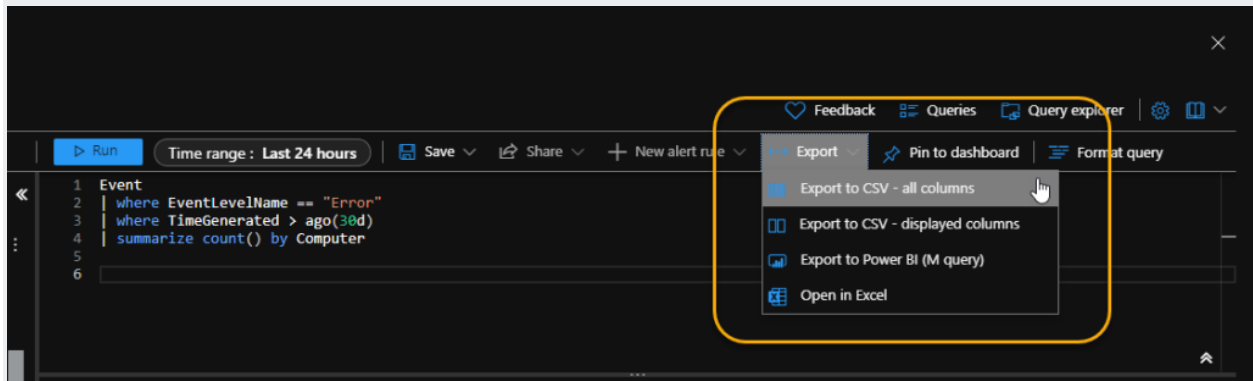

New Alert Rule


You can create rules for either Azure Monitor or Microsoft Sentinel directly from the Logs UI. This is an awesome feature that allows you to create and tune your query until it's perfect and then begin the steps to turn it into a rule to automatically analyze security for your environment. We're not quite at that step in this series, so we'll come back to this feature in Part 21. (See the [TOC](#))



Pin to Dashboard

Pin to Dashboard is an interesting feature in that you can take the query results that are formatted as a chart and pin the visualization directly to the standard

Azure portal dashboard. This dashboard can be your own private collection of visualizations or a collection that is shared among your teammates or even supplied so your manager has purview into operations.

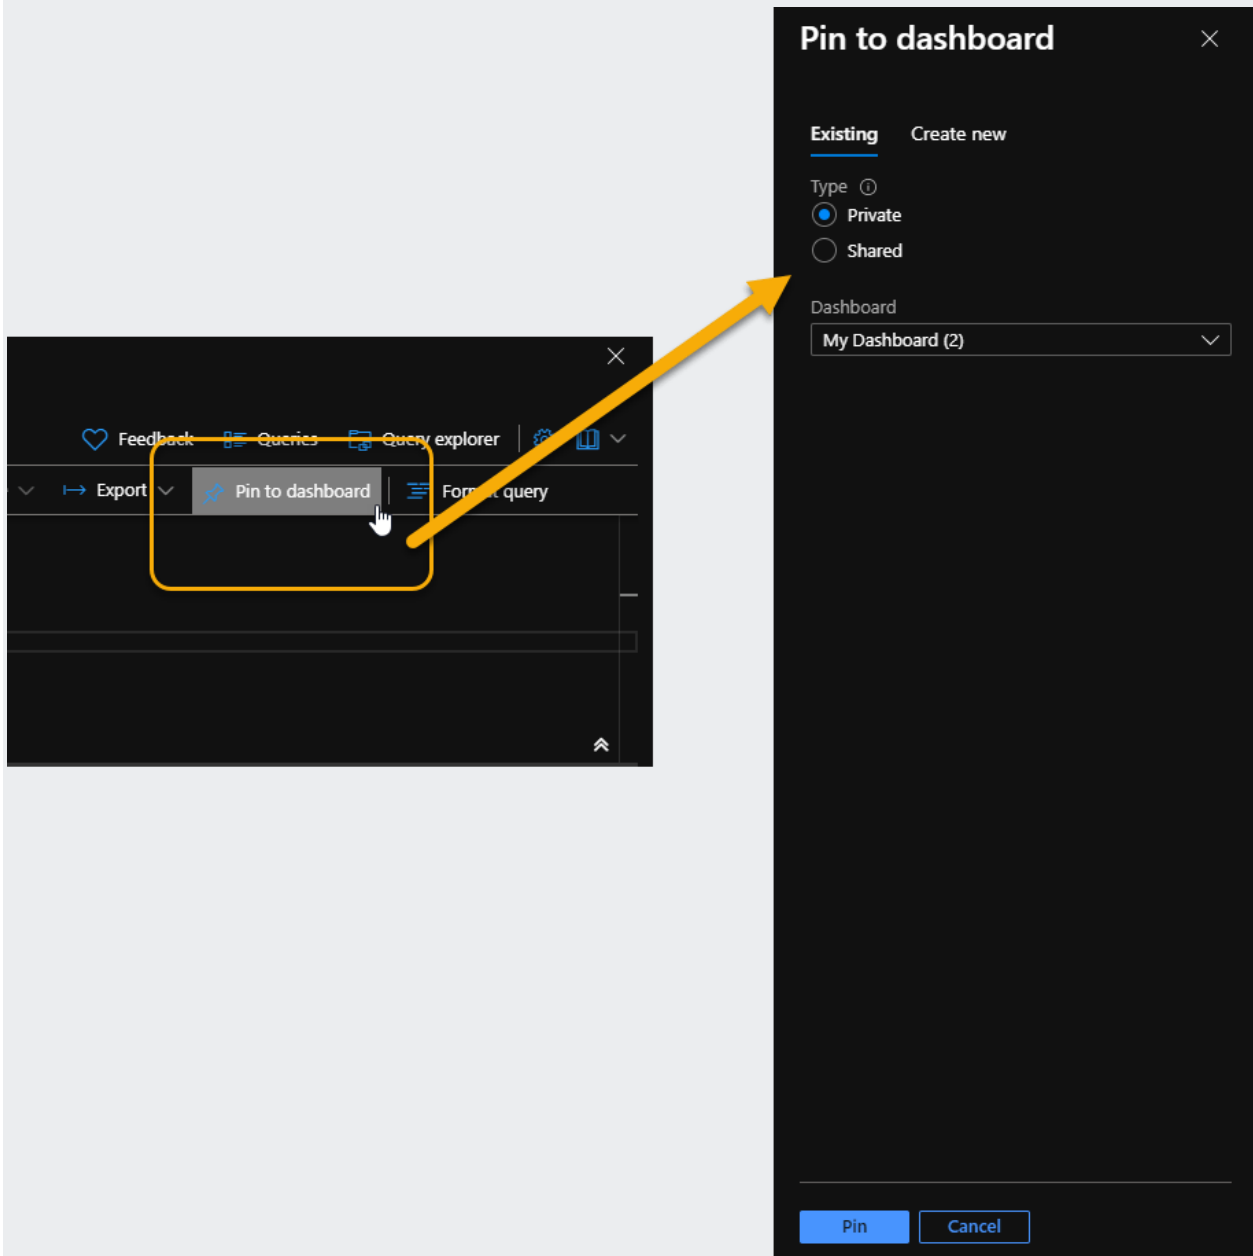


Settings

I'm not going to dig into each option, but the Settings icon contains configuration adjustments including things like how double-clicking works, if you want to see tables that contain no data, how many rows per page should display by default in the results window, and other things.



In-UI Reference

Lastly, to round out this intimate review of the Logs UI, there's a very good, very solid collection of references built into the UI. Some of those I've already supplied as references in [Part 1](#), but, like everything in Azure, this is also updated continually. So, keep an eye out here for updates.

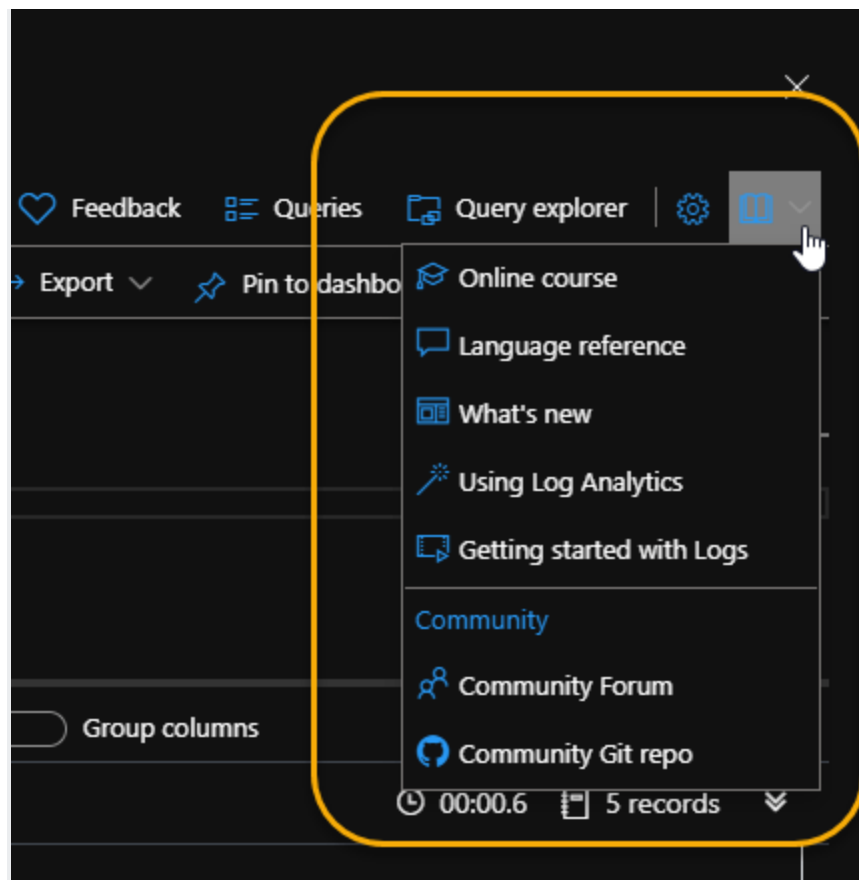

Must Learn KQL Part 7: Schema Talk

Before jumping directly into talking through some common KQL operators and providing you example queries for hands-on learning (*see the [TOC](#)*) in the next part of this series, there's some lingering discussion from [the last post around the UI](#), but also how this relates to table schema. I wanted to keep this information separate from the rest and in its own area because it will help you determine where things exist in the tables and how to better pinpoint the data. You saw in [Part 4](#) that it's easy to find anything in the data. But as you start getting closer and closer to taking the knowledge to develop your very own Analytics Rules for Microsoft Sentinel, you want to take the learning from [Part 5](#) and go just a tad bit further. This where an understanding of the schema becomes important.

The table schema is important. As with any data storage function or service, data is collected and stored – *most times appropriately* – in organized columns. I noted in [Part 5](#) about the [getschema operator](#) for KQL that produces the list of all columns and their types.

In case you missed it or you forgot...

Example:

```
OfficeActivity
```

```
| getschema
```

Sample results:

Run Time range: Last 24 hours Save Share + New alert rule Export Pin to dashboard Format query

```
1 OfficeActivity
2 | getschema
```

Results Chart Columns Add bookmark Display time (UTC-05:00) Group columns

Completed. Showing results from the last 24 hours. 00:00.7 132 records

Column Name	Column Ordinal	Data Type	Column Type
TenantId	0	System.String	string
Application	1	System.String	string
UserDomain	2	System.String	string
UserAgent	3	System.String	string
RecordType	4	System.String	string
TimeGenerated	5	System.DateTime	datetime
Operation	6	System.String	string
OrganizationId	7	System.String	string
OrganizationId_	8	System.String	string
UserType	9	System.String	string
UserKey	10	System.String	string
OfficeWorkload	11	System.String	string

Page 1 of 3 50 items per page 1 - 50 of 132 items

Results from *getschema*

As you can see in the results, *getschema* shows a lot of great information. It shows the actual column names that are important to know for what types of information can be found, but also note the *DataType* and *ColumnType* results. These tell us how to query the data – or, rather, the approach we need to take (the type of KQL operator) to query, extract, and manipulate the data.

Using just the information displayed in the screenshot example, I can see that I can use [Part 5](#)'s knowledge to show regular Exchange users that sent emails. The following example shows that.

```
OfficeActivity
```

```
| where UserType == "Regular"
```

```
| where OfficeWorkload == "Exchange"
```

```
| where Operation == "Send"
```

```
| project UserId, UserDomain
```

Query example is located at: <https://cda.ms/3pf>


Note that not everything is as neatly stored and defined as the OfficeActivity table in the screenshot. I said earlier that *most times* data is stored neatly and orderly. There are exceptions and you need to be aware of these. In these cases, you'll need to utilize some parsing functions of KQL to extract the data yourself. But let's not focus on that here in this post. I promise, I'll dig into that later in the series (see the [TOC](#)) just before creating your first Analytics Rule.

But fortunately, *most times* data is store neatly and orderly. This is where the Data Connectors come into play in Microsoft Sentinel. The parsing is done for you when an actual Data Connector is in play. The "parser" is part of the Data Connector or the Sentinel Solution. For those situations where an official Data Connector does not exist, you may be called on to create your own parser. Again, I'll cover this later in this series, but I do want to call this out, as its important. So, for your efforts as you begin building your KQL knowledge, stick with the tables that are part of a Data Connector, otherwise you'll bump off into unknown territory that can get miry fast.

OK...with this knowledge firmly in-hand, let's jump back to the UI to talk about some areas in the console that help shortcut some of this activity.


Back to the UI

The UI has an area that aids in organizing and customizing the table/schema view, but it also has capabilities to enable easier and quicker access to KQL query creation. In this post, I'm not going to focus heavily on areas 2-4. You should be able to figure out how to click through and use most of those on your own. And, while I'll provide a quick overview of all the areas just now, I'll circle back and focus on the Tables area. As you're getting started learning KQL, this is the important area that will save you a lot of time learning to create your own queries.

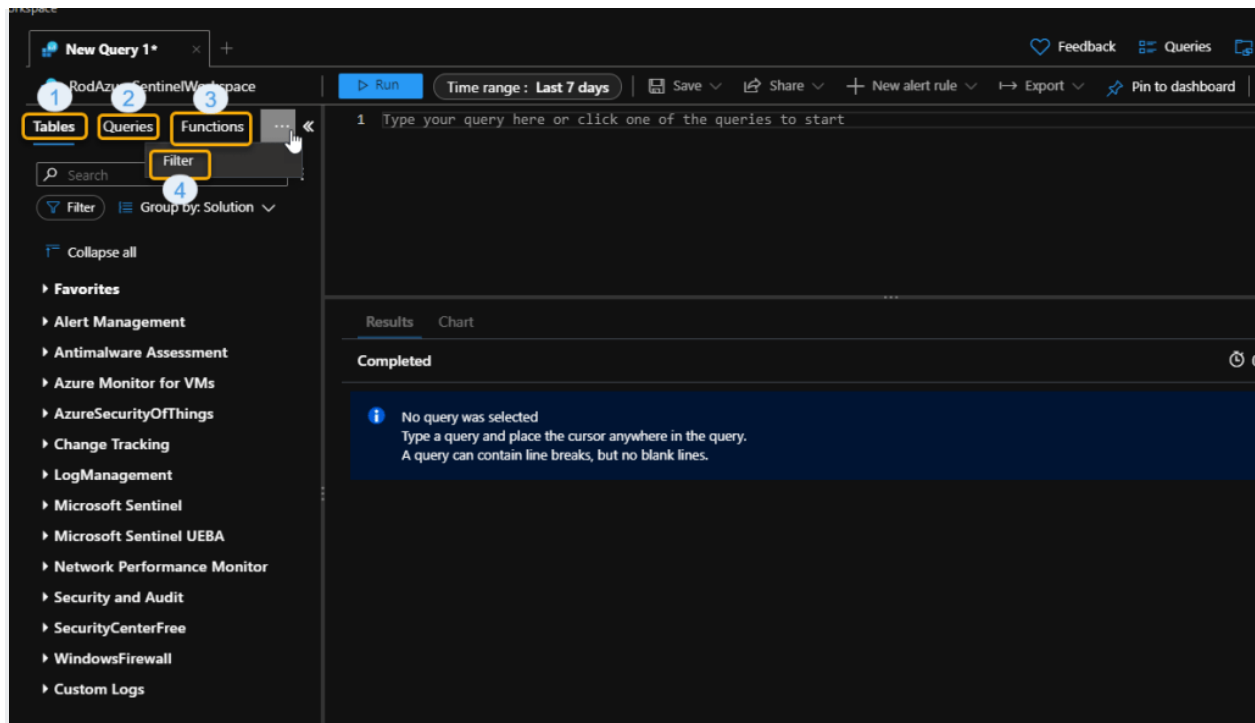

UI Overview:


1. This is the *Tables* list. This is where you can find all the available tables for which you can create queries against. We'll focus on this area just below.
2. This is the *Queries* list. This tab area contains a slew of pre-made KQL queries that you can spend hours and days executing, reverse engineering, and all other matters of query learning importance. These are separated by category types like Applications, Audit, Azure Monitor, Azure Resources, Containers, Databases, Desktop Analytics, IT & Management Tools, Network, Security, Virtual Machines, Windows Virtual Desktop, Workloads, and Others.
3. This is the *Functions* list. A *Function* is like a *stored procedure* in SQL, except in our case the query code is in KQL. This is a hugely useful component of KQL. I'll cover this in-depth later in the series (see [the TOC](#)). Did you know that the Watchlist feature of Microsoft Sentinel relies heavily on a Function? If you access the Function tab in the UI, you'll see the `_GetWatchlist` function.
4. The *Filter* tab. The Filter tab is absolutely awesome and delivers another shortcut method of developing your KQL queries. After running a query the Filter tab will contain a list of empty data columns that you can select to filter out of the query results. Once a column is selected and applied, you can see in the screenshot that the query is updated automatically with the `where` operator to use as the filter mechanism and then the query is rerun. The `isempty()` component is used, which, in itself is a powerful tool that we'll talk about later in this series.

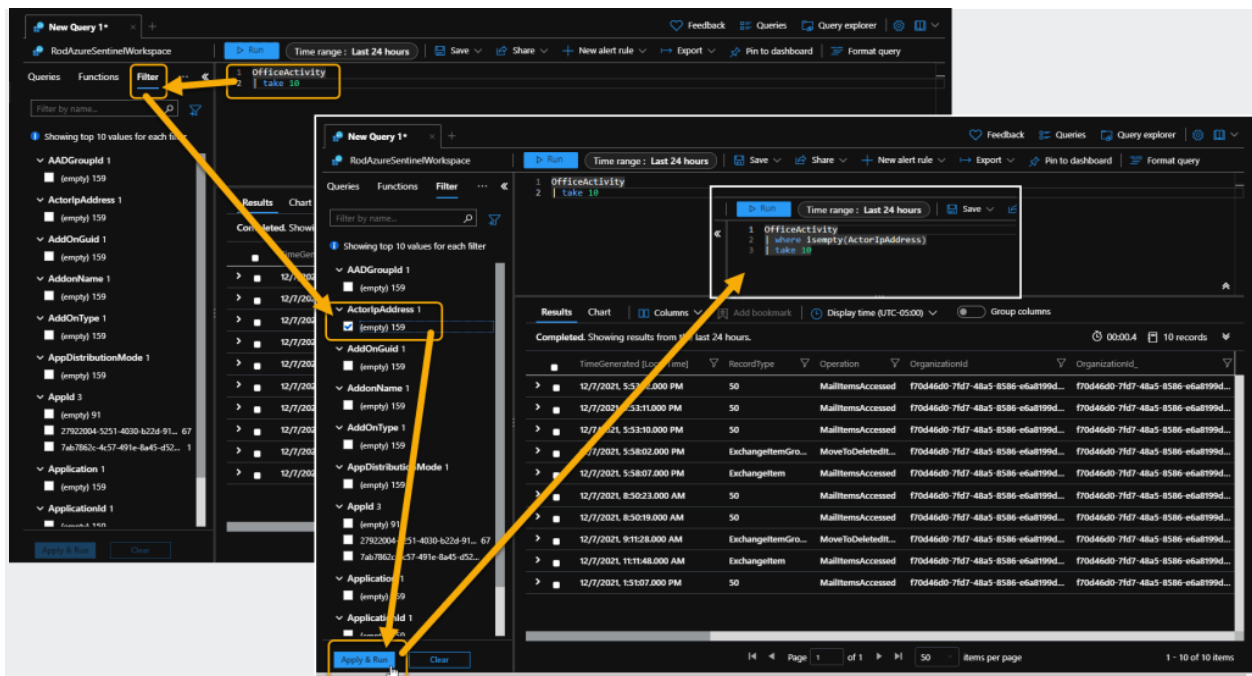

Filter tab

Schema Area Focus

I noted in [Part 6](#) that everything that can be done in the UI we should eventually accomplish in the KQL query itself. That's still the case here, but the UI provides some neat shortcuts that shouldn't be overlooked.

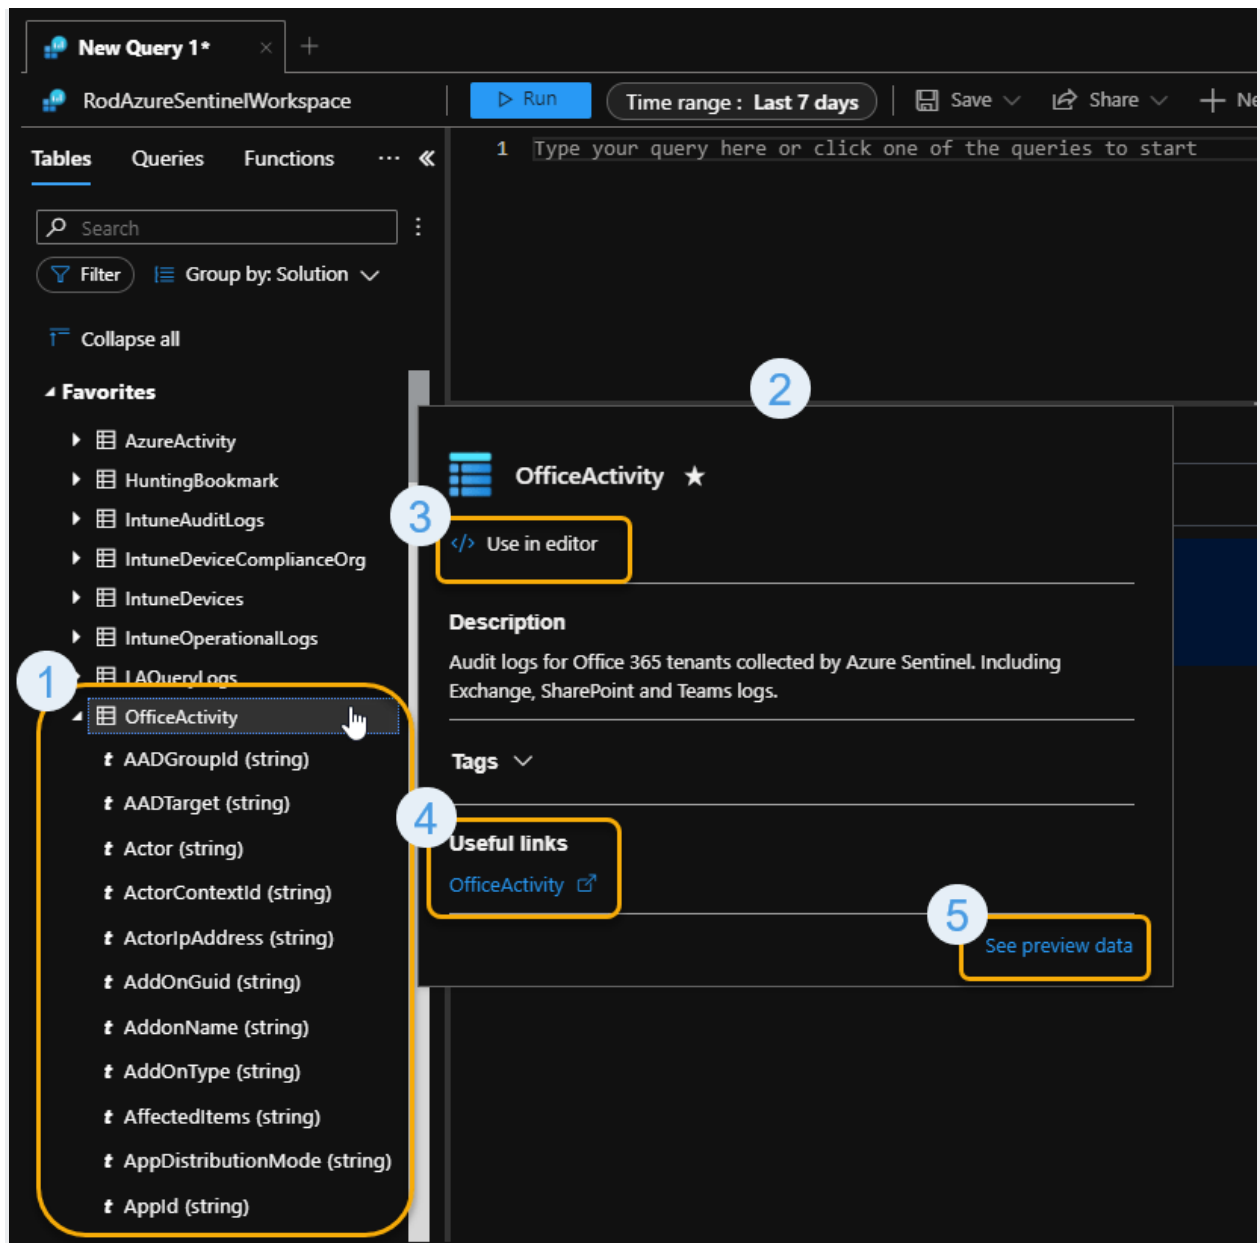

5. And, finally, the most excellent, super-cool shortcut is the capability to click and look at sample results from the table itself. Clicking on this will produce its own window similar to the following:

OfficeActivity ★

</> Use in editor

Description

Audit logs for Office 365 tenants collected by Azure Sentinel. Including Exchange, SharePoint and Teams logs.

Tags

Useful links

[OfficeActivity](#)

Preview Data

TenantId	RecordType	TimeGenerated [Local Time]	Operation	OrganizationId	Org:
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46
e73fcae6-0260-4da5-9d56-f9e36...	50	12/7/2021, 7:56:04.000 AM	MailItemsAcc...	f70d46d0-7fd7-48a5-8586-e6a81...	f70d46

Page 1 of 150 items per page 1 - 10 of 10 items

Data Sampling

Incidentally, this most excellent, super-cool shortcut is actually a KQL query itself that uses the [take operator](#) that I'll cover later in the series. In fact, it's a take 10 similar to the following:

OfficeActivity

| take 10

This tells the query engine to display a random set of 10 records as a data sample. Because its random, every time it runs different data will display.

OK, now that we have all the concepts and UI functionality finally out of the way, it's time to start building queries using the most common KQL operators. From this point on in the series, I'll supply a KQL example based on an operator you can

expect to use and see constantly in Microsoft Sentinel and our other security platform services. You should make it your intent to make use of the public KQL Playground I supplied in the Part 1 resources, or your own environment, to get hands-on with each operator I talk about.

You'll see as I go along, I'll take a simple query and start to build on it with each new part in this series. We'll begin simple and end up with a pretty interesting, but more complex query than what we started with.