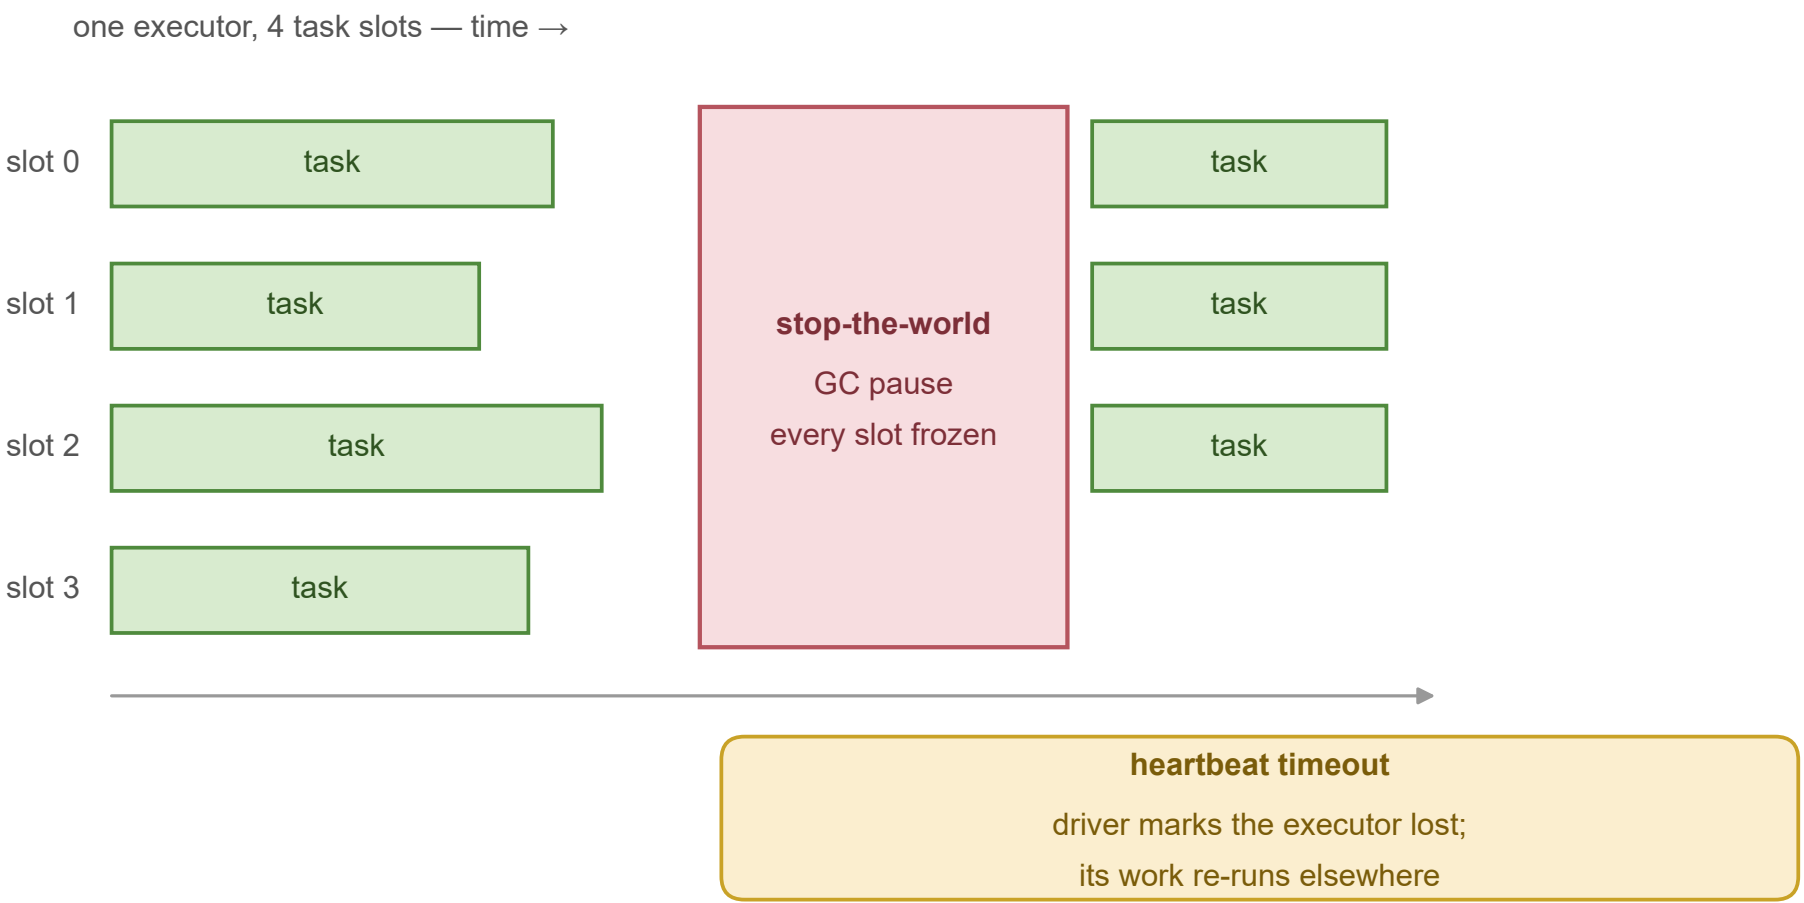
one executor, 4 task slots — time →
slot 0
slot 1
slot 2
slot 3
task
task
task
task
stop-the-world
GC pause
every slot frozen
task
task
task
heartbeat timeout
driver marks the executor lost;
its work re-runs elsewhere