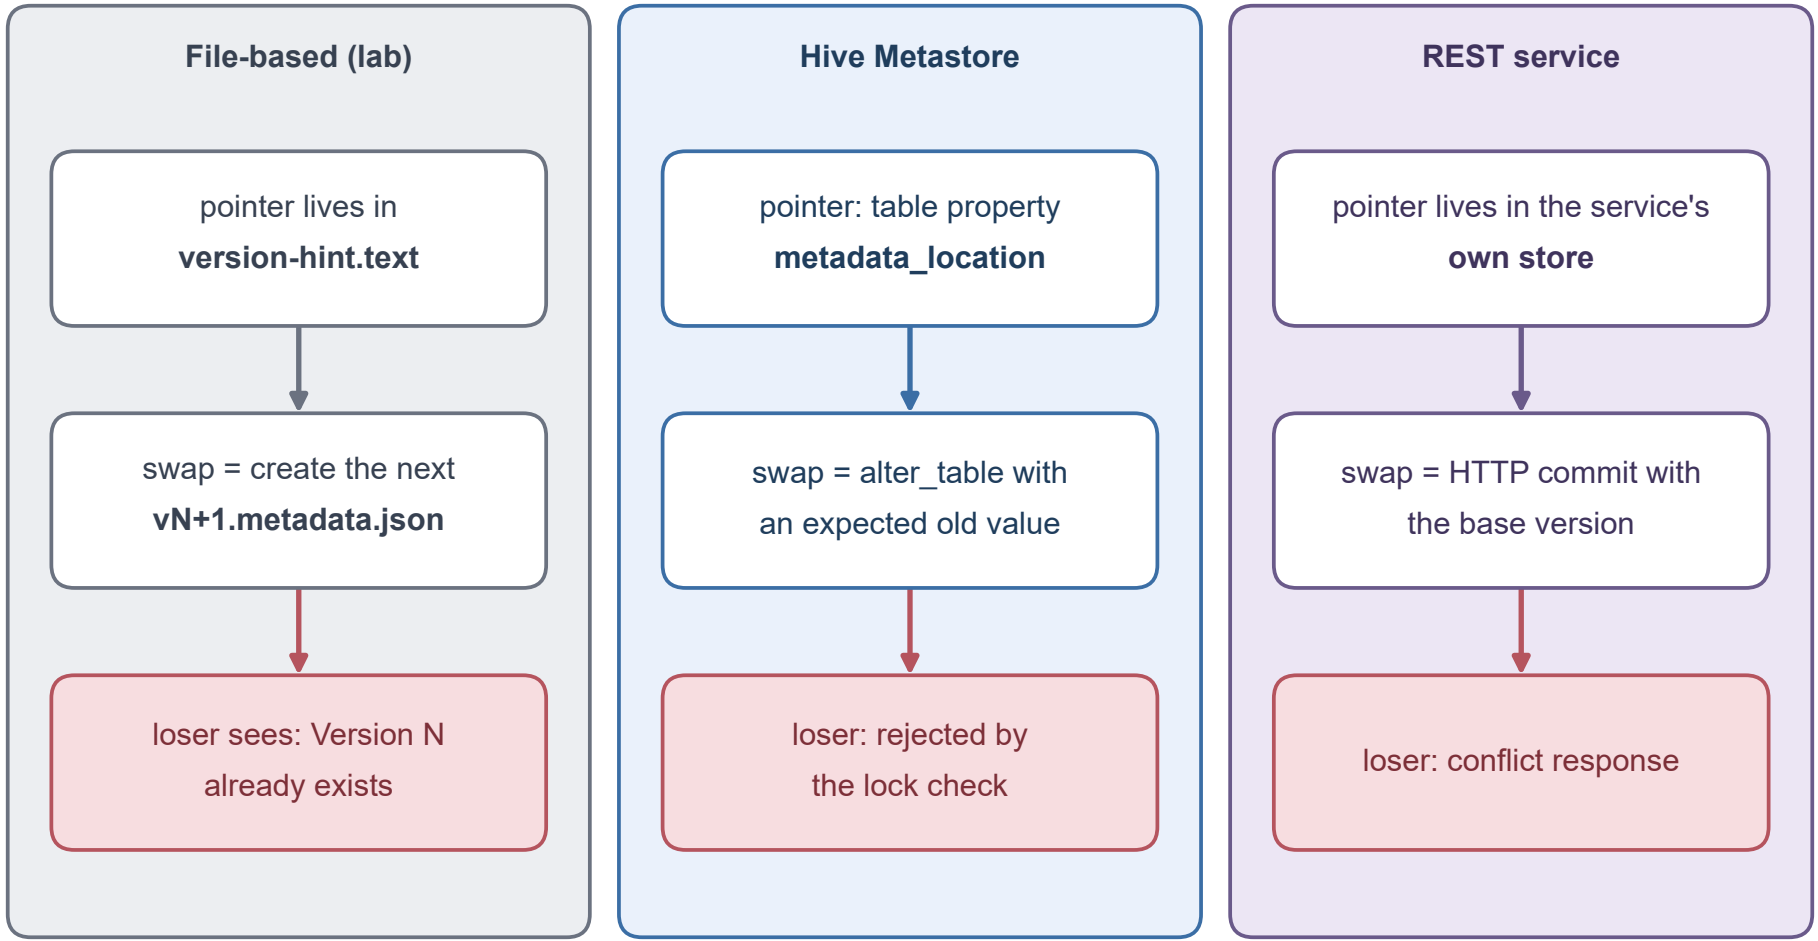
File-based (lab)
pointer lives in
version-hint.text
swap = create the next
vN+1.metadata.json
loser sees: Version N
already exists
Hive Metastore
pointer: table property
metadata_location
swap = alter_table with
an expected old value
loser: rejected by
the lock check
REST service
pointer lives in the service's
own store
swap = HTTP commit with
the base version
loser: conflict response