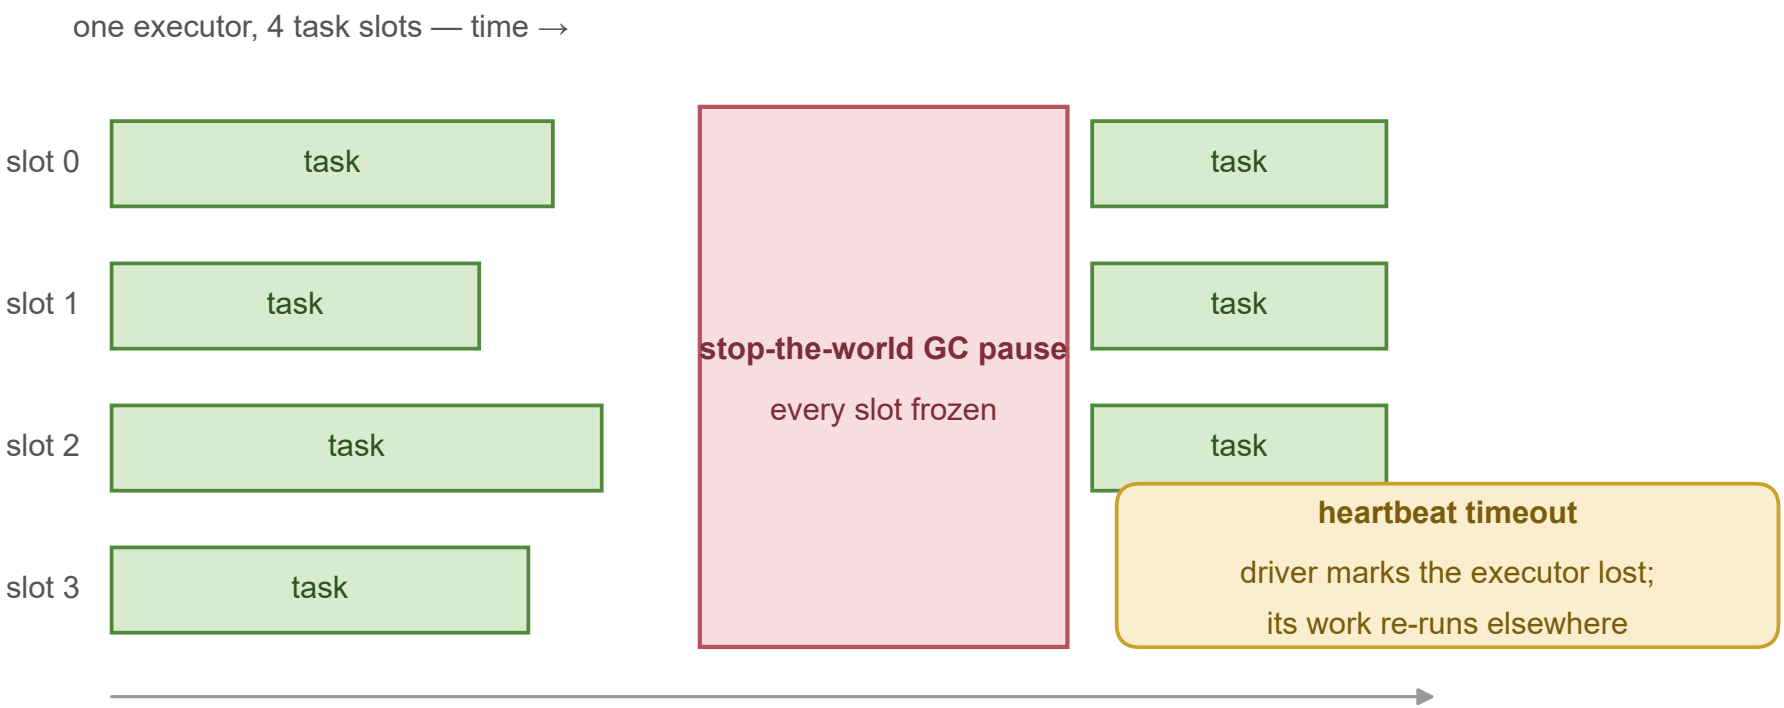
one executor, 4 task slots — time →
slot 0
task
slot 1
task
slot 2
task
slot 3
task
stop-the-world GC pause
every slot frozen
task
task
task
heartbeat timeout
driver marks the executor lost;
its work re-runs elsewhere