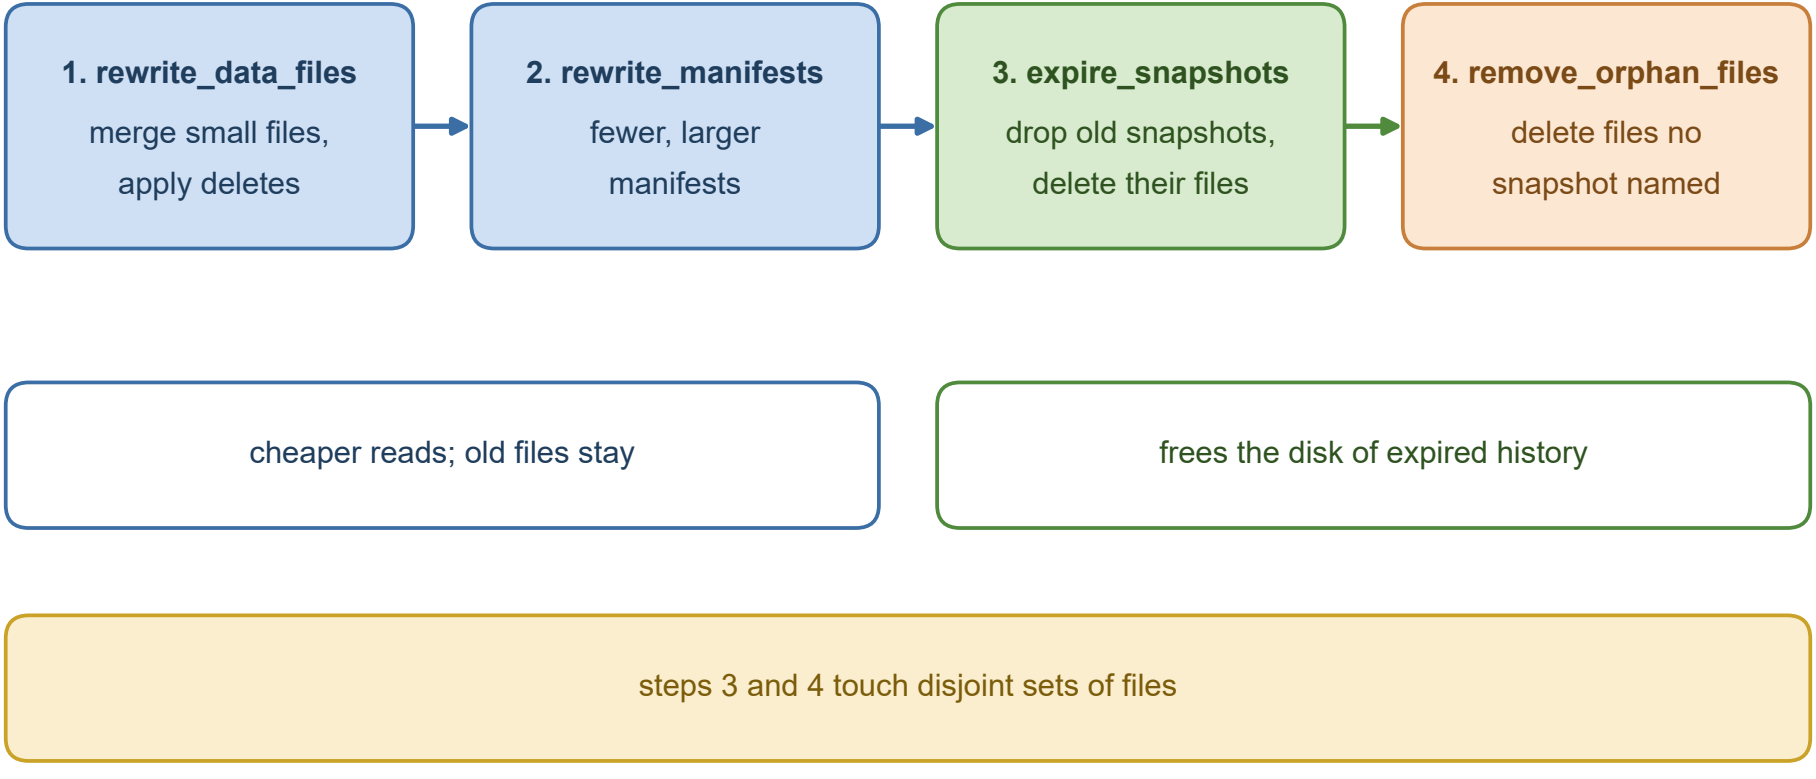
1. rewrite_data_files
merge small files, apply deletes
2. rewrite_manifests
fewer, larger manifests
3. expire_snapshots
drop old snapshots, delete their files
4. remove_orphan_files
delete files no snapshot named
cheaper reads; old files stay
frees the disk of expired history
steps 3 and 4 touch disjoint sets of files