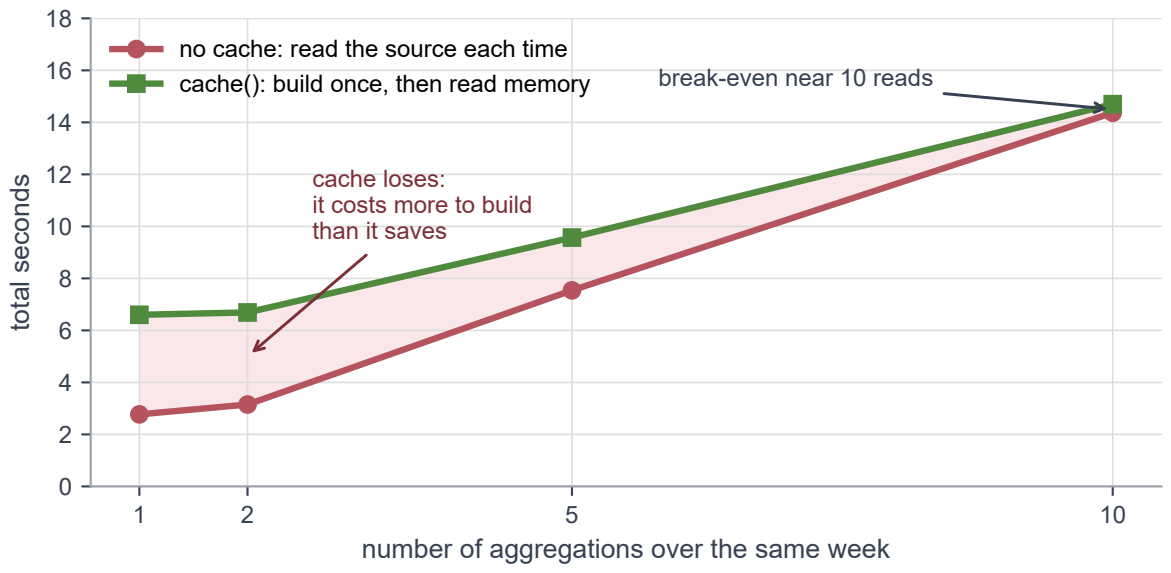
no cache: read the source each time
cache(): build once, then read memory
break-even near 10 reads
cache loses:
it costs more to build
than it saves
total seconds
number of aggregations over the same week
0
2
4
6
8
10
12
14
16
18
1
2
5
10