

Example

Dr. A K M Akhtar Hossain

Back Propagation Solved Example - 1

- Assume that the neurons have a sigmoid activation function, perform a forward pass and a backward pass on the network. Assume that the actual output of y is 0.5 and learning rate is 1. Perform another forward pass.

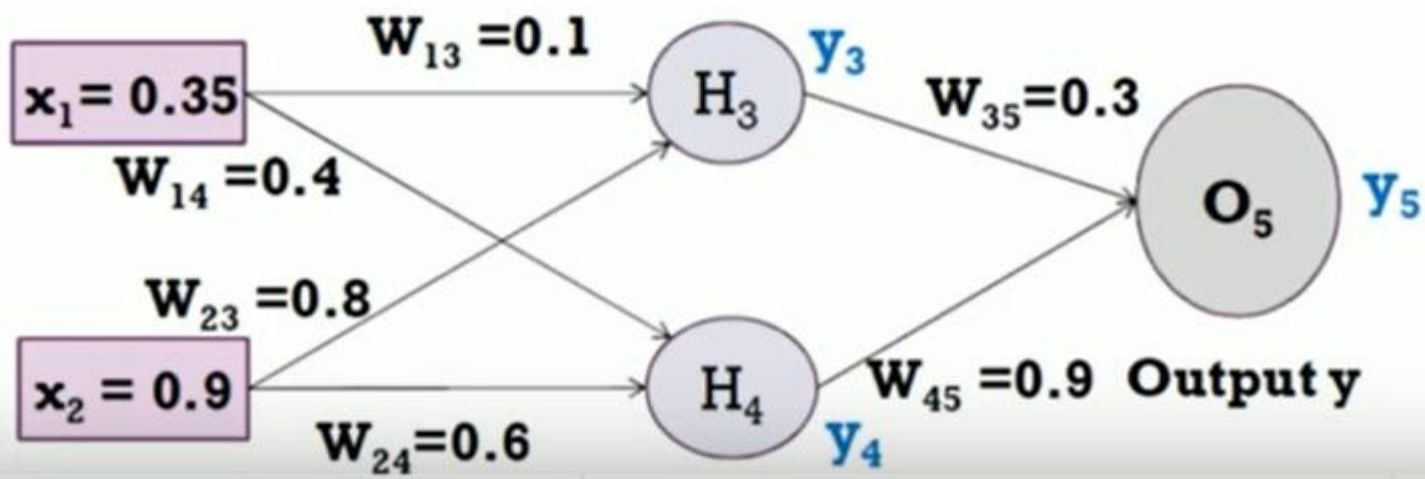

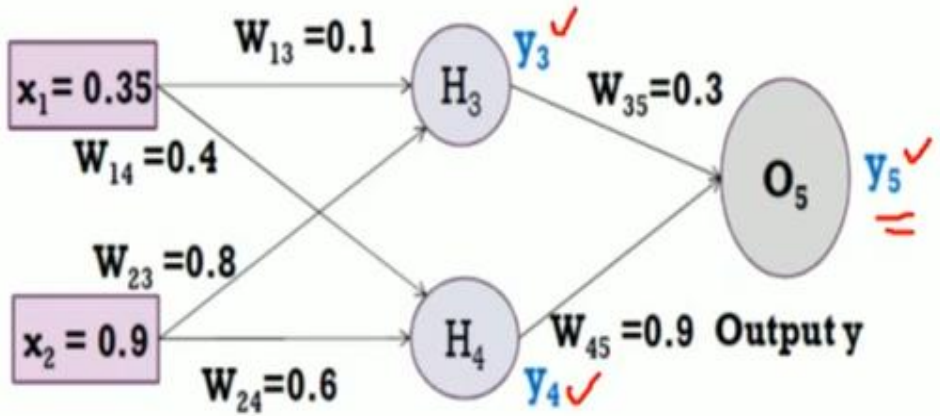

- Forward Pass: Compute output for y3, y4 and y5.

$$a_j = \sum_j (w_{i,j} * x_i) \qquad yj = F(aj) = \frac{1}{1 + e^{-a_j}}$$

$a_1 = (w_{13} * x_1) + (w_{23} * x_2)$

$= (0.1 * 0.35) + (0.8 * 0.9) = 0.755$

$y_3 = f(a_1) = 1/ (1 + e^{-0.755}) = 0.68$

$a_2 = (w_{14} * x_1) + (w_{24} * x_2)$

$= (0.4 * 0.35) + (0.6 * 0.9) = 0.68$

$y_4 = f(a_2) = 1/ (1 + e^{-0.68}) = 0.6637$

$a_3 = (w_{35} * y_3) + (w_{45} * y_4)$

$= (0.3 * 0.68) + (0.9 * 0.6637) = 0.801$

$y_5 = f(a_3) = 1/ (1 + e^{-0.801}) = \mathbf{0.69}$ (Network Output)

$\text{Error} = y_{target} - y_5 = -0.19$


0.5 - 0.69

$$\Delta w_{ji} = \eta \delta_j o_i$$

$$\delta_j = o_j(1-o_j)(t_j - o_j) \qquad \text{if } j \text{ is an output unit}$$

$$\delta_j = o_j(1-o_j)\sum_k \delta_k w_{kj} \qquad \text{if } j \text{ is a hidden unit}$$

- where η is a constant called the learning rate
- tj is the correct teacher output for unit j
- δj is the error measure for unit j

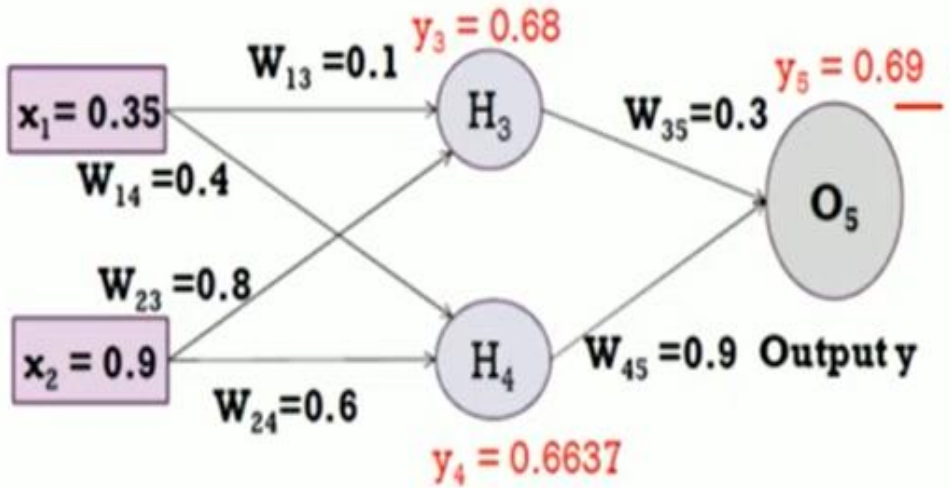

Backward Pass: Compute δ3, δ4 and δ5.

For output unit:

$\delta_5 = y(1-y)\,(y_{target} - y)$

$= 0.69*(1-0.69)*(0.5-0.69) = -0.0406$

For hidden unit:

$\delta_3 = y_3(1-y_3)\, w_{35} * \delta_5$

$= 0.68*(1 - 0.68)*(0.3 * -0.0406) = -0.00265$

$$\Delta w_{ji} = \eta \delta_j o_i$$


$$\delta_j = o_j(1-o_j)(t_j - o_j) \quad \text{if } j \text{ is an output unit}$$

$$\delta_j = o_j(1-o_j)\sum_k \delta_k w_{kj} \quad \text{if } j \text{ is a hidden unit}$$

$\delta_4 = y_4(1-y_4)w_{45} * \delta_5$

$= 0.6637*(1 - 0.6637)*(0.9 * -0.0406) = -0.0082$

Subscribe

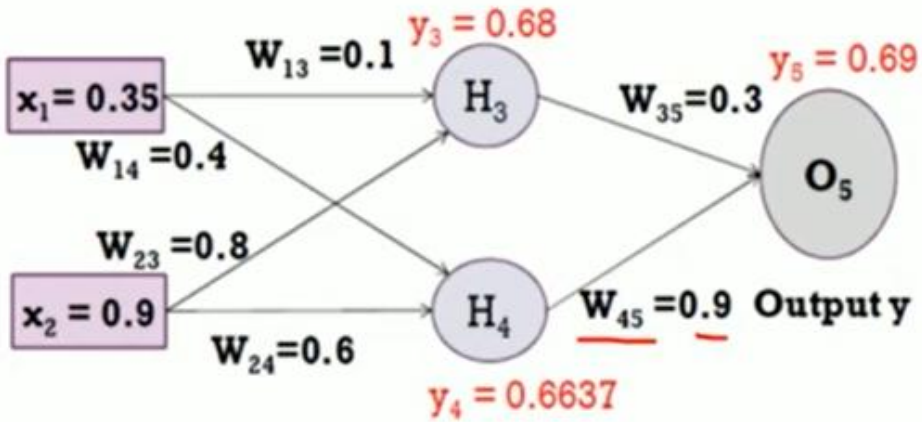

- Backward Pass: Compute δ3, δ4 and δ5.

For output unit:

$\delta_5 = y(1-y)\,(y_{target} - y)$

$= 0.69*(1-0.69)*(0.5-0.69) = -0.0406$

For hidden unit:

$\delta_3 = y_3(1-y_3)\, w_{35} * \delta_5$

$= 0.68*(1 - 0.68)*(0.3 * -0.0406) = -0.00265$

$\delta_4 = y_4(1-y_4) w_{45} * \delta_5$

$= 0.6637*(1 - 0.6637)* (0.9 * -0.0406) = -0.0082$

Compute new weights

$$\Delta w_{ji} = \eta \delta_j o_i$$

$\Delta w_{45} = \eta\, \delta_5\, y_4 = 1 * -0.0406 * 0.6637 = -0.0269$


w_{45} (new) $= \Delta w_{45} + w_{45}$(old) $= -0.0269 + (0.9) = 0.8731$

$\Delta w_{14} = \eta\, \delta_4\, x_1 = 1 * -0.0082 * 0.35 = -0.00287$

w_{14} (new) $= \Delta w_{14} + w_{14}$(old) $= -0.00287 + 0.4 = 0.3971$

- Similarly, update all other weights

i	j	w_{ij}	δ_j	x_i	η	Updated w_{ij}
1	3	0.1	-0.00265	0.35	1	0.0991
2	3	0.8	-0.00265	0.9	1	0.7976
1	4	0.4	-0.0082	0.35	1	0.3971
2	4	0.6	-0.0082	0.9	1	0.5926
3	5	0.3	-0.0406	0.68	1	0.2724
4	5	0.9	-0.0406	0.6637	1	0.8731

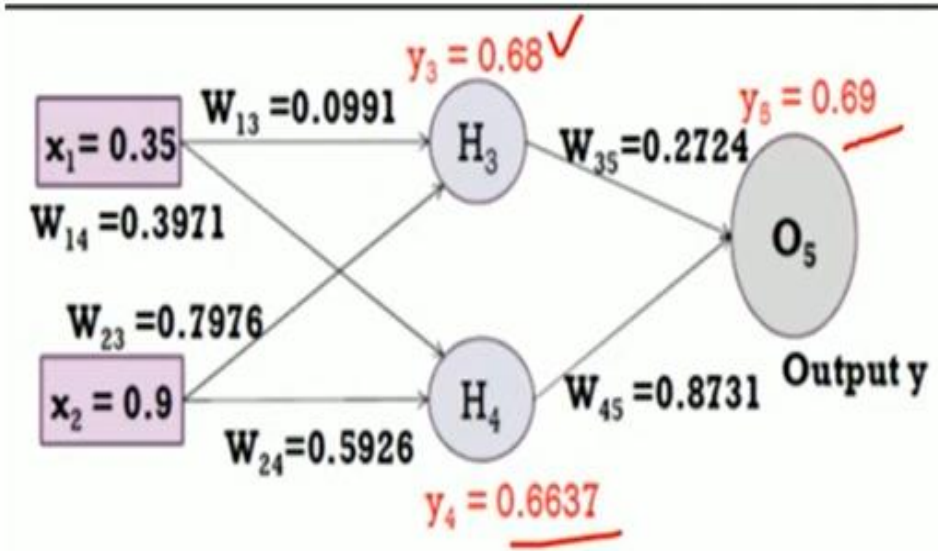

- Forward Pass: Compute output for y3, y4 and y5.

$$a_j = \sum_j (w_{i,j} * x_i) \qquad yj = F(aj) = \frac{1}{1 + e^{-a_j}}$$

$a_1 = (w_{13} * x_1) + (w_{23} * x_2)$
$= (0.0991 * 0.35) + (0.7976 * 0.9) = 0.7525$
$y_3 = f(a_1) = 1/(1 + e^{-0.7525}) = 0.6797$


$a_2 = (w_{14} * x_1) + (w_{24} * x_2)$
$= (0.3971 * 0.35) + (0.5926 * 0.9) = 0.6723$
$y_4 = f(a_2) = 1/(1 + e^{-0.6723}) = 0.6620$

$a_3 = (w_{35} * y_3) + (w_{45} * y_4)$
$= (0.2724 * 0.6797) + (0.8731 * 0.6620) = 0.7631$
$y_5 = f(a_3) = 1/(1 + e^{-0.7631}) = \mathbf{0.6820}$ (Network Output)

$$\text{Error} = y_{target} - y_5 = -0.182$$

- **Assignment 01:** **Last date of Submission: 11/02/2024**

- Consider the following BPNN with corresponding inputs, weights, bias, learning rate, stopping factor. Calculate the networks Forward pass two times and Backward pass one time and show the possible output.

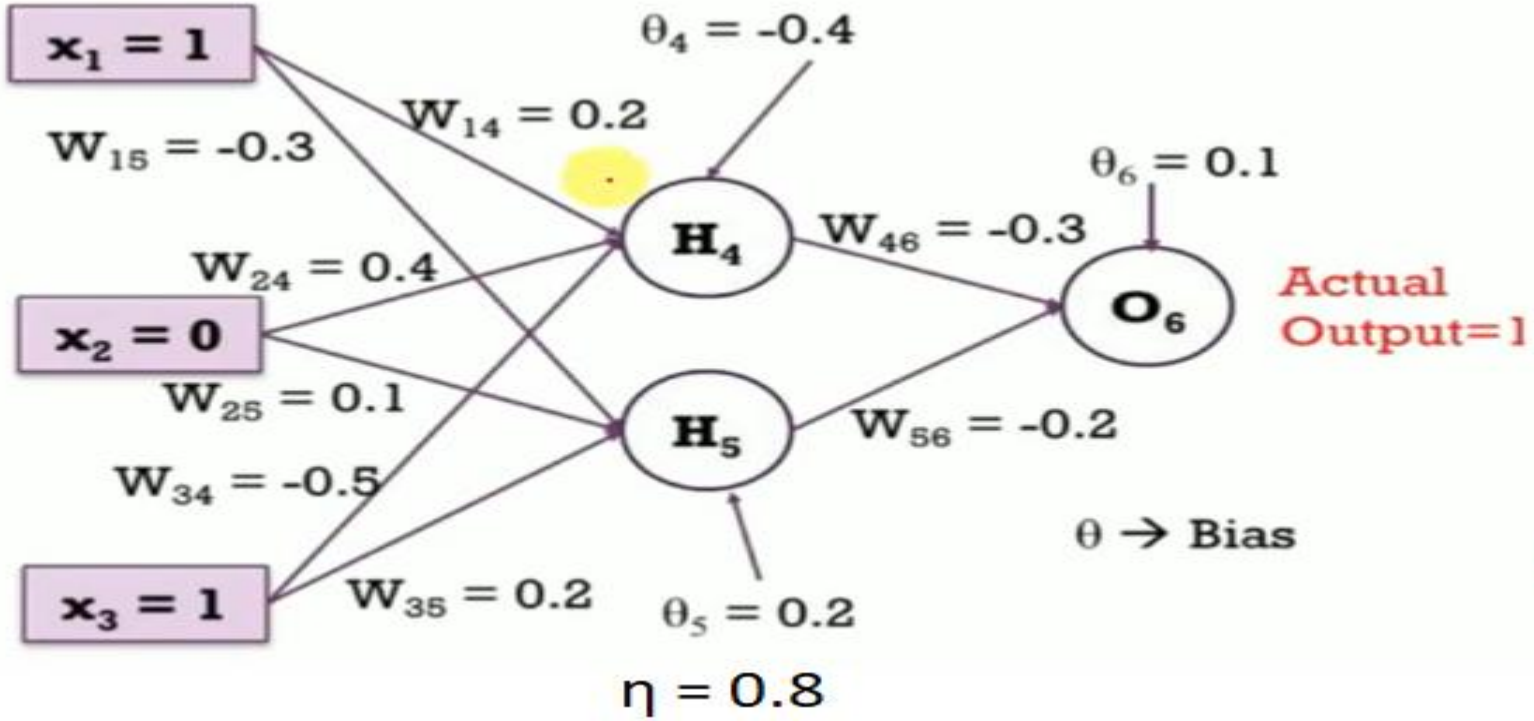

THE END