


Практическая работа 30 – Агрегирование каналов

1. Строим сеть



2. Настраиваем оба свича.

```
Switch(config)#int range fa0/1-2
Switch(config-if-range)#channel-group mode on
^
% Invalid input detected at '^' marker.

Switch(config-if-range)#channel-group 1 mode on
^
% Invalid input detected at '^' marker.

Switch(config-if-range)#channel-group 1 mode on
Switch(config-if-range)#
Creating a port-channel interface Port-channel 1

%LINK-5-CHANGED: Interface Port-channel1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Port-channel1, changed state to up

Switch(config-if-range)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
wr memory
Building configuration...
[OK]
Switch#

Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int range fa0/1-2
Switch(config-if-range)#channel-group 1 mode on
Switch(config-if-range)#
Creating a port-channel interface Port-channel 1

%LINK-5-CHANGED: Interface Port-channel1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Port-channel1, changed state to up

Switch(config-if-range)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#wr memory
Building configuration...
[OK]
Switch#
```

3. Проверяем с одним отключенным проводом и с двумя включенными.

```
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=5ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 5ms, Average = 1ms


C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

4. Создаем сеть

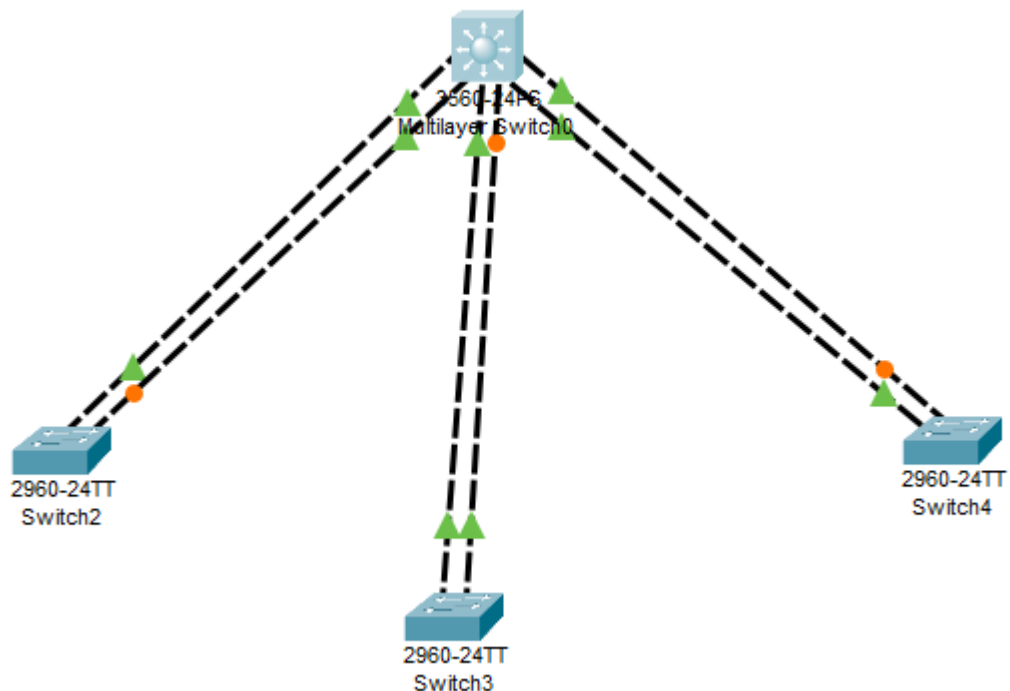

5. Настраиваем 3560 свич

```
Switch(config)#int range fa0/1-2
Switch(config-if-range)#channel-protocol lacp
Switch(config-if-range)#channel-group 1 mode active
Switch(config-if-range)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-3-UPDOWN: Interface Port-channel1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Port-channel1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch(config-if-range)#int range fa0/3-4
Switch(config-if-range)#channel-protocol lacp
Switch(config-if-range)#channel-group 2 mode active
Switch(config-if-range)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch(config-if-range)#int range fa0/5-6
Switch(config-if-range)#channel-protocol lacp
Switch(config-if-range)#channel-group 3 mode active
Switch(config-if-range)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
```


6. Настраиваем каждый свич подобным образом

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int range fa0/1-2
Switch(config-if-range)#channel-protocol lacp
Switch(config-if-range)#channel-group 1 mode active
Switch(config-if-range)#
% Invalid input detected at '^' marker.

Switch(config-if-range)#channel-protocol lacp
Switch(config-if-range)#channel-group 1 mode passive
Switch(config-if-range)#
Creating a port-channel interface Port-channel 1

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface Port-channel1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Port-channel1, changed state to up
```

7. Добавляем компьютеры

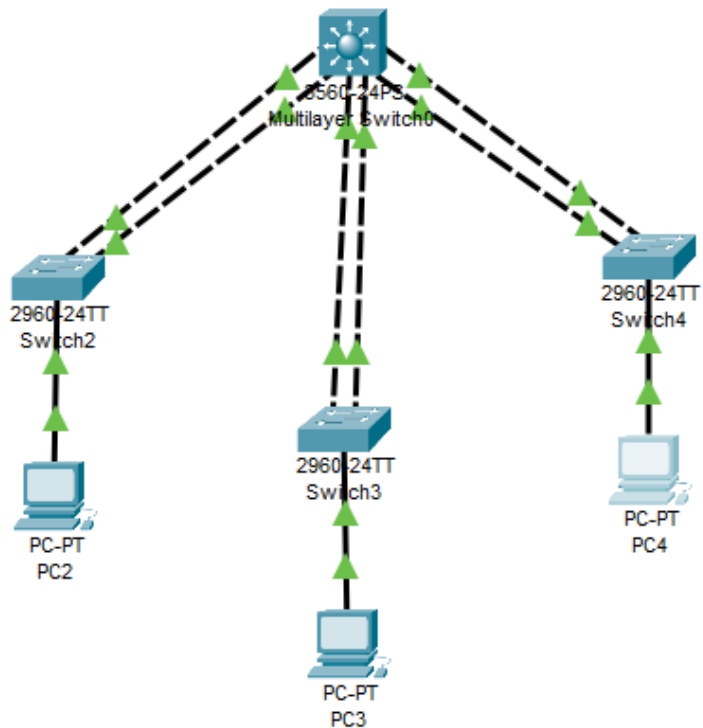

8. Пробуем пингануть

```
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```