

Hik-Connect for Teams OpenAPI V2.15.500

Developer Guide

Legal Information

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision")our company makes no warranties, express or implied.
- Please use this Document with the guidance and assistance of professionals trained in supporting the Product.

Acknowledgment of Intellectual Property RightsTrademarks Acknowledgment

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- HIKVISION and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.

All trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISIONOUR COMPANY MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISIONOUR COMPANY BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISIONOUR COMPANY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISIONOUR COMPANY SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISIONOUR COMPANY WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

Contents

Chapter 1 Overview 1
1.1 Introduction 1
1.2 Open Capabilities 1
1.2.1 System Capabilities 1
1.2.2 Alarm Capabilities 2
1.2.3 Resource Capabilities 3
1.2.4 Video Capabilities 4
1.2.5 Message Capabilities 5
1.2.6 Person Management Capabilities 5
1.2.7 Video Intercom Capabilities 6
1.2.8 Access Control Capabilities 6
1.2.9 On-Board Monitoring Capabilities 6
1.2.10 Attendance Capabilities 7
1.3 Terms and Definitions 8
1.4 Update History 9
Chapter 2 Getting Started 16
Chapter 3 Protocol Summary 17
3.1 API Rules 17
3.2 Signature and Authentication 17
3.3 Response Rules 18
Chapter 4 Typical Applications 20
4.1 Get System Information 20
4.2 Manage Resources 20
4.3 Subscribe to and Get Alarms 24
4.4 Configure Alarm Rules 26
4.5 Subscribe to and Get Messages 28

4.6 Start Live View / Playback Without Plug-in 29
4.7 Receive Video Intercom Events 30
4.8 Get Department List 31
4.9 Manage On-Board Monitoring 32
4.10 Add Person 34
4.11 Apply Access Level 35
4.12 Update Fingerprint/Card Information 36
4.13 Add Temporary Pass 37
4.14 Add Resident 38
4.15 Update Resident 39
4.16 Search for Attendance Data 40
4.17 Webhook Message Push 41
4.18 Configure ANPR 46
Chapter 5 API Reference 49
5.1 System-Related Services 49
5.1.1 Get Token 49
5.1.2 System Operation 51
5.2 Resource-Related Services 57
5.2.1 Physical Resources 57
5.2.2 Logical Resources 70
5.3 Alarm-Related Services 98
5.3.1 Alarm Subscription 99
5.3.2 Alarm Rules 104
5.3.3 Alarm Logs 119
5.3.4 Alarm Voltage Setting 122
5.4 Message-Related Services 124
5.4.1 Message Subscription and Receiving 124
5.5 Video-Related Services 129

5.5.1 Recording Schedule and Playback 129
5.6 Video Intercom Services 140
5.6.1 Buildings and Rooms 140
5.6.2 ISAPI Protocol Transmission 144
5.6.3 Residents 149
5.6.4 Temporary Passes 157
5.6.5 Video Intercom Calls 166
5.7 Access Control Services 167
5.7.1 POST /api/hccgw/acs/v1/remote/control 167
5.7.2 GET /api/hccgw/acs/v1/encryptinfo/get 169
5.7.3 POST /api/hccgw/acs/v1/event/certificaterecords/search 170
5.7.4 POST /api/hccgw/acspm/v1/accesslevel/list 173
5.7.5 POST /api/hccgw/acspm/v1/maintain/overview/person/{id}/elementdetail 175
5.7.6 POST /api/hccgw/acspm/v1/accesslevel/person/add 176
5.7.7 POST /api/hccgw/acspm/v1/accesslevel/person/delete 178
5.7.8 POST /api/hccgw/acspm/v1/accesslevel/person/modify 180
5.8 Person-Related Services 181
5.8.1 POST /api/hccgw/person/v1/groups/search 181
5.8.2 POST /api/hccgw/person/v1/groups/add 184
5.8.3 POST /api/hccgw/person/v1/groups/update 185
5.8.4 POST /api/hccgw/person/v1/groups/delete 186
5.8.5 POST /api/hccgw/person/v1/persons/add 187
5.8.6 POST /api/hccgw/person/v1/persons/update 190
5.8.7 POST /api/hccgw/person/v1/persons/photo 192
5.8.8 POST /api/hccgw/person/v1/persons/fingercollect 193
5.8.9 POST /api/hccgw/person/v1/persons/updatefingers 195
5.8.10 POST /api/hccgw/person/v1/persons/cardcollect 197
5.8.11 POST /api/hccgw/person/v1/persons/updatecards 198

5.8.12 POST /api/hccgw/person/v1/persons/updatepincode 200
5.8.13 POST /api/hccgw/person/v1/persons/get 201
5.8.14 POST /api/hccgw/person/v1/persons/delete 203
5.8.15 POST /api/hccgw/person/v1/persons/quick/add 204
5.8.16 POST /api/hccgw/person/v1/persons/list 207
5.8.17 POST /api/hccgw/person/v1/persons/qrcode 208
5.9 On-Board Monitoring Services 210
5.9.1 POST /api/hccgw/resource/v1/areas/vehicles/add 210
5.9.2 POST /api/hccgw/resource/v1/areas/vehicles/{id}/update 212
5.9.3 POST /api/hccgw/resource/v1/areas/vehicles/get 214
5.9.4 POST /api/hccgw/resource/v1/picture/uploadparam/get 217
5.9.5 POST /api/hccgw/resource/v1/accstatus/search 218
5.9.6 POST /api/hccgw/vehicle/v1/driver/batchquery 220
5.9.7 POST /api/hccgw/vehicle/v1/driver/add 222
5.9.8 POST /api/hccgw/vehicle/v1/driver/update 224
5.9.9 POST /api/hccgw/vehicle/v1/driver/batchdel 226
5.9.10 POST /api/hccgw/vehicle/v1/driverGroup/batchquery 227
5.9.11 POST /api/hccgw/vehicle/v1/driverGroup/add 228
5.9.12 POST /api/hccgw/vehicle/v1/driverGroup/update 230
5.9.13 POST /api/hccgw/vehicle/v1/driverGroup/batchdel 231
5.9.14 POST /api/hccgw/vehicle/v1/driverFace/distribution 232
5.9.15 POST /api/hccgw/vehicle/v1/driverFace/status/query 233
5.10 Attendance Services 234
5.10.1 POST /api/hccgw/attendance/v1/report/totaltimecard/list 234
5.11 Maintenance Services 238
5.11.1 POST /api/hccgw/maintain/v1/offline/info/list 238
5.11.2 POST /api/hccgw/maintenance/v1/list/device/detail 240
5.12 BI Related 242

5.12.1 POST /api/hccgw/bi/v1/store/report/peopleflow 242
5.13 ANPR Related 244
5.13.1 POST /api/hccgw/bi/v1/anpr/nameList/list 244
5.13.2 POST /api/hccgw/bi/v1/licensePlate/add 246
5.13.3 POST /api/hccgw/bi/v1/nameList/detail 248
5.13.4 POST /api/hccgw/bi/v1/licensePlate/update 252
5.13.5 POST /api/hccgw/anpr/v1/remove/scrip/licensePlate 253
5.13.6 POST /api/hccgw/anpr/v1/licensePlate/apply/manual 255
5.13.7 POST /api/hccgw/bi/v1/anpr/passing/record/search 256
5.13.8 POST /api/hccgw/bi/v1/anpr/barrierGate/control 260
5.14 Webhook Related 262
5.14.1 POST /api/hccgw/webhook/v1/config/query 262
5.14.2 POST /api/hccgw/webhook/v1/config/save 263
5.14.3 POST /api/hccgw/webhook/v1/config/delete 264
5.15 Access Level Related 265
5.15.1 POST /api/hccgw/acspm/v1/template/list 265
5.15.2 POST /api/hccgw/acspm/v1/access/level/add 269
5.15.3 POST /api/hccgw/acspm/v1/access/level/update 272
5.15.4 POST /api/hccgw/acspm/v1/access/level/{id}/delete 274
5.15.5 POST /api/hccgw/acspm/v1/access/level/{id}/res/add 275
5.15.6 POST /api/hccgw/acspm/v1/access/level/{id}/res/delete 277
5.15.7 POST /api/hccgw/acspm/v1/access/level/delete 278
Appendix A. Appendixes 281
A.1 Data Dictionary 281
A.1.1 Alarm Category 281
A.1.2 Resource Type 281
A.1.3 Device Category 282
A.1.4 Alarm Type 282

A.1.5 Alarm Source 289
A.1.6 Message Type 289
A.1.7 Capability Set 293
A.1.8 Country/Region Code 294
A.1.9 Vehicle Brand 303
A.2 Time/Date Format 323
A.2.1 ISO 8601 Time Format Instruction 323
A.2.2 Date Format Type 323
A.2.3 Time Format Type 324
A.2.4 Time Duration Format Type 325
A.3 Object Description 325
A.3.1 AccessLevel 325
A.3.2 AccessLevelFailed 325
A.3.3 AccessLevelInfo 326
A.3.4 AccessLevelResponse 326
A.3.5 AccessLevelSearchCriteria 327
A.3.6 AccessLevelSearchRequest 327
A.3.7 AcsSnapPicInfo 327
A.3.8 AddDeviceResponse 328
A.3.9 AlarmCategory 328
A.3.10 AlarmDeviceInfo 329
A.3.11 AlarmEventSource 329
A.3.12 AlarmFile 330
A.3.13 AlarmFileExtendInfo 330
A.3.14 AlarmFileInfo 331
A.3.15 AlarmInfo 331
A.3.16 AlarmInputChannel 332
A.3.17 AlarmInputInfo 332

A.3.18 AlarmLinkageConfig 332
A.3.19 AlarmLinkage 332
A.3.20 AlarmMsg 333
A.3.21 AlarmOutputChannel 334
A.3.22 AlarmOutputOperation 334
A.3.23 AlarmOutputState 334
A.3.24 Alarmpriorities 335
A.3.25 AlarmPriority 335
A.3.26 AlarmResourceInfo 336
A.3.27 AlarmRuleDetail 336
A.3.28 AlarmRuleOperation 336
A.3.29 AlarmRule 337
A.3.30 AlarmTimeInfo 337
A.3.31 ANPRInfo 337
A.3.32 Area 338
A.3.33 Area 338
A.3.34 AreaBrief 338
A.3.35 AreaInfo 338
A.3.36 AssociateResId 339
A.3.37 AssociateResInfo 339
A.3.38 Attachment 339
A.3.39 AuthRecord 339
A.3.40 Awake 340
A.3.41 BaseStatus 340
A.3.42 BasicInfo(1) 341
A.3.43 BasicInfo(2) 342
A.3.44 BriefArea 343
A.3.45 Building 343

A.3.46 BuildingSearchCriteria 343
A.3.47 CameraChannel 344
A.3.48 CameraInfo 344
A.3.49 Card(1) 345
A.3.50 Card(2) 345
A.3.51 CardFailed 345
A.3.52 CertificateInfo 346
A.3.53 CertificateStatus 346
A.3.54 ChannelInfo 346
A.3.55 CloudStorage 347
A.3.56 CloudStorageInfo 347
A.3.57 CloudStorageDetail 347
A.3.58 CombineBaseInfo 347
A.3.59 CombineDeviceInfo 348
A.3.60 CombineEvent 348
A.3.61 CombineEventData 348
A.3.62 CombineResourceInfo 349
A.3.63 CommonFailed 349
A.3.64 DataBean 350
A.3.65 Device 351
A.3.66 Device 352
A.3.67 DeviceBaseInfo 352
A.3.68 DeviceBrief 353
A.3.69 DeviceByResource 353
A.3.70 DeviceInfo 353
A.3.71 DeviceInfo (2) 354
A.3.72 DeviceList 354
A.3.73 DeviceOfflineInfo 354

A.3.74 DeviceRecordStatus 355
A.3.75 DeviceTalkInfo 355
A.3.76 DevInfo 356
A.3.77 DiskStatus 356
A.3.78 DistributionErrorInfo 357
A.3.79 DistributionInfo 357
A.3.80 DoorChannel 357
A.3.81 DoorInfo 358
A.3.82 DriverDistributionFail 358
A.3.83 DriverGroupInfo 358
A.3.84 DriverInfo (1) 359
A.3.85 DriverInfo (2) 359
A.3.86 DriverLicenseInfo 360
A.3.87 DriverLicenseAddInfo 360
A.3.88 DriverGroupInfo 360
A.3.89 ElementDetail 361
A.3.90 ElementStatus 361
A.3.91 Event(1) 361
A.3.92 Event(2) 362
A.3.93 EventSource 362
A.3.94 FailedResult 363
A.3.95 Finger(1) 363
A.3.96 Finger(2) 364
A.3.97 FingerFailed 364
A.3.98 GetDeviceInfo 364
A.3.99 GetDevicesResVo 365
A.3.100 GPSInfo 365
A.3.101 HddAttributeList 366

A.3.102 HddStatusList 366
A.3.103 IdNameInfo 366
A.3.104 IgnoreRecurring 367
A.3.105 ImportToArea 367
A.3.106 IntelliInfo 367
A.3.107 LicenseInfo 368
A.3.108 LinkageAlarmOutput 368
A.3.109 LinkageCamera 369
A.3.110 LinkageConfig 369
A.3.111 LinkageItem 370
A.3.112 LinkAlarmOutput 370
A.3.113 LinkCamera 370
A.3.114 LinkCapturePicture 370
A.3.115 LinkEmail 371
A.3.116 LocalStorage 371
A.3.117 Notification 372
A.3.118 PackageDetails 372
A.3.119 PackageOverview 372
A.3.120 Person 372
A.3.121 PersonBaseInfo(1) 373
A.3.122 PersonBaseInfo(2) 373
A.3.123 PersonDTO 374
A.3.124 PersonGroup 376
A.3.125 PersonInfo(1) 376
A.3.126 PersonInfo(2) 377
A.3.127 PictureInfo 377
A.3.128 PlateRect 377
A.3.129 Priority 378

A.3.130 QueueInfo 378
A.3.131 QueueRelatedInfo 379
A.3.132 ReceivingSchedule 379
A.3.133 Recipients 379
A.3.134 RecordInfo 379
A.3.135 RecordListInfo 381
A.3.136 RecordSetting 381
A.3.137 RelatedVehicleInfo 382
A.3.138 RemoteControl 382
A.3.139 RemoteControlResponse 382
A.3.140 ResidentFilter 383
A.3.141 ResidentSearchRequest 383
A.3.142 Resource 384
A.3.143 ResourceAddResult 384
A.3.144 RoomDTO 385
A.3.145 RoomFilter 385
A.3.146 RoomSearchCriteria 386
A.3.147 RoomVO 386
A.3.148 Schedule 387
A.3.149 SelfRelated 387
A.3.150 ServicePackage 387
A.3.151 ServicePackageOverview 388
A.3.152 SolarEnergyRecord 389
A.3.153 TempAuth 389
A.3.154 TempAuthFilter 390
A.3.155 TempAuthSearchRequest 390
A.3.156 TemperatureInfo 390
A.3.157 TimeRange 391

A.3.158 TimeSchedule 391
A.3.159 TimeSetting 391
A.3.160 TimeSpan 392
A.3.161 TimeZone 392
A.3.162 TimeZoneInfo 392
A.3.163 TimeZoneDst 393
A.3.164 TotalTimeCardReportData 393
A.3.165 User 395
A.3.166 VehicleInfo(1) 395
A.3.167 VehicleInfo(2) 396
A.3.168 VehicleInfo(3) 396
A.3.169 VehicleRelatedInfo 396
A.3.170 VideoInfo 397
A.4 Status and Error Code 397

Chapter 1 Overview

1.1 Introduction

Hik Connect for Teams, Hikvision's VSaaS (Video Security as a Service) platform for unified security management, provides open capabilities and APIs for the management of user accounts, resources, and alarms/events. Based on the open capabilities, the third-party manufacturers and developers are able to fast integrate different applications. This document introduces the application scenarios, APIs, and API calling methods in details.

Before starting integration, make sure you have acquired the following skills and knowledge.

- Master one or multiple common programming languages such as JAVA and C++.
- Gain the basic knowledge of video security, such as camera, PTZ control, and alarm.

For getting started, you are recommended to read this manual in the following order to help you fast learn the available capabilities and APIs.

1. Take a glance at the terms and definitions in ***Terms and Definitions*** .
2. See open capabilities in ***Open Capabilities*** for reference.
3. See API calling flows and typical applications in ***Typical Applications*** .
4. Check the APIs to be used based on your service needs.
5. See API calling rules, signature and authentication, and response rules in ***Protocol Summary*** .
6. See API reference to get the request URI, request parameters, and response parameters in ***API Reference*** .

1.2 Open Capabilities

The open capabilities of Hik Connect for Teams for application integration include system, resource, alarm, and video.

1.2.1 System Capabilities

System capabilities are about services concerning several platform operations and login including login authentication, getting platform and user information, getting streaming token, etc.

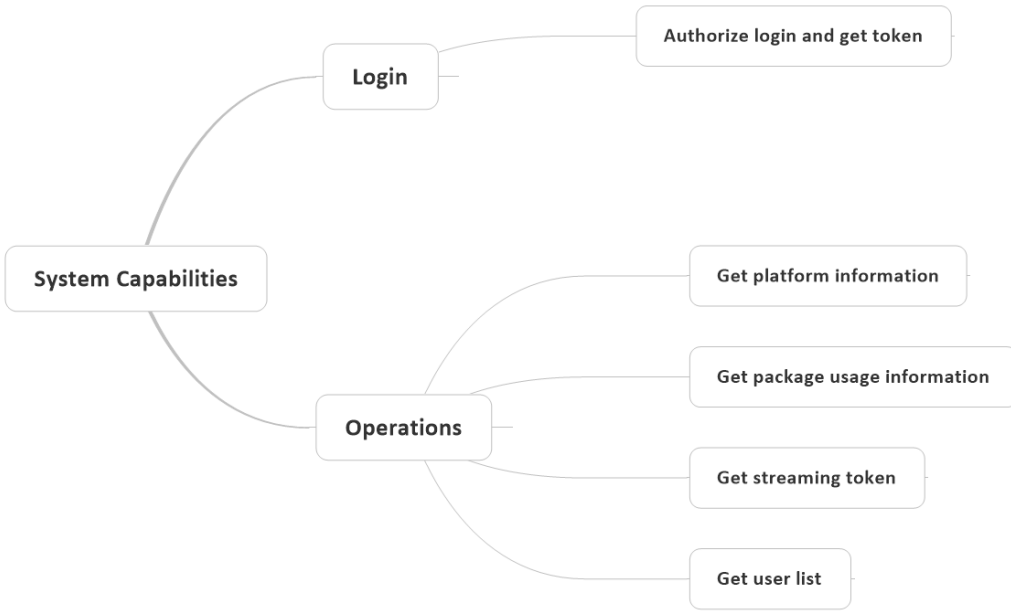


Figure 1-1 System Capabilities

1.2.2 Alarm Capabilities

Alarm capabilities are about services such as getting alarm rules, editing alarm rules, subscribing events, and getting alarm messages.

Note

For alarm types that can be received, see details in ***Alarm Type*** .

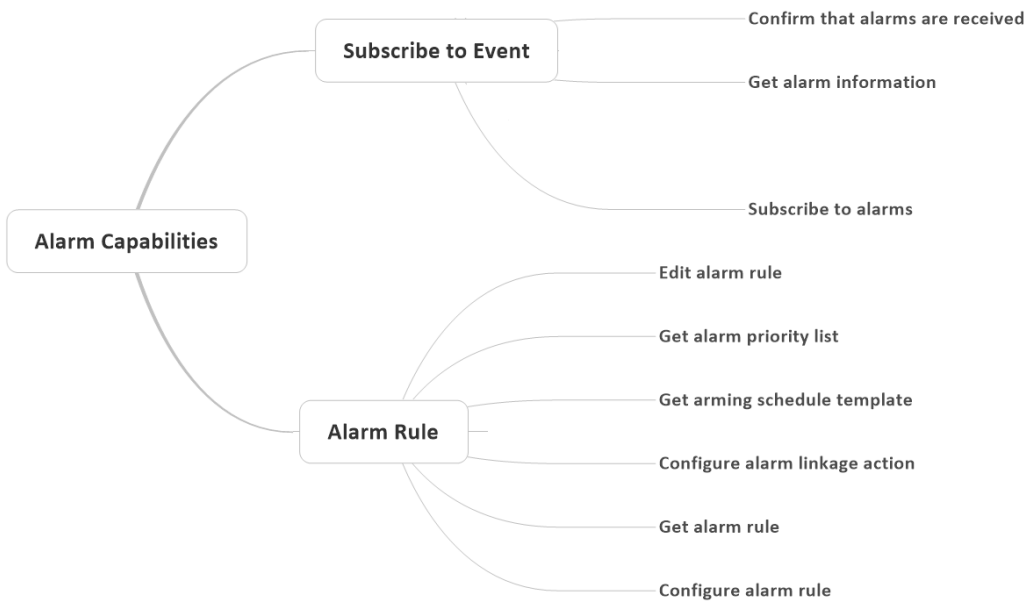


Figure 1-2 Alarm Capabilities

Note

- If you get a message via ***POST /api/hccgw/alarm/v1/mq/messages*** and confirm that you have received the message via ***POST /api/hccgw/alarm/v1/mq/messages/complete*** , you will no longer be able to get the message even if you call the API again.
- The message can be stored for three days by default.
- It is recommended that you call the two APIs of getting alarm messages and confirming that you have received the messages every 500ms. Make sure that you start to time the interval after you have finished calling the API of confirming that you have received the messages.

1.2.3 Resource Capabilities

Resource capabilities are about services concerning getting device information including area information, camera information, alarm information, etc.

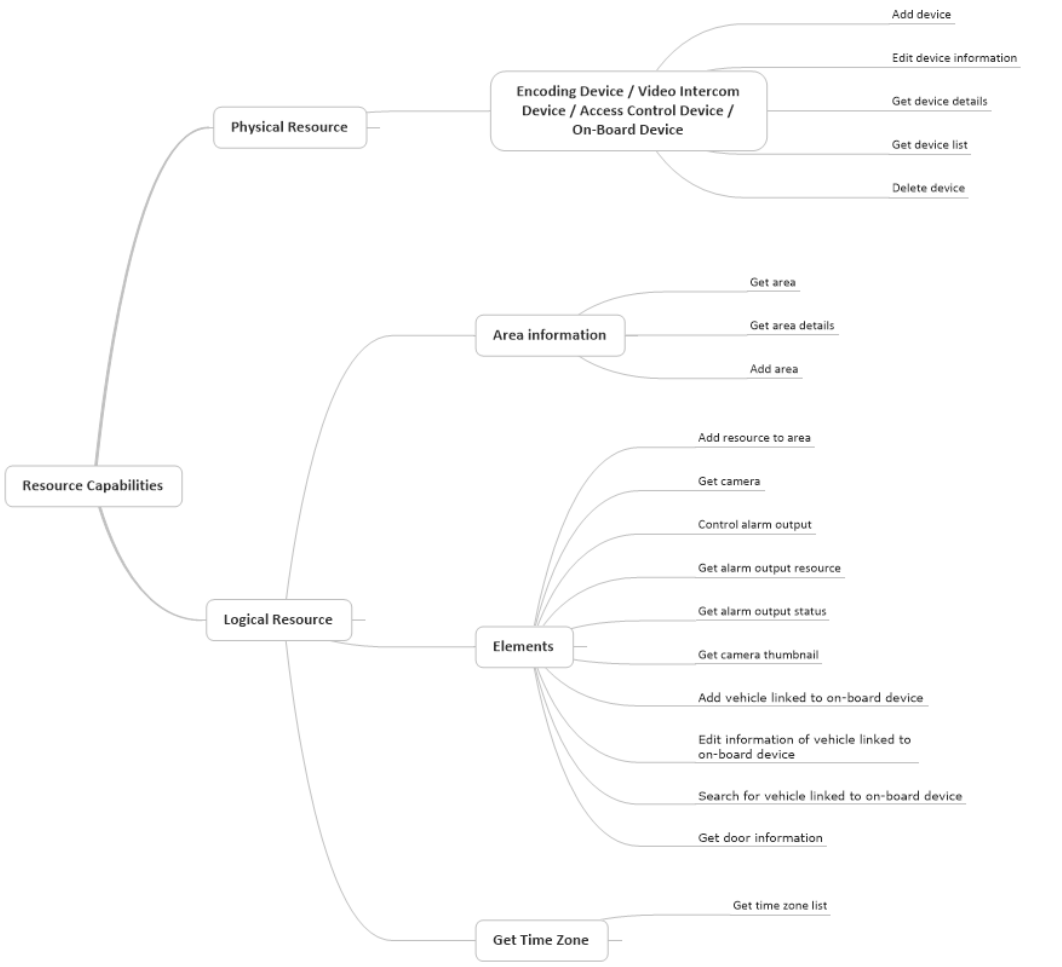


Figure 1-3 Resource Capabilities

1.2.4 Video Capabilities

Video capabilities are about services including getting recording schedule templates and getting playback addresses.



Figure 1-4 Video Capabilities

Note

Currently no-plugin video playing is only supported in Singapore, North America, South America, and Europe. It is not supported in India or Russia.

1.2.5 Message Capabilities

Message capabilities are about services including subscribing to messages, unsubscribing from messages, getting messages, etc.



Figure 1-5 Message Capabilities

1.2.6 Person Management Capabilities

Person management capabilities include getting department list, adding/deleting persons, updating basic information of persons, viewing information of single person, searching for person list, collecting/updating fingerprints, collecting/updating cards, updating PIN code, updating face pictures, and fast adding persons.

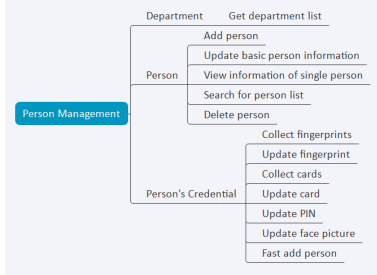


Figure 1-6 Person Management Capabilities

1.2.7 Video Intercom Capabilities

Video intercom capabilities are about services including building/room management, resident management, temporary pass management, and call management.

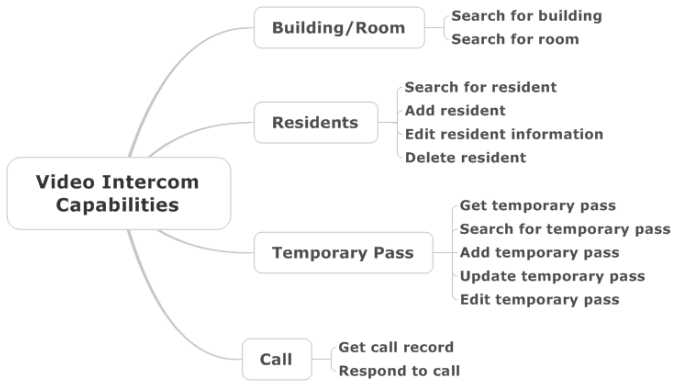


Figure 1-7 Video Intercom Capabilities

1.2.8 Access Control Capabilities

Access control capabilities include opening door remotely, getting Bluetooth encryption information, searching for card swiping records, and applying person's access level.




Figure 1-8 Access Control Capabilities

1.2.9 On-Board Monitoring Capabilities

On-board monitoring capabilities are about services including managing on-board devices and vehicles linked to on-board device, subscribe to and get alarms and messages, etc.

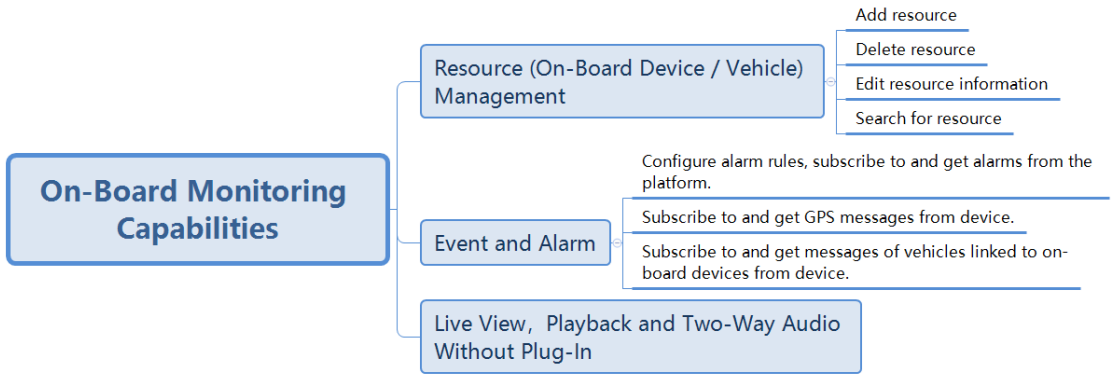


Figure 1-9 On-Board Monitoring Capabilities

Note

- Each on-board device and each vehicle are in one-to-one correspondence. An on-board device cannot be linked to multiple vehicles.
- Messages are raw information uploaded by device. Alarms are messages processed by alarm rules on the platform.
- You can subscribe to and get alarms of vehicles linked to on-board devices (***Alarm Type***). See details of API calling flow in ***Subscribe to and Get Alarms*** .
- You can subscribe to and get messages of vehicles linked to on-board devices (***Message Type***). See details of API calling flow in ***Subscribe to and Get Messages*** .
- The information of a vehicle linked to an on-board device includes the license plate No., driver's name, driver's phone No., vehicle type, annotations, and linked on-board device serial No.
- Live view, playback, and two-way audio without plug-in are all developed via the JSSDK toolkit. For two-way audio with on-board devices, you should enter 1 as the camera channel No.

1.2.10 Attendance Capabilities

The attendance capabilities involve the report exporting service, including searching for Total Time Card.

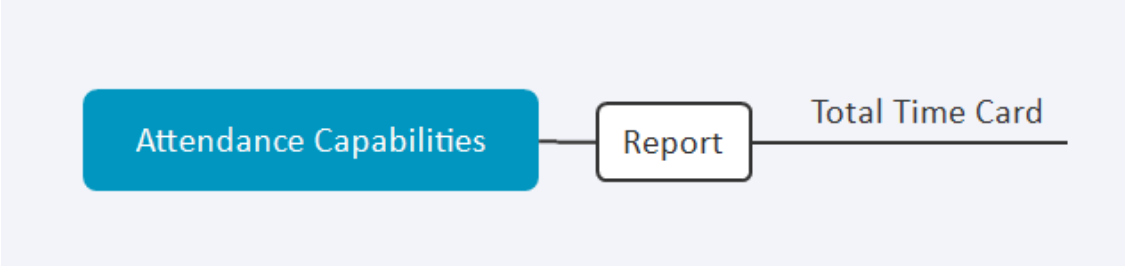


Figure 1-10 Attendance Capabilities

1.3 Terms and Definitions

Term	Description
OpenAPI	The publicly available APIs (application programming interfaces) that provide developers with programmatic access to proprietary software applications or web services.
Hik Connect for Teams	A video security management platform.
HTTP Method	A set of request methods defined by HTTP to indicate the desired action to be performed for a given resource. The useful methods include GET (get resources), PUT (set or update resources), POST (add or search resources), and DELETE (delete resources).
header (Request Header)	The supplemental data at the beginning of a request data block, usually in key-value pairs. For example, "Accept:text/plain".
path	HTTP request path, which follows the domain name or IP address (port No.). For example, if the request address is "www.example.com/artemis/api", then the path refers to "/artemis/api".
query	The parameters in the request address. For example, in the address "www.example.com/artemis/api?a=b&c=d", the queries are "a" and "c" and their values are "b" and "d" respectively.
bodyForm	The parameters in key-value pairs in the request body sent by POST method.
AK	Access key, which relates with the secret access key. They are used in pair to encrypt the signature in the request. It refers to **appKey** in this manual.
SK	Secret access key, which is used to mark the sender and prevent the request from being modified during signature encryption. It is used together with the access key and refers to **appSecret** in this manual.
Message	Refers to the content uploaded by the device actively when there is no external trigger source.
Alarm	Refers to the content uploaded by the device when the configured alarm rules are triggered.

1.4 Update History

Summary of Changes in Version 2.15.500_August, 2026

1. Updated Hik Connect for Teams server addresses: ***Getting Started*** .
2. Updated the five applications: ***Get System Information*** , ***Manage Resources*** , ***Subscribe to and Get Alarms*** , ***Configure Alarm Rules*** , and ***Subscribe to and Get Messages*** .
3. Added a typical application: ***Configure ANPR*** .
4. Updated the request URL of APIs from ***https://[serverAddress]:[serverPort]/api/xxx*** to ***{areaDomain}/api/xxx***.
5. Added ANPR-related APIs:
   - Added an API to search for lists: ***POST /api/hccgw/bi/v1/anpr/nameList/list*** .
   - Added an API to add license plates to a list: ***POST /api/hccgw/bi/v1/licensePlate/add*** .
   - Added an API to search for the details of a list: ***POST /api/hccgw/bi/v1/nameList/detail*** .
   - Added an API to edit a license plate: ***POST /api/hccgw/bi/v1/licensePlate/update*** .
   - Added an API to delete license plates: ***POST /api/hccgw/anpr/v1/remove/scrip/licensePlate*** .
   - Added an API to re-apply license plates: ***POST /api/hccgw/anpr/v1/licensePlate/apply/manual*** .
   - Extended ***Status and Error Code*** :
     Added error codes VMS051002, VMS051001, VMS051070, VMS051072, and VMS051010.

Summary of Changes in Version 2.15.0_Febrary, 2026

1. Added a typical application: ***Webhook Message Push*** .
   - Added an API to get the message push configuration: ***POST /api/hccgw/webhook/v1/config/query*** .
   - Added an API to save message push configurations: ***POST /api/hccgw/webhook/v1/config/save*** .
   - Added an API to delete message push configurations: ***POST /api/hccgw/webhook/v1/config/delete*** .
2. Added BI related APIs:
   - Search for passing vehicle records: ***POST /api/hccgw/bi/v1/anpr/passing/record/search*** .
   - Control the barrier gate: ***POST /api/hccgw/bi/v1/anpr/barrierGate/control*** .
   - Search for the customer traffic data: ***POST /api/hccgw/bi/v1/store/report/peopleflow*** .
3. Added access level related APIs:
   - Get the schedule template list: ***POST /api/hccgw/acspm/v1/template/list*** .
   - Add an access level: ***POST /api/hccgw/acspm/v1/access/level/add*** .
   - Edit the access level: ***POST /api/hccgw/acspm/v1/access/level/update*** .
   - Delete an access level: ***POST /api/hccgw/acspm/v1/access/level/{id}/delete*** .
   - Batch delete access levels: ***POST /api/hccgw/acspm/v1/access/level/delete*** .

- Add resources to an access level: ***POST /api/hccgw/acspm/v1/access/level/{id}/res/add*** .
- Delete resources from an access level: ***POST /api/hccgw/acspm/v1/access/level/{id}/res/delete*** .

4. Extended the ***Alarm Type*** :
   added face recognition event (event code: 10018) to the video security.
5. Extended the extended information of an alarm file (***AlarmFileExtendInfo***).
   Added fields: **humanId**, **humanName**, **similarity**, **fileType**, **faceLibName**, and **faceLibThreshold**.
6. Extended the event's extended information (***DataBean***):
   added the object **flowRelatedInfo** (customer traffic event and traffic flow event information).

Summary of Changes in Version 2.14.0_October, 2025

1. Edited the field **areaID** to **areaId** in the request message of API ***POST /api/hccgw/resource/v1/devices/get*** .
2. Edited the data type of field **areaID** to string in the request message of API ***POST /api/hccgw/alarm/v1/alarmlog*** .
3. Added the HLS protocol type to the field **protocol** in the request message of API ***POST /api/hccgw/video/v1/live/address/get*** .
4. Added one time type for search to the field **type** in the request message of API ***POST /api/hccgw/acs/v1/event/certificaterecords/search*** .
5. In ***Person-Related Services*** :
   - Added an API to add a department (person group): ***POST /api/hccgw/person/v1/groups/add*** .
   - Added an API to edit a department (person group): ***POST /api/hccgw/person/v1/groups/update*** .
   - Added an API to delete a department (person group): ***POST /api/hccgw/person/v1/groups/delete*** .
6. Deleted alarm subscription V2 APIs and related event messages.
7. Added the ***Country/Region Code*** and ***Vehicle Brand*** to data dictionary.
8. Added a field **type** (area type) to ***BriefArea*** .
9. Added two fields **direction** and **recordTime** to ***RecordInfo*** .
10. Extended ***Status and Error Code*** :
    Added error codes VMS051025, VMS051026, VMS051027, and VMS051028.

Summary of Changes in Version 2.13.0_May, 2025

1. Added one API for editing the low battery threshold of solar-powered cameras: ***POST /api/hccgw/alarm/v1/voltagesetting/set*** .
2. Added one API for waking up a specified solar-powered camera: ***POST /api/hccgw/video/v1/video/device/wakeup*** .
3. Added the ***Maintenance Services*** .
   Added one API for searching for resources that are offline within a specified time period: ***POST /api/hccgw/maintain/v1/offline/info/list*** .
   Added one API for getting the device maintenance status details: ***POST /api/hccgw/maintenance/v1/list/device/detail*** .

Summary of Changes in Version 2.11.800_Feb., 2025

1. In ***Video-Related Services*** :
   - Extended the request and response parameters for ***POST /api/hccgw/video/v1/live/address/get*** ;
   - Added the API of searching for playback segments: ***POST /api/hccgw/video/v1/record/element/search*** ;
   - Added the API of triggering the standard MP4 recording storage function of device, and generating the download URL: ***POST /api/hccgw/video/v1/video/save*** ;
   - Added the API of getting the video recording status and downloading URL: ***POST /api/hccgw/video/v1/video/download/url*** .
2. In ***On-Board Monitoring Services*** , added 10 driver related APIs:
   - Batch search for driver information: ***POST /api/hccgw/vehicle/v1/driver/batchquery*** ;
   - Add driver: ***POST /api/hccgw/vehicle/v1/driver/add*** ;
   - Edit driver: ***POST /api/hccgw/vehicle/v1/driver/update*** ;
   - Batch delete drivers: ***POST /api/hccgw/vehicle/v1/driver/batchdel*** ;
   - Batch search for driver group information: ***POST /api/hccgw/vehicle/v1/driverGroup/batchquery*** ;
   - Add driver group: ***POST /api/hccgw/vehicle/v1/driverGroup/add*** ;
   - Edit driver group: ***POST /api/hccgw/vehicle/v1/driverGroup/update*** ;
   - Batch delete driver groups: ***POST /api/hccgw/vehicle/v1/driverGroup/batchdel*** ;
   - Apply driver's face pictures: ***POST /api/hccgw/vehicle/v1/driverFace/distribution*** ;
   - Search for the applying status of driver's face picture: ***POST /api/hccgw/vehicle/v1/driverFace/status/query*** .
3. Fixed some bugs in APIs, object descriptions, data dictionary, etc.

Summary of Changes in Version 2.11.0_Nov., 2024

1. Added the API of transmitting ISAPI protocol transparently (parameters transparently transmitted directly from OpenAPI to Hik-Connect): ***POST /api/hccgw/proxy/v1/isapi/proxypass*** ;
   Added the API of getting alarm input status (parameters transparently transmitted directly from OpenAPI to Hik-Connect): ***POST /api/hccgw/proxy/v1/areas/alarminputs/status/get*** ;
2. Added the API of getting person's QR code: ***POST /api/hccgw/person/v1/persons/qrcode*** ;
3. Added the API of getting the vehicle ACC status: ***POST /api/hccgw/resource/v1/accstatus/search*** ;
4. Added 3 APIs of Alarm Subscription (V2) and added the corresponding events:
   - Added APIs of subscribing to events: POST /api/hccgw/combine/v1/mq/subscribe;
   - Added APIs of pulling events: POST /api/hccgw/combine/v1/mq/messages;
   - Added APIs of confirming events are received: POST /api/hccgw/combine/v1/mq/messages/complete.
5. Added 4 types of event messages.
6. Corrected and adjusted ***Alarm Type*** and ***Message Type*** ;
7. Corrected several object descriptions.

Summary of Changes in Version 6.2.1_Apr., 2024

1. Extended ***AlarmMsg*** and added ***ANPRInfo*** , ***PictureInfo*** , and ***PlateRect*** .
2. Added ***Attendance Capabilities*** and a corresponding typical application ***Search for Attendance Data*** :
   - added the API of searching for Total Time Card ***POST /api/hccgw/attendance/v1/report/totaltimecard/list*** ;
   - added the time/date format types ***Date Format Type*** , ***Time Format Type*** , and ***Time Duration Format Type*** ;
   - added the object description of Total Time Card report data ***TotalTimeCardReportData*** .

Summary of Changes in Version 6.2.0_Mar., 2024

1. Extended ***Person Management Capabilities*** and added relevant typical applications ***Add Person*** and ***Update Fingerprint/Card Information*** :
   - extended request parameters for the API of getting department list ***POST /api/hccgw/person/v1/groups/search*** ;
   - added the API of adding person on the platform ***POST /api/hccgw/person/v1/persons/add*** ;
   - added the API of deleting person ***POST /api/hccgw/person/v1/persons/delete*** ;
   - added the API of updating person's basic information ***POST /api/hccgw/person/v1/persons/update*** ;
   - added the API of updating person's face picture ***POST /api/hccgw/person/v1/persons/photo*** ;
   - added the API of collecting fingerprint by device ***POST /api/hccgw/person/v1/persons/fingercollect*** ;
   - added the API of updating person's fingerprint information ***POST /api/hccgw/person/v1/persons/updatefingers*** ;
   - added the API of collecting card by device ***POST /api/hccgw/person/v1/persons/cardcollect*** ;
   - added the API of updating person's card information ***POST /api/hccgw/person/v1/persons/updatecards*** ;
   - added the API of updating person's PIN code information ***POST /api/hccgw/person/v1/persons/updatepincode*** ;
   - added the API of viewing information of a single person ***POST /api/hccgw/person/v1/persons/get*** ;
   - added the API of fast adding a person ***POST /api/hccgw/person/v1/persons/quick/add*** ;
   - added the API of searching for person list ***POST /api/hccgw/person/v1/persons/list*** .
2. Extended ***Access Control Capabilities*** and added the typical application ***Apply Access Level*** :
   - added the API of searching for card swiping records ***POST /api/hccgw/acs/v1/event/certificaterecords/search*** ;
   - added the API of searching for access level list ***POST /api/hccgw/acspm/v1/accesslevel/list*** ;
   - added the API of getting access level applying information by specifying person ID ***POST /api/hccgw/acspm/v1/maintain/overview/person/{id}/elementdetail*** ;
   - added the API of assigning access level by person ***POST /api/hccgw/acspm/v1/accesslevel/person/add*** ;

- added the API of removing access level by person ***POST /api/hccgw/acspm/v1/accesslevel/person/delete*** ;
- added the API of modifying access level by person ***POST /api/hccgw/acspm/v1/accesslevel/person/modify*** .

3. Added the typical application ***Add Resident*** , ***Update Resident*** , and ***Add Temporary Pass*** : Modified the request parameter for the API of adding temporary passes ***POST /api/hccgw/vims/v1/tempauth/add*** and API of updating temporary passes ***POST /api/hccgw/vims/v1/tempauth/update*** .
4. Added authentication events in ***Alarm Type*** and authentication events ***Message Type*** .
5. Added error codes in ***Status and Error Code*** .

Summary of Changes in Version 6.0.200_Nov., 2023

1. Extended the response parameters and the corresponding response message for ***POST /api/hccgw/resource/v1/device/capturePic*** and ***POST /api/hccgw/resource/v1/areas/cameras/thumbnail/get*** :
   added a response parameter **isEncrypted** (whether the picture is encrypted).
2. Extended error codes for ***openAPI Errors*** :
   Added OPEN000501, OPEN000502, OPEN000503, OPEN000504, OPEN000505, OPEN000510, OPEN000511, OPEN000550, OPEN000552, OPEN000554, OPEN000555, and OPEN000556.

Summary of Changes_June., 2023

1. Extended the request parameters and the corresponding request message for ***POST /api/hccgw/resource/v1/devices/get*** :
   added a request parameter **areaID** (area ID);
   extended the description for the request parameter **deviceCategory**.
2. Added an API for synchronously refreshing device status: ***POST /api/hccgw/resource/v1/device/{deviceId}/refresh*** .
3. Extended the response parameters and the corresponding response message for ***POST /api/hccgw/alarm/v1/alarmrules/add*** :
   added a response parameter **data** and the corresponding object description ***AlarmRuleOperation*** .
4. Extended the response parameters and the corresponding response message for ***POST /api/hccgw/alarm/v1/alarmrules/update*** :
   added a response parameter **data** and the corresponding object description ***AlarmRuleOperation*** .
5. Extended the response parameters and the corresponding response message for ***POST /api/hccgw/alarm/v1/alarmlinkage/add*** :
   added a response parameter **data** and the corresponding object description ***AlarmLinkage*** .
6. Added an error code **OPEN000031** and modified **OPEN000006** in ***Status and Error Code*** .

Summary of Changes_May., 2023

1. Extended the time threshold from an hour to 2 days for auto-canceling the alarm or message subscription:

Subscribe to and Get Alarms ;
Subscribe to and Get Messages .

2. Added a validity for the response parameter **captureUrl**: ***POST /api/hccgw/resource/v1/device/capturePic*** .
   Added a validity for the response parameter **pictureURL**: ***POST /api/hccgw/resource/v1/areas/cameras/thumbnail/get*** .
   Added a validity for the response parameter **url**: ***POST /api/hccgw/resource/v1/picture/uploadparam/get*** .
   Added a validity for the parameter **URL**: ***AlarmFile*** .
   Added a validity for the parameter **url**: ***Attachment*** .
3. Extended the response parameters and extended the corresponding response message: ***POST /api/hccgw/resource/v1/areadetail/get*** :
   added a response parameter **areaPath** (detailed path starting from the origin area to the current area) to ***BriefArea*** .
4. Added a request parameter **reqNumber** (information volume per request) and added a response message: ***POST /api/hccgw/alarm/v1/mq/messages*** .
5. Added an API for getting the list of alarm logs: ***POST /api/hccgw/alarm/v1/alarmlog*** .
6. Extended the description for the request parameter **eventType**: ***POST /api/hccgw/rawmsg/v1/mq/subscribe*** .
7. Added an event type **100657** (Leaving Queue Detection): ***Alarm Type*** .
8. Added 2 parameters **currentEvent** (whether it is real-time alarm) and **queueRelatedInfo** (queuing-alarm related information): ***AlarmMsg*** .
9. Extended the description of **enable**: ***ImportToArea*** .
10. Added 6 error codes (**OPEN000024**, **OPEN000025**, **OPEN000026**, **OPEN000027**, **OPEN000028**, and **OPEN000029**): ***openAPI Errors*** .

Summary of Changes in Version 1.2.1_Mar., 2023

1. Added request frequency limit as an API rule and specifies **Content-Type** as application/json for data format: ***API Rules*** .
2. Added a response parameter **areaDomain** for ***GET /api/hccgw/platform/v1/streamtoken/get*** .
3. Added a request parameter **deleteVehicle** for ***POST /api/hccgw/resource/v1/devices/delete*** .
4. Added a response parameter **failedResultList** for ***POST /api/hccgw/vims/v1/person/add*** .
5. Extended the description for the parameter **includeSubArea**:
   POST /api/hccgw/resource/v1/areas/cameras/get ;
   POST /api/hccgw/resource/v1/areas/alarminputs/get ;
   POST /api/hccgw/resource/v1/areas/alarmoutputs/get ;
   POST /api/hccgw/resource/v1/areas/doors/get .
6. Added an API for capturing pictures by camera channel: ***POST /api/hccgw/resource/v1/device/capturePic*** .
7. Added an API for deleting resources from an area by resource IDs: ***POST /api/hccgw/resource/v1/areas/resources/delete*** .
8. Added an API for getting the alarm input status: ***POST /api/hccgw/resource/v1/areas/alarminputs/status/get*** .

9. Added an API for ISAPI protocol transmission: ***POST /api/hccgw/video/v1/isapi/proxypass*** .
10. Added an API for getting door information: ***POST /api/hccgw/resource/v1/areas/doors/get*** .
11. Added APIs of on-board monitoring services:
    POST /api/hccgw/resource/v1/areas/vehicles/add ;
    POST /api/hccgw/resource/v1/areas/vehicles/{id}/update ;
    POST /api/hccgw/resource/v1/areas/vehicles/get ;
    POST /api/hccgw/resource/v1/picture/uploadparam/get .
12. Added an alarm main category **alarmCategoryDriving** (On-Board Monitoring) and 2 alarm sub categories **alarmSubCategoryMobileDevice** (On-Board Device) and **alarmSubCategoryVehicle** (Vehicle Linked to On-Board Device): ***Alarm Category*** .
    Added a list of alarm types for on-board monitoring: ***Alarm Type*** .
    Added **vehicle** (Vehicle Linked to On-Board Device) and **mobileDevice** (On-Board Device) for ***Alarm Source*** .
    Added 2 resource types **vehicle** (Vehicle Linked to On-Board Device) and **door**: ***Resource Type*** .
    Added 2 device categories **accessControllerDevice** and **videoIntercomDevice**: ***Device Category*** .
    Added a list of message types for on-board monitoring: ***Message Type*** .
13. Added a parameter **relatedVehicleInfo** for ***AddDeviceResponse*** .
    Added values of **type** and deleted **suffixName** for ***AlarmFile*** .
    Added values of **fileContent** for ***AlarmFileInfo*** .
    Added a parameter **vehicleRelatedInfo** (***VehicleRelatedInfo***) for ***AlarmMsg*** and ***DataBean*** .
    Added a parameter **abilitySet** (***Capability Set***) and values of **online** for ***CameraInfo*** .
    Added parameters **uuid**, **update**, and **video** to ***Event(1)*** .
    Added two parameters **doorChannel** and **relatedVehicleInfo** to ***GetDeviceInfo*** .
14. Added object descriptions: ***DoorChannel*** ; ***GPSInfo*** ; ***VehicleInfo(2)*** ; ***VehicleRelatedInfo*** .
    Changed the object description **Picture** to ***Attachment*** , and extended the parameter **url**.
    Modified the parameter **groupId** for ***PersonDTO*** .
    Extended ***VehicleInfo(3)*** .
15. Added error codes to ***Internal Errors*** and ***openAPI Errors*** .

Summary of Changes in Version 1.2_Dec., 2022

Added message-related services, video intercom services, and access control services. See details in ***Message-Related Services*** , ***Video Intercom Services*** , and ***Access Control Services*** .

Summary of Changes in Version 1.1_Aug., 2022

New document.

Chapter 2 Getting Started

1. Get the Hik Connect for Teams server address and register an account.

Country/Region	Server Address
Russia	https://team.hikcentralconnectru.com
Singapore	https://isgp-team.hikcentralconnect.com
Europe	https://ieu-team.hikcentralconnect.com
South America	https://isa-team.hikcentralconnect.com
North America	https://ius-team.hikcentralconnect.com
India	https://iind-team.hikcentralconnect.com

2. Obtain the AK and SK from the technical support by providing your Hik Connect for Teams account.

Note

Make sure you properly keep the AK and SK. Once they are leaked, contact the technical support to get new AK and SK.

3. Request for the token by providing the AK and SK: ***POST /api/hccgw/platform/v1/token/get*** .
4. Call other APIs by providing the token and other parameters as needed.

Chapter 3 Protocol Summary

3.1 API Rules

Name	Description
Transmission Protocol	HTTPS is adopted to ensure secure transmission.
Request URL	Format of request URL: https://{ hostname }:hostname:{port}/{ uri } • **hostname**: the IP address or domain name of Hik Connect for Teams. • **port**: the port No. for accessing Hik Connect for Teams. • **uri**: the URI of the API. See details in ***API Reference*** .
Request Method	POST/GET.
Data Format	JSON format for both request and response messages. Supports application/json as Content-Type.
Character Encoding	UTF-8.
Security Authentication	Security authentication based on AK/SK that is required before calling APIs.
Permission Control	Only those APIs with calling permission can be called successfully.
Certificate Requirement	Not required currently.
Response Rules	See details in ***Response Rules*** .
Request Frequency	No more than 5 times are allowed for request per second.

3.2 Signature and Authentication

The APIs in this document use AK/SK authentication.

Make sure you have applied for and obtained the AK and SK from the technical support. You can call the login API ***POST /api/hccgw/platform/v1/token/get*** by using the AK and SK to get the authentication token. The validity period of the token is 7 days, within which you can call the login API repeatedly to refresh the token so that the remaining validity period will be restored to 7 days again.

The token (the "**Token**" parameter) should be transmitted in the request Headers for calling other APIs.

Example
Get the Platform Information
Request address: http://www.example.com/api/hccgw/platform/v1/systemproperties

HTTP method: GET
Headers:

```
Accept: application/json, text/plain, */*
Accept-Encoding: gzip, deflate, br
Accept-Language: zh-CN,zh;q=0.9
Cache-Control: no-cache
Connection: keep-alive
Content-Type: application/json;charset=utf-8
Token: hcc.vh5hb9q495qjjei71g3pdmrjslo5wyti
```

Request

```
{
}
```

Response

```
{
  "data": {
    "systemGUID": "fe436da09dca4e46996c1178f06c7911"
  },
  "errorCode": "0"
}
```

3.3 Response Rules

The response returned after calling APIs contains the response message and status/error code.

Response Message

The response message is in JSON format and encoded by UTF-8 rule. It consists of multiple output parameters, and the parameters are named by camel case. Refer to the parameter description below.

```
{
  "errorCode": //Status/error code.
  "message": //Error description (not returned for success).
  "data"://Returned data in details.
}
```

Status/Error Code

The status or error code will be returned in the response message. The status code is 0 for success and other values for failure. Refer to ***Status and Error Code*** for details.

Example
Success

```
{
  "data": {
    "accessToken": "hcc.vh5hb9q495qjjei71g3pdmrjslo5wyti",
```

```
    "expireTime": 1655193135,
    "userId": "8a7485aa7f209dd5017f2141adff0019"
  },
  "errorCode": "0"
}
```


Example

Failure


```
{
  "message": "SECRET_KEY_NOT_EQUALS{OPEN300002}",
  "errorCode": "OPEN300002"
}
```

Chapter 4 Typical Applications

4.1 Get System Information

Get system information, package usage information, streaming token, and system user list.

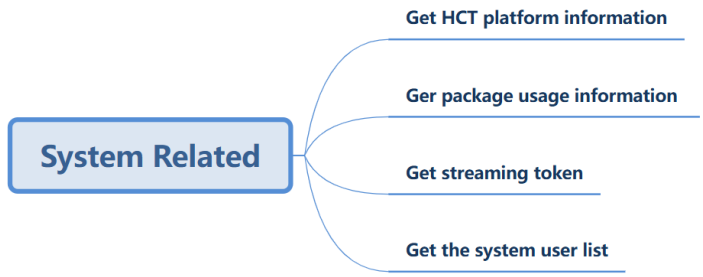


Figure 4-1 System-Related Features

Function	Description
Get HCT platform information	***GET /api/hccgw/platform/v1/systemproperties***
Get package usage information	***GET /api/hccgw/platform/v1/servicepackage***
Get streaming token	***GET /api/hccgw/platform/v1/streamtoken/get***
Get system user list	***POST /api/hccgw/platform/v1/users/get***

4.2 Manage Resources

The document provides a full set of APIs to manage resources including devices, areas, cameras, alarm inputs, alarm outputs and other resources. For example, the APIs can be used to obtain resource indexCode and perform operations on resources.

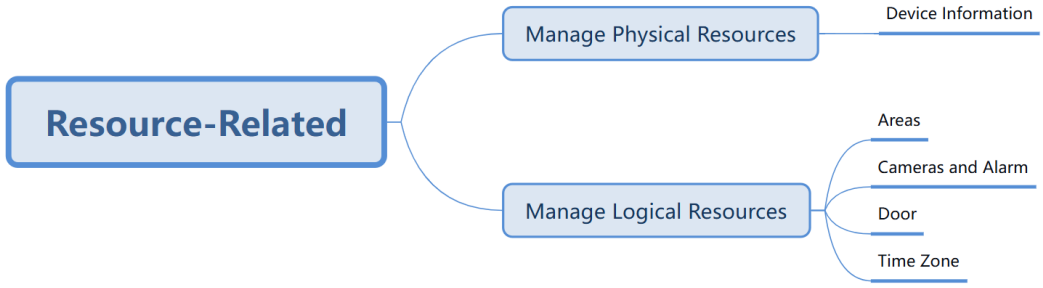


Figure 4-2 Get Resource Information

Note

- By calling physical resource APIs, you can obtain the information of the physical devices, including single-resource information and all-resource information.
- By calling logical resource APIs, you can obtain site information, root area information, subordinate organization information of parent areas, single-area information, all-area information, and detailed area information. Camera information, as a kind of logical resource added to areas, is part of the area information.

Manage Physical Resources

Manage Physical Resources provides the capability to manage physical devices added to the HCT platform.

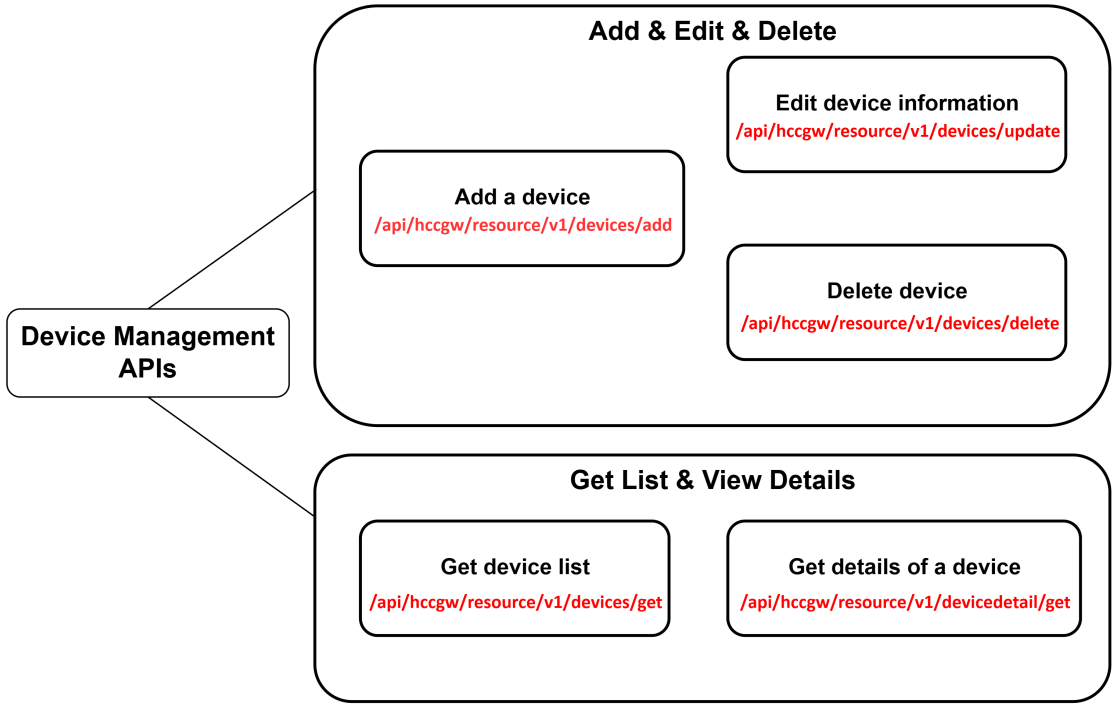


Figure 4-3 Manage Physical Resources

Function	Description
Get the device list by specifying device information.	***POST /api/hccgw/resource/v1/devices/get***
Search for and get the device information by device serial No.	***POST /api/hccgw/resource/v1/devicedetail/get***
Add device by specifying the device serial No., etc.	***POST /api/hccgw/resource/v1/devices/add***
Edit device information.	***POST /api/hccgw/resource/v1/devices/update***
Delete device by the specifying device ID, etc.	***POST /api/hccgw/resource/v1/devices/delete***

Manage Logical Resources

Manage Logical Resources provides the capability to manage logical resources, including areas, cameras, alarm inputs/outputs, access control, time zones, and other information, to meet the development needs of multiple platforms (web, PC, and mobile).

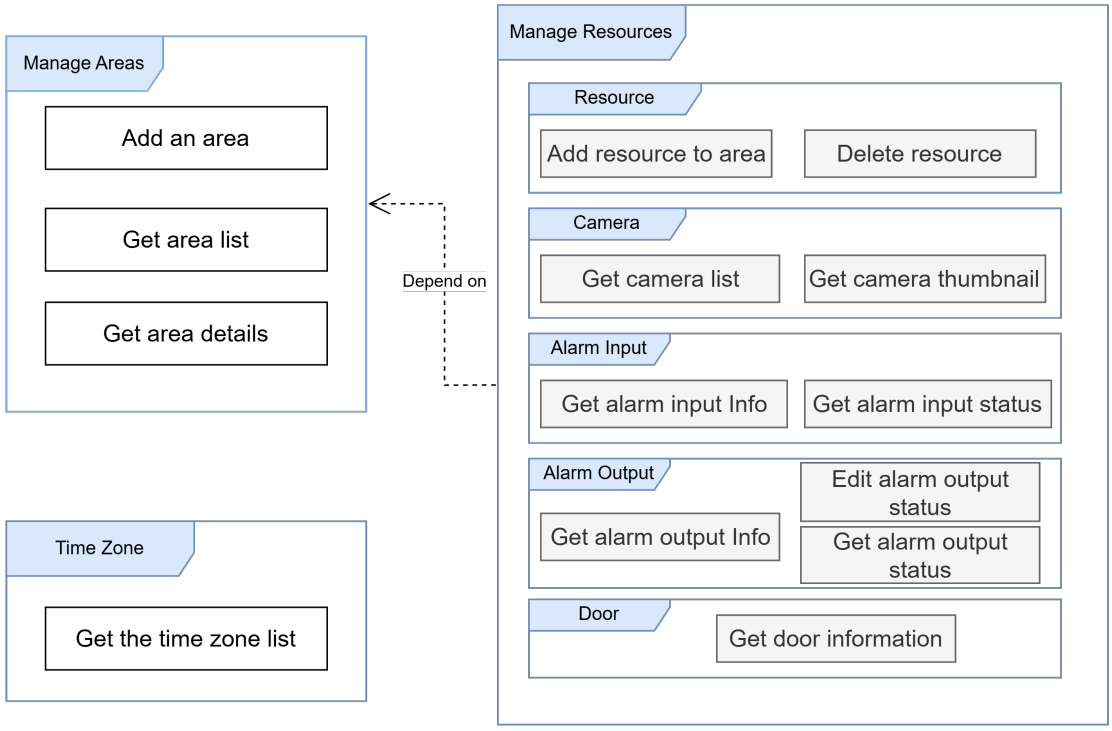


Figure 4-4 Manage Logical Resources

Table 4-1 Area

Function	Description
Add area by specifying area-related information.	***POST /api/hccgw/resource/v1/areas/add***
Get the area list.	***POST /api/hccgw/resource/v1/areas/get***
Get area information by specifying area ID.	***POST /api/hccgw/resource/v1/areadetail/get***

Table 4-2 Cameras, Alarm Inputs/Outputs and Doors

Function	Description
Add resource to area by specifying the resource information.	***POST /api/hccgw/resource/v1/areas/resources/add***
Delete resources from an area by resource IDs.	***POST /api/hccgw/resource/v1/areas/resources/delete***
Get camera list by specifying the camera information.	***POST /api/hccgw/resource/v1/areas/cameras/get***

Function	Description
Get the information of alarm output resource	***POST /api/hccgw/resource/v1/areas/alarmoutputs/get***
Get information of alarm input resources	***POST /api/hccgw/resource/v1/areas/alarminputs/get***
Get the alarm input status	***POST /api/hccgw/resource/v1/areas/alarminputs/status/get***
Edit alarm output status	***POST /api/hccgw/resource/v1/areas/alarmoutputs/control***
Get alarm output status	***POST /api/hccgw/resource/v1/areas/alarmoutputs/status/get***
Get camera thumbnail by specifying camera information	***POST /api/hccgw/resource/v1/areas/cameras/thumbnail/get***
Get door information	***POST /api/hccgw/resource/v1/areas/doors/get***

Table 4-3 Time Zone

Function	Description
Get the time zone list	***POST /api/hccgw/resource/v1/timezone/get***

4.3 Subscribe to and Get Alarms

The document provides a full set of APIs to subscribe to alarms and get alarm information.

Alarms refer to the content uploaded by a device when it triggers a configured alarm rule. After configuring alarm rules, the system is capable of receiving alarms that meet the configured rules. You can search for alarm logs through APIs, subscribe to alarm messages you are interested in, and pull alarm messages through APIs .

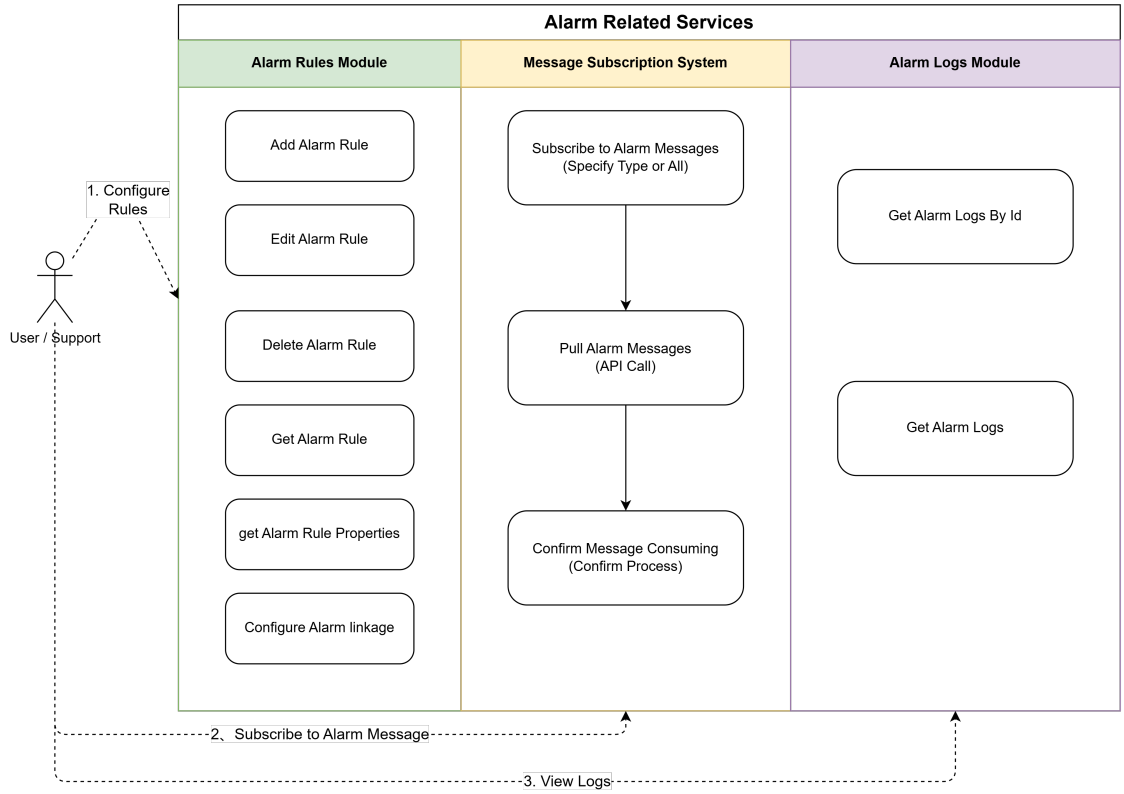


Figure 4-5 Alarm Services

Table 4-4 Alarm Rules

Function	Description
Configure alarm rules.	***POST /api/hccgw/alarm/v1/alarmrules/add***
Get the list of alarm rules	***POST /api/hccgw/alarm/v1/alarmrules/get***
Edit alarm rules	***POST /api/hccgw/alarm/v1/alarmrules/update***
Get the alarm priority list	***POST /api/hccgw/alarm/v1/alarmpriorities/get***
Get the list of alarm arming schedule templates	***POST /api/hccgw/alarm/v1/receivingschedules/get***
Configure alarm linkage	***POST /api/hccgw/alarm/v1/alarmlinkage/add***

Table 4-5 Message Subscription

Function	Description
Subscribe to alarm information	***POST /api/hccgw/alarm/v1/mq/subscribe***
Get alarm information	***POST /api/hccgw/alarm/v1/mq/messages***
Confirm that alarms are received by specifying the batchId	***POST /api/hccgw/alarm/v1/mq/messages/complete***

Table 4-6 Alarm Log

Function	Description
Get the list of alarm logs	***POST /api/hccgw/alarm/v1/alarmlog***

Note

- **Alarm Rules**: You can configure alarm rules using the Alarm Rules APIs. Once configured, the system will automatically receive events that match your rule criteria. You can also retrieve detailed information about your configured rules via the corresponding API.
- **Message Subscription**: You can access alarm logs through the Alarm Log APIs. This allows you to retrieve logs in batch using filter criteria, or get the details of a specific alarm log.
- **Alarm Log**: You can subscribe to specific alarm messages of interest, or subscribe to all alarm messages, via the Message Subscribe module. Once subscribed, you can pull alarm messages using the provided API. After consuming the messages, you can commit the offset to acknowledge receipt.

4.4 Configure Alarm Rules

Messages refer to the content that a device actively uploads without an external trigger. You can manage these messages through the APIs we provide.

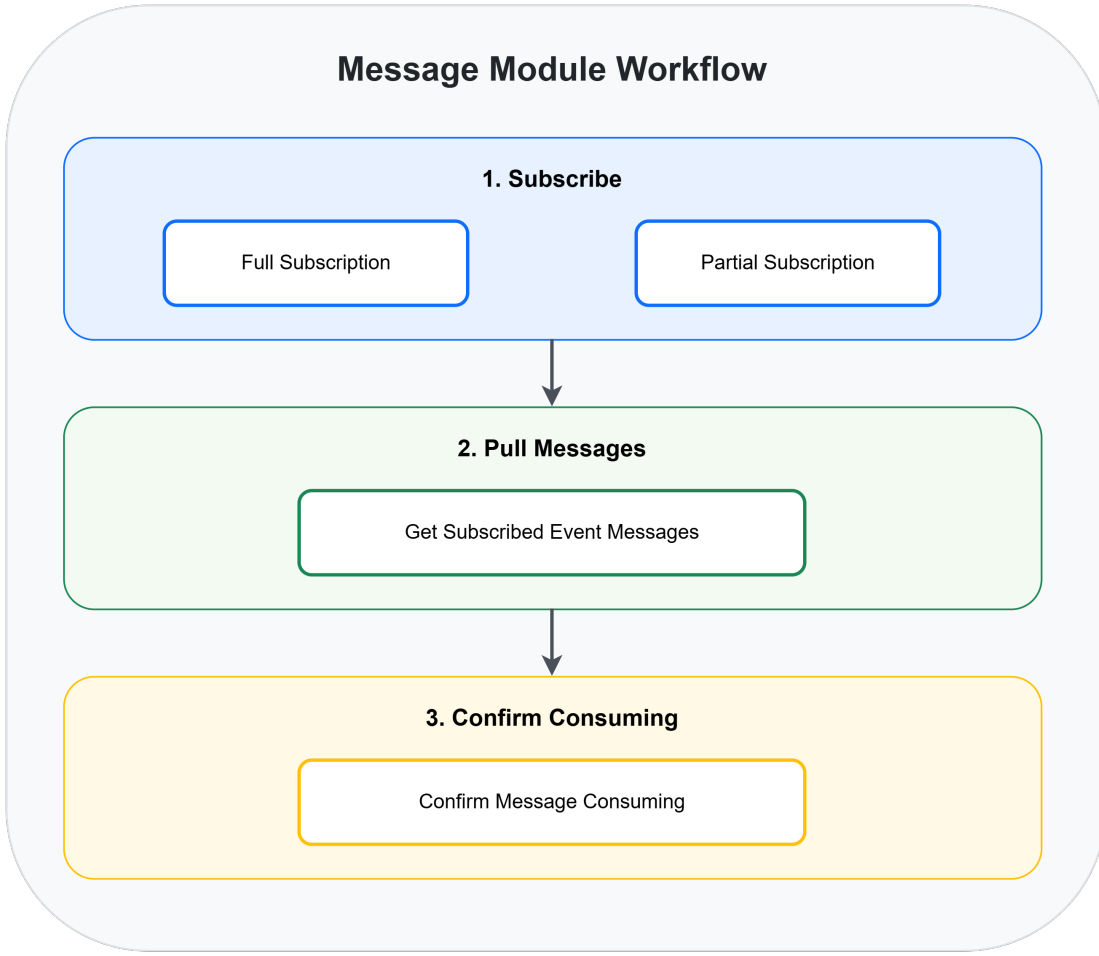


Figure 4-6 Sequence Diagram of Configuring Alarm Rules

1. You can subscribe to messages through the Subscription API. There are two options: you can subscribe to all messages, or subscribe only to specific messages of interest. This is done via ***POST /api/hccgw/rawmsg/v1/mq/subscribe*** .
2. You can pull subscribed messages via ***POST /api/hccgw/resource/v1/devices/get*** .
3. You can acknowledge messages by calling ***POST /api/hccgw/rawmsg/v1/mq/messages/complete*** .

Table 4-7 Message-Related Services

Function	Description
Subscribe to messages.	***POST /api/hccgw/rawmsg/v1/mq/subscribe***
Get messages manually from the device.	***POST /api/hccgw/resource/v1/devices/get***
Confirm that message consuming is finished according to the input batchId.	***POST /api/hccgw/rawmsg/v1/mq/messages/complete***

Note

- It is recommended that the interval of getting messages be 500 ms.
- If messages are not received within 2 days, the message subscription will be canceled.

4.5 Subscribe to and Get Messages

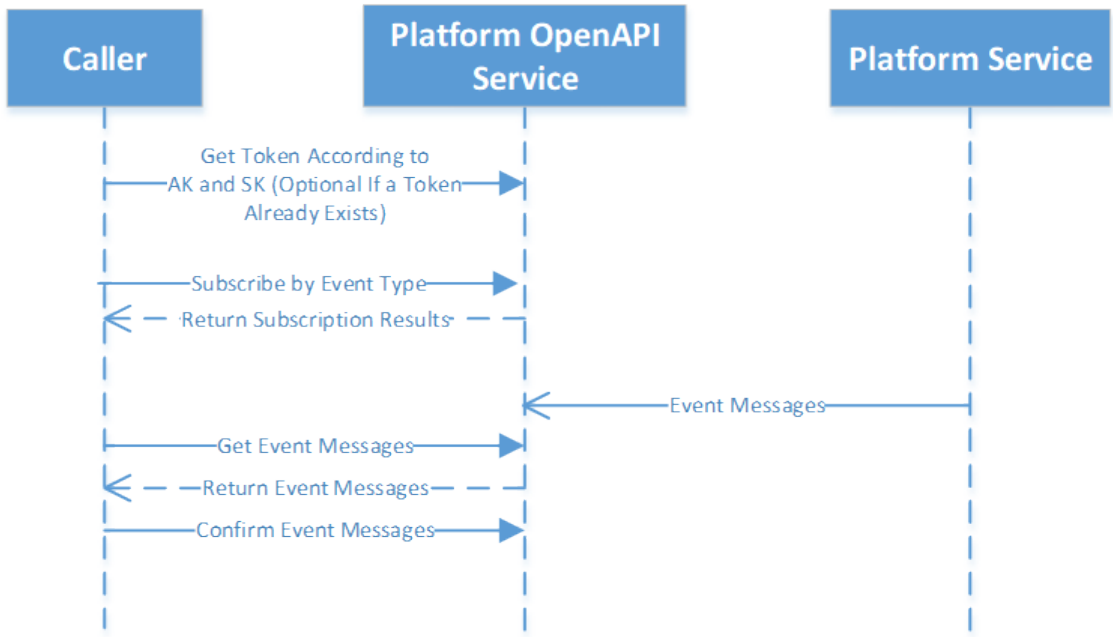


Figure 4-7 Sequence Diagram of Subscribing to and Getting Messages

Note

- It is recommended that the interval of getting messages be 500 ms.
- If messages are not received within 2 days, the message subscription will be canceled.

4.6 Start Live View / Playback Without Plug-in

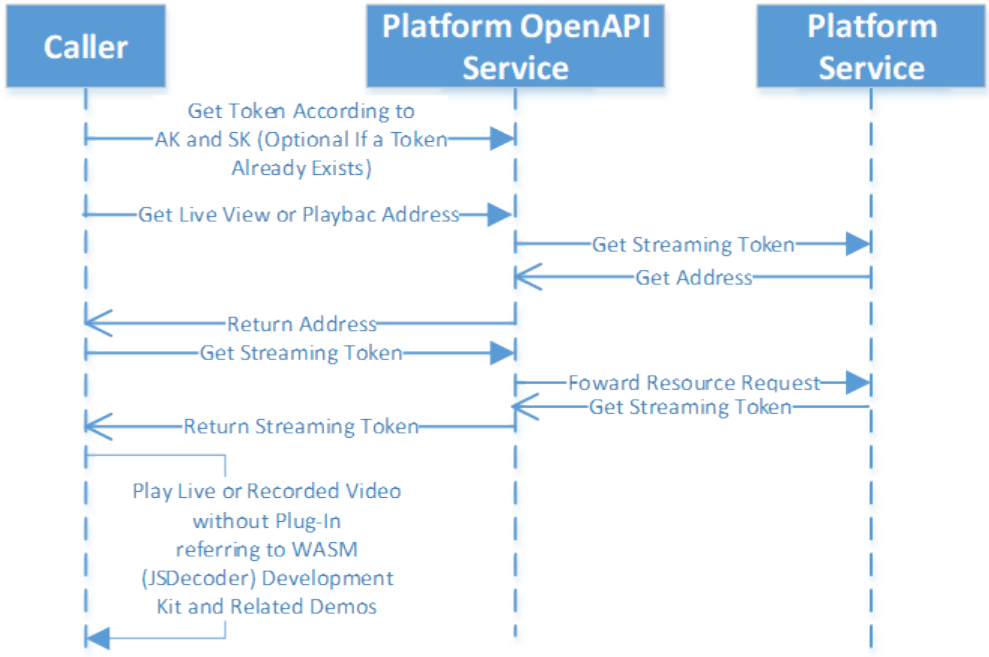


Figure 4-8 Sequence Diagram of Starting Live View / Playback Without Plug-in

4.7 Receive Video Intercom Events

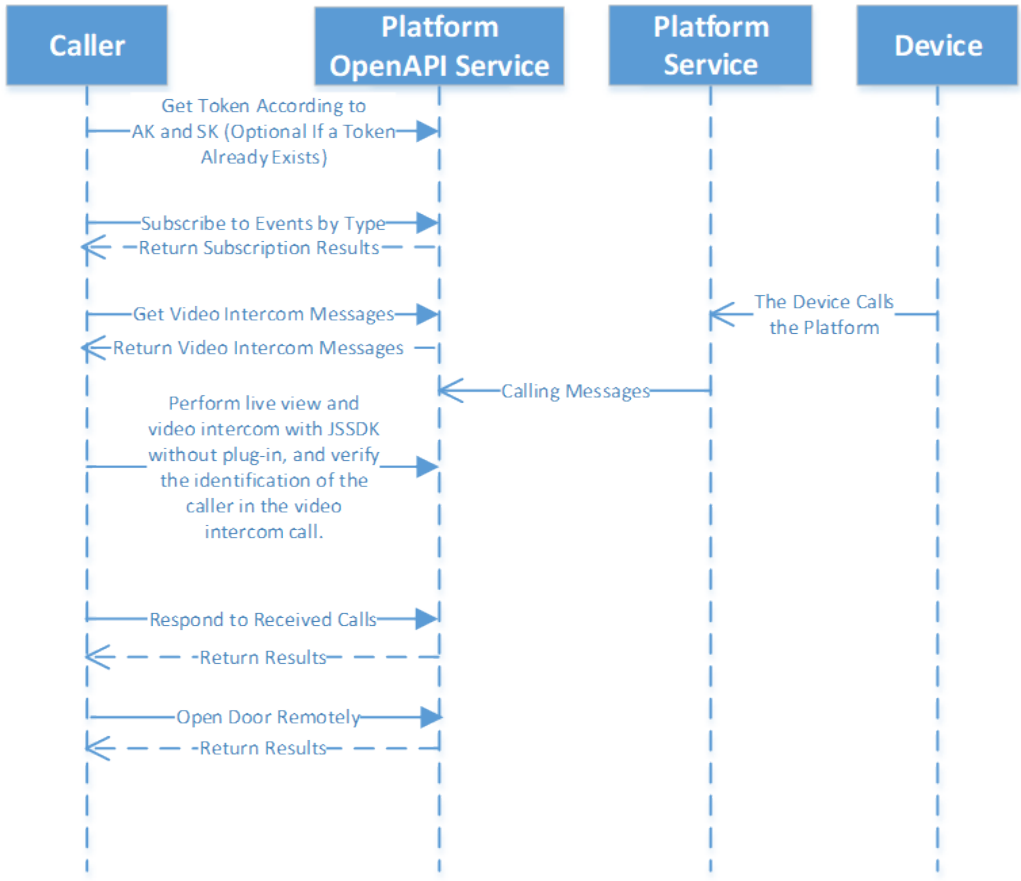


Figure 4-9 Sequence Diagram of Receiving Video Intercom Events

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. Call ***POST /api/hccgw/rawmsg/v1/mq/subscribe*** to subscribe to video intercom events (Msg140001).
3. When a device calls, the Hik Connect for Teams platform will send the event messages to OpenAPI service.
4. The caller calls ***POST /api/hccgw/rawmsg/v1/mq/messages*** to get the video intercom messages.

5. With the JSSDK in the development kit , the caller can perform live view and video intercom without plug-in.
6. Based on the received video intercom messages, the caller can call ***POST /api/hccgw/devcall/v1/call/receive*** to respond to the received calls, and can then call ***POST /api/hccgw/acs/v1/remote/control*** to open the door remotely.

4.8 Get Department List

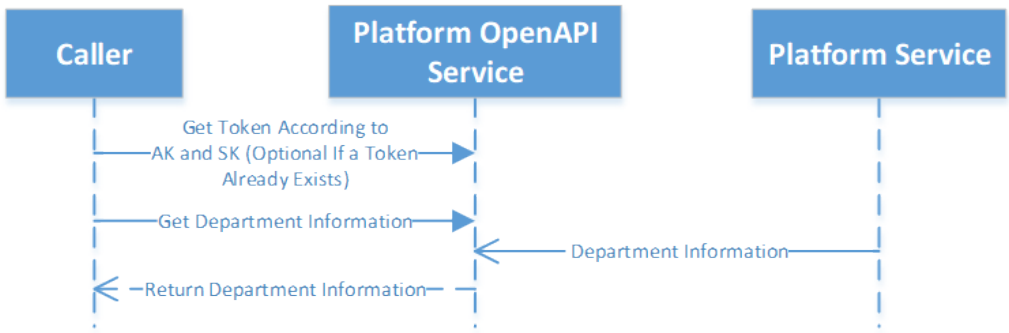


Figure 4-10 Sequence Diagram of Getting Department List

Hik Connect for Teams OpenAPI supports getting department list.

4.9 Manage On-Board Monitoring

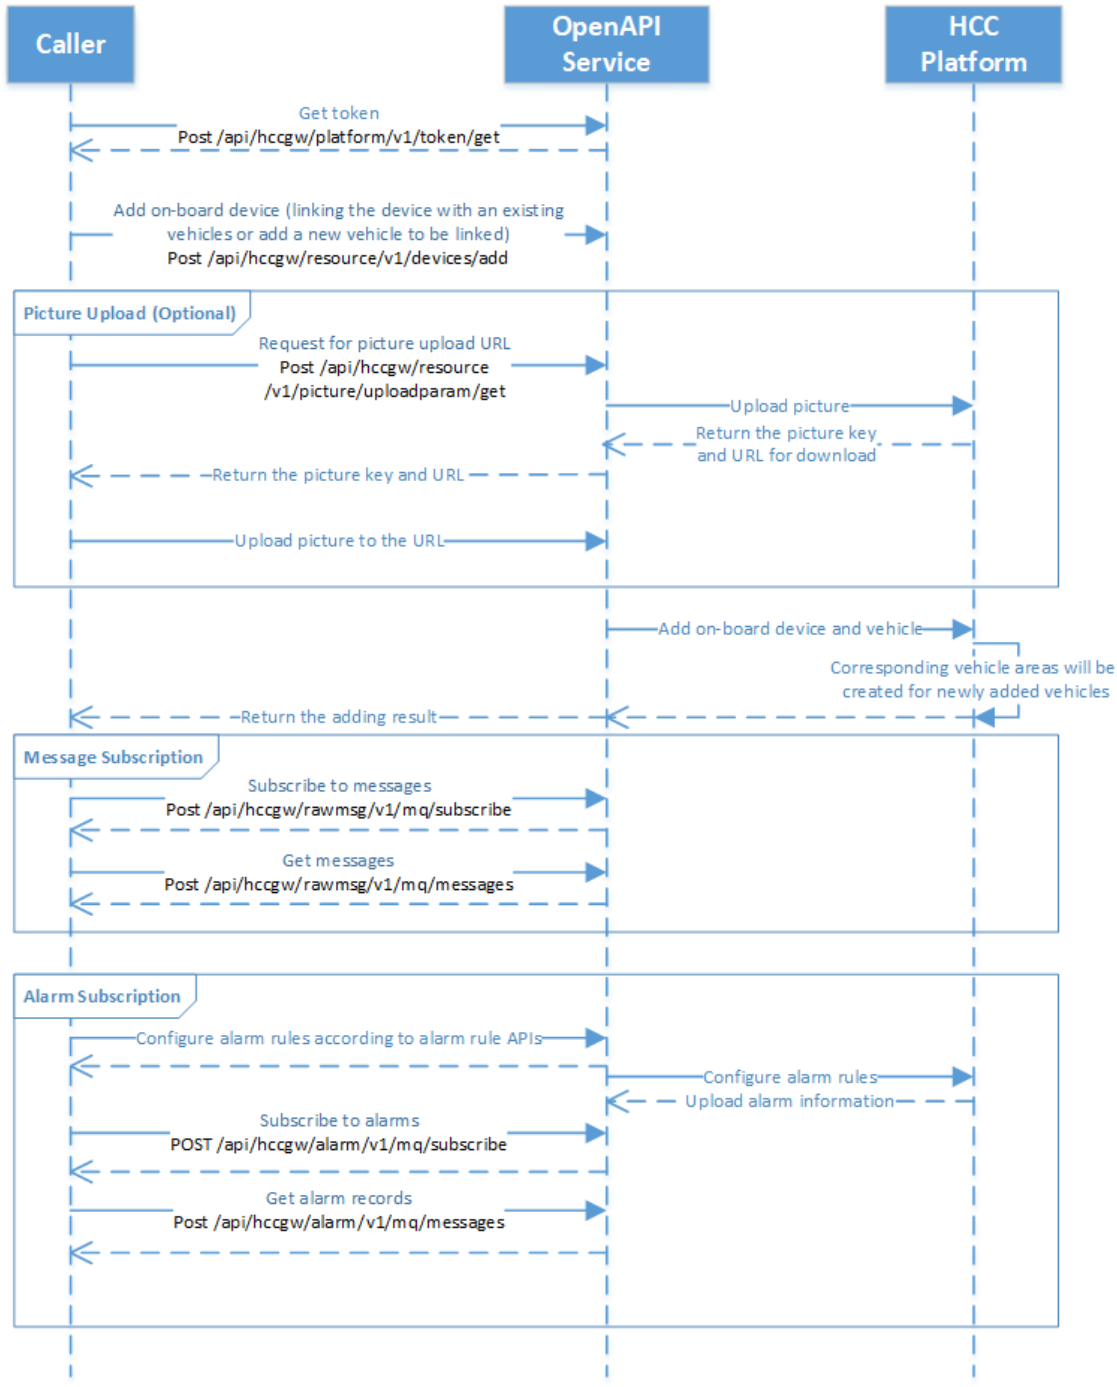


Figure 4-11 Sequence Diagram of Managing On-Board Monitoring

1. Call ***POST /api/hccgw/resource/v1/devices/add*** to add on-board devices. When adding devices, you should link them with existing vehicles or add new vehicles to the platform to be linked with.

   Note

   - When linking the on-board device with an existing vehicle, make sure the device and vehicle are in the same area.
   - All logical resources of the added on-board devices will be imported to the area of linked vehicles.
   - Support separate management of on-board devices and linked vehicles. See details in ***Device Information*** and ***On-Board Monitoring Services*** respectively.

2. Call ***POST /api/hccgw/resource/v1/picture/uploadparam/get*** to upload pictures and link them with vehicles. Currently a vehicle can only be linked with one picture.
3. When you add vehicles, the corresponding vehicle area will be created by the platform. The vehicle and its area share the same ID. If you delete a vehicle, its area will also be deleted. See details of deleting vehicles in ***POST /api/hccgw/resource/v1/areas/resources/delete*** .

   Note

   The free package only supports adding 10 vehicles and 8 camera channels, and some functions are limited. If you want to access more functions, please contact the service provider.

4.10 Add Person

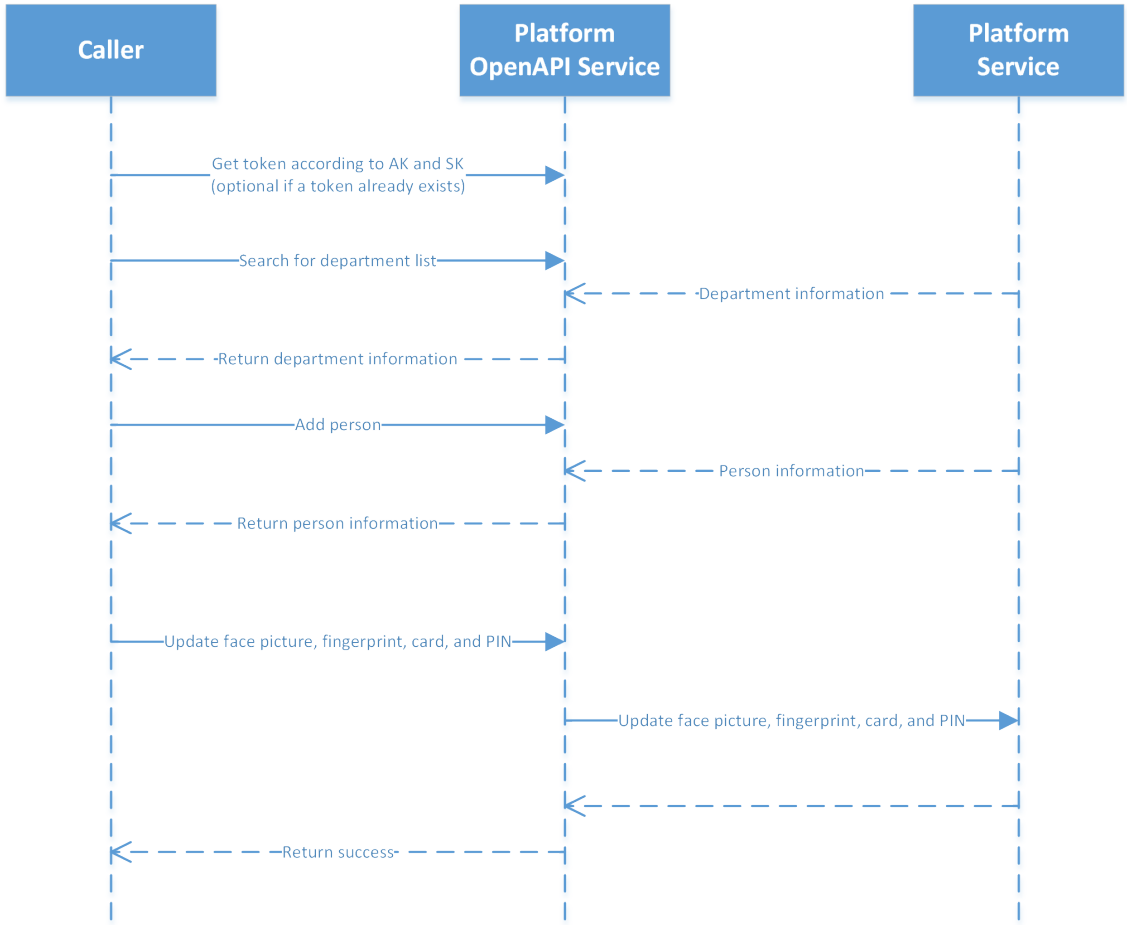


Figure 4-12 Sequence Diagram of Adding Person

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. Call ***POST /api/hccgw/person/v1/groups/search*** to get the department list. The obtained department ID can be used for subsequent person adding.
3. Call ***POST /api/hccgw/person/v1/persons/add*** to add persons on the platform.

Note

After the person is added successfully, you can perform the following operations as needed.

- For adding credential information, proceed to the next step.
- For adding this person to device, refer to ***Apply Access Level*** .
- For fast adding a person and fast applying the person's face picture and PIN code to device with a single protocol, refer to ***POST /api/hccgw/person/v1/persons/quick/add*** .

4. Call ***POST /api/hccgw/person/v1/persons/photo*** to update person's profile information.

Call ***POST /api/hccgw/person/v1/persons/updatepincode*** to update person's PIN information. For updating person's fingerprint/card information, refer to ***Update Fingerprint/Card Information*** .

Note

Operations on person's credential information are not in sequence.

4.11 Apply Access Level

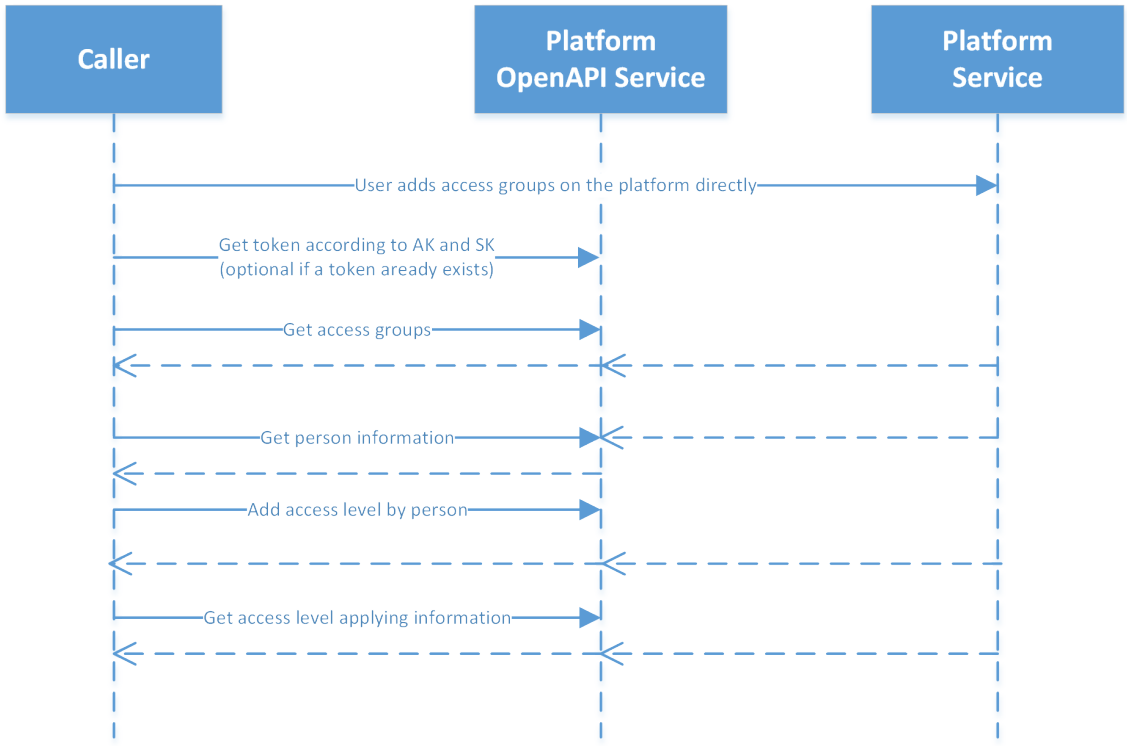


Figure 4-13 Sequence Diagram of Applying Access Level

1. Users should add access group(s) on the platform first.
2. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
3. Call ***POST /api/hccgw/acspm/v1/accesslevel/list*** to get the access group information added in step 1.
4. Call ***POST /api/hccgw/person/v1/persons/list*** to get the person information.
5. With information obtained in the previous 2 steps, call ***POST /api/hccgw/acspm/v1/accesslevel/person/add*** to assign access level by person, call ***POST /api/hccgw/acspm/v1/accesslevel/person/delete*** to remove access level by person, and call ***POST /api/hccgw/acspm/v1/accesslevel/person/modify*** to modify person's access level.

6. Call ***POST /api/hccgw/acspm/v1/maintain/overview/person/{id}/elementdetail*** to get the access level applying information.
7. After the person is linked with the access group, updates on the basic person information and linked credential information (face picture, card, and fingerprint) will synchronize with those on device of the access group.

4.12 Update Fingerprint/Card Information

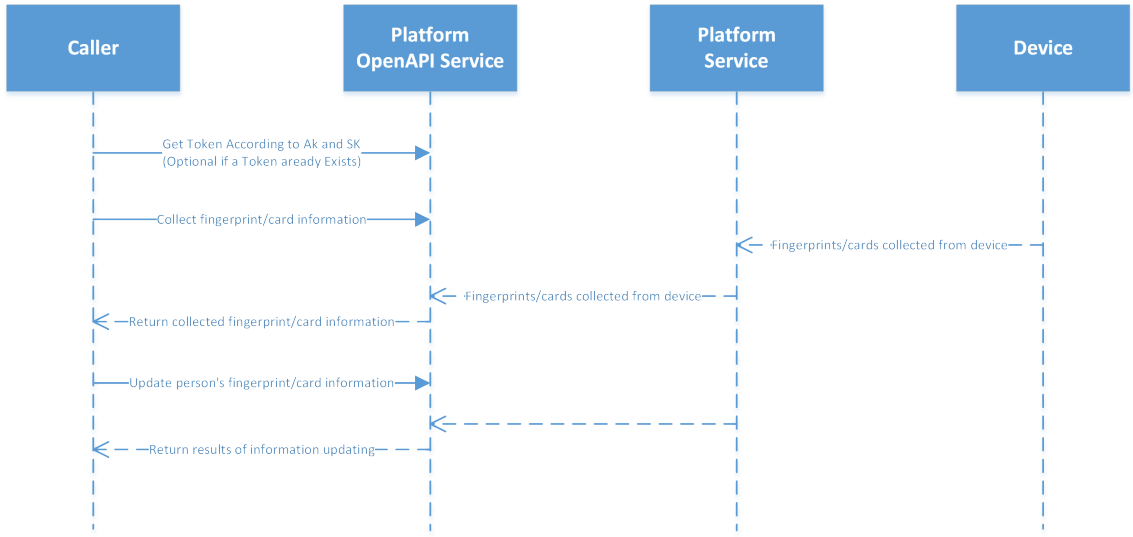


Figure 4-14 Sequence Diagram of Updating Fingerprint/Card Information

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. Call ***POST /api/hccgw/person/v1/persons/fingercollect*** to collect fingerprint information.
   Call ***POST /api/hccgw/person/v1/persons/cardcollect*** to collect card information.
3. Call ***POST /api/hccgw/person/v1/persons/updatefingers*** to update fingerprint information.
   Call ***POST /api/hccgw/person/v1/persons/updatecards*** to update card information.

Note

The fingerprint information must be collected from device.
For card without card No. showing, the card information can be collected from device; for card with card No. showing, the card information does not need to be collected from device.

4.13 Add Temporary Pass

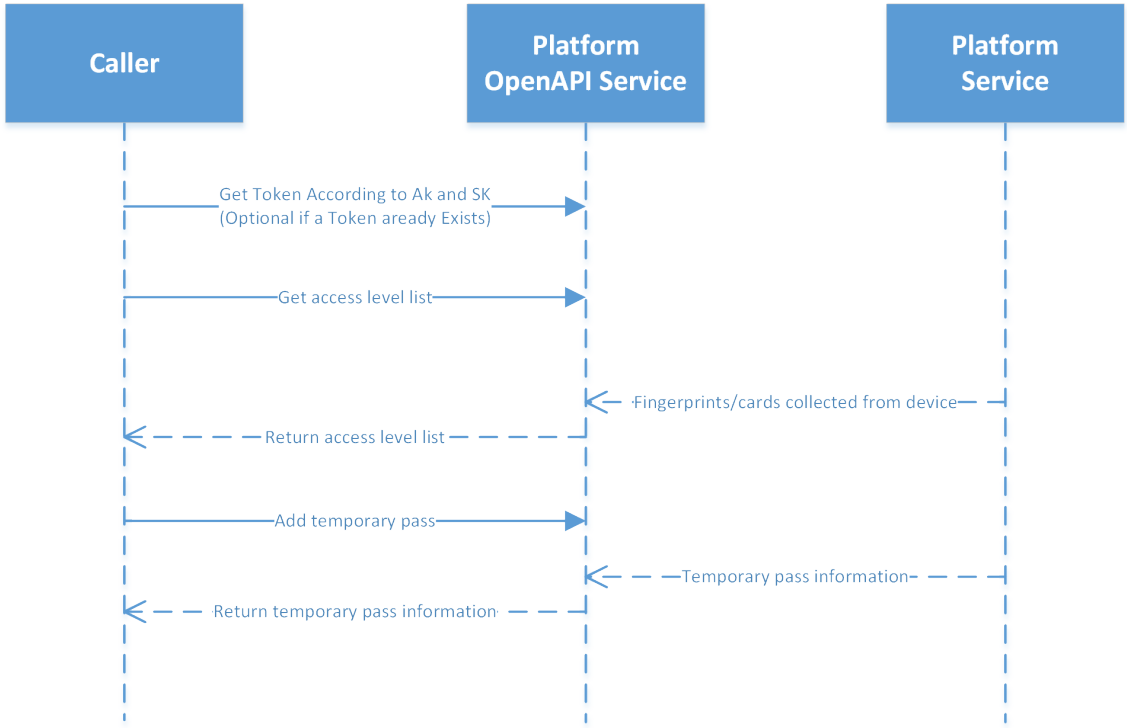


Figure 4-15 Sequence Diagram of Adding Temporary Pass

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. Call ***POST /api/hccgw/acspm/v1/accesslevel/list*** to get access level list.
3. Call ***POST /api/hccgw/vims/v1/tempauth/add*** to add temporary pass. After it is added, with returned password and QR code information, you can perform verification on the access level linked device.

Note

There are 2 types of QR codes: dynamic QR code and static QR code. The dynamic one is only valid for 60 seconds from the moment it is obtained, therefore, it is recommended to call ***POST /api/hccgw/vims/v1/tempauth/get*** every 60 seconds to get a valid dynamic QR code. Once the new dynamic QR code is obtained and used, the previous one will be invalid. The static QR code is valid during the whole temporary pass period. Users can choose to configure the dynamic or static QR code on the Hik Connect for Teams platform, and the dynamic or static QR code will be returned accordingly.

4.14 Add Resident

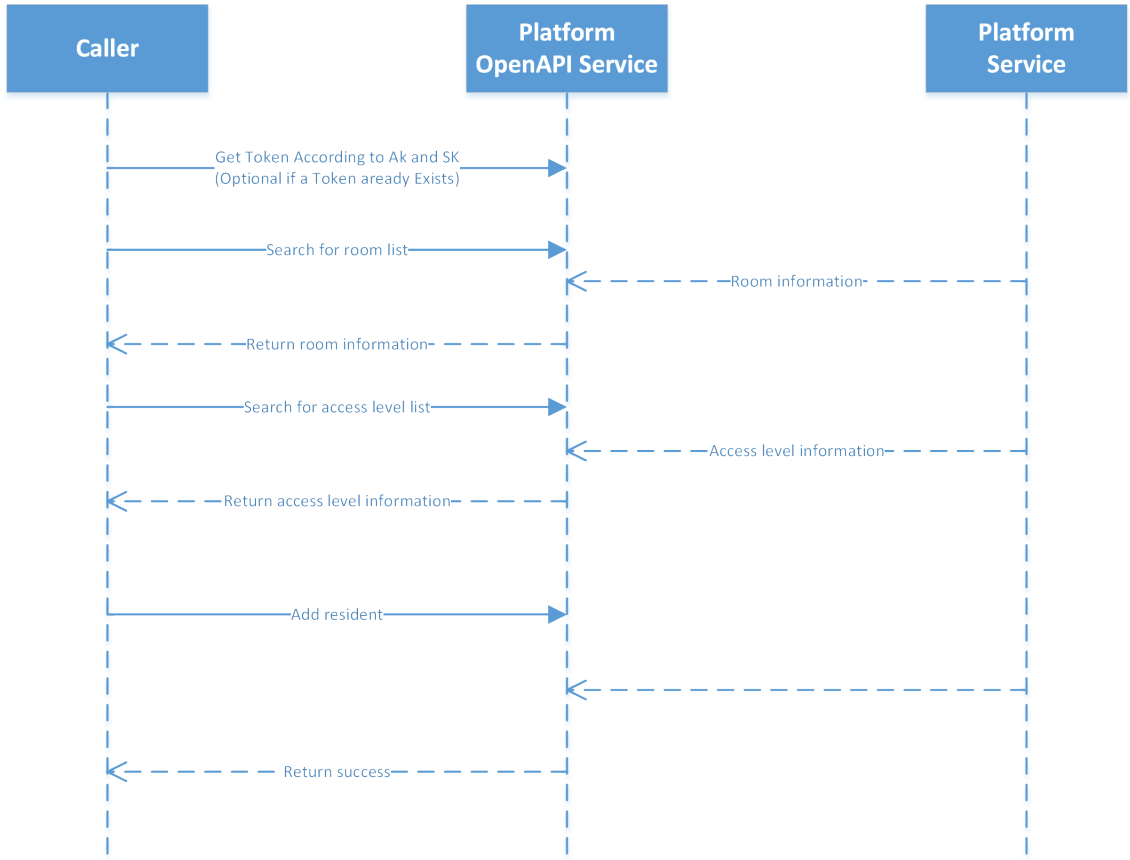


Figure 4-16 Sequence Diagram of Adding Resident

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. Call ***POST /api/hccgw/vims/v1/room/search*** to get the room list. Currently only adding room information via HCC/HCT is allowed. You can contact the technical support for guidance and help.
3. (Optional) Call ***POST /api/hccgw/acspm/v1/accesslevel/list*** to get the access level list.

   Note

   If the building linked with the room owns device, the resident will be automatically assigned with the access level of the building. Call this API if there are still other access levels to be assigned to this resident.
4. Call ***POST /api/hccgw/vims/v1/person/add*** to add a resident.
5. For adding information (face picture, fingerprint, card, and/or PIN) for the resident, refer to step 4 in ***Add Person*** . As a resident is a person owning room, the protocol for persons also applies.

4.15 Update Resident

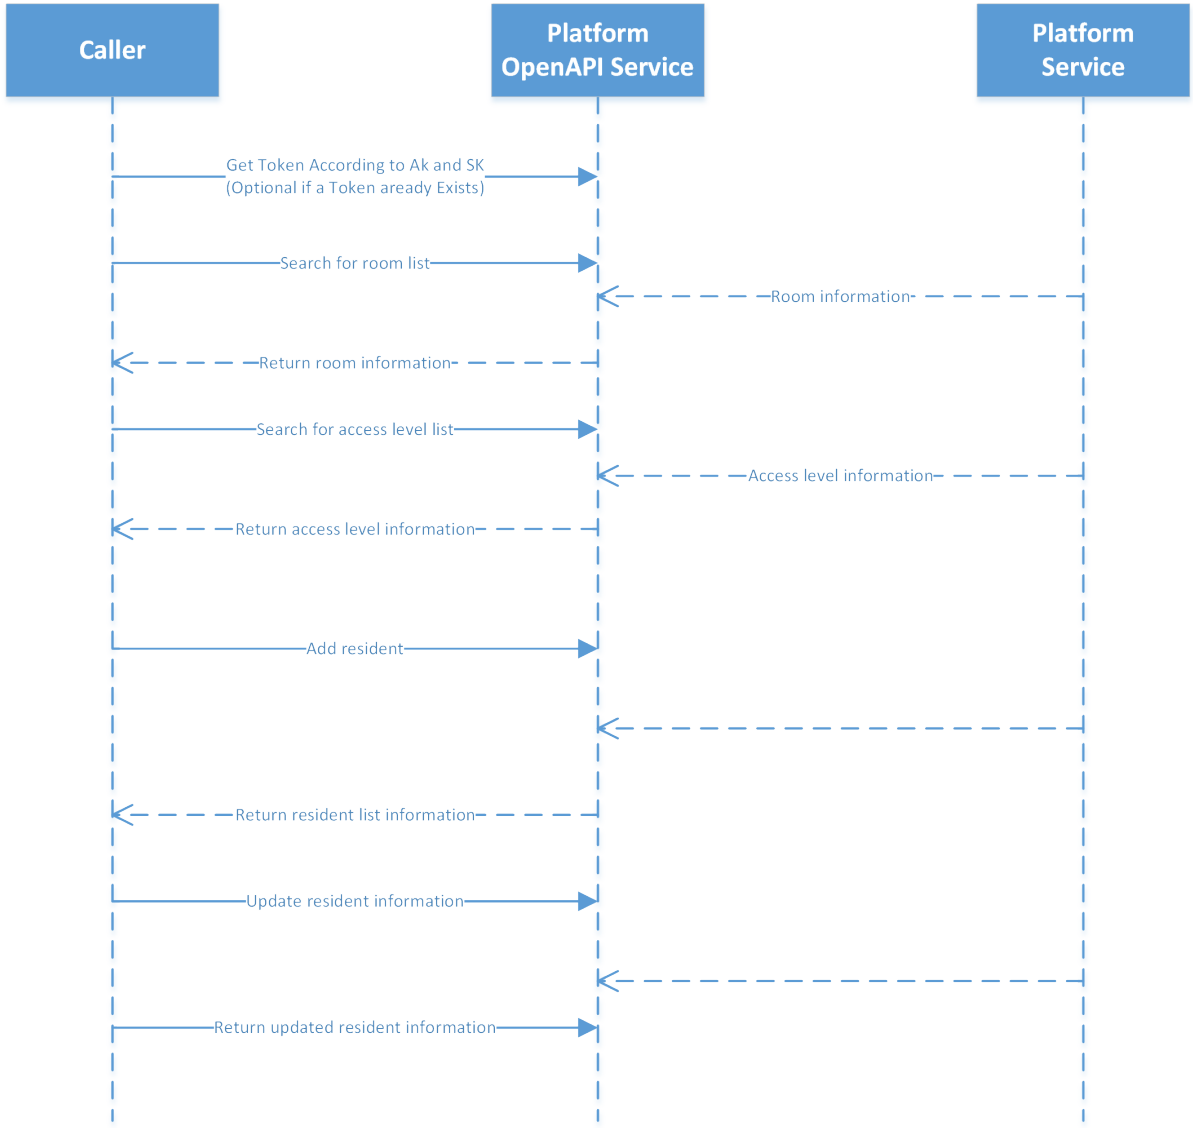


Figure 4-17 Sequence Diagram of Updating Resident

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. (Optional) Call ***POST /api/hccgw/vims/v1/room/search*** to get the room list.

Note

- Currently only adding room information via HCC/HCT is allowed. You can contact the technical support for guidance and help.
- Skip this step if you do not wish to add room for the resident.

3. (Optional) Call ***POST /api/hccgw/acspm/v1/accesslevel/list*** to get the access level list.

   Note

   If the building linked with the room owns device, the resident will be automatically assigned with the access level of the building. Call this API if there are still other access levels to be assigned to this resident.

4. Call ***POST /api/hccgw/vims/v1/person/search*** to get the resident information as well as the linked room information.
5. Call ***POST /api/hccgw/vims/v1/person/update*** to update the resident information (basic resident information and the linked room information).

   Note

   - If the resident owns 2 rooms, the information of both room should be entered as request parameters; if not, the room left will be deleted by default.
   - If you only want to update the basic information of the resident (no room information involved), you can also call the API of updating person information: ***POST /api/hccgw/person/v1/persons/update*** .

6. For adding information (face picture, fingerprint, card, and/or PIN) for the resident, refer to step 4 in ***Add Person*** . As a resident is a person owning room(s), the protocol for persons also applies.

4.16 Search for Attendance Data

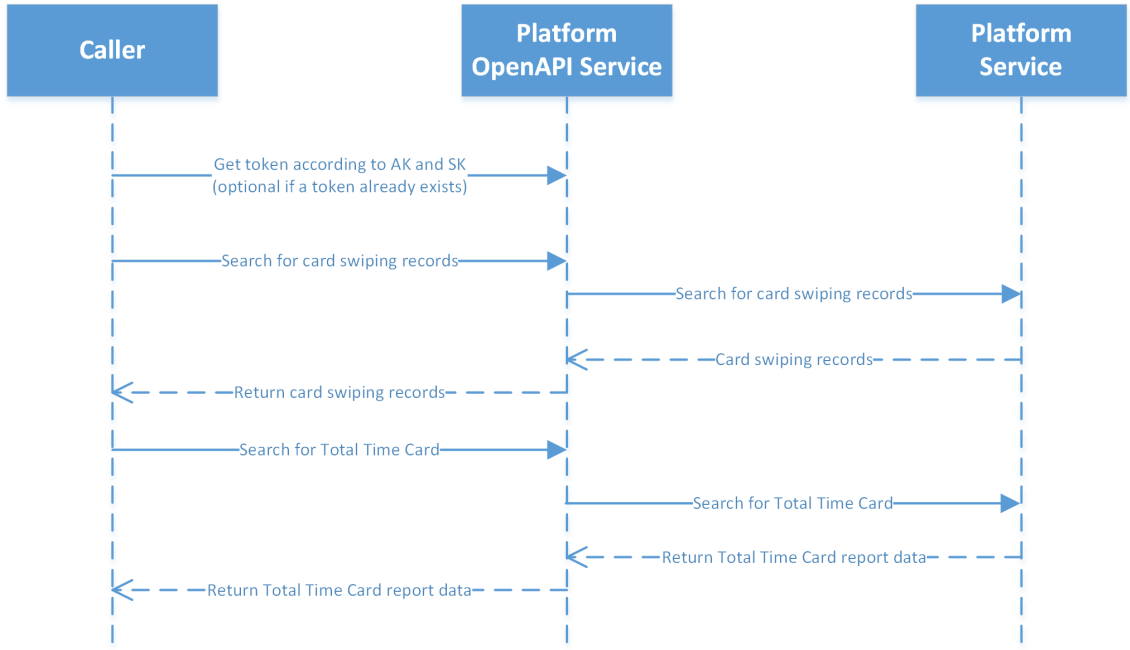


Figure 4-18 Sequence Diagram of Searching for Attendance Data

1. Get token according to AK and SK. If the token already exists, it is not required to get the token every time.
2. (Optional) Call ***POST /api/hccgw/acs/v1/event/certificaterecords/search*** to search for card swiping records, to check if a specific person has performed attendance check on the device on a specific day.
3. Call ***POST /api/hccgw/attendance/v1/report/totaltimecard/list*** to search for attendance result data, to get the attendance result of a specific person on a specific day, including the corresponding attendance duration and attendance status.

4.17 Webhook Message Push

Prerequisite: An Open API platform account is required.


The system currently supports the following message modes (choose one):

- Polling (active message retrieval)
- Webhook (push-based message delivery)

Note

After the Webhook configuration, event notifications are pushed via Webhook. The original polling may no longer acquire messages. If integrators have implemented the event notification via polling (/api/hccgw/rawmsg/v1/mq/messages or /api/hccgw/alarm/v1/mq/messages), they need to contact the technical support to switch from polling to Webhook.

Webhook Integration Flow

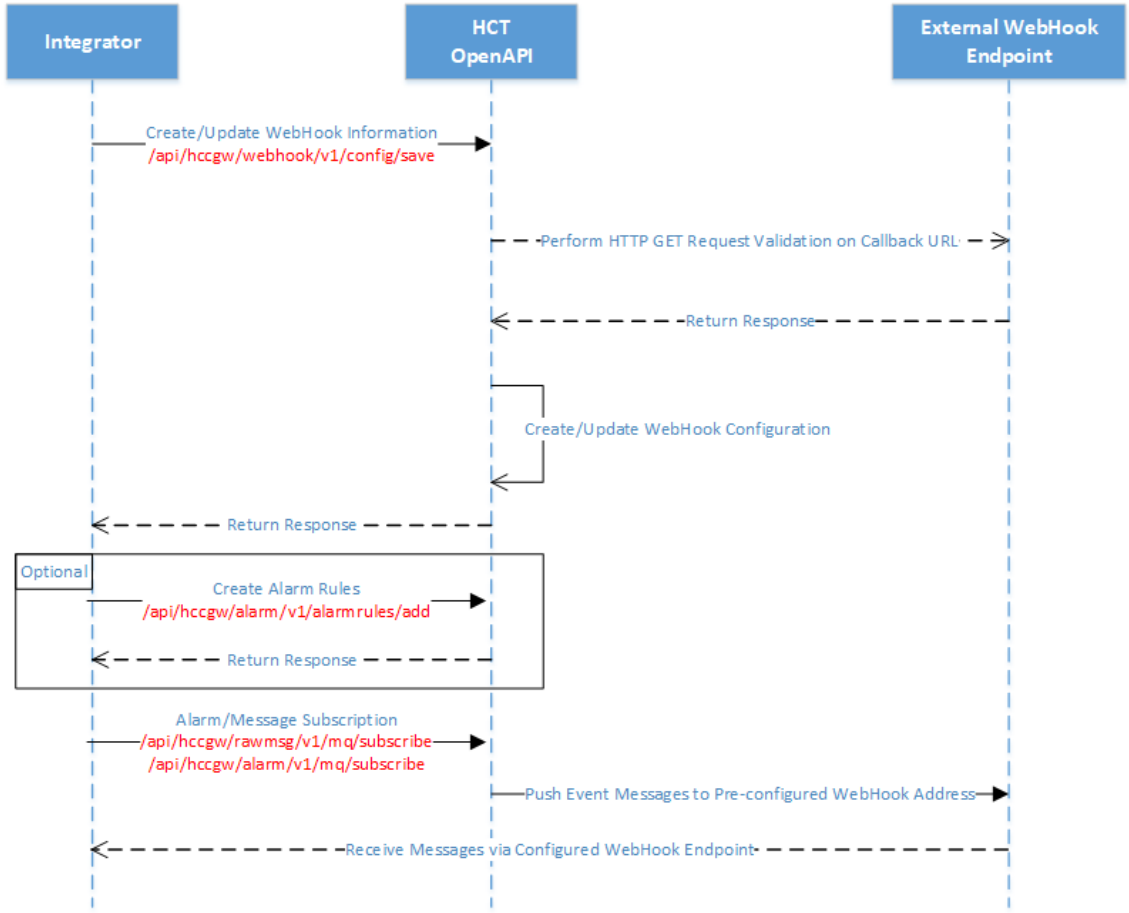

1. Call the API ***POST /api/hccgw/webhook/v1/config/save*** to create the Webhook configuration.
2. Call the API ***POST /api/hccgw/rawmsg/v1/mq/subscribe*** or ***POST /api/hccgw/alarm/v1/mq/subscribe*** to subscribe to events.
3. Receive event notifications via the configured Webhook endpoint.
   Return an HTTP status code 2XX for success, and return non-2XX for failure. The timeout is 5 seconds.

Security Control

Note

For security, callback URLs must use HTTPS during Webhook operations.

1. **Callback URL Signature Verification**
   When an integrator creates a Webhook configuration via the API, the OpenAPI service will not create webhook configuration instantly; instead, it firstly verifies the callback URL by sending an HTTPS GET request, including the following headers: **X-Hook-Batch-Id** (random string) and **X-Hook-Timestamp** (request initiation timestamp).

Verification criteria: The response must contain an X-Hook-Signature (see X-Hook-Signature and Signature Algorithm Demo below) in the header, and the signature must pass validation. Only after successful validation is the Webhook created. Similarly, when updating the Webhook, the same verification process will be performed to confirm the URL validity.

2. **Push Message Signature Verification**
   To ensure the message security (tamper-proof and anti-replay), receivers must verify the sender. When the system service sends an HTTP POST request to the callback URL, the Webhook related request headers are as follows:

Table 4-8 Webhook Related Request Header

HTTP Header	Description
X-Hook-Batch-Id	Matches the **batchId** in the request body.
X-Hook-Signature	Digital signature (format: algorithm + signature). For example: `sha256=ede4cd6ad2e2b76b81d5c403234629a36a9d75793b12c7b9e382c8f061d1bf61` It is used by receivers to verify senders.
X-Hook-Timestamp	Request initiation timestamp. (Receivers must validate this timestamp to enhance the signature freshness and improve security, e.g., the timestamp deviation should be no longer than 1 minute.)

Note

During the Webhook registration, integrators must specify a Webhook secret key (**signSecret**) of API ***POST /api/hccgw/webhook/v1/config/save***). It defaults to the integrator's SecretKey (SK) when the field is absent.

X-Hook-Signature

1. Prefix: Hash function identifier (currently fixed as sha256).
2. Delimiter: Equals sign (=).
3. Digital Signature: Hex-encoded hash value generated as follows:
   - Concatenate the following elements to form the message: request timestamp (matches X-Hook-Timestamp), period (.), batchId.
   - Determine the hash function via prefix (e.g., SHA-256), then generate MAC using HMAC algorithm with the secret key (**signSecret** during Webhook registration).
   - Hex-encode the MAC to generate the final signature.

Example Code of Signature Algorithm Demo (Java)

```java
import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;
import java.nio.charset.StandardCharsets;
```

```
  public class SignatureDemo {
    private static final String HASH_ALGORITHM = "HmacSHA256";
    public static String generateSignature(String secret, String timestamp, String batchId) throws Exception {
      // Step 1: Concatenate `Message`
      String message = timestamp + "." + batchId;
      // Step 2: Generate `MAC` using `secret` as a key with `HmacSHA256`
      Mac mac = Mac.getInstance(HASH_ALGORITHM);
      SecretKeySpec secretKey = new SecretKeySpec(secret.getBytes(StandardCharsets.UTF_8), HASH_ALGORITHM);
      mac.init(secretKey);
      byte[] rawMac = mac.doFinal(message.getBytes(StandardCharsets.UTF_8));

      // Step 3: Convert `MAC` to a hexadecimal string
      StringBuilder hexString = new StringBuilder();
      for (byte b : rawMac) {
        hexString.append(String.format("%02x", b));
      }
      // The final signature format: `sha256=<signature>
      return "sha256=" + hexString.toString();
    }

    public static void main(String[] args) {
      try {
        String secret = "your_secret_key";
        Long timestamp = System.currentTimeMillis();
        String batchId = "ebd5a32a518c423f91d4f889a9d5e841";
        String signature = generateSignature(secret, timestamp + "", batchId);
        System.out.println("Generated Signature: " + signature);
      } catch (Exception e) {
        e.printStackTrace();
      }
    }
  }
```

Alarm Message Example

```
{
 "batchId": "10c317bdcd3542d6887b157f9861d5a8",
 "list": [
  {
   "systemId": "9cc1f14f6bcd4f8a8e72ab1f757a47eb",
   "guid": "2200252220dc4f34b0fa41c550a8a7da",
   "msgType": "1",
   "alarmState": "1",
   "pulseAlarm": "1",
   "alarmMainCategory": "alarmCategoryMaintenance",
   "alarmSubCategory": "alarmSubCategoryCamera",
   "timeInfo": {
    "startTime": "2025-11-05T09:27:24Z",
    "endTime": "2025-11-05T09:27:24Z"
   },
   "eventSource": {
```

```
      "eventType": "10000",
      "sourceID": "21d5785794af49bb8ae0acb97eae4068",
      "sourceName": "Camera 01",
      "sourceType": "camera",
      "areaID": "9cc1f14f6bcd4f8a5572ab1f757a47eb_r",
      "areaName": "",
      "deviceInfo": {
       "devID": "8b5865ef32bf403b95bfd73c23c56eff",
       "devName": "DS-7108NI-S2/WX(FR9256952)",
       "devCategory": "encodingDevice",
       "deviceSerial": "FR9552952"
      }
     },
     "alarmRule": {
      "id": "1985974955187245056",
      "name": "Camera 01-Video Loss"
     },
     "alarmPriority": {
      "id": "8a748eb39a3e86be019a48e5464f00f8",
      "level": "1",
      "levelName": "",
      "color": "#F40B0B"
     },
     "markState": "0",
     "affirmedState": "0",
     "fileInfo": {
      "file": []
     },
     "type": "alarm"
    }
  ]
}
```


Event Message Example


```
{
   "list": [
      {
         "data": {
            "openDoorInfo": {
               "event": {
                  "basicInfo": {
                     "areaId": "9411b6ec380447d7aa016d2256e9939a",
                     "areaName": "TM Int POC",
                     "category": "2002",
                     "deviceId": "ac56cc2674d645d6b91313aeaa7c07da",
                     "serialNo": 484,
                     "systemId": "593fbd35224641bb8acc3305cd9cfd9a",
                     "channelNo": 1,
                     "elementId": "c3720af986524bc3bca234f12ce7a66e",
                     "eventType": 110013,
                     "occurTime": "2026-01-30T15:40:07+08:00",
```

```
                    "deviceName": "Face terminal API test",
                    "elementName": "Face terminal API test",
                    "elementType": 1002,
                    "cardReaderId": "01880a28e24945d0a20c3c3a556e30d3",
                    "currentEvent": 1,
                    "deviceSerial": "FZ8954256"
                  },
                  "intelliInfo": {
                    "groupId": "590856019023211520",
                    "fullPath": "SNS & HIK",
                    "lastName": "",
                    "personId": "549648292066532352",
                    "phoneNum": "",
                    "firstName": "Leong",
                    "authResult": 1,
                    "cardNumber": "3305386219",
                    "personPicUrl": "https://hpc-sgp-prod-s3-person-data-storage.oss-ap-southeast-1.aliyuncs.com/
GDPR001/593fbd35224641bb8acc3305cd9cfd9a/549648292066532352/0/picture.data?X-Amz-Algorithm=AWS4-
HMAC-SHA256&X-Amz-Credential=LTAI5tQckMpJxMb4qoHXJySP%2F20260130%2Foss-ap-
southeast-1%2Fs3%2Faws4_request&X-Amz-Date=20260130T071010Z&X-Amz-Expires=3600&X-Amz-
SignedHeaders=host&X-Amz-Signature=dc0f1c10c477514d6d496ca567df65ed7bb5d3427f72c91946048231c67c6",
                    "attendanceStatus": 0
                  }
                }
              }
            },
            "type": "event",
            "basicInfo": {
              "device": {
                "id": "ac56cc2674d645d6b91313aeaa7c07da",
                "name": "Face terminal API test",
                "category": "accessControllerDevice",
                "deviceSerial": "FZ8954256"
              },
              "systemId": "593fbd35224641bb8acc3305cd9cfd9a",
              "eventType": "110013",
              "occurrenceTime": "2026-01-30T15:40:07+08:00"
            }
          }
        ],
        "batchId": "406c44ec5ac34d72842f8c724b5c6684"
}
```


4.18 Configure ANPR

After enabling the ANPR configuration on Hik Connect for Teams, you need to link ANPR cameras on the list management page. The ANPR function can only be used after completing the configuration.

1. **Add a Device and Subscribe to the ANPR Service**

a. Log in to the Hik Connect for Teams, navigate to the **Device** page.
b. Click **Add** to add an ANPR camera.
c. Click the device name to enter the device details page.
d. Enable **ANPR Switch** to subscribe to the ANPR service.

2. **Add a List and Link to Cameras**
   a. On the List Management page of ANPR module, click + to add a list.

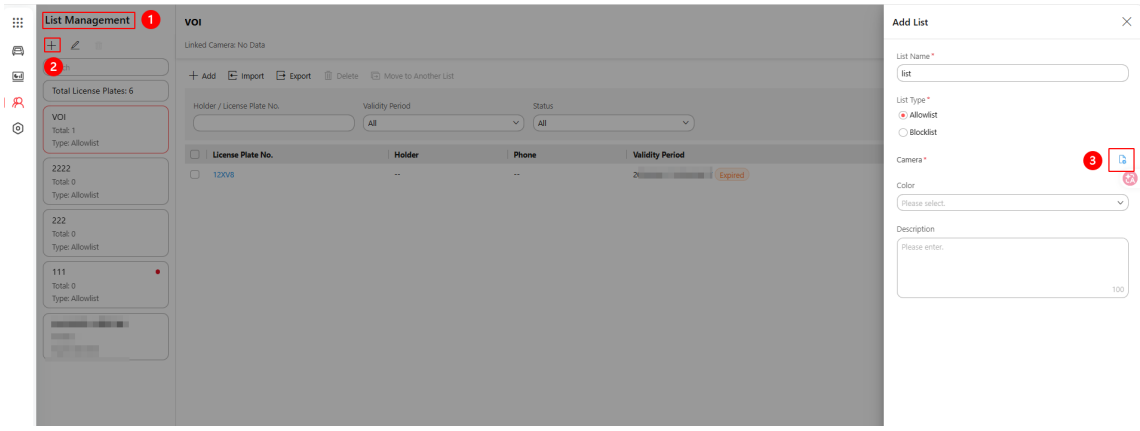


Figure 4-19 Add a List

b. Select cameras that have subscribed to the ANPR service to link them with the list.

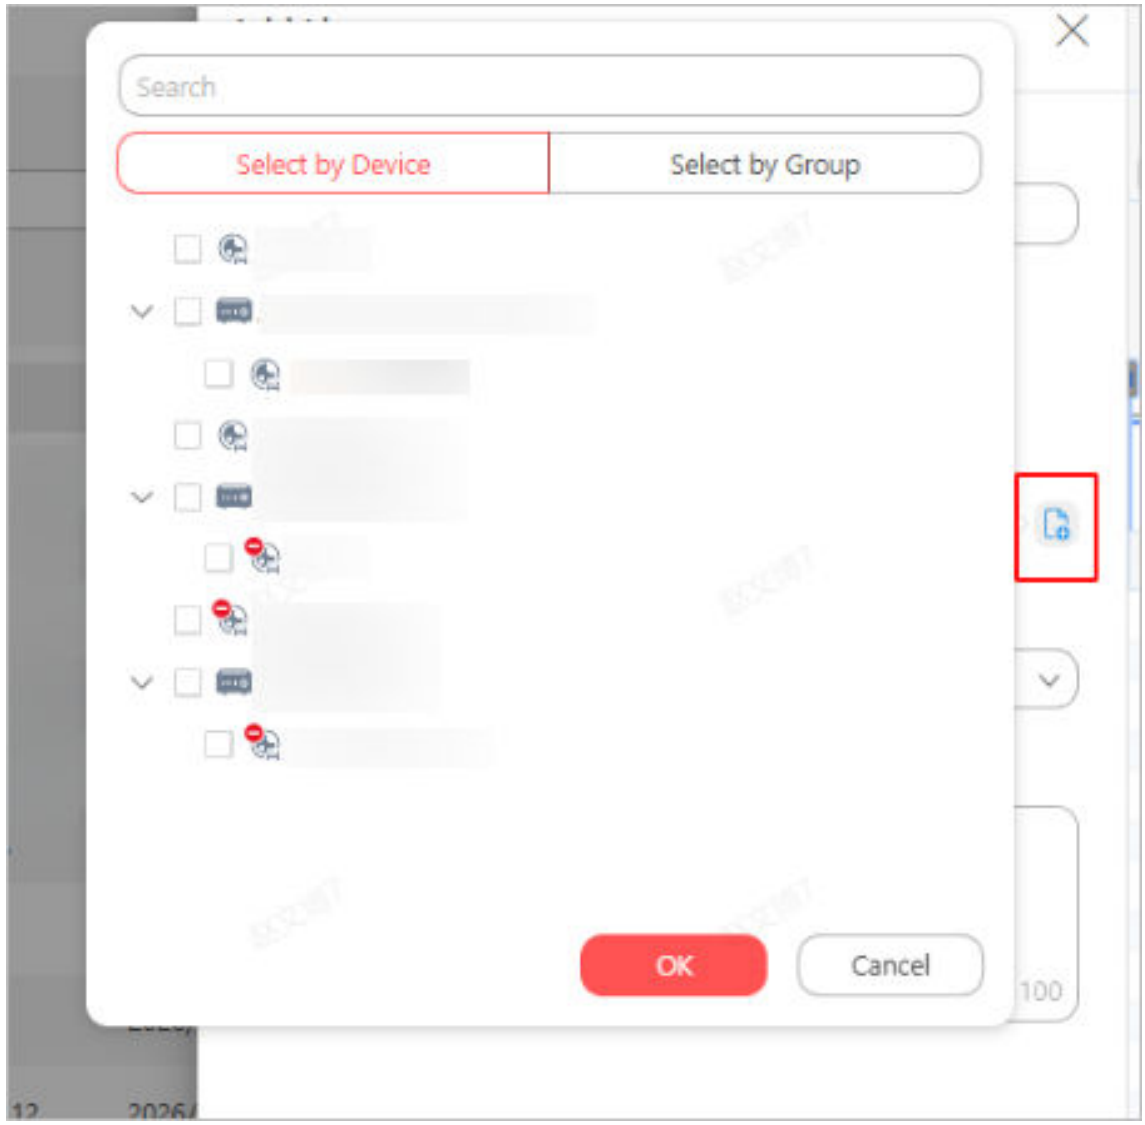


Figure 4-20 Configure ANPR

c. After completing these steps, the list is created successfully, and you can call the related APIs to perform business operations.

Chapter 5 API Reference

Note

This manual lists all the available APIs provided by Hik Connect for Teams. However, some APIs may be unavailable since it depends on the capabilities of different encoding devices. You can view the available API list for the current Portal of Hik Connect for Teams in the developing environment.

5.1 System-Related Services

5.1.1 Get Token

POST /api/hccgw/platform/v1/token/get

Get the authentication token for calling the development platform via appkey(AK) and appSecret(SK) verification.

Request URL

{areaDomain}/api/hccgw/platform/v1/token/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Content-Type	Req.	String	Header	Only application/json is supported.
appKey	Req.	String	Body	appkey(AK). The maximum length is 64.
secretKey	Req.	Number	Body	appSecret(SK). The maximum length is 64.

Request Example

```
{
   "appKey":"cewm9w0qjhv3i290uufnyxzp25l6ym7e",
   "secretKey":"s77w0ckmlyetp2lhfqw8p8zgm23pkpw7"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-1 data Object Description

accessToken	Req.	String	It is used as the node Token for the following APIs. The maximum length is 64.
expireTime	Req.	Integer	Expiry time. The maximum length is 16.
userId	Req.	String	User ID. The maximum length is 64.
areaDomain	Req.	String	Name of the domain where the server is located (for composing URLs).

Response Example

```
{
   "data": {
      "accessToken": "hcc.vh5hb9q495qjjei71g3pdmrjslo5wyti",
      "expireTime": 1655193135,
      "userId": "8a7485aa7f209dd5017f2141adff0019"
      "areaDomain": "https://isgp.hikcentralconnect.com"
   },
   "errorCode": "0"
}
```

5.1.2 System Operation

GET /api/hccgw/platform/v1/systemproperties

Get the Hik Connect for Teams platform information.

Request URL

{areaDomain}/api/hccgw/platform/v1/systemproperties

Request Parameters

Table 5-2 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.
-**systemGUID**	Opt.	String	System ID. The maximum length is 64.

Response Example

```
{
   "data": {
      "systemGUID": "fe436da09dca4e46996c1178f06c7911"
   },
   "errorCode": "0"
}
```

GET /api/hccgw/platform/v1/servicepackage

Get the package usage information (package type, total purchases, etc.) of the Hik Connect for Teams platform where the current user is logged in.

Request URL

{areaDomain}/api/hccgw/platform/v1/servicepackage

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-3 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
packageOverview	Opt.	***PackageOverview***	The package overview.
packageDetails	Opt.	***PackageDetails***	The package details.

Response Example

```
{
   "data": {
      "packageOverview": {
         "servicePackageOverview": [
            {
               "serviceType": "serviceVideo",
               "packageType": "3",
```

```
            "usingAmount": "18",
            "remainingAmount": "92",
            "totalAmount": "110",
            "lastExpiredTime": "1655697132000",
            "packageStatus": 2,
            "cloudStorage": {
               "usingAmountFor7Days": "0",
               "usingAmountFor30Days": "2",
               "remainingAmount": "6"
            }
         },
         {
            "serviceType": "serviceVehicle",
            "packageType": "1",
            "usingAmount": "9",
            "remainingAmount": "1",
            "totalAmount": "10",
            "lastExpiredTime": "4102329600000",
            "packageStatus": 0
         }
      ]
   },
   "packageDetails": {
      "servicePackage": [
         {
            "serviceType": "serviceVideo",
            "packageType": "3",
            "activationTime": "1645243200000",
            "expiredTime": "1655697132000",
            "cloudStorage": []
         },
         {
            "serviceType": "serviceVideo",
            "packageType": "3",
            "activationTime": "1647834732000",
            "expiredTime": "1655783532000",
            "cloudStorage": []
         },
         {
            "serviceType": "serviceVideo",
            "packageType": "1",
            "activationTime": "1645530404870",
            "expiredTime": "7257916800000",
            "cloudStorage": []
         },
         {
            "serviceType": "serviceVehicle",
            "packageType": "1",
            "activationTime": "1645530404870",
            "expiredTime": "7257916800000"
         }
      ]
```

```
      }
   },
   "errorCode": "0"
}
```

GET /api/hccgw/platform/v1/streamtoken/get

Get the Hik-Connect streaming token via the current account, and stream via Hik-Connect SDK according to the information returned by the API.

Request URL

{areaDomain}/api/hccgw/platform/v1/streamtoken/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-4 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
appKey	Opt.	String	Hik-Connect account appkey. The maximum length is 64.
appToken	Opt.	String	Hik-Connect streaming token. The maximum length is 64.

Parameter Name	Req. or Opt.	Data Type	Description
			Note The validity period of the token is 7 days, within which you can call this API repeatedly to refresh the token so that the remaining validity period will be restored to 7 days again.
streamAreaDomain	Opt.	String	Hik-Connect domain name.
expireTime	Opt.	String	Expiry time. The maximum length is 16.

Response Example

```
{
   "data": {
      "appKey": "ceec5568a64916c72dbeb75f2c6bb3ef",
      "appToken": "at.5rmgt7658l535evhapzn3h4b370yxhft-4u9zipalvq-14f9b7j-vuvcag8hn",
      "streamAreaDomain": "https://isgpopen.ezvizlife.com",
      "expireTime": "1655719632454"
   },
   "errorCode": "0"
}
```

POST /api/hccgw/platform/v1/users/get

Get the system user list via the current account. The user list obtained can be used in alarm rule configuration.

Request URL

{areaDomain}/api/hccgw/platform/v1/users/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page.

Request Example

```
{
   "pageIndex":1,
   "pageSize":10

}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-5 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	/	Integer	Number of total pages.
pageIndex	/	Integer	The current page.
pageSize	/	Integer	Number of records on each page.
user	/	***User*** []	User information.

Response Example


```
{
   "data": {
      "totalCount": 5,
      "pageIndex": 1,
      "pageSize": 10,
      "user": [
         {
            "id": "8a74899f82157836018215dc643d037f",
            "name": "22"
         },
         {
            "id": "8a74899f82157836018215b5c7aa0377",
            "name": "11"
         },
         {
            "id": "8a748b0d82142e4f0182150971c10369",
            "name": "222333"
         },
         {
            "id": "8a748b3181a510aa0181a53fef2e1210",
            "name": "lmklmk"
         },
         {
            "id": "8a7489d68161eaf9018161f84bb70004",
            "name": "abc"
         }
      ]
   },
   "errorCode": "0"
}
```


5.2 Resource-Related Services

5.2.1 Physical Resources

Device Information

POST /api/hccgw/resource/v1/devices/add

Add device by specifying the device serial No., etc.

Request URL

{areaDomain}/api/hccgw/resource/v1/devices/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
deviceCategory	Req.	***Device Category***	Body	Device category. The maximum length is 32.
deviceInfo	Req.	***DeviceInfo***	Body	Device information.
importToArea	Opt.	***ImportToArea***	Body	Whether to import to area automatically.
timeZone	Req.	***TimeZone***	Body	Time zone information.
vehicleInfo	Opt.	***VehicleInfo(3)***	Body	On-Board device information. **Note** This node is required when the device category is on-board device.

Request Example

```
{
   "deviceCategory": "encodingDevice",
   "deviceInfo": {
      "name": "ceshi",
      "ezvizSerialNo": "G81652987",
      "ezvizVerifyCode": "hcc12345",
      "userName": "",
      "password": "",
      "streamSecretKey":""
   },
   "importToArea": {
      "areaID": "",
      "enable": "0"
   },
   "timeZone": {
      "id": "26",
      "applyToDevice": "1"
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-6 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
addDeviceResponse	Opt.	***AddDeviceResponse***	The information returned for adding devices.

Response Example

```
{
   "data": {
      "addDeviceResponse": {
         "failed": 1,
         "succeeded": 0,
         "total": 1,
         "deviceList": [
            {
               "alias": "ceshi",
               "deviceId": "",
               "deviceSerial": "G81652987",
               "errorCode": "EVZ20010"
            }
         ]
      }
   },
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/devices/update

Edit device information.

Request URL

{areaDomain}/api/hccgw/resource/v1/devices/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
deviceInfo	Req.	***DeviceInfo (2)***	Body	Device information.
timeZone	Opt.	***TimeZone***	Body	Time zone information.

Request Example

```
{
   "deviceInfo":{
      "id":"4606458718594636bb0487029f759684",
      "name":"NVR_test221",
      "userName":"admin",
      "password":"Abc12345"
   },
   "timeZone":{
      "id":"19",
      "applyToDevice":"1"
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/devices/get

Get the device list by specifying device information.

Request URL

{areaDomain}/api/hccgw/resource/v1/devices/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
areaId	Opt.	String	Body	Area ID, which is used exclusively with **jobNumber**.
deviceCategory	Opt.	String	Body	Device category (encoding device, on-board device, alarm device,etc.). The maximum length is 32. When the node **jobNumber** is involved, multiple device categories can be configured (separated by comma); in other cases, searching by multiple device categories is not supported.
filter	Opt.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-7 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
matchKey	Opt.	String	Body	Fuzzy search; search fields including device name, device serial No., and device version.
jobNumber	Opt.	String	Body	Work order No. The maximum length is 128.

Request Example

```
{
   "pageIndex":1,
   "pageSize":10,
   "deviceCategory":"encodingDevice",
   "areaId":"420be45bdeb2407c84dc58b3caf056c4",
   "filter":{
      "matchKey":"0",
      "jobNumber":"0"
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	***GetDevicesResVo***	Device list structure.

Response Example

```
{
   "data": {
      "pageIndex": 1,
      "pageSize": 10,
      "totalCount": 2,
      "device": [
         {
            "id": "037d62d6cf0744e39d2274b64fdd279c",
            "name": "10.18.67.249",
            "category": "encodingDevice",
```

```
            "type": "iDS-9664NXI-I8/X",
            "serialNo": "J88106219",
            "version": "V4.60.110 build 220303",
            "timeZone": "30",
            "onlineStatus": 1,
            "addTime": "2022-06-20 11:12:10"
        },
        {
            "id": "4481afd6a2ee425eaa9ad77e8fe491f0",
            "name": "F68147103",
            "category": "encodingDevice",
            "type": "DS-9664NI-I8",
            "serialNo": "F68147103",
            "version": "V4.40.220 build 210125",
            "timeZone": "30",
            "onlineStatus": 1,
            "addTime": "2022-06-20 01:35:10"
        }
    ]
  },
  "errorCode": "0"
}
```


POST /api/hccgw/resource/v1/devicedetail/get

Search for and get the device information by device serial No.

Request URL

{areaDomain}/api/hccgw/resource/v1/devicedetail/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
deviceSerialNo	Req.	String	Body	Device serial No. The maximum length is 16.

Request Example


```
{
  "deviceSerialNo":"F68147103 "
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-8 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
device	Opt.	***GetDeviceInfo***	The returned device information.

Response Example


```
{
   "data": {
      "device": {
         "baseInfo": {
            "id": "5c263e4293c84eae81720e9e481e33ad",
            "name": "F68147103",
            "category": "encodingDevice",
            "serialNo": "F68147103",
            "version": "V4.40.220 build 210125",
            "type": "DS-9664NI-I8",
            "streamEncryptEnable": "1",
            "availableCameraChannelNum": "4",
            "availableAlarmInputChannelNum": "10",
            "availableAlarmOutputChannelNum": "14"
         },
         "cameraChannel": [
            {
               "id": "5b206babd3fd4439b4884acb86e8bd89",
               "name": "IPCamera 01",
               "no": "1",
               "online": "0",
               "area": {
                  "id": "",
                  "name": ""
               }
            },
            {
```

```
        "id": "1c693dbf435e4e5ca048d4dd7efbb33b",
        "name": "IPdome",
        "no": "2",
        "online": "1",
        "area": {
          "id": "",
          "name": ""
        }
      }
    ],
    "alarmInputChannel": [
      {
        "id": "1facb548c63746eb8c3eea5b510495d8",
        "name": "D 201",
        "no": "201",
        "online": "1",
        "area": {
          "id": "",
          "name": ""
        }
      },
      {
        "id": "dc7b7129f14a424fa8d04bfc846c0343",
        "name": "D 202",
        "no": "202",
        "online": "1",
        "area": {
          "id": "",
          "name": ""
        }
      }
    ],
    "alarmOutputChannel": [
      {
        "id": "3a900e5c84b64ab9b0bb1e92089c8c23",
        "name": "A 1",
        "no": "1",
        "online": "1",
        "area": {
          "id": "",
          "name": ""
        }
      },
      {
        "id": "4c5fbf177a5c43efa265479e0f9fbb61",
        "name": "A 2",
        "no": "2",
        "online": "1",
        "area": {
          "id": "",
          "name": ""
        }
```

```
            }
          ],
          "onlineStatus": 1,
          "timeZoneID": "30"
        }
    },
    "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/devices/delete

Delete device by the specifying device ID, etc.

Request URL

{areaDomain}/api/hccgw/resource/v1/devices/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
deviceID	Req.	String[]	Body	Device ID.
deviceCategory	Req.	String	Body	Device category. The maximum length is 32.
deleteVehicle	Opt.	Integer	Body	Whether to delete the vehicle synchronously: 0-no (by default), 1-yes.

Request Example

```
{
    "deviceID":[
        "4ab20c2f3ba54daea4e0f569b622c362"
    ],
    "deviceCategory":"encodingDevice"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/device/capturePic

Capture pictures by camera channel.

Request URL

{areaDomain}/api/hccgw/resource/v1/device/capturePic

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
deviceSerial	Req.	String[]	Body	Camera serial No.
channelNo	Req.	Integer	Body	Camera channel No.

Request Example

```
{
   "deviceSerial": "F68147103",
   "channelNo": 1
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.
captureUrl	Opt.	String	Returned captured picture URL (valid for 15 minutes).
isEncrypted	Req.	Integer	Whether the picture is encypted: 1-encrypted, 0-not encrypted. After stream encryption is enabled for device, the captured picture will be encrypted and requires decryption. For picture decryption needs, please contact the technical support for relevant guide documents.

Response Example


```
{
"data": {
"captureUrl":"http://10.19.215.172:31677/hcc-dev-2/hccopen/capture/2023-01-12/F68147103/1/29668554-c828-44ed-b13c-faba96c3697c.jpeg?X-Amz-Algorithm=AWS4-HMAC-SHA256&X-Amz-Date=20230112T024359Z&X-Amz-SignedHeaders=host&X-Amz-Expires=900&X-Amz-Credential=minio123%2F20230112%2Fap-southeast-1%2Fs3%2Faws4_request&X-Amz-Signature=64065497a8b887c1845f4443029096c12daf220533a8ae3bf4662d8f4414a6ff"
"isEncrypted": 0
},
"errorCode": "0"
}
```


POST /api/hccgw/resource/v1/device/{deviceId}/refresh

Synchronously refresh device status.

Request URL

{areaDomain}/api/hccgw/resource/v1/device/{deviceId}/refresh

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
deviceId	Req.	String	Path	Device ID.

Request Example

```
http://dev-3.hikcentralconnect.com/api/hccgw/resource/v1/device/
c6a91398ffeb46888ace8f4667483095 /refresh
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-9 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
deviceId	Req.	String	Device ID.
status	Opt.	Integer	Device network status: 0-offline, 1-online.
errorCode	Opt.	String	Error code, returned when refreshing device status failed.

Response Example

```
{
  "data": {
```

```
      "deviceId": "1aed864a17214f4f8d43f258b9bb4d88",
      "status": 1
   },
   "errorCode": "0"
}
Or
{
   "data": {
      "deviceId": "1aed864a17214f4f8d43f258b9bb4d88",
      "errorCode": " CCF021307"
   },
   "errorCode": "0"
}
```

5.2.2 Logical Resources

Areas

POST /api/hccgw/resource/v1/areas/add

Add area by specifying area-related information.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
parentAreaID	Req.	String	Body	Parent area ID. The maximum length is 32.
areaName	Req.	String	Body	Area name. The maximum length is 64.

Request Example

```
{
   "parentAreaID":"-1",
   "areaName":"test_mgz2"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-10 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
areaID	/	String	Area ID created.

Response Example

```
{
   "data": {
      "areaID": "1aed864a17214f4f8d43f258b9bb4d88"
   },
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/areas/get

Get the area list.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Opt.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-11 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
parentAreaID	Opt.	String	Body	Parent area ID, which can be used to get the corresponding child area list. All areas are included if this node is empty or "-1". The maximum length is 32.
includeSubArea	Opt.	String	Body	Whether to get the corresponding child areas: 0 (only get the parent area), -1 (get all corresponding child areas under the parent area).

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10",
   "filter":{
      "parentAreaID":"-1",
      "includeSubArea":1
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-12 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total records.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
area	Opt.	***BriefArea*** []	Area information.

Response Example


```
{
   "data": {
      "totalCount": 2,
      "pageIndex": 1,
      "pageSize": 10,
      "area": [
         {
            "id": "1d3797d6f5c84b4c9720f2d1453b3516",
            "name": "10.18.67.249",
            "parentAreaID": "-1",
            "existSubArea": "0"
         },
         {
            "id": "d9eaa479588b48cb9f79a59ab5fb41b9",
            "name": "F68147103",
            "parentAreaID": "-1",
            "existSubArea": "0"
         }
      ]
   },
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/areadetail/get

Get area information by specifying area ID.

Request URL

{areaDomain}/api/hccgw/resource/v1/areadetail/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
areaID	Opt.	String[]	Body	The list of area IDs.

Request Example

```
{
   "areaID":[
      "1d3797d6f5c84b4c9720f2d1453b3516","d9eaa479588b48cb9f79a59ab5fb41b9","test"
   ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-13 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
area	Opt.	***BriefArea***	Area information.

Response Example


```
{
   "data": {
      "area": [
         {
            "id": "1d3797d6f5c84b4c9720f2d1453b3516",
            "name": "10.18.67.249",
            "parentAreaID": "-1",
            "existSubArea": 0,
            "areaPath": "area0->area1->area2"
         },
         {
            "id": "d9eaa479588b48cb9f79a59ab5fb41b9",
            "name": "F68147103",
            "parentAreaID": "-1",
            "existSubArea": 0
         },
         {
            "id": "test",
            "message": "Area is not exist([id=test]){VMS021101}",
            "errorCode": "VMS021101"
         }
      ]
   },
   "errorCode": "0"
}
```


Cameras and Alarm Inputs/Outputs

POST /api/hccgw/resource/v1/areas/resources/add

Add resource to area by specifying the resource information.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/resources/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
areaID	Req.	String	Body	Area ID. The maximum length is 32.
devChannel	Req.	Object[]	Body	Resource information. See details in the devChannel Object Description below.

Table 5-14 devChannel Object Description

Parameter Name	Req. or Opt.	Data Type	Parameter Type	Description
resourceName	Req.	String	Body	Resource name. The maximum length is 64.
resourceType	Req.	String	Body	Resource type, e.g., camera, alarmInput (alarm input), alarmOutput (alarm output). The maximum length is 64.
channelID	Req.	String	Body	Channel ID, equivalent to the node id in ***CameraChannel*** , ***AlarmInputChannel*** , and ***AlarmOutputChannel*** from ***GetDeviceInfo*** returned from POST /api/hccgw/resource/v1/devicedetail/get. The maximum length is 32.

Request Example

```
{
   "areaID":"1d3797d6f5c84b4c9720f2d1453b3516",
   "devChannel":[
      {
      "resourceName":"D 201",
      "resourceType":"alarmInput",
      "channelID":"564138cd313d41dab82b41e73757edaa"
      }
```

```
  ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-15 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
resource	/	***ResourceAddResult*** []	Area-related information.

Response Example

```
{
  "data": {
    "areaID": "1d3797d6f5c84b4c9720f2d1453b3516",
    "devChannel": [
      {
        "id": "239a3b48baf64f20bdce8aee4a84d917",
        "name": "D 201",
        "channelID": "564138cd313d41dab82b41e73757edaa",
        "resourceType": "alarmInput",
        "errorCode": "0"
      }
    ]
  },
  "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/areas/resources/delete

Delete resources from an area by resource IDs.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/resources/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
ids	Req.	String[]	Body	Area ID. The maximum length is 32.

Request Example

```
{
"ids": ["1d3797d6f5c84b4c9720f2d1453b3516"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
"errorCode": "0"
}
```

POST /api/hccgw/resource/v1/areas/cameras/get

Get camera list by specifying the camera information.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/cameras/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Req.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-16 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
areaID	Opt.	String	Body	Area ID. All areas are included if this node is empty. The maximum length is 32.
includeSubArea	Opt.	String	Body	Whether to include cameras in the child area: 0 (No), -1 (yes). It is 0 (No) when **deviceID** or **deviceSerialNo** is specified.
deviceSerialNo	Opt.	String	Body	Device serial No. The maximum length is 32.
cameraID	Opt.	String[]	Body	Camera ID. The maximum length is 32.

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10",
   "filter":{
      "areaID":"-1",
      "includeSubArea":"1",
      "deviceID":"",
      "deviceSerialNo":"",
      "cameraID":[
         "ba1e16a1f1084a93a7dc72b21609c380","b6ddbebb36584a51858edbba30c7283c"
      ]
```

```
  }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-17 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	Integer	Number of total pages.
pageIndex	Req.	Integer	The current page.
pageSize	Req.	Integer	Number of records on each page.
camera	/	***CameraInfo*** []	Camera-related information.

Response Example

```
{
  "data": {
    "totalCount": 2,
    "pageIndex": 1,
    "pageSize": 10,
    "camera": [
      {
        "id": "ba1e16a1f1084a93a7dc72b21609c380",
        "name": "Camera 13",
        "abilitySet": "1,21,22,2002,2021,2022",
        "online": "1",
        "area": {
          "id": "128bb54e279144b0a0d324b36b8f262b",
          "name": "10.66.250.14"
        },
        "device": {
          "devInfo": {
            "id": "497c3301093b4678b32033a8dad10dab",
            "category": "0",
```

```
            "serialNo": "J32355571",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "00889ceac8c44267904b2c500bc1420b",
            "no": "13"
          }
        }
      },
      {
        "id": "b6ddbebb36584a51858edbba30c7283c",
        "name": "IPcamera1",
        "abilitySet": "1,21,22,2002,2015,2016,2021,2022,2023,2024,2027,2029,2030",
        "online": "1",
        "area": {
          "id": "b105274991b2460097a0cd5c83399cfe",
          "name": "10.66.250.104"
        },
        "device": {
          "devInfo": {
            "id": "f401a9a6d4e743618ddd4b2dae9e3866",
            "category": "0",
            "serialNo": "J32353319",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "0090c1cd4bf44379b500cbbc67085217",
            "no": "61"
          }
        }
      }
    ]
  },
  "errorCode": "0"
}
```


POST /api/hccgw/resource/v1/areas/alarmoutputs/get

Get the information of alarm output resource.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/alarmoutputs/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Req.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-18 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
areaID	Opt.	String	Body	Area ID. All areas are included if this node is empty. The maximum length is 32.
includeSubArea	Req.	String	Body	Whether to include cameras in the child area: 0 (No), 1 (yes). It is 0 (No) when **deviceID** or **deviceSerialNo** is specified. The maximum length is 1.
deviceID	Opt.	String	Body	Device ID. The maximum length is 32.
deviceSerialNo	Opt.	String	Body	Device serial No. The maximum length is 32.

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10",
   "filter":{
      "areaID":"-1",
      "includeSubArea":"1",
      "deviceID":"",
      "deviceSerialNo":""
```

```
  }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-19 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total pages.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
alarmOutput	/	***AlarmInfo*** []	Information of alarm output resource.

Response Example

```
{
  "data": {
    "totalCount": 2,
    "pageIndex": 1,
    "pageSize": 10,
    "alarmOutput": [
      {
        "id": "4944007e0a154eabaa8ee9c337f0525c",
        "name": "A 1",
        "abilitySet": "",
        "online": "1",
        "area": {
          "id": "2174986f377c4a75a10e03e757be33f6",
          "name": "10.66.8.48"
        },
        "device": {
          "devInfo": {
            "id": "2ee24be89de1467faaf4d9f33ddebb48",
```

```
            "category": "0",
            "serialNo": "J72878604",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "b58a0172ab504c9f98060456a3c7069f",
            "no": "1"
          }
        }
      },
      {
        "id": "488615f2caa944b1b7507efd7bb08c23",
        "name": "A 2",
        "abilitySet": "",
        "online": "1",
        "area": {
          "id": "2174986f377c4a75a10e03e757be33f6",
          "name": "10.66.8.48"
        },
        "device": {
          "devInfo": {
            "id": "2ee24be89de1467faaf4d9f33ddebb48",
            "category": "0",
            "serialNo": "J72878604",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "373398c10ef3464d86ea850fcd2184e2",
            "no": "2"
          }
        }
      }
    ]
  },
  "errorCode": "0"
}
```


POST /api/hccgw/resource/v1/areas/alarminputs/get

Get information of alarm input resources.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/alarminputs/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Req.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-20 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
areaID	Opt.	String	Body	Area ID. All areas are included if this node is empty. The maximum length is 32.
includeSubArea	Req.	String	Body	Whether to include cameras in the child area: 0 (No), 1 (yes). It is 0 (No) when **deviceID** or **deviceSerialNo** is specified. The maximum length is 1.
deviceID	Opt.	String	Body	Device ID. The maximum length is 32.
deviceSerialNo	Opt.	String	Body	Device serial No. The maximum length is 32.

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10",
   "filter":{
      "areaID":"-1",
      "includeSubArea":"1",
      "deviceID":"",
      "deviceSerialNo":""
```

```
  }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-21 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total pages.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
alarmInput	/	***AlarmInfo*** []	Information of alarm input resources.

Response Example

```
{
  "data": {
    "totalCount": 2,
    "pageIndex": 1,
    "pageSize": 10,
    "alarmOutput": [
      {
        "id": "4944007e0a154eabaa8ee9c337f0525c",
        "name": "A 1",
        "abilitySet": "",
        "online": "1",
        "area": {
          "id": "2174986f377c4a75a10e03e757be33f6",
          "name": "10.66.8.48"
        },
        "device": {
          "devInfo": {
            "id": "2ee24be89de1467faaf4d9f33ddebb48",
```

```
            "category": "0",
            "serialNo": "J72878604",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "b58a0172ab504c9f98060456a3c7069f",
            "no": "1"
          }
        }
      },
      {
        "id": "488615f2caa944b1b7507efd7bb08c23",
        "name": "A 2",
        "abilitySet": "",
        "online": "1",
        "area": {
          "id": "2174986f377c4a75a10e03e757be33f6",
          "name": "10.66.8.48"
        },
        "device": {
          "devInfo": {
            "id": "2ee24be89de1467faaf4d9f33ddebb48",
            "category": "0",
            "serialNo": "J72878604",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "373398c10ef3464d86ea850fcd2184e2",
            "no": "2"
          }
        }
      }
    ]
  },
  "errorCode": "0"
}
```


POST /api/hccgw/resource/v1/areas/alarminputs/status/get

Get the alarm input status.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/alarminputs/status/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
alarmIntputID	Req.	Array[String]	Body	Alarm input ID set. You can get statuses of up to 8 resources at the same time.

Request Example

```
{
   "alarmInputID": [
      "2c0a4ab9a2504de4842d95435f3a8620",
      "b35b8e9a9326418ca2198ed45709b5bd"
]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-22 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
alarmInput	Req.	***AlarmInputInfo*** []	Returned alarm input status. If the requested alarm input ID does not exist, the returned information will not include the corresponding alarm input information.

Response Example

```
{
   "data": {
```

```
    "alarmInput": [
        {
          "id": "0da41f0ac59c4debade796914f874148",
          "status": 2,
          "errorCode": "0"
        },
        {
          "id": "3d75a50c0ae84fc99c19581ef82d1b29",
          "status": 1,
          "errorCode": "0"
        }
]
},
"errorCode": "0"
}
```


POST /api/hccgw/resource/v1/areas/alarmoutputs/control

Edit alarm output status.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/alarmoutputs/control

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
alarmOutputOperation	Req.	Object[]	Body	Alarm output status.

Table 5-23 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
alarmOutputID	Req.	String	Body	Alarm output ID. The maximum length is 32.
operation	Req.	Integer	Body	Whether to enable: 0 (No), -1 (yes).

Request Example


```
{
  "alarmOutputOperation":[
    {
```

```
        "alarmOutputID":"b58a0172ab504c9f98060456a3c7069f",
        "operation":1
      }
   ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-24 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
alarmOutputOperation	/	***AlarmOutputOperation*** []	Information related to alarm output control.

Response Example

```
{
   "data": {
      "alarmOutputOperation": [
         {
            "alarmOutputID": "b58a0172ab504c9f98060456a3c7069f",
            "alarmOutputState": 1,
            "errorCode": "0"
         }
      ]
   },
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/areas/alarmoutputs/status/get

Get alarm output status.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/alarmoutputs/status/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
alarmOutputID	Req.	String[]	Body	Alarm output ID set.

Request Example

```
{
   "alarmOutputID":[
     "b58a0172ab504c9f98060456a3c7069f"
   ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-25 data Object Description

Parameter Name	Data Type	Parameter Type	Description
alarmOutput	***AlarmOutputState*** []	Body	Information related to alarm output status.

Response Example

```
{
   "data": {
     "alarmOutput": [
```

```
        {
          "id": "b58a0172ab504c9f98060456a3c7069f",
          "status": 1,
          "errorCode": "0"
        }
      ]
   },
   "errorCode": "0"
}
```

POST /api/hccgw/resource/v1/areas/cameras/thumbnail/get

Get camera thumbnail by specifying camera information.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/cameras/thumbnail/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
cameraID	Req.	String	Body	Camera ID. The maximum length is 32.
refresh	Req.	Integer	Body	Whether to refresh and get the camera thumbnail: 0 (do not refresh), 1(refresh).

Request Example

```
{
   "cameraID":"ba1e16a1f1084a93a7dc72b21609c380",
   "refresh":1
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-26 data Object Description

Parameter Name	Data Type	Parameter Type	Description
pictureURL	String	Body	Thumbnail URL (valid for a day).
isEncrypted	Integer	Body	Whether the picture is encypted: 1-encrypted, 0-not encrypted. After stream encryption is enabled for device, the captured picture will be encrypted and requires decryption. For picture decryption needs, please contact the technical support for relevant guide documents.

Response Example

```
{
   "data": {
      "pictureURL": "https://testuslite.ezvizlife.com:443/https://testuslite.ezvizlife.com/image/pic/
ad3fc9cb47854fceadcf27abe4da87b8?c=59c1da51"
     "isEncrypted": 0
   },
   "errorCode": "0"
}
```

Door

POST /api/hccgw/resource/v1/areas/doors/get

Get door information.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/doors/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Req.	Object	Body	Search condition. The maximum length is 64. See details in the filter Object Description below.

Table 5-27 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
areaID	Opt.	String	Body	Area ID. All areas are included if this node is empty. The maximum length is 32.
includeSubArea	Req.	String	Body	Whether to include cameras in the child area: "0" (No), "1" (yes). It is 0 (No) when **deviceID** or **deviceSerialNo** is specified. The maximum length is 1.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
deviceID	Opt.	Opt.	Body	Device ID. The maximum length is 32.
deviceSerialNo	Opt.	Opt.	Body	Device serial No. The maximum length is 32.

Request Example

```
{
   "pageIndex":1,
   "pageSize":10,
   "filter":{
      "areaID":"-1",
      "includeSubArea":"1",
      "deviceID":"",
      "deviceSerialNo":""
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-28 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total pages.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
door	/	***AlarmInfo*** []	Information of alarm input resources.

Response Example


```
{
  "data": {
    "totalCount": 2,
    "pageIndex": 1,
    "pageSize": 10,
    "door": [
      {
        "id": "9365880922bf49bd8df94cafccf9214c",
        "name": "Door TEST 02",
        "online": "1",
        "area": {
          "id": "e3c8840f789a4203ba45f9f106dc9da3",
          "name": "APP video intercom testing"
        },
        "device": {
          "devInfo": {
            "id": "a4a7ba685065471bae03cf039f23d901",
            "category": "0",
            "serialNo": "K14891504",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "288329024512665601",
            "no": "2"
          }
        }
      },
      {
        "id": "b1c47d5d318e438b910f0a38fcc0d54a",
        "name": "Door TEST 01",
        "online": "1",
        "area": {
          "id": "e3c8840f789a4203ba45f9f106dc9da3",
          "name": "APP video intercom testing"
        },
        "device": {
          "devInfo": {
            "id": "a4a7ba685065471bae03cf039f23d901",
            "category": "0",
            "serialNo": "K14891504",
            "streamSecretKey": ""
          },
          "channelInfo": {
            "id": "288329024512665600",
            "no": "1"
          }
        }
      }
    ]
```

```
  },
  "errorCode": "0"
}
```

Time Zone

POST /api/hccgw/resource/v1/timezone/get

Get the time zone list.

Request URL

{areaDomain}/api/hccgw/resource/v1/timezone/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-29 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
systemTimeZoneID	/	String	Time zone ID of the Hik Connect for Teams platform.
timeZone	/	***TimeZoneInfo*** []	Time zone information.

Response Example


```
{
   "data": {
      "timeZone": [
         {
            "id": "19",
            "standardName": "Central Asia Standard Time",
            "displayName": "(UTC+06:00) Astana",
            "bias": -360,
            "dst": {
               "daylightBias": "-60",
               "daylightDate": "0:0:0:0:0",
               "standardDate": "0:0:0:0:0",
               "enable": 0
            }
         },

      ...

         {
            "id": "1",
            "standardName": "Afghanistan Standard Time",
            "displayName": "(UTC+04:30) Kabul",
            "bias": -270,
            "dst": {
               "daylightBias": "-60",
               "daylightDate": "0:0:0:0:0",
               "standardDate": "0:0:0:0:0",
               "enable": 0
            }
         }
      ],
      "systemTimeZoneID": "30"
   },
   "errorCode": "0"

}
```


5.3 Alarm-Related Services

Alarm refers to the content uploaded by the device when the configured alarm rules are triggered.

5.3.1 Alarm Subscription

POST /api/hccgw/alarm/v1/mq/subscribe

Subscribe to alarm information.

Request URL

{areaDomain}/api/hccgw/alarm/v1/mq/subscribe

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
subscribeType	Req.	Integer	Body	0 (cancel subscription), 1 (subscribe).
subscribeMode	Req.	Integer	Body	0 (subscribe to all alarm types), 1(subscribe by alarm type).
eventType	Opt.	Integer[]	Body	Alarm event type. See details in ***Alarm Type*** .

Request Example

```
{
    "subscribeType": 1,
    "subscribeMode": 1,
    "eventType": [0,1]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

POST /api/hccgw/alarm/v1/mq/messages

Get alarm information.

Request URL

{areaDomain}/api/hccgw/alarm/v1/mq/messages

Request Parameters

Table 5-30 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	The maximum length is 64.

Table 5-31 Request Body

Parameter	Req. or Opt.	Data Type	Description
maxNumberPerTime	Opt.	Integer	Information volume per request: 100, 200, 300 (default), 400, 500.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned when the request succeeded.
-**batchId**	Req.	String	ID of information batch processing.
-**remainingNumber**	Req.	Long	Total remaining alarms.
-**alarmMsg**	/	Object[]	Event information. See ***AlarmMsg*** for details.

Response Example (for Leaving Queue Alarm)


```
{
   "data": {
      "batchId":
"0730b5d3664040f33fe8bfd4eb6b886b88f10040e489a0d54c00e41546a6a9b2946cbcd91f0a6eca6ec6cddf4511a78f",
      "remainingNumber": 13445,
      "alarmMsg": [
        {
          "systemId": "f718f3013b5a4fb38e573043afe28683",
          "guid": "18892bc026ddddd",
          "dataRetransmission": 1,
          "msgType": "1",
          "alarmState": "1",
          "pulseAlarm": "false",
          "alarmMainCategory": "alarmCategoryVideo",
          "alarmSubCategory": "alarmSubCategoryCamera",
          "timeInfo": {
            "endTime": "2023-04-13T08:56:55Z",
            "endTimeLocal": "2023-04-13T16:56:55+08:00",
            "startTime": "2023-04-13T08:56:40Z",
            "startTimeLocal": "2023-04-13T16:56:40+08:00"
          },
          "eventSource": {
            "eventType": "100657",
            "sourceID": "780e25f5f72b4592a2e5c2deae38726f",
            "sourceName": "IPCamera 01",
            "sourceType": "camera",
            "areaID": "66669b5dd0024e12b5502623f7dc343a",
            "areaName": "1",
            "deviceInfo": {
              "devID": "38a0c1e93feb4838bcb541cae43d14f6",
              "devName": "G95721825"
            }
          },
          "alarmRule": {
            "id": "1640597519769669632",
            "name": "People Queue Leave",
            "description": ""
          },
          "alarmPriority": {
            "id": "0545620a6ed24fdda0673188e334b561",
            "level": "1",
            "levelName": "1",
            "color": "#F40B0B"
          },
          "markState": "0",
          "affirmedState": "0",
          "linkageTypes": [

          ],
```

```
            "linkageConfig": {

            },
            "vehicleRelatedInfo": {

            },
            "fileInfo": {
               "fileContent": "1",
               "file": [
                  {
                     "type": "1",
                     "url": "https://example.com/api/lapp/mq/downloadurl?
appKey=59eeb3b106b2495da8558dde6ceecd73&fileKey=ISAPI_FILES/AC6513819_1/20251103131626480-
AC6513819-1-10000-4$encrypt=2,2025-11-03T20:16:28,f110a631f105aa196e86b71165f140d1",
                     "saveState": "0",
                     "generationMode": "1",
                     "encrypted": "0",
                     "extendInfo": {
                        "sourceID": "e5614c7e6aae47f9b5c8ef65a3548b01",
                        "sourceName": "IPDVRHQ001",
                        "sourceType": "1001",
                        "captureIndex": 1,
                        "humanId": "6652391106",
                        "humanName": "Example",
                        "similarity": 0.87,
                        "fileType": "face",
                        "faceLibName": "LYN",
                        "faceLibThreshold": 0.8
                     }
                  }
               ]
            },
            "queueRelatedInfo": {
               "queueInfo": {
                  "regionID": "123",
                  "regionName": "122-3232",
                  "queueThreshold": 15,
                  "peopleTargetId": 11,
                  "waitTime": 600,
                  "startTime": "2023-04-13T19:42:27+08:00",
                  "endTime": "2023-04-13T20:42:27+08:00"
               }
            }
         }
      ]
   },
   "errorCode": "0"
}
```

POST /api/hccgw/alarm/v1/mq/messages/complete

Confirm that alarms are received by specifying the batchId.

Request URL

{areaDomain}/api/hccgw/alarm/v1/mq/messages/complete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
batchId	Req.	String	Body	The batchId returned when getting the list of event information. The maximum length is 256.

Request Example

```
{

"batchId":"5a32fddc6f5c01e067f7abdfe5348a6c98f64d1fe196b9d54c45b01b50a3a7b5946dbcd91f0a6eca6ec6cddf4511a78f"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

5.3.2 Alarm Rules

POST /api/hccgw/alarm/v1/alarmrules/add

Configure alarm rules.

Request URL

{areaDomain}/api/hccgw/alarm/v1/alarmrules/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
alarmrule	/	Object[]	Body	Information related to alarm rules.

Table 5-32 alarmrule Object Description

Parameter Name	Req. or Opt.	Data Type	Parameter Type	Description
name	Req.	String	Body	Alarm rule name. The maximum length is 255.
alarmMainCategory	Opt.	String	Body	Alarm main category. The maximum length is 64.
alarmSubCategory	Opt.	String	Body	Alarm sub category. The maximum length is 64.
description	Opt.	String	Body	Alarm rule description. The maximum length is 128.
color	Opt.	String	Body	Alarm rule color. The maximum length is 64.
notification	Opt.	***Notification***	Body	Notification configuration.
schedule	Opt.	***Schedule***	Body	Alarm template.
priority	Opt.	***Priority***	Body	Alarm priority.

Parameter Name	Req. or Opt.	Data Type	Parameter Type	Description
ignoreRecurring	Opt.	***IgnoreRecurring***	Body	Auto-close alarming window.
eventSource	Req.	***EventSource***	Body	Event source.

Request Example

```
{
  "alarmRule": [
    {
      "name": "fjx-test",
      "color": "#ff0000",
      "alarmMainCategory": "alarmCategoryVideo",
      "alarmSubCategory": "alarmSubCategoryCamera",
      "description": "fjx-test",
      "enable": 1,
      "priority": {
        "id": "2f87acf0985e431d852bbaed10aba040"
      },
      "notification": {
        "enable": 1,
        "recipients": [
          {
            "userID": "8a7485aa7f209dd5017f2141adff0019",
            "userName": "hccdd2 uat6"
          }
        ]
      },
      "schedule": {
        "type": "1",
        "timeSchedule": {
          "id": "161a03299fd94914b89accdf0844b0e6"
        }
      },
      "ignoreRecurring": {
        "enable": "1",
        "timeValue": "15"
      },
      "eventSource": {
        "sourceType": "camera",
        "eventType": 10102,
        "sourceID": "6a95b98ae34e4eac88f3af8a286bf47c",
        "sourceName": "5546G0_191 Camera 01"
      }
    }
  ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-33 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
alarmRule	Req.	***AlarmRuleOperation*** []	Alarm rule information.

Response Example

```
{
   "errorCode": "0",
   "data": {
      "alarmRule": [
       {
         "name": "fjx-test",
         "errorCode": "",
         "id": "1658413372250656768"
       }
      ]
     }
}
```

POST /api/hccgw/alarm/v1/alarmrules/get

Get the list of alarm rules.

Request URL

{areaDomain}/api/hccgw/alarm/v1/alarmrules/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Opt.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-34 filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
alarmRuleID	Opt.	String	Body	Alarm rule ID. This search condition is not enabled if this node is empty or null. The maximum length is 64.
alarmRuleName	Opt.	String	Body	Alarm rule name. Fuzzy search supported. This search condition is not enabled if this node is empty or null. The maximum length is 64.
eventSourceName	Opt.	String	Body	Alarm source name. Fuzzy search supported. This search condition is not enabled if this node is empty or null. The maximum length is 64.
alarmRuleState	Opt.	Integer	Body	-1 or empty (all), 0 (normal), 1 (abnormal). The maximum length is 3.
alarmRuleEnable	Opt.	Integer	Body	-1 or empty (all), 0 (disable), 1 (enable). The maximum length is 3.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
eventSource	Opt.	***EventSource*** []	Body	Alarm source. Only sourceType and sourceID is required for search.
alarmCategory	Opt.	***AlarmCategory***	Body	Alarm category.

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10",
   "filter":{
      “alarmRuleID”:””,
      “alarmRuleName”:””,
      “eventSourceName”:””,
      “alarmRuleState”:0,
      “alarmRuleEnable”:0,
“alarmCategory”:{
         “mainCategory”:””,
         “subCategory”:””
},
      eventSource:[
{
“sourceID”:””,
“sourceType”:””
}
]
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Alarm rule list structure.

Table 5-35 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total pages.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
alarmRule	/	***AlarmRuleDetail*** []	Information related to alarm rules.

Response Example


```
{
   "data": {
      "totalCount": 1,
      "pageIndex": 1,
      "pageSize": 10,
      "alarmRule": [
         {
            "id": "1542072136028524544",
            "name": "Camera 01-Motion Detection",
            "color": "#ff0000",
            "enable": 1,
            "state": "0",
            "alarmMainCategory": "alarmCategoryVideo",
            "alarmSubCategory": "alarmSubCategoryCamera",
            "notification": {
               "enable": 1,
               "recipients": [
                  {
                     "userID": "8a7489d68161eaf9018161f84bb70004",
                     "userName": "abc  abc"
                  },
                  {
                     "userID": "8a748b3181a510aa0181a53fef2e1210",
                     "userName": "lmk  lmk"
                  }
               ]
            },
            "schedule": {
               "timeSchedule": {
                  "id": "8a748e7681618fea018161f847d70000",
                  "name": ""
               },
               "type": "1"
            },
            "priority": {
               "id": "0db8cd1c85324e27a1f36c4f5a66e18",
               "level": "1",
               "levelName": "",
```

```
            "color": "#F40B0B"
          },
          "ignoreRecurring": {
            "enable": 0,
            "timeValue": 15
          },
          "eventSource": {
            "eventType": 10002,
            "sourceID": "a1afc31e55af4960900fa6498d67399d",
            "sourceType": "camera",
            "sourceName": "Camera 01"
          }
        }
      ]
    },
    "errorCode": "0"
}
```


POST /api/hccgw/alarm/v1/alarmrules/update

Edit alarm rules.

Request URL

{areaDomain}/api/hccgw/alarm/v1/alarmrules/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
alarmrule	Req.	Object[]	Body	Information related to alarm rules.

Table 5-36 alarmrule Object Description

Parameter Name	Req. or Opt.	Data Type	Parameter Type	Description
id	Req.	String	Body	Alarm rule ID. The maximum length is 64.
name	Req.	String	Body	Alarm rule name. The maximum length is 255.

Parameter Name	Req. or Opt.	Data Type	Parameter Type	Description
description	Opt.	String	Body	Alarm rule description. The maximum length is 128.
color	Opt.	String	Body	Alarm rule color. The maximum length is 64.
notification	Opt.	***Notification***	Body	Notification configuration.
schedule	Opt.	***Schedule***	Body	Alarm template.
priority	Opt.	***Priority***	Body	Alarm priority.
ignoreRecurring	Opt.	***IgnoreRecurring***	Body	Auto-close alarming window.
eventSource	Req.	***EventSource***	Body	Event source.

Request Example

```
{
    "alarmRule": [
      {
        "id": "1542072136028524544",
        "name": "Camera 01-Motion Detection",
        "color": "#ff0000",
        "enable": 1,
        "state": "0",
        "alarmMainCategory": "alarmCategoryVideo",
        "alarmSubCategory": "alarmSubCategoryCamera",
        "notification": {
          "enable": 1,
          "recipients": [
            {
              "userID": "8a7489d68161eaf9018161f84bb70004",
              "userName": "abc abc"
            },
            {
              "userID": "8a748b3181a510aa0181a53fef2e1210",
              "userName": "lmk  lmk"
            }
          ]
        },
        "schedule": {
          "timeSchedule": {
            "id": "8a748e7681618fea018161f847d70000",
            "name": ""
          },
          "type": "1"
        },
```

```
            "priority": {
              "id": "0db8cd1c85324e27a1f36c4f5a66e18",
              "level": "1",
              "levelName": "",
              "color": "#F40B0B"
            },
            "ignoreRecurring": {
              "enable": 0,
              "timeValue": 15
            },
            "eventSource": {
              "eventType": 10002,
              "sourceID": "a1afc31e55af4960900fa6498d67399d",
              "sourceType": "camera",
              "sourceName": "Camera 01"
            }
          }
      ]
}
```


Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-37 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
alarmRule	Req.	***AlarmRuleOperation*** []	Alarm rule information.

Response Example


```
{
   "errorCode": "0",
   "data": {
      "alarmRule": [
       {
         "name": "fjx-test",
```

```
          "id": "1658413372250656768"
        }
      ]
    }
}
```

POST /api/hccgw/alarm/v1/alarmpriorities/get

Get the alarm priority list.

Request URL

{areaDomain}/api/hccgw/alarm/v1/alarmpriorities/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-38 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total pages.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
alarmpriorities	/	***Alarmpriorities*** []	Information related to alarm priorities.

Response Example


```
{
   "data": {
      "totalCount": "3",
      "pageIndex": "0",
      "pageSize": "10",
      "alarmpriorities": [
         {
            "id": "0db8cd1c85324e27a1f36c4f5a66e18",
            "level": 1,
            "levelName": "",
            "color": "#F40B0B",
            "audioURL": ""
         },
         {
            "id": "0e17d83ee1b24f239aec7a1a9a69d66",
            "level": 3,
            "levelName": "",
            "color": "#2D8B3D",
            "audioURL": ""
         },
         {
            "id": "0e1f9742db0d48cea90b5c92b73806d",
            "level": 2,
            "levelName": "",
            "color": "#D79931",
            "audioURL": ""
         }
      ]
   },
   "errorCode": "0"
}
```

POST /api/hccgw/alarm/v1/receivingschedules/get

Get the list of alarm arming schedule templates.

Request URL

{areaDomain}/api/hccgw/alarm/v1/receivingschedules/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.

Request Example

```
{
   "pageIndex":"1",
   "pageSize":"10"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-39 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Req.	String	Number of total pages.
pageIndex	Req.	String	The current page.
pageSize	Req.	String	Number of records on each page.
receivingSchedule	/	***ReceivingSchedule*** []	Information related to alarm arming schedule templates.

Response Example


```
{
   "data": {
      "totalCount": "3",
      "pageIndex": "1",
      "pageSize": "10",
      "alarmpriorities": [
         {
            "id": "0db8cd1c85324e27a1f36c4f5a66e18",
            "level": 1,
            "levelName": "",
            "color": "#F40B0B",
            "audioURL": ""
         },
         {
            "id": "0e17d83ee1b24f239aec7a1a9a69d66",
            "level": 3,
            "levelName": "",
            "color": "#2D8B3D",
            "audioURL": ""
         },
         {
            "id": "0e1f9742db0d48cea90b5c92b73806d",
            "level": 2,
            "levelName": "",
            "color": "#D79931",
            "audioURL": ""
         }
      ]
   },
   "errorCode": "0"
}
```

POST /api/hccgw/alarm/v1/alarmlinkage/add

Configure alarm linkage.

Request URL

{areaDomain}/api/hccgw/alarm/v1/alarmlinkage/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
alarmLinkage	/	Object[]	Body	Information related to alarm linkage configuration.

Table 5-40 alarmrule Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
alarmRuleID	Req.	String	Body	Alarm rule ID. The maximum length is 32.
linkageItem	Opt.	***LinkageItem*** []	Body	Linkage item name.

Request Example

```
{
   "alarmLinkage": [
      {
         "alarmRuleID": "b9619db8ee50475cbf8c6c89cbfb5dbd",
         "linkageItem": [
            {
               "linkageType": "LinkCamera",
               "linkageConfig": {
                  "linkCamera": {
                     "preRecordTime": 3,
                     "postRecordTime": 15,
                     "camera": [
                        {
                           "id": "21f84da3f9604a30a3f5b6975fa0f38a",
                           "name": "5546G0_191 Camera 01",
                           "areaID": "450ac442bf4e4daf9f04e1af1bc90be7",
                           "areaName": "_2022-05-07T201804_0"
                        }
                     ]
```

```
            }
          }
        },
        {
          "linkageType": "LinkCapturePicture",
          "linkageConfig": {
            "linkCapturePicture": {
              "captureInterval": 3,
              "captureMode": 2,
              "camera": [
                {
                  "resourceType": "1001",
                  "id": "21f84da3f9604a30a3f5b6975fa0f38a",
                  "name": "5546G0_191 Camera 01",
                  "areaID": "450ac442bf4e4daf9f04e1af1bc90be7",
                  "areaName": "_2022-05-07T201804_0"
                }
              ]
            }
          }
        },
        {
          "linkageType": "LinkAlarmOutput",
          "linkageConfig": {
            "linkAlarmOutput": {
              "autoClose": 0,
              "autoCloseTime": 15,
              "alarmOutput": [
                {
                  "id": "d5418485784b44f79b52e24a64bf2574",
                  "name": "A 2",
                  "areaID": "1b65a68be27d41be9f2ed7ddc7045276",
                  "areaName": "111"
                }
              ]
            }
          }
        },
        {
          "linkageType": "LinkEMail",
          "linkageConfig": {
            "linkEmail": {
              "emailTemplateId": "8a748675809d8e3901809d9c57370000",
              "emailTemplateName": "test22"
            }
          }
        }
      ]
    }
  ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-41 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
alarmLinkage	Req.	***AlarmLinkage*** []	Alarm linkage rule information.

Response Example

```
{
  "data": {
   "alarmLinkage": [
    {
     "alarmRuleID": "1651173299037802496",
     "itemID": "5BE20D67677647EF8D448E67E4AFB411",
     "linkageType": "LinkCamera",
     "errorCode": "0"
    }
   ]
  },
 "errorCode": "0"
}
```

5.3.3 Alarm Logs

POST /api/hccgw/alarm/v1/alarmlog

Get the list of alarm logs.

Request URL

{areaDomain}/api/hccgw/alarm/v1/alarmlog

Request Parameters

Table 5-42 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	The maximum length is 64.

Table 5-43 Request Body

Parameter	Req. or Opt.	Data Type	Description
pageIndex	Req.	Integer	The current page No., which is equal to or greater than 1.
pageSize	Req.	Integer	Number of records on each page, which is between 1 and 500.
timeRange	Req.	Object	Time range parameters of device. The time between the start time and end time should be no more than a day. See ***TimeRange*** for details.
areaID	Opt.	String	Area ID. If this field is absent, it indicates to search for all alarm logs of all areas.
eventTypeList	Opt.	String[]	See details in ***Alarm Type*** . If this node is not configured, all event types will be included.

Request Example

```
{
   "pageIndex":1,
   "pageSize":5,
   "timeRange":{
     "beginTime":"2023-04-23 00:00:00",
     "endTime":"2023-04-24 00:00:00"
   },
   "areaID":"565623256767",
   "eventTypeList":["10061","10657"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned when the request succeeded.

Table 5-44 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
pageIndex	Req.	Integer	The current page No.
pageSize	Req.	Integer	Number of records on the current page.
moreData	Req.	Integer	Whether it is more than one page: 0-no, 1-yes.
alarmlogList	Req.	Object []	Alarm log set. See ***AlarmMsg*** for details.

Response Example


```
{
  "data": {
    "pageIndex": 1,
    "pageSize": 1,
    "moreData": 0,
    "alarmLogList": [
      {
        "guid": "9af74b16484d43eaaa64c833c05bcb3a",
        "dataRetransmission": 1,
        "alarmState": "0",
        "pulseAlarm": "0",
        "alarmMainCategory": "alarmCategoryVideo",
        "alarmSubCategory": "alarmCategoryVideo",
        "timeInfo": {
          "startTime": "2023-04-26T04:00:00Z",
          "endTime": "2023-04-26T04:00:15Z"
        },
        "eventSource": {
          "eventType": "100657",
          "sourceID": "a333cd708cd542be975e8f1298cc8aa1",
          "sourceName": "201",
```

```
            "sourceType": "camera",
            "areaID": "96c4b7293d4a4a30818c988d1a79b438",
            "areaName": "11",
            "deviceInfo": {
              "devID": "8838bae9a94b4d0591a13bd16bcebe43",
              "devName": "K44201853",
              "devCategory": "2001"
            }
          },
          "alarmRule": {
            "id": "1650433180307689472",
            "name": "201-Leaving Queue Detection",
            "description": ""
          },
          "alarmPriority": {
            "id": "1",
            "level": "1",
            "levelName": "1",
            "color": "#ff1122"
          },
          "markState": "0",
          "affirmedState": "0",
          "fileInfo": {},
          "queueRelatedInfo": {
            "queueInfo": {
              "regionID": "1",
              "peopleTargetId": 3438,
              "waitTime": 310,
              "startTime": "2023-04-21T10:50:25+08:00",
              "endTime": "2023-04-21T10:55:35+08:00",
              "queueThreshold": 15
            }
          }
        }
      ]
    },
    "errorCode": "0"
}
```


5.3.4 Alarm Voltage Setting

POST /api/hccgw/alarm/v1/voltagesetting/set

Edit the low battery threshold of solar-powered cameras.

Request URL

{areaDomain}/api/hccgw/alarm/v1/voltagesetting/set

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
voltageThreshold	Req.	Number	Body	Low battery threshold (percentage). Range: [0,100], default: 20.

Request Example

```
{
   "voltageThreshold": 20
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Opt.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-45 data Object Description

Parameter	Req. or Opt.	Data Type	Description
data	Req.	Boolean	true (edited).

Response Example

```
{
   "data":true,
   "errorCode": "0"
}
```

5.4 Message-Related Services

Message refers to the content uploaded by the device actively when there is no external trigger source.

5.4.1 Message Subscription and Receiving

POST /api/hccgw/rawmsg/v1/mq/subscribe

Subscribe to messages.

Request URL

{areaDomain}/api/hccgw/rawmsg/v1/mq/subscribe

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
subscribeType	Req.	Integer	Body	0-cancel subscription, 1-subscribe. The maximum length is 1.
msgType	Req.	String[]	Body	Event type to subscribe to. If this node is empty, all events will be subscribed by default. Refer to ***Message Type*** for details.

Request Example

```
{
   "subscribeType":1,
   "msgType": ["Msg330001","Msg330002"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

POST /api/hccgw/rawmsg/v1/mq/messages

After you subscribe to messages, you can get messages manually from the device. It is recommended that the interval of getting messages be 500 ms.

Request URL

{areaDomain}/api/hccgw/rawmsg/v1/mq/messages

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-46 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
batchId	Req.	String	Message queue batch processing ID.
event	/	***Event(1)*** []	Information related to event messages.

Response Example


```
{
   "data": {
      "batchId":
"5823e397664b41e677fab5c4ee6e8c3fc8f60012f480a6c94e40e60501b8b7f59468bcd91f0a6eca6ec6cddf4511a78f",
      "remainingNumber": 0,
      "event": [
        {
          "basicInfo": {
            "occurrenceTime": "2023-05-08 11:15:26",
            "systemId": "855362005e074fbba3f2400d7fba3670",
            "msgType": "Msg330001",
            "resource": {
              "id": "25051e2467f44cf5947493a56921ca4c",
              "name": "111",
              "areaName": "333"
            },
            "device": {
              "id": "0d961d4a05264d4b848522d3414eca3a",
              "name": "K70728087",
              "category": "mobileDevice"
            }
          },
          "data": {
            "vehicleRelatedInfo": {
              "gpsInfo": {
                "ew": "E",
                "lng": "6.943345",
                "ns": "N",
                "lat": "50.331554",
                "direction": 32759,
```

```
            "height": 6090,
            "speed": 33333
          },
          "vehicleInfo": {
            "licensePlate": "111",
            "driverName": " ",
            "driverPhone": "",
            "id": "25051e2467f44cf5947493a56921ca4c",
            "speedLimit": 8200000
          }
        }
      }
    },
    {
      "basicInfo": {
        "occurrenceTime": "2023-05-05 11:15:32",
        "systemId": "855362005e074fbba3f2400d7fba3670",
        "msgType": "Msg330502",
        "resource": {
          "id": "25051e2467f44cf5947493a56921ca4c",
          "name": "111",
          "areaName": "333"
        },
        "device": {
          "id": "0d961d4a05264d4b848522d3414eca3a",
          "name": "K70728087",
          "category": "mobileDevice"
        }
      },
      "picture": [],
      "video": [],
      "data": {
        "vehicleRelatedInfo": {
          "gpsInfo": {
            "ew": "E",
            "lng": "6.943345",
            "ns": "N",
            "lat": "50.331551",
            "direction": 32759,
            "height": 6090,
            "speed": 33333
          },
          "vehicleInfo": {
            "licensePlate": "111",
            "driverName": " ",
            "driverPhone": "",
            "id": "25051e2467f44cf5947493a56921ca4c",
            "speedLimit": 8200000
          }
        }
      },
      "uuid": "ba28708fd5664a7281bc764925d68a28",
```

```
            "update": false
          }
        ]
    },
    "errorCode": "0"
}
```


POST /api/hccgw/rawmsg/v1/mq/messages/complete

Confirm that message consuming is finished according to the input batchId. Without confirming, you will get the same data continuously. After confirming, you will get the new data.

Request URL

{areaDomain}/api/hccgw/rawmsg/v1/mq/messages/complete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
batchId	Req.	String	Body	The returned batchID when getting event messages. The maximum length is 256.

Request Example


```
{

"batchId":"4075e8d16a4b4ce63dabebcdba3cd37e83b65a13edd5b4d34343ef595ab6b5a7946a86e61d086cc86cc4cfdd4713a58d"
}
```


Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

5.5 Video-Related Services

5.5.1 Recording Schedule and Playback

POST /api/hccgw/video/v1/recordsettings/get

Get the recording schedule.

Request URL

{areaDomain}/api/hccgw/video/v1/recordsettings/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
cameraID	Req.	String[]	Body	Camera ID set.

Request Example

```
{
   "cameraId":[
      "2aeec98c14a4427f9ace6c48e91ab4cc"
   ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-47 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
recordSetting	Req.	***RecordSetting*** []	Recording schedule information.

Response Example


```
{
   "data": {
      "recordSetting": [
         {
            "cameraID": "2aeec98c14a4427f9ace6c48e91ab4cc",
            "enableLocalStorage": 1,
            "localStorage": {
               "scheduleTemplateId": "1",
               "recordingStreamType": 1,
               "postRecordTime": 10,
               "anr": 0,
               "storageTime": 0
            },
            "enableCloudStorage": 0,
            "cloudStorage": {}
         }
      ]
   },
   "errorCode": "0"
}
```


POST /api/hccgw/video/v1/live/address/get

Get the address of live view or playback. You need to use JS SDK for live view and playback.

Note

- India and Russia regions do not support RTMP/HLS protocols.
- When using RTMP/HLS protocols, there are following constraints.

- Playback is not supported.
- Stream encryption cannot be enabled.
- Only H264 video format is supported.
- During live view via RTMP/HLS, operations such as enabling/disabling audio or switching between main/sub streams require resending the RTMP/HLS request to restart live view.

Request URL

{areaDomain}/api/hccgw/video/v1/live/address/get

Request Parameters

Table 5-48 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	The maximum length is 64.

Table 5-49 Request Body

Parameter	Req. or Opt.	Data Type	Description
resourceId	Req.	String	Camera resource ID, which is CameraInfo obtained from /api/hccgw/resource/v1/areas/cameras/get. The maximum length is 64.
deviceSerial	Req.	String	Device serial No. The maximum length is 32.
type	Req.	String	Type: 1 (live view), 2 (playback from local recording), 3 (playback from cloud storage recording). 2 and 3 are both playback types.
code	Opt.	String	Password for device recording encryption. The maximum length is 16. The encryption is not supported when **protocol** is RTMP.
protocol	Opt.	Integer	Stream protocol: 2-HLS, 3-RTMP, the default is 1. For RTMP/HLS protocols: 1. Playback is not supported. 2. Stream encryption cannot be enabled. 3. Video format is limited to H264.

Parameter	Req. or Opt.	Data Type	Description
			4. During live view via RTMP/HLS, operations such as enabling/disabling audio or switching between main/sub streams require resending the RTMP/HLS request to restart live view. 5. India and Russia regions do not support RTMP/HLS protocols.
quality	Opt.	String	Video quality: 1-HD (main bitrate), 2-Fluent (sub-bitrate), the default is 1.
expireTime	Opt.	Integer	Expiration time, the unit is second; set validity period for RTMP: 30s-720d.
startTime	Opt.	String	Start time of recording playback from local or cloud storage, e.g., 2019-12-01 00:00:00.
stopTime	Opt.	String	End time of recording playback from local or cloud storage, e.g., 2019-12-01 00:00:00.

Request Example

```
{
   "deviceSerial": "L45203285",
   "resourceId": "5ce3cebed0e549938c59034edb5fe290",
   "type": "1",
   "protocol": 3,
   "quality": 2,
   "expireTime": 600
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Opt.	Object	Data returned when the request succeeded.

Parameter	Req. or Opt.	Data Type	Description
id	Opt.	String	ID.
url	Opt.	String	URL.

Response Example


```
{
   "data": {
   "id": "786192075142131712",
      "url": "rtmp://vtmsgpzl.ezvizlife.com:1935/v3/openlive/L26577519_1_2?
expire=1733720797&id=786192075142131712&c=047020a3b0&t=c17825ce51d23a7bc172912ac7263b352a9640aa78
176ce94f2b13cb4c0b5c52&ev=100"
   },
   "errorCode": "0"
}
```


POST /api/hccgw/video/v1/record/element/search

Search for playback segments.

Request URL

{areaDomain}/api/hccgw/video/v1/record/element/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
pageSize	Req.	Integer	Body	Number of records on each page.
pageIndex	Req.	Integer	Body	Starts from 1.
cameraId	Req.	String	Body	Camera resource ID, which is CameraInfo obtained from /api/hccgw/resource/v1/areas/cameras/get. The maximum length is 64.
filter	Req.	Object	Body	Search condition.
timeType	Req.	Integer	Body	0 (time of client), 1 (time of local device).

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
beginTime	Req.	String	Body	Start time, in the format of yyyy-MM-ddTHH:mm:ss +08:00.
endTime	Req.	String	Body	End time, in the format of yyyy-MM-ddTHH:mm:ss+08:00.
targetType	Req.	Integer	Body	0 (local device), 1 (cloud storage).

Request Example

```
{
  "pageSize": 10,
  "pageIndex": 1,
  "cameraId": "35cbe44b091044a0924dcc2036848973",
  "filter": {
    "timeType": 1,
    "beginTime": "2024-11-28T00:00:00+08:00",
    "endTime": "2024-11-28T23:00:00+08:00",
    "targetType": 0
  }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-50 data Object Description

Parameter	Req. or Opt.	Data Type	Description
pageSize	Opt.	Integer	Number of records on each page.
pageIndex	Opt.	Integer	The current page.
recordSetting	Opt.	***RecordListInfo*** []	Recording schedule information.

Response Example

```
{
  "data": {
    "pageIndex": 1,
    "pageSize": 10,
    "recordList": [
      {
        "beginTime": "2024-11-28T11:39:14+08:00",
        "endTime": "2024-11-28T23:00:00+08:00",
        "targetType": 0
      },
      {
        "beginTime": "2024-11-28T14:17:43+08:00",
        "endTime": "2024-11-28T14:17:53+08:00",
        "targetType": 0
      }
    ]
  },
  "errorCode": "0"
}
```

POST /api/hccgw/video/v1/video/save

Trigger the standard MP4 recording storage function of device, and generate the download URL.

Request URL

{areaDomain}/api/hccgw/video/v1/video/save

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
cameraId	Req.	String	Body	Camera resource ID, which is the ID in CameraInfo obtained from /api/hccgw/resource/v1/areas/cameras/get. The maximum length is 64.
beginTime	Req.	String	Body	Start time, in the format of yyyy-MM-ddTHH:mm:ss +08:00.
voiceSwitch	Opt.	Integer	Body	Voice switch for video recording: 0 (off), 1 (on), 2 (auto, by default). The switch control is only supported by AAC and G711A audio format.
endTime	Req.	String	Body	End time, in the format of yyyy-MM-ddTHH:mm:ss+08:00.

Request Example

```
{
  "cameraId": "35cbe44b091044a0924dcc2036848973",
  "beginTime": "2024-11-28T14:15:41+08:00",
  "endTime": "2024-11-28T14:17:43+08:00",
  "voiceSwitch": 2
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.
taskId	Opt.	String	Asynchronous task ID, for getting the recording result.

Response Example

```
{
  "data": {
    "taskId": "550596eee62c42c6a0377fcd65912dc5#780eaa6ce4d64eccbe6c334308c10a36"
  },
  "errorCode": "0"
}
```

POST /api/hccgw/video/v1/video/download/url

Get the video upload status and downloading URL.

Request URL

{areaDomain}/api/hccgw/video/v1/video/download/url

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
taskId	Req.	String	Body	Asynchronous task ID, obtained from ***POST /api/hccgw/video/v1/video/save*** .

Request Example

```
{
  "taskId": "550596eee62c42c6a0377fcd65912dc5#780eaa6ce4d64eccbe6c334308c10a36"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-51 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
status	Req.	Integer	File status: 0 (uploaded), 1(uploading), 2 (upload failed), 3 (expired), 4 (deleted).
expireTime	Req.	Long	Expiry time stamp.
urls	Req.	String[]	Recording URL list.

Response Example


```
{
  "data": {
    "status": 0,
    "expireTime": 1732792813206,
    "urls": [
      "https://sgp-openteam.s3.ap-southeast-1.amazonaws.com/REC_FILES/
e04aa691be9349e484edf082c31ff6a8/550596eee62c42c6a0377fcd65912dc5/
L45203285-4/780eaa6ce4d64eccbe6c334308c10a36_20241128T141541Z_20241128T141743Z.mp4?X-Amz-
Algorithm=AWS4-HMAC-SHA256&X-Amz-Date=20241128T102013Z&X-Amz-SignedHeaders=host&X-Amz-
Expires=3600&X-Amz-Credential=AKIAZGODXVYYLQULDFHU%2F20241128%2Fap-
southeast-1%2Fs3%2Faws4_request&X-Amz-
Signature=b875bcca42ea74470d4767323f76ffb8131f26fae59c83830b5efb5d9b81fb0c"
    ]
  },
  "errorCode": "0"
}
```

POST /api/hccgw/video/v1/video/device/wakeup

Wake up a specified solar-powered camera.

Request URL

{areaDomain}/api/hccgw/video/v1/video/device/wakeup

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
deviceSerial	Req.	String	Body	Device serial number.

Request Example

```
{
  "deviceSerial": "L30221228"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-52 data Object Description

Parameter	Req. or Opt.	Data Type	Description
data	Req.	Boolean	Wakeup result.

Response Example

```
{
  "data":true,
  "errorCode": "0"
}
```

5.6 Video Intercom Services

5.6.1 Buildings and Rooms

POST /api/hccgw/vims/v1/build/search

Search for buildings.

Request URL

{areaDomain}/api/hccgw/vims/v1/build/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageNum	Req.	Integer	Body	Page number.
pageSize	Req.	Integer	Body	Page size.
searchCriteria	Req.	Object	Body	Search condition. Refer to ***BuildingSearchCriteria*** for details.

Request Example

```
{
     "pageNum": 1,
  "pageSize": 64,
  "searchCriteria": {
    "areaId": "-1",
    "isContainSubArea": 1,
    "filterName": ""
```

```
 }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-53 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
pageNum	Req.	Integer	Page number.
pageSize	Req.	Integer	Page size.
totalNum	Req.	Integer	Total records.
buildList	Req.	***Building*** []	List of building information.

Response Example

```
{
"data": {
{
  "pageNum": 0,
  "pageSize": 0,
  "totalNum": 0,
  "buildList": [
    {
      "buildId": "",
      "buildName": "",
      "areaId": "",
      "areaName": "",
      "totalRoom": 0,
      "totalPerson": 0,
      "deviceNames": ""
    }
  ]
}
},
```

"errorCode": "0"
}

POST /api/hccgw/vims/v1/room/search

Search for rooms.

Request URL

{areaDomain}/api/hccgw/vims/v1/room/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageNum	Req.	Integer	Body	Page number.
pageSize	Req.	Integer	Body	Page size.
searchCriteria	Req.	Object	Body	Search condition. Refer to ***RoomSearchCriteria*** for details.

Request Example

{
  "pageNum": 1,
 "pageSize": 64,
 "searchCriteria": {
  "areaId": "-1",
  "buildId": "",
  "isContainSubArea": 1,
  "filter": {
   "roomNum": "",
   "roomName": "",
   "personAmount": "",
   "email": "",
   "mainAccount": ""
  }
 }}

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-54 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
pageNum	Req.	Integer	Page number.
pageSize	Req.	Integer	Page size.
totalNum	Req.	Integer	Total records.
roomList	Req.	***RoomVO*** []	List of room information.

Response Example

```
{
"data": {
{
  "pageNum": 0,
  "pageSize": 0,
  "totalNum": 0,
  "roomList": [
    {
      "roomId": "",
      "roomName": "",
      "roomNum": 0,
      "buildId": "",
      "buildName": "",
      "areaId": "",
      "areaName": "",
      "personAmount": 0,
      "mainAccount": "",
      "email": "",
      "phone": ""
    }
  ]
}
```

```
},
"errorCode": "0"
}
```

5.6.2 ISAPI Protocol Transmission

POST /api/hccgw/video/v1/isapi/proxypass

Transmit ISAPI protocol transparently.

Request URL

{areaDomain}/api/hccgw/video/v1/isapi/proxypass

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
method	Req.	String	Body	Method (GET, POST, PUT, and DELETE).
url	Req.	String	Body	URL.
id	Req.	String	Body	Device ID.
contentType	Req.	String	Body	application/xml, application/json, and application/x-www-form-urlencoded are supported.
body	Opt.	String	Body	Request parameters.

Request Example

```
{
   "method": "GET",
   "url": "/ISAPI/PTZCtrl/channels/2/presets/1",
   "id": "85cff214670c4bc69a8d7436fb93576c",
   "contentType": "application/xml",
   "body": ""
}
{
   "method": "GET"
```

```
   "url": "/ISAPI/PTZCtrl/channels/2/presets"
   "deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
   "contentType": "application/xml"
}
{
   “method": "POST"
   “url": "/ISAPI/PTZCtrl/channels/2/presets"
   “deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
   “contentType": "application/xml"
}
{
   "method": "DELETE"
   "url": "/ISAPI/PTZCtrl/channels/2/presets"
   "deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
   "contentType": "application/xml"
}
{
   "method": "PUT"
   "url": "/ISAPI/PTZCtrl/channels/1/auxcontrols/1"
   "deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
   "contentType": "application/xml",
   "body": "<PTZAux><type>WIPER</type><status>on</status></PTZAux>"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Req.	String	Prompt message.
data	Req.	String	Data returned by the successful request.

Response Example

```
{
   "data": "<?xml version=\"1.0\" encoding=\"UTF-8\" ?><ResponseStatus version=\"2.0\" xmlns=\"http://
www.isapi.org/ver20/XMLSchema\"><requestURL>/ISAPI/PTZCtrl/channels/2/presets/1</
requestURL><statusCode>4</statusCode><statusString>Invalid Operation</
statusString><subStatusCode>notSupport</subStatusCode></ResponseStatus>",
   "errorCode": "0"
}
```

POST /api/hccgw/proxy/v1/isapi/proxypass

Transmit ISAPI protocol transparently.

Note

This API shares the same request and response parameters with ***POST /api/hccgw/video/v1/isapi/proxypass*** , and the parameters are transparently transmitted directly from OpenAPI to Hik-Connect.

Request URL

{areaDomain}/api/hccgw/proxy/v1/isapi/proxypass

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
method	Req.	String	Body	Method (GET, POST, PUT, and DELETE).
url	Req.	String	Body	URL.
id	Req.	String	Body	Device ID.
contentType	Req.	String	Body	application/xml, application/json, and application/x-www-form-urlencoded are supported.
body	Opt.	String	Body	Request parameters.

Request Example

```
{
   "method": "GET",
   "url": "/ISAPI/PTZCtrl/channels/2/presets/1",
   "id": "85cff214670c4bc69a8d7436fb93576c",
   "contentType": "application/xml",
   "body": ""
}
{
   "method": "GET"
   "url": "/ISAPI/PTZCtrl/channels/2/presets"
   "deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
```

```
  "contentType": "application/xml"
}
{
  “method": "POST"
  “url": "/ISAPI/PTZCtrl/channels/2/presets"
  “deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
  “contentType": "application/xml"
}
{
  "method": "DELETE"
  "url": "/ISAPI/PTZCtrl/channels/2/presets"
  "deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
  "contentType": "application/xml"
}
{
  "method": "PUT"
  "url": "/ISAPI/PTZCtrl/channels/1/auxcontrols/1"
  "deviceSerial": "85cff214670c4bc69a8d7436fb93576c"
  "contentType": "application/xml",
  "body": "<PTZAux><type>WIPER</type><status>on</status></PTZAux>"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Req.	String	Prompt message.
data	Req.	String	Data returned by the successful request.

Response Example

```
{
  "data": "<?xml version=\"1.0\" encoding=\"UTF-8\" ?><ResponseStatus version=\"2.0\" xmlns=\"http://
www.isapi.org/ver20/XMLSchema\"><requestURL>/ISAPI/PTZCtrl/channels/2/presets/1</
requestURL><statusCode>4</statusCode><statusString>Invalid Operation</
statusString><subStatusCode>notSupport</subStatusCode></ResponseStatus>",
  "errorCode": "0"
}
```

POST /api/hccgw/proxy/v1/areas/alarminputs/status/get

Get alarm input status.

Note

This API shares the same function with ***POST /api/hccgw/resource/v1/areas/alarminputs/status/get*** (only difference: the request parameter **alarmIntputId** and **alarmIntputID**), and the parameters are transparently transmitted directly from OpenAPI to Hik-Connect.

Request URL

{areaDomain}/api/hccgw/proxy/v1/areas/alarminputs/status/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
alarmIntputId	Req.	Array[String]	Body	Alarm input ID set. You can get status of up to 8 resources at the same time.

Request Example

```
{
   "alarmInputId": [
      "2c0a4ab9a2504de4842d95435f3a8620",
      "b35b8e9a9326418ca2198ed45709b5bd"
]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-55 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
alarmInput	Req.	***AlarmInputInfo*** []	Returned alarm input status. If the requested alarm input ID does not exist, the returned information will not include the corresponding alarm input information.

Response Example

```
{
   "data": {
      "alarmInput": [
          {
            "id": "0da41f0ac59c4debade796914f874148",
            "status": 2,
            "errorCode": "0"
         },
         {
            "id": "3d75a50c0ae84fc99c19581ef82d1b29",
            "status": 1,
            "errorCode": "0"
         }
]
},
"errorCode": "0"
}
```

5.6.3 Residents

POST /api/hccgw/vims/v1/person/search

Search for residents.

Request URL

{areaDomain}/api/hccgw/vims/v1/person/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageNum	Req.	Integer	Body	Page number.
pageSize	Req.	Integer	Body	Page size.
searchCriteria	Req.	Object	Body	Search condition. Refer to ***ResidentSearchRequest*** for details.

Request Example

```
{
   "pageNum": 0,
  "pageSize": 0,
  "searchRequest": {
   "areaId": "",
   "buildId": "",
   "isContainSubArea": 0,
   "filter": {
    "name": "",
    "roomNum": 0,
    "email": "",
    "phone": "",
    "type": 0,
    "isExpired": 0
   }
  }}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-56 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
pageNum	Req.	Integer	Page number.
pageSize	Req.	Integer	Page size.
totalNum	Req.	Integer	Total records.
personList	Req.	***Person***	List of person information.

Response Example


```
{
"data": {
{
  "pageNum": 0,
  "pageSize": 0,
  "totalNum": 0,
  "personList": [
   {
    "personId": "",
    "firstName": "",
    "lastName": "",
    "phone": "",
    "email": "",
    "isExpired": 0,
    "photoUrl": "",
    "headPicUrl": "",
    "roomList": [
     {
      "roomId": "",
      "roomNum": 0,
      "roomName": "",
      "areaId": "",
      "areaName": "",
      "buildId": "",
      "buildName": "",
      "accountType": 0
     }
    ]
   }
  ]
}
},
"errorCode": "0"
}
```

POST /api/hccgw/vims/v1/person/add

Add a resident.

Request URL

Note

Refer to ***Add Resident*** for specific guidance.

{areaDomain}/api/hccgw/vims/v1/person/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
alIds	Opt.	String[]	Body	Access level ID.
language	Opt.	String	Body	Language used for sending emails to the resident, for example, zh_CN (Chinese). If this parameter is empty, the default language will be en (English). If the resident is added from the existing persons, this parameter is not required to be filled in. List of languages: en (English), it (Italiano), es (Español), de (Deutsch), fr (Français) pl (Polski), nl (Nederlands), pt (Português), ru (Русский), tr (Türkçe), ko (한국어), zh_TW (繁體中文), zh_CN (□体中文), th (ภาษาไทย), vi (Tiếng Việt), ja (日本語), pt_BR (Português(Brasil)), ar (العربية), id (Bahasa Indonesia)

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
personBaseInfo	Req.	***PersonDTO***	Body	Person basic information.
roomList	Req.	***RoomDTO*** []	Body	Resident room information.

Request Example

```
{
   "personBaseInfo": {
   "id": "",
   "personCode": "",
   "groupId": "",
   "firstName": "",
   "lastName": "",
   "gender": 0,
   "phone": "",
   "email": "",
   "description": "",
   "startDate": "",
   "endDate": ""
  },
  "allds": [
   ""
  ],
  "roomList": [
   {
    "roomId": "",
    "roomNum": 0,
    "buildId": "",
    "buildName": "",
    "areaId": "",
    "areaName": "",
    "accountType": 0
   }
  ],
  "language": ""
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-57 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
personId	Req.	String	Person ID.
failedResultList	Opt.	***FailedResult*** []	The error list is returned only when the number of persons exceeds the limit.

Response Example

```
{
"data": {
  "personId": ""
},
"errorCode": "0"
}
```

POST /api/hccgw/vims/v1/person/update

Update a resident.

Request URL

Note

Refer to ***Update Resident*** for specific guidance.

{areaDomain}/api/hccgw/vims/v1/person/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
alIds	Opt.	String[]	Body	Access level ID.
personBaseInfo	Req.	Object	Body	Person basic information. Refer to ***PersonDTO*** for details.
roomList	Req.	***RoomDTO*** []	Body	Resident room information.

Request Example

```
{
   "personBaseInfo": {
   "id": "",
   "personCode": "",
   "groupId": "",
   "firstName": "",
   "lastName": "",
   "gender": 0,
   "phone": "",
   "email": "",
   "description": "",
   "startDate": "",
   "endDate": ""
  },
  "alIds": [
   ""
  ],
  "roomList": [
   {
     "roomId": "",
     "roomNum": 0,
     "buildId": "",
     "buildName": "",
     "areaId": "",
     "areaName": "",
     "accountType": 0
   }
  ],
  "language": ""
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
"errorCode": "0"
}
```

POST /api/hccgw/vims/v1/person/delete

Delete a resident.

Request URL

Note

This API only deletes the linkage between the resident and the room(s). To completely delete the person, refer to ***POST /api/hccgw/person/v1/persons/delete*** .

{areaDomain}/api/hccgw/vims/v1/person/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
deleteList	Req.	String[]	Body	ID of the resident to be deleted.

Request Example

```
{
   "deleteList": [“string1”]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
"errorCode": "0"
}
```

5.6.4 Temporary Passes

A temporary pass contains a password and a QR code. A person with a temporary access need (e.g., delivery person) can use the temporary pass to unlock doors according to the set access level.

POST /api/hccgw/vims/v1/tempauth/get

Get temporary passes.

Request URL

{areaDomain}/api/hccgw/vims/v1/tempauth/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
id	Req.	String	Body	Temporary pass ID (temporary person ID).
clientLocalTime	Req.	String	Body	Request time (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.

Request Example

```
{
   "id": "237160983473358848",
  "clientLocalTime": "2022-10-28T11:08:23+08:00"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-58 data Object Description

Parameter	Req. or Opt.	Data Type	Description
openCount	Req.	Integer	Allowed passes for each door.
name	Req.	String	Temporary pass name.
startTime	Req.	Long	Start time of the validity period (unit: ms).
endTime	Req.	Long	End time of the validity period (unit: ms).
code	Req.	String	base64.
creatorId	Req.	String	Creator ID.
creatorName	Req.	String	Creator name.
expiredStatus	Req.	Integer	Expiry status: 1-expired, 0-valid.
password	Req.	String	Password to open the door.
accessLevelList	Req.	***AccessLevel***	Access level information.

Response Example

```
{
"data": {
```

```
 {
  "openCount": 0,
  "name": "",
  "startTime": 0,
  "endTime": 0,
  "code": "",
  "creatorId": "",
  "creatorName": "",
  "expiredStatus": 0,
  "password": "",
  "accessLevelList": [
   {
    "accessLevelId": "",
    "accessLevelName": ""
   }
  ]
}"
},
"errorCode": "0"
}
```


POST /api/hccgw/vims/v1/tempauth/list

Search for temporary passes.

Request URL

{areaDomain}/api/hccgw/vims/v1/tempauth/list

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageNum	Req.	Integer	Body	Page number.
pageSize	Req.	Integer	Body	Page size.
searchRequest	Opt.	Object	Body	Search conditions. Refer to ***TempAuthSearchRequest*** for details.

Request Example


```
{
   "pageNum": 0,
```

```
 "pageSize": 0,
 "searchRequest": {
  "filter": {
   "name": ""
  }
 }}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-59 data Object Description

Parameter	Req. or Opt.	Data Type	Description
pageNum	Req.	Integer	Page number.
pageSize	Req.	Integer	Page size.
totalNum	Req.	Integer	Total records.
tempAuthList	Req.	***TempAuth*** []	List of temporary passes.

Response Example

```
{
"data": {
{
 "pageNum": 0,
 "pageSize": 0,
 "totalNum": 0,
 "tempAuthList": [
  {
   "id": "",
   "name": "",
   "openCount": 0,
   "creatorId": "",
   "creatorName": "",
   "password": "",
   "creatorEmail": "",
```

```
    "startDate": 0,
    "endDate": 0,
    "expiredStatus": 0
   }
  ]
}
},
"errorCode": "0"
}
```


POST /api/hccgw/vims/v1/tempauth/add

Add temporary passes.

Request URL

Note

Refer to ***Add Temporary Pass*** for specific guidance.

{areaDomain}/api/hccgw/vims/v1/tempauth/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
name	Req.	String	Body	Temporary pass name. The maximum length is 32.
openCount	Req.	Integer	Body	Allowed passes for each door. The range is between 1 and 200.
startTime	Req.	String	Body	Start time of validity period (unit: ms, in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
endTime	Req.	String	Body	End time of validity period (unit: ms, in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
clientLocalTime	Req.	String	Body	Request time (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
allds	Opt.	String[]	Body	List of access level ID. Required for the Portal, optional for the Mobile Client.

Request Example

```
{
   "name": "",
  "openCount": 0,
  "startTime": "",
  "endTime": "",
  "clientLocalTime": "",
  "allds": [
    ""
  ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-60 data Object Description

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	Temporary pass ID.
openCount	Req.	Integer	Times of opening door.

Parameter	Req. or Opt.	Data Type	Description
name	Req.	String	Temporary pass name.
startTime	Req.	Long	Start time of validity period (unit: ms).
endTime	Req.	Long	End time of validity period (unit: ms).
code	Req.	String	Base64 encoding.
creatorId	Req.	String	Creator ID.
creatorName	Req.	String	Creator name.
expiredStatus	Req.	Integer	Expiry status: 1-expired, 0-valid.
password	Req.	String	Password to open the door.
accessLevelList	Opt.	***AccessLevel*** []	Access level information.

Response Example

```
{
"data": {
 {
"id": “”,
  "openCount": 0,
  "name": "",
  "startTime": 0,
  "endTime": 0,
  "code": "",
  "creatorId": "",
  "creatorName": "",
  "expiredStatus": 0,
  "password": "",
  "accessLevelList": [
   {
    "accessLevelId": "",
    "accessLevelName": ""
   }
  ]
}"
},
"errorCode": "0"
}
```

POST /api/hccgw/vims/v1/tempauth/update

Update temporary passes.

Request URL

{areaDomain}/api/hccgw/vims/v1/tempauth/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
id	Req.	String	Body	Temporary pass ID.
name	Req.	String	Body	Temporary pass name. The maximum length is 32.
openCount	Req.	Integer	Body	Allowed passes for each door. The range is between 1 and 200.
startTime	Req.	String	Body	Start time of validity period (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
endTime	Req.	String	Body	End time of validity period (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
clientLocalTime	Req.	String	Body	Current time of the request (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
allds	Opt.	String	Body	List of access level ID. Required for the Portal, optional for the Mobile Client.

Request Example

```
{
   "id": "",
   "name": "",
  "openCount": 0,
  "startTime": "",
  "endTime": "",
  "clientLocalTime": "",
```

```
 "allIds": [
   ""
 ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
"errorCode": "0"
}
```

POST /api/hccgw/vims/v1/tempauth/delete

Delete temporary passes.

Request URL

{areaDomain}/api/hccgw/vims/v1/tempauth/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
deleteList	Req.	String[]	Body	List of temporary pass ID.

Request Example

```
{
   "deleteList": [“string1”]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
"errorCode": "0"
}
```

5.6.5 Video Intercom Calls

POST /api/hccgw/devcall/v1/call/receive

Respond to calls.

Request URL

{areaDomain}/api/hccgw/devcall/v1/call/receive

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
recordId	Req.	String	Body	Call record ID. The maximum length is 64.
status	Req.	Integer	Body	Operation type: 1-answer (when receiving calls), 2-not answer (when receiving calls),

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
				3-hang up (after the call is picked up).
userId	Req.	String	Body	User ID of the called resident, which can be obtained from ***POST /api/hccgw/platform/v1/users/get*** .

Request Example

```
{
  "recordId": "",
  "userId": "",
  "status": "2"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
"errorCode": "0"
}
```

5.7 Access Control Services

5.7.1 POST /api/hccgw/acs/v1/remote/control

Open door remotely.

Request URL

{areaDomain}/api/hccgw/acs/v1/remote/control

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
remoteControl	Req.	***RemoteControl***	Body	Operation content.

Request Example

```
{
  "remoteControl": {
  "actionType": 1,
  "elementlist": [],
  "direction": 0,
  "areaId": "",
  "depthTraversal": 0
  }}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-61 data Object Description

Parameter	Req. or Opt.	Data Type	Description
operationResult	Req.	***RemoteControlResponse*** []	List of failures. If this parameter is empty, the operation succeeded.

Response Example

```
{
"data": {
```

```
{
 "operationResult": [
  {
   "elementId": "",
   "elementName": "",
   "areaId": "",
   "areaName": "",
   "errorCode": ""
  }
 ]
}
},
"errorCode": "0"
}
```


5.7.2 GET /api/hccgw/acs/v1/encryptinfo/get

Get system Bluetooth encryption key.

Request URL

{areaDomain}/api/hccgw/acs/v1/encryptinfo/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-62 data Object Description

Parameter	Req. or Opt.	Data Type	Description
encryptType	Req.	String	Encryption type (AES128_CBC).
authData	Req.	String	Authentication information (32-byte hex data).
vector	Req.	String	Initialized vector (32-byte hex data).
loopCount	Req.	Integer	Times of loop when generating the encryption key.

Response Example

```
{
"data": {
 "encryptType": "",
  "authData": "",
  "vector": "",
  "loopCount": 0
},
"errorCode": "0"
}
```

5.7.3 POST /api/hccgw/acs/v1/event/certificaterecords/search

Search for access control card swiping records. Search for corresponding access control card swiping records by page according to start time and end time, access point ID, event type, and person name.

Request URL

{areaDomain}/api/hccgw/acs/v1/event/certificaterecords/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageIndex	Opt.	Integer	Body	The current page. The default value is 1.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
pageSize	Opt.	Integer	Body	Number of records on each page, which is between 1 and 200.
searchCriteria	Opt.	Object	Body	Conditions for searching for card swiping records.

Table 5-63 searchCriteria Details

Parameter	Req. or Opt.	Data Type	Description
beginTime	Opt.	String	Begin time, ISO time format, e.g.: 2023-10-21T11:08:23+08:00.
endTime	Opt.	String	End time, ISO time format, e.g.: 2023-10-21T11:08:23+08:00.
type	Opt.	Integer	Searching time type, 0-client time (default value), 1-device time, 2-time of importing alarm information to database.
eventTypes	Opt.	String	Event type, seperate by comma.
swipeAuthResult	Opt.	Integer	Authentication result, 0: all, 1: succeed, 2: fail.
elementIDs	Opt.	String	Access control point, seperate by comma.
searchType	Opt.	Integer	0: search by person, 1: search by card number, 0 by default.
personCondition	Opt.	Object	Person searching condition. It is valid when searchType equals 0. Details are as follows.
cardNumber	Opt.	String	Card number. It is valid when searchType is 1.
temperatureStatus	Opt.	Integer	Temperature status, 0-all, 1-normal, 2-exception, 3-unknown.
maskStatus	Opt.	Integer	Mask status, 0-all, 1-unknown, 2-no mask, 3-wearing mask.

Table 5-64 personCondition Details

Parameter	Req. or Opt.	Data Type	Description
personIds	Opt.	String	Person ID conflicts with person name, separated by comma.
personName	Opt.	String	Person name, fuzzy search.

Request Example

```
{
    "pageIndex":1,
    "pageSize":20,
    "searchCriteria": {
        "beginTime": "beginTime_8099b37eccb9",
        "endTime": "endTime_866cfe61fe68",
        "type": 0,
        "swipeAuthResult": 0,
        "searchType": 0,
        "temperatureStatus": 0,
        "maskStatus": 0,
        "eventTypes": "eventTypes_8b3f52764c58",
        "elementIDs": "elementIDs_0bd018ad8ff3",
        "cardNumber": "cardNumber_907d7ad05c5b",
        "personCondition": {
            "personIds": "personIds_5d2a11221093",
            "personName": "personName_209bdb6d5d02"
        }
    }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
errorMsg	Req.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Parameter	Req. or Opt.	Data Type	Description
recordList	Req.	***RecordInfo*** []	Department list.
pageIndex	Req.	Integer	Page No.
pageSize	Req.	Integer	Items per page.
totalNum	Req.	Integer	Total number.

Response Example

```
{
   "errorCode": "0",
   "errorMsg": "",
   "data": {
      "totalNum":4,
      "pageIndex":1,
      "pageSize":1,
      "recordList": []
   }
}
```

5.7.4 POST /api/hccgw/acspm/v1/accesslevel/list

Get access level list of the system by condition. Currently add access level only via HCC/HCT. Users can contact technical support for guidance and help.

Request URL

{areaDomain}/api/hccgw/acspm/v1/accesslevel/list

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
accessLevelSearchRequest	Req.	String	***AccessLevelSearchRequest***	Request packet body.

Request Example

```
{
   "accessLevelSearchRequest":{
      "pageIndex":1,
```

```
    "pageSize":20,
    "searchCriteria":{
        "accessLevelName":"",
     "associateResInfoList":[ ]
}
}
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
errorMsg	Req.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Parameter	Req. or Opt.	Data Type	Description
accessLevelResponse	Req.	***AccessLevelResponse***	AccessLevel list.
pageIndex	Req.	Integer	Page No.
pageSize	Req.	Integer	Items per page.
totalNum	Req.	Integer	Total number.

Response Example

```
{
"errorCode": "0",
"errorMsg": "",
"data": {
    "accessLevelResponse":{
    "pageIndex":1,
    "pageSize":1,
    "totalNum": 1,
    "accessLevelList":[]
}
}
}
```

5.7.5 POST /api/hccgw/acspm/v1/maintain/overview/person/{id}/elementdetail

Get access level apply information of the person according to person ID.

Request URL

{areaDomain}/api/hccgw/acspm/v1/maintain/overview/person/{id}/elementdetail

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personId	Req.	String	Url Param	Person ID
returnSuccess	Opt.	Boolean	Body	Whether to return success information. It is false by default (not returned).

Request Example

```
POST /api/hccgw/acspm/v1/maintain/overview/person/111222333/elementdetail
{
"returnSuccess": false
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
errorMsg	Req.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Parameter	Req. or Opt.	Data Type	Description
elementDetailList	Req.	***ElementDetail*** []	ElementDetail list.

Response Example


```
{
"errorCode": "0",
"errorMsg": "",
"data": {
      "elementDetailList": [
        {
          "id": "3e252f4f3e1a4831850abc06778fa484",
          "name": "AF6590718-Door 1",
          "type": 0,
          "elementStatus": {
            "errorCode": "",
            "status": 2
          },
          "certificateStatusList": [
            {
              "id": "377772357428962304",
              "errorCode": "THD_ISAPI_0x60000037",
              "status": 2,
              "type": 2
            }
          ]
        }
     ] }
}
```


5.7.6 POST /api/hccgw/acspm/v1/accesslevel/person/add

Add access level by person.

Request URL

{areaDomain}/api/hccgw/acspm/v1/accesslevel/person/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personList	Req.	Object[]	Body	List corresponding to person and access level.

Table 5-65 Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
personId	Opt.	String	Header	Person ID, which contains 1 to 18 digits.
accessLevelIdList	Opt.	String[]	Body	Access level list. Each access level ID should contain 1 to 18 digits.

Request Example

```
{
"personList":[{
"personId":"aaaa",
"accessLevelIdList": ["222","333"]
}
]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.

Table 5-66 Object Description

Parameter	Req. or Opt.	Data Type	Description
accessLevelFailed	Opt.	***AccessLevelFailed*** []	List of access level assigning failures.

Response Example

```
{
"errorCode": "0"
}
```

5.7.7 POST /api/hccgw/acspm/v1/accesslevel/person/delete

Remove access level by person.

Request URL

{areaDomain}/api/hccgw/acspm/v1/accesslevel/person/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personList	Req.	Object[]	Body	List corresponding to person and access level.

Table 5-67 Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
personId	Opt.	String	Body	Person ID, 1-18 digits.
accessLevelIdList	Opt.	String[]	Body	Access level list. Each access level ID should contain 1-18 digits.
deleteAll	Opt.	boolean	Body	Whether to delete all. accessLevelIdList is invalid when it is true.

Request Example

```
{
"personList":[{
"personId":"aaaa",
"deleteAll":false,
"accessLevelIdList": ["222","333"]
}
]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.

Table 5-68 Object Description

Parameter	Req. or Opt.	Data Type	Description
accessLevelFailed	Opt.	***AccessLevelFailed*** []	List of access level assigning failures.

Response Example

```
{
"errorCode": "0"
}
```

5.7.8 POST /api/hccgw/acspm/v1/accesslevel/person/modify

Assign access level by person.

Request URL

{areaDomain}/api/hccgw/acspm/v1/accesslevel/person/modify

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personList	Req.	Object[]	Body	List corresponding to person and access level.

Table 5-69 Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
personId	Opt.	String	Body	Person ID, 1-18 digits.
accessLevelIdList	Opt.	String[]	Body	Person full access level list. Back-end check adding and deleting according to history data. Access level ID should contain 1-18 digits.
deleteAll	Opt.	boolean	Body	Whether to delete all. accessLevelIdList is invalid when it is true.

Request Example

```
{
"personList":[{
"personId":"aaaa",
```

```
"deleteAll":false,
"accessLevelIdList": ["222","333"]
}
]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.

Table 5-70 Object Description

Parameter	Req. or Opt.	Data Type	Description
accessLevelFailed	Opt.	***AccessLevelFailed*** []	List of access level assigning failures.

Response Example

```
{
"errorCode": "0"
}
```

5.8 Person-Related Services

5.8.1 POST /api/hccgw/person/v1/groups/search

Get the department (person group) list.

Request URL

Please refer to ***Add Person*** .
{areaDomain}/api/hccgw/person/v1/groups/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
parentGroupId	Opt.	String	Body	Parent node ID. If this parameter is empty, the department in the root directory will be included.
groupName	Opt.	String	Body	Department name for fuzzy search. The maximum length is 64.
depthTraversal	Opt.	Bool	Body	Whether to enable deep search: true, false. The default option is false. (True-return including parentGroupId and all sub-nodes, false-including parentGroupId and lower-level sub-nodes, false by default.)
groupIdList	Opt.	Array[String]	Body	Department ID list. Used for getting department information. (If this parameter exists, parameters above are invalid. Search only by groupId.)

Request Example

```
{
   "parentGroupId": "",
   "groupName": "",
   "depthTraversal": "",
   "groupIdList": ["111"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
errorMsg	Req.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-71 data Object Description

Parameter	Req. or Opt.	Data Type	Description
personGroupList	Req.	***PersonGroup*** []	Department list.

Response Example

```
{
"errorCode": "0",
"errorMsg": "",
"data": {
   "personGroupList": [
   {
     "groupId": "",
     "groupName": "",
     "parentId": "",
     "childNodeExist": "",
     "permissionState": "",
"description": "",
"areaList": [{
   "areaId": ""
}],
"groupFullPath": ""
   }
  ]
}
}
```

5.8.2 POST /api/hccgw/person/v1/groups/add

Add a department (person group).

Request URL

{areaDomain}/api/hccgw/person/v1/groups/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
description	Opt.	string	Body	Description. The maximum length is 128.
groupName	Req.	string	Body	Department name. The maximum length is 64.
areaId	Opt.	string	Body	Department linked area ID. When this field is absent, the area ID validation will be skipped. The maximum length is 64.

Request Example

```
{
    "description": "Test",
    "groupName": "Financial",
    "areaId": "area-123"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error***

Parameter	Req. or Opt.	Data Type	Description
			Code for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-72 data Object Description

Parameter	Req. or Opt.	Data Type	Description
groupId	Req.	string	Department (person group) ID

Response Example

```
{
    "data": {
        "groupId": "feawfeawfewafew"
    },
    "errorCode": "0"
}
```

5.8.3 POST /api/hccgw/person/v1/groups/update

Edit the department (person group).

Request URL

{areaDomain}/api/hccgw/person/v1/groups/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
description	Opt.	string	Body	Description. The maximum length is 128.
groupName	Opt.	string	Body	Department name. The special characters are not allowed. When empty value does not take effect. The maximum length is 64.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
areaId	Opt.	string	Body	Department linked area ID. The maximum length is 64.
parentId	Opt.	string	Body	Root department ID. If this field is absent, the root department ID will not be edited.
groupId	Req.	string	Body	Department (person group) ID.

Request Example

```
{
    "groupId": "id_60b55e9e9754",
    "groupName": "name_ef4b007fb389",
    "description": "description_73fa0e48c445",
    "areaId": "areaId_7f0c2e8a08cc",
    "parentId": "parentId_4c601822dfa0"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.

Response Example

```
{
    "errorCode": "0"
}
```

5.8.4 POST /api/hccgw/person/v1/groups/delete

Delete a department (person group).

Request URL

{areaDomain}/api/hccgw/person/v1/groups/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
groupId	Req.	string	Body	Department (person group) ID. It cannot be set to the root department ID for deleting all departments (all groups). Only non-root department IDs are valid.

Request Example

```
{
   "groupId": "id_60b55e9e9754"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.

Response Example

```
{
   "errorCode": "0"
}
```

5.8.5 POST /api/hccgw/person/v1/persons/add

Add a person on the platform.

Request URL

Please refer to ***Add Person*** .
{areaDomain}/api/hccgw/person/v1/persons/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
groupId	Req.	String	Body	Person group ID.
personCode	Req.	String	Body	Employee No., 1-16 characters, digits and letters allowed, which should be unique.
firstName	Req.	String	Body	First name, no more than 255 characters. First name and last name should be no more than 255 characters.
lastName	Req.	String	Body	Last name, no more than 255 characters. First name and last name should be no more than 255 characters.
gender	Req.	Integer	Body	0-female, 1-male, 2-unknown.
phone	Opt.	String	Body	Phone number, no more than 32 characters.
email	Opt.	String	Body	Email address, no more than 64 characters.
description	Opt.	String	Body	Description, no more than 128 characters.
startDate	Req.	String	Body	Validity period start date, ISO time format, e.g.: 2022-10-21T11:08:23+08:00.
endDate	Req.	String	Body	Validity period end date, ISO time format, e.g.: 2023-10-21T11:08:23+08:00. The year should be no more than 2037. After the validity period, person and person on the device will not be deleted, but authentication via fingerprint, swiping card, PIN code, and

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
				face picture are not allowed on the device.

Request Example

```
{
   "groupId": "378117915440051200",
   "firstName": "test",
   "lastName":"",
   "gender": 2,
   "personCode":"odhdf888",
   "phone": "110",
   "email": "test@email.com",
   "description": "",
   "startDate": "2022-02-21T20:12:45+08:00",
   "endDate": "2032-02-21T20:12:45+08:00"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Opt.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-73 data Object Description

Parameter	Req. or Opt.	Data Type	Description
personId	Req.	String	Person ID added.
personCode	Req.	String	Employee No. added.

Response Example

```
{
   "data": {
      "personId": "379224379437087745",
      "personCode": "0dhdf888"
   },
   "errorCode": "0"
}
```

5.8.6 POST /api/hccgw/person/v1/persons/update

Update person's basic information. If person has been applied to device, the information will be modified on device as well.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
groupId	Req.	String	Body	Person group ID.
firstName	Req.	String	Body	First name, no more than 255 characters. First name and last name should be no more than 255 characters.
lastName	Req.	String	Body	Last name, no more than 255 characters. First name and last name should be no more than 255 characters.
gender	Req.	Integer	Body	0-female, 1-male, 2-unknown.
phone	Opt.	String	Body	Phone number, no more than 32 characters.
email	Opt.	String	Body	Email address, no more than 64 characters.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
description	Opt.	String	Body	Description, no more than 128 characters.
startDate	Req.	String	Body	Validity period start date, ISO time format, e.g.: 2022-10-21T11:08:23+08:00.
endDate	Req.	String	Body	Validity period end date, ISO time format, e.g.: 2023-10-21T11:08:23+08:00. The year should be no more than 2037.
personCode	Req.	String	Body	Employee No., returned after the person is added. If the person is added but not recorded, you can search via ***POST /api/hccgw/person/v1/persons/get*** or ***POST /api/hccgw/person/v1/persons/list*** . The employee No. cannot be edited.
personId	Req.	String	Body	Person ID, returned after the person is added. If the person is added but not recorded, search via ***POST /api/hccgw/person/v1/persons/list*** .

Request Example

```
{
  "groupId": "1",
   "firstName": "test1",
   "lastName":"test12",
   "gender": 2,
   "phone": "110",
   "email": "test@email.com",
   "startDate": "2022-02-21T20:12:45+08:00",
   "endDate": "2032-02-21T20:12:45+08:00",
   "personCode":"odhdf888",
   "personId":"399996371484193792"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.

Response Example

```
{
  "errorCode": "0"
}
```

5.8.7 POST /api/hccgw/person/v1/persons/photo

Update face pictures of persons. If the person has been applied to the device, the face picture information of the person will be updated.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/photo

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64 characters.
personId	Req.	String	Body	Person ID.
photoData	Req.	String	Body	Face picture data encoded by Base 64. The face picture size is not limited. If the picture size exceeds 200K, the picture will be compressed.

Request Example

```
{
  "personId":"381019761745728512",
  "photoData":"ddd"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
"errorCode": "0"
}
```

5.8.8 POST /api/hccgw/person/v1/persons/fingercollect

Collect fingerprints of persons. The device should support collecting fingerprints and has been added to HCC/HCT beforehand.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/fingercollect

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
deviceSerial	Req.	String	Body	Collection device serial No.

Request Example

```
{
"deviceSerial": "378117915440051200"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the Data Object Description below.

Table 5-74 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
fingerData	Opt.	String	Fingerprint data.
fingerQuality	Opt.	Integer	Fingerprint quality. Range of value: [1, 100]. It is used to evaluate finger quality. The higher the value, the more accurate the fingerprint recognition. It is recommended to use the fingerprint of quality above 80.

Response Example

```
{
"errorCode": "0",
"data": {
  "fingerData": "aaaa",
  "fingerQuality": 100
```

```
 }
}
```

5.8.9 POST /api/hccgw/person/v1/persons/updatefingers

Update fingerprints of persons. Fingerprints are collected by device.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/updatefingers

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personId	Req.	String	Body	Person ID.
fingerList	Opt.	Object[]	Body	Fingerprint list of person. If this node is not uploaded or set, all fingerprint data of the person will be deleted. Up to 2 fingerprints can be configured for one person. If you need to reserve only one fingerprint of two, you should upload the fingerprint data (id, name, and data) of the fingerprint to be reserved.

Table 5-75 fingerList Object Description

Parameter	Req. or Opt.	Data Type	Description
id	Opt.	String	Fingerprint ID. If this node is not uploaded, it means adding the fingerprint by default, otherwise it means editing the fingerprint.
name	Req.	String	Fingerprint name. It is used to record which

Parameter	Req. or Opt.	Data Type	Description
			finger the fingerprint belongs to. The maximum length is 32.
data	Req.	String	Fingerprint data (hexadecimal data). The maximum length is 1024.

Request Example

```
{
  "personId":"377140151211762688",
  "fingerList":[{
    "data":"90030500A3B1564620B3A616A0A7246092E00000000000397",
    "name":"ssssss"
  }]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the Data Object Description below.

Table 5-76 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
fingerFailed	Opt.	***FingerFailed***	Fingerprint data error list.

Response Example

```
{
  "errorCode":"0",
```

```
 "data":{
  "fingerFailed":{
   "personId":"",
   "personName":"",
   "errorCode ":"0",
   " fingerList ":[{
    "id":"0",
    "failedName":"0",
    "errorCode":"CCF000000"
   }]
  }
 }
}
```

5.8.10 POST /api/hccgw/person/v1/persons/cardcollect

Collect card information of persons. The device should support collecting card information and has been added to HCC/HCT beforehand.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/cardcollect

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
deviceSerial	Req.	String	Body	Collection device serial No.

Request Example

```
{
 "deviceSerial": "378117915440051200"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the Data Object Description below.

Table 5-77 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
cardNo	Opt.	String	The returned card No.

Response Example

```
{
  "errorCode":"0",
  "data":{
    "cardNo":"666"
  }
}
```

5.8.11 POST /api/hccgw/person/v1/persons/updatecards

Update cards information of persons. The card NO. can be collected by device and cannot be duplicated. If you know the card NO., you can enter it by yourself.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/updatecards

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personId	Req.	String	Body	Person ID.
cardList	Opt.	Object[]	Body	Card list of person. If this node is not uploaded or set, all card

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
				data of the person will be deleted. Up to 2 cards data can be configured for one person. If you need to reserve only one card of two, you should upload the card data (id and cardNo) of the card to be reserved.

Table 5-78 cardList Object Description

Parameter	Req. or Opt.	Data Type	Description
id	Opt.	String	Card ID. If this node is not uploaded, it means adding the card by default, otherwise it means editing the card. After editing, the card No. will change.
cardNo	Req.	String	Card No., which cannot be duplicated. The maximum length is 20.

Request Example

```
{
  "personId":"378222739150076928",
  "cardList":[{
    "cardNo":"892"
  }]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the Data Object Description below.

Table 5-79 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
cardFailed	Opt.	***CardFailed***	Card data error list.

Response Example

```
{
  "errorCode":"0",
  "data":{
    "cardFailed":{
      "personId":"",
      "personName":"",
      "errorCode ":"0",
      "cardList ":[{
        "cardId":"0",
        "cardNo":"0",
        "errorCode":"CCF000000"
      }]
    }
  }
}
```

5.8.12 POST /api/hccgw/person/v1/persons/updatepincode

Update PIN code. PIN code can be used as password to open a door.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/updatepincode

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personId	Req.	String	Body	Person ID.
pinCode	Req.	String	Body	PIN code. If this node is not set, it will be deleted and not be applied to the device. Length range: [4, 8] digits.

Request Example

```
{
  "personId":"395611750566890496",
  "pinCode":"3452"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
  "errorCode": "0"
}
```

5.8.13 POST /api/hccgw/person/v1/persons/get

View the information (face picture, card, fingerprint, etc.) of a single person.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
Id	Req.	String	Body	Person ID.

Request Example

```
{
  "personId":"376748042642236416"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the Data Object Description below.

Table 5-80 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
personInfo	Opt.	***PersonInfo(1)***	Person basic information.
cardList	Opt.	***Card(2)*** []	Card information list.

Parameter	Req. or Opt.	Data Type	Description
fingerList	Opt.	***Finger(2)*** []	Fingerprint information list.
pinCode	Opt.	String	PIN code.

Response Example

```
{
  "errorCode": "0",
  "data":{}
}
```

5.8.14 POST /api/hccgw/person/v1/persons/delete

Delete persons. The persons on the device will also be deleted.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/delete

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personId	Req.	String	Body	Person ID. Multiple person IDs are separated by commas.

Request Example

```
{
  "personId":"376748042642236416"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
  "errorCode": "0"
}
```

5.8.15 POST /api/hccgw/person/v1/persons/quick/add

Add a person quickly, and apply the PIN code and face picture information of the person to the device. The card information and fingerprint should be collected beforehand. For now quick applying is not supported.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/quick/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personInfo	Req.	***PersonBaseInfo(2)***	Body	Basic information of the person.
aceessLevelList	Opt.	String[]	Body	Access level ID list.
pinCode	Opt.	String	Body	PIN code. Length: [4, 8] digits.
photoData	Opt.	String	Body	Face picture data encoded by Base 64. The face picture file size is not limited, but if the picture size exceeds 200K, the picture will be compressed.

Table 5-81 Object Description

Parameter	Req. or Opt.	Data Type	Description
name	Req.	String	Fingerprint name. The maximum length is 32.
data	Req.	String	Fingerprint data (hexadecimal data). The maximum length is 1024.

Request Example

```
{
  "personInfo":{
    "groupId":"381019761120777216",
    "firstName":"zmh_145",
    "lastName":"",
    "gender":1,
    "phone":"1124235678051",
    "email":"zmh13445name78901@lzx.com",
    "startDate":"2023-02-21T20:12:45+08:00",
    "endDate":"2033-02-21T20:12:45+08:00",
    "personCode":"12114785901"
  },
  "pinCode":"33456",
  "photoData":"",
  "aceessLevelList":["395619513653140480"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-82 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
personId	Req.	String	Added person IDs.
accessLevelFailed	Opt.	Object	Details about access level assigning failure.
pinCodeFailed	Opt.	***CommonFailed***	Details about PIN code failure.
photoFailed	Opt.	***CommonFailed***	Details about face picture updating failure.

Table 5-83 accessLevelFailed Object Description

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	Integer	Error message.
personAccessLevelFailedList	Opt.	***AccessLevelFailed*** []	List of access levels failed to be assigned. If the value of **errorCode** is not "0", this node will return an empty list. If the value of **errorCode** is "0", the list will be returned.

Response Example

```
{
  "data":{
    "personId":"379224379437087745"
  },
  "errorCode":"0"
}
```

5.8.16 POST /api/hccgw/person/v1/persons/list

Search for person list.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/list

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageIndex	Req.	Integer	Body	Page No., which is no less than 1.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 100.
filter	Opt.	Object[]	Body	Fuzzy search by filter.

filter Object Description

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
name	Opt.	String	Header	Person's name.
email	Opt.	String	Body	Person's email.
phone	Opt.	String	Body	Person's phone No.

Request Example

```
{
"pageIndex":1,
   "pageSize":10,
   "filter":{
      "name":"zmh",
      "email":"zmh",
      "phone":"112"
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
data	Opt.	Object[]	Data returned by the successful request. See details in the Data Object Description below.

Data Object Description

Parameter	Req. or Opt.	Data Type	Description
personInfo	Req.	***PersonInfo(1)***	Basic information of person.
cardList	Opt.	***Card(2)***	Card information list.
fingerList	Opt.	***Finger(2)***	Fingerprint information list.
pinCode	Opt.	Object[]	PIN code.

Response Example

```
{
"errorCode": "0",
"data": {
}
}
```

5.8.17 POST /api/hccgw/person/v1/persons/qrcode

Get person's QR code.

Note

There are 2 types of QR codes: dynamic QR code and static QR code.

- The dynamic QR code will expire 60 seconds after the moment it is obtained, or when a new dynamic QR code is obtained and used. It is recommended to call ***POST /api/hccgw/vims/v1/***

tempauth/get every 60 seconds to get a new dynamic QR code and inform the end user of the 60-second validity.

- The static QR code is valid during the whole temporary pass period.
- Users can choose to configure the dynamic or static QR code on the Hik Connect for Teams platform, and the dynamic or static QR code will be returned accordingly.

Request URL

{areaDomain}/api/hccgw/person/v1/persons/qrcode

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
personId	Req.	String	Body	Person ID.
clientLocalTime	Req.	String	Body	Local time for the caller, in ISO 8601 standard time format: yyyy-MM-ddTHH:mm:ss +current zone, e.g., 2018-07-26T15:00:00+08:00.

Request Example

```
{
" personId ": "xxx",
"clientLocalTime":"2022-10-20T12:21:30+08:00"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
Data	Opt.	Object	Data returned by the successful request. See details in the Data Object Description below.

Table 5-84 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
qrCodeData	Req.	String	Data encoded by Base64.

Response Example

```
{
"errorCode": "0",
"data": {
" qrCodeData ":"xxxxxxxxxxxx"
}
}
```

5.9 On-Board Monitoring Services

5.9.1 POST /api/hccgw/resource/v1/areas/vehicles/add

Add vehicle resources. The free package only supports adding 10 vehicles and 8 camera channels, and some functions are limited. If you want to access more functions, please contact the service provider.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/vehicles/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
areaId	Req.	String	Body	Area ID.
licensePlateNo	Req.	String	Body	License plate No.
vehicleType	Req.	Integer	Body	Vehicle type: 0-others, 1-car, 2-truck, 3-bus.
driverFirstName	Opt.	String	Body	Driver's first name.
driverLastName	Opt.	String	Body	Driver's last name.
driverPhoneNo	Opt.	String	Body	Driver's phone No.
pictureKey	Opt.	String	Body	Key of the vehicle picture.
deviceSerial	Opt.	String	Body	Linked device serial No.
extend	Opt.	String	Body	Annotations.

Request Example

```
{
   "areaId": "2aeec98c14a4427f9ace6c48e91ab4cc",
   "licensePlateNo": "ADDDEEE",
      "driverFirstName": "san",
      "driverLastName": "zhang",
      "driverPhoneNo": "18611119999",
      "pictureKey": "",
      "deviceSerial": "J091122",
      "vehicleType": 1,
      "extend": "this is a demo car"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-85 data Object Description

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	Vehicle ID.

Response Example

```
{
   "data": {
      "id": "2aeec98c14a4427f9ace6c48e91ab4cc"
   },
   "errorCode": "0"
}
```

5.9.2 POST /api/hccgw/resource/v1/areas/vehicles/{id}/update

Edit vehicle information.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/vehicles/{id}/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
{id}	Req.	String	PathParam	Vehicle ID.
Token	Req.	String	Header	Token. The maximum length is 64.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
licensePlateNo	Req.	String	Body	License plate No.
vehicleType	Req.	String	Body	Vehicle type: 0-others, 1-car, 2-truck, 3-bus.
driverFirstName	Opt.	String	Body	Driver's first name.
driverLastName	Opt.	String	Body	Driver's last name.
driverPhoneNo	Opt.	String	Body	Driver's phone No.
pictureKey	Opt.	String	Body	Key of the vehicle picture.
deviceSerial	Opt.	String	Body	Linked device serial No.
extend	Opt.	String	Body	Annotations.

Request Example

```
{
   "licensePlateNo": "ADDDEEE",
      "driverFirstName": "san",
      "driverLastName": "zhang",
      "driverPhoneNo": "18611119999",
      "pictureKey": "",
      "deviceSerial": "J091122",
      "vehicleType": 1,
      "extend": "this is a demo car"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

5.9.3 POST /api/hccgw/resource/v1/areas/vehicles/get

Search for vehicle resources.

Request URL

{areaDomain}/api/hccgw/resource/v1/areas/vehicles/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageIndex	Req.	Integer	Body	The current page.
pageSize	Req.	Integer	Body	Number of records on each page, which is between 1 and 500.
filter	Opt.	Object	Body	Search condition. See details in the filter Object Description below.

Table 5-86 filter Object Description

Parameter	Req. or Opt.	Data Type	Description
areaID	Opt.	String	Area ID.
includeSubArea	Opt.	String	Whether to include vehicles in the lower-level areas: 0-no, 1-yes.
vehicleID	Opt.	String[]	Vehicle ID.

Request Example

```
{
    "pageIndex": 1,
     "pageSize": 10,
```

```
    "filter": {
        "areaID": "-1",
        "includeSubArea": "1",
        "vehicleID": []
    }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-87 data Object Description

Parameter	Req. or Opt.	Data Type	Description
totalCount	Req.	Integer	Total searched vehicles.
pageIndex	Req.	Integer	Page index.
pageSize	Req.	Integer	Number of records on each page, which is between 1 and 500.
vehicle	Req.	***VehicleInfo(1)*** []	Vehicle-related information.

Response Example

```
{
  "data": {
    "totalCount": 85,
    "pageIndex": 1,
    "pageSize": 2,
    "vehicle": [
      {
        "id": "ab51324d3c224335aa90b5036f1a2527",
        "name": "test222",
        "abilitySet": "",
        "online": "1",
        "area": {},
        "device": {
          "devInfo": {
```

```
                "id": "2a19980bbd414a029f57b752ca675b95",
                "category": "0",
                "serialNo": "G02907733",
                "streamSecretKey": ""
              },
              "channelInfo": {}
            },
            "vehicleInfo": {
              "licensePlateNo": "test222",
              "vehicleType": 0,
              "driverFirstName": "first name",
              "driverLastName": "last name",
              "driverPhoneNo": "1232312",
              "pictureUrl": "http://10.19.215.172:31677/hcc-dev-2/msvehicle/images/
f718f3013b5a4fb38e573043afe28683/2022-11-24/39c764aa5acd49a385222f479b34ddc6.jpg?X-Amz-
Algorithm=AWS4-HMAC-SHA256&X-Amz-Credential=minio123%2F20221128%2Fap-
southeast-1%2Fs3%2Faws4_request&X-Amz-Date=20221128T034040Z&X-Amz-Expires=86400&X-Amz-
SignedHeaders=host&X-Amz-Signature=330cc2959ec24a347beed7df4f42fbb49854f534d2646e0c30cdfb7422aa3377",
              "extend": ""
            }
          },
          {
            "id": "2ab33fd299124cf8911cc0d5be679e59",
            "name": "yyyy",
            "abilitySet": "",
            "online": "0",
            "area": {},
            "device": {
              "devInfo": {
                "id": "",
                "category": "0",
                "serialNo": "",
                "streamSecretKey": ""
              },
              "channelInfo": {}
            },
            "vehicleInfo": {
              "licensePlateNo": "yyyy",
              "vehicleType": 0,
              "driverFirstName": "",
              "driverLastName": "",
              "driverPhoneNo": "",
              "pictureUrl": "",
              "extend": ""
            }
          }
        ]
```

5.9.4 POST /api/hccgw/resource/v1/picture/uploadparam/get

Get the picture upload parameters.

Request URL

{areaDomain}/api/hccgw/resource/v1/picture/uploadparam/get

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
format	Req.	String	Body	Picture format. Currently only JPG format is supported.

Request Example

```
{
   "format": "jpg"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-88 data Object Description

Parameter	Req. or Opt.	Data Type	Description
key	Req.	String	Key of the vehicle picture.
url	Req.	String	Vehicle picture URL, used for picture upload (valid for 15 minutes).

Response Example


```
{
   "data": {
      "key": "msvehicle/images/f718f3013b5a4fb38e573043afe28683/2022-11-28/
e39da74daa66463f8227960707fca60c.jpg",
      "url": "http://10.19.215.172:31677/hcc-dev-2/msvehicle/images/
f718f3013b5a4fb38e573043afe28683/2022-11-28/e39da74daa66463f8227960707fca60c.jpg?X-Amz-
Algorithm=AWS4-HMAC-SHA256&X-Amz-Credential=minio123%2F20221128%2Fap-
southeast-1%2Fs3%2Faws4_request&X-Amz-Date=20221128T025154Z&X-Amz-Expires=86400&X-Amz-
SignedHeaders=host&X-Amz-Signature=b9d0e9b4b0aa27e3763582f5bb90956146645deacaa9ce06bee11caac5edbbf2"
},
"errorCode": "0"
}
```


5.9.5 POST /api/hccgw/resource/v1/accstatus/search

Get the vehicle ACC status. It is recommended to call this API no more frequent than every other minute.

Request URL

{areaDomain}/api/hccgw/resource/v1/accstatus/search

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
deviceSerials	Req./Opt.	String	Body	Set of on-board device serial No.s connected by comma. Either **deviceSerials** or **vehicleIds** is required. If both are configured, **vehicleIds** shall prevail.
vehicleIds	Req./Opt.	String	Body	Set of vehicle IDs connected by comma. Either **deviceSerials** or **vehicleIds** is required. If both are configured, **vehicleIds** shall prevail.

Request Example

```
{

   "vehicleIds":"0005c11ef9a64f6d9932e881bdea93d4, 0005c11ef9a64f6d9932e881bdea93d5,
0005c11ef9a64f6d9932e881bdea93d6"
}
```

Or

```
{
   "deviceSerials":"CA5565496,K70728087,CA7911952,CA2203964"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-89 data Object Description

Parameter	Req. or Opt.	Data Type	Description
accStatusInfos	Req.	[]	Returned array. See details in the following **accStatusInfos** object.

Table 5-90 accStatusInfos Object Description

Parameter	Req. or Opt.	Data Type	Description
idOrDeviceSerial	Req.	String	Vehicle ID or serial No., depending on the request resource type.
accStatus	Req.	Integer	ACC status: -1 (unknown: no information uploaded by device), 0 (ACC off), 1 (ACC on).

Response Example


```
{
   "data": {
      "accStatusInfos": [
         {
            "idOrDeviceSerial": "0005c11ef9a64f6d9932e881bdea93d4",
            "accStatus": 0
         },
         {
            "idOrDeviceSerial": "0005c11ef9a64f6d9932e881bdea93d5",
            "accStatus": 1
         },
         {
            "idOrDeviceSerial": "0005c11ef9a64f6d9932e881bdea93d6",
            "accStatus": -1
         }
      ]
   },
"errorCode": "0"
}
```


5.9.6 POST /api/hccgw/vehicle/v1/driver/batchquery

Batch search for driver information.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driver/batchquery

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
groupId	Opt.	String	Body	Driver group ID.
driverIds	Opt.	Array<String>	Body	Driver ID set.
distributionStatus	Opt.	Integer	Body	Applying status: null or -1 (all), 0 (not applied), 1 (applying), 2 (applied), 3 (applying failed).
fuzzySearch	Opt.	String	Body	Fuzzy search by driver's name/ No. / license plate No.

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
relatedVehicle	Opt.	Integer	Body	Whether to link with vehicle: null or -1 (all), 1 (not link), 2 (link).
pageIndex	Req.	Integer	Body	The current page, which starts from 1.
pageSize	Req.	Integer	Body	Number of records on each page, [1, 500].

Request Example

```
{
   "groupId": "",
   "driverIds": ["521728422020533248"],
   "distributionStatus": -1,
   "fuzzySearch": "",
   "relatedVehicle": -1,
   "pageIndex": 1,
   "pageSize": 10
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.
drivers	Opt.	***DriverInfo (2)***	Driver information set.

Response Example

```
{
  "data": {
    "drivers": [
```

```
    {
     "driverGroupId": "xxxxxx
     "driverGroupName": "xxxxxx",
     "driverId": "xxxxxx",
     "facepicUrl": "xxxxxx",
     "driverName": "xxxxxx",
     "driverCode": "xxxxxx",
     "gender": "0",
     "phone": " xxxxxx",
     "email": " xxxxxx",
     "description": "xxxxxx",
     "distributionStatus": 0,
     "distributionInfo": {
      "errorInfo": []
     },
     "relatedVehicles": [
      {
       "plateLicense": "xxxxxx",
       "vehicleId": "xxxxxx",
       "deviceSerial": "xxxxxx"
      }
     ],
     "driverLicenseInfo": {
      "validTime": "",
      "licenseNo": "xxxxxx",
      "imageUrl": "xxxxxx"
     }
    }
   ]
  },
  "errorCode": "0"
}
```


5.9.7 POST /api/hccgw/vehicle/v1/driver/add

Add driver.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driver/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
firstName	Req./Opt.	String	Body	First name. Either **firstName** or **lastName** should be configured.
lastName	Req./Opt.	String	Body	Last name. Either **firstName** or **lastName** should be configured.
driverCode	Req.	String	Body	Driver code.
gender	Req.	Integer	Body	0 (unknown), 1 (male), 2 (female).
groupId	Req.	String	Body	Linked driver group ID.
phone	Req.	String	Body	Phone No.
email	Req.	String	Body	Email.
description	Req.	String	Body	Description.
relateVehicleIds	Req.	Array<String>	Body	ID set of linked vehicles. Up to 100 items are allowed.
driverLicenseInfo	Req.	***DriverLicenseAddInfo***	Body	Driving license information.
photoData	Req.	String	Body	Driver's profile picture data, encoded by Base64, max. size: 5 MB.

Request Example

```
{
   "firstName": "xxxxxx",
   "lastName": "xxxxxx",
   "driverCode": "xxxxxx",
   "groupId": " xxxxxx",
   "gender": 0,
   "phone": "xxxxxx",
   "email": "xxxxxx",
   "description": "xxxxxx",
   "relateVehicleIds": ["xxxxxx"],
```

```
   "driverLicenseInfo": {
     "licenseNo": "xxxxxx",
     "validTime": "xxxxxx",
     "imageData": "xxxxxx
},
"photoData":"xxxxxx"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.
driverId	Opt.	String	Driver ID.

Response Example

```
{
  "data": {
    " driverId":"xxxxxx"
  },
  "errorCode": "0"
}
```

5.9.8 POST /api/hccgw/vehicle/v1/driver/update

Edit driver.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driver/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
driverId	Req.	String	Body	Driver ID.
firstName	Req.	String	Body	First name. Either **firstName** or **lastName** should be configured.
lastName	Req.	String	Body	Last name. Either **firstName** or **lastName** should be configured.
driverCode	Req.	String	Body	Driver code.
gender	Req.	Integer	Body	0 (unknown), 1 (male), 2 (female).
groupId	Req.	String	Body	Linked driver group ID.
phone	Req.	String	Body	Phone No.
email	Req.	String	Body	Email.
description	Req.	String	Body	Description.
relateVehicleIds	Req.	Array<String>	Body	ID set of linked vehicles. Up to 100 items are allowed.
driverLicenseInfo	Req.	***DriverLicenseAddInfo***	Body	Driving license information.
photoData	Req.	String	Body	Driver's profile picture data, encoded by Base64, max. size: 5 MB.

Request Example

```
{
   "driverId": "xxxxxx",
   "firstName": "xxxxxx",
   "lastName": "xxxxxx",
   "driverCode": "xxxxxx",
   "groupId": "xxxxxx",
   "gender": 0,
   "phone": "xxxxxx",
```

```
  "email": "xxxxxx",
  "description": "xxxxxx",
  "relateVehicleIds": ["xxxxxx"],
  "driverLicenseInfo": {
    "licenseNo": "xxxxxx",
    "validTime": "xxxxxx",
    "imageData": "xxxxxx
  }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
  "errorCode": "0"
}
```

5.9.9 POST /api/hccgw/vehicle/v1/driver/batchdel

Batch delete drivers.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driver/batchdel

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
driverIdList	Req.	Array<String>	Body	Driver ID set.

Request Example

```
{
   "driverIdList": ["xxxxxx"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
  "errorCode": "0"
}
```

5.9.10 POST /api/hccgw/vehicle/v1/driverGroup/batchquery

Batch search for driver group information.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driverGroup/batchquery

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
driverGroupIdList	Opt.	Array<String>	Body	Driver group No. set. All will be included when this field is null.

Request Example

```
{
   "driverGroupIdList": ["xxxxxx"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.
DriverGroupInfo[]	Opt.	***DriverGroupInfo***	Driver group information.

Response Example

```
{
   "data": [
      {
         "groupId": "xxxxxx"
         "groupName": "xxxxxx",
         "areaId": "xxxxxx",
         "areaName": "xxxxxx",
         "peopleCount": 1
      }
   ],
   "errorCode": "0"
}
```

5.9.11 POST /api/hccgw/vehicle/v1/driverGroup/add

Add driver group.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driverGroup/add

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
driverGroupName	Req./Opt.	String	Body	Driver group name, which should be unique.
relatedAreaId	Req.	String	Body	Linked area ID.

Request Example

```
{
"driverGroupName": "xxxxxx",
"relatedAreaId": "xxxxxx"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.
id	Opt.	String	Driver group ID.

Response Example

```
{
   "data":
      {
         "id": "xxxxxx"
      },
   "errorCode": "0"
}
```

5.9.12 POST /api/hccgw/vehicle/v1/driverGroup/update

Edit driver group.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driverGroup/update

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
id	Req.	String	Body	Driver group ID.
driverGroupName	Req.	String	Body	Driver group name.
relatedAreaId	Req.	String	Body	Linked area ID.

Request Example

```
{
"id": "xxxxxx",
"driverGroupName": "xxxxxx",
"relatedAreaId": "xxxxxx"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
   "errorCode": "0"
}
```

5.9.13 POST /api/hccgw/vehicle/v1/driverGroup/batchdel

Batch delete driver groups.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driverGroup/batchdel

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
driverGroupIdList	Req.	Array<String>	Body	Driver group ID. set.

Request Example

```
{
"driverGroupIdList": ["xxxxxx"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Response Example

```
{
   "errorCode": "0"
}
```

5.9.14 POST /api/hccgw/vehicle/v1/driverFace/distribution

Apply driver's face pictures. The face picture applying process is asynchronous. If no task GUID is returned from the response message, see whether the applying succeeded according to the error code and error information; if the task GUID is returned, use the GUID to call the API of searching for face picture applying status and get the result in 1or 2 seconds.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driverFace/distribution

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
driverIds	Req.	Array<String>	Body	Driver ID set.

Request Example

```
{
"driverIds": ["xxxxxx"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.
data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.
GUID	Opt.	String	Applying task ID, used for searching for applying status.

Response Example

```
{
"data": {
   "guid": "xxxxxx"
},
   "errorCode": "0"
}
```

5.9.15 POST /api/hccgw/vehicle/v1/driverFace/status/query

Search for the applying status of driver's face picture.

Request URL

{areaDomain}/api/hccgw/vehicle/v1/driverFace/status/query

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
guid	Req.	String	Body	Applying task GUID.

Request Example

```
{
"guid": "xxxxxx"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
Message	Opt.	String	Error message.

Parameter	Req. or Opt.	Data Type	Description
data	Opt.	Object[]	Data returned by the successful request. See details in the data Object Description below.
totalCount	Opt.	Integer	Total number of tasks.
successCount	Opt.	Integer	Number of successful tasks.
distributionFailedStatus	Opt.	***DriverDistributionFail***	Set of failed tasks.

Response Example

```
{
  "data": {
    "totalCount": 2,
    "successCount": 2,
    "distributionFailedStatus": [
      {
        "driverId": "xxxxxx",
        "driverName": "xxxxxx",
        "licensePlate": "xxxxxx",
        "errorCode": "xxxxxx",
        "message": "xxxxxx",
        "deviceSerial": "xxxxxx"
      }
    ]
  },
  "errorCode": "0"
}
```

5.10 Attendance Services

5.10.1 POST /api/hccgw/attendance/v1/report/totaltimecard/list

Search for Total Time Card.

Request URL

{areaDomain}/api/hccgw/attendance/v1/report/totaltimecard/list

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	Token. The maximum length is 64.
pageIndex	Opt.	Integer	Body	Token. The maximum length is 64.
pageSize	Opt.	Integer	Body	Number of records on each page, which is between 1 and 200. The default value is 20.
beginTime	Req.	String	Body	Start time, in ISO time format, e.g., 2023-10-21T11:08:23+08:00.
endTime	Req.	String	Body	End time, in ISO time format, e.g., 2023-10-21T11:08:23+08:00.
personName	Opt.	String	Body	Person name(s), matched by fuzzy search. By default all will be included.
personCode	Opt.	String	Body	Employee No.(s), matched by fuzzy search. By default all will be included.
personGroupIds	Opt.	String[]	Body	Person group ID list. By default it is the department which the account has permission for.
dateFormat	Opt.	String	Body	Date format, by default represented by "yyyy/MM/dd". See details in ***Date Format Type*** .
timeFormat	Opt.	String	Body	Date format, by default represented by "HH:mm". See details in ***Time Format Type*** .
durationFormat	Opt.	String	Body	Date format, by default represented by "HH:MM". See details in ***Time Duration Format Type*** .

Request Example

```
{
  "pageIndex": 1,
  "pageSize": 20,
  "beginTime": "2024-01-01T00:00:00+08:00",
  "endTime": "2024-01-31T23:59:59+08:00",
  "personName": "abc",
  "personCode": "123",
  "personGroupIds": [],
  "dateFormat": "yyyy/MM/dd",
  "timeFormat": "HH:mm",
  "durationFormat": "HH:MM"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-91 data Object Description

Parameter Name	Req. or Opt.	Data Type	Description
reportDataList	Req.		Report data list. For circumstances where no data exists, an empty list will be returned.
pageIndex	Req.	Integer	Page No.
pageSize	Req.	Integer	Number of records per page.
moreData	Req.	Integer	Whether it is more than one page: 0-no, 1-yes.

Response Example


```
{
"errorCode": "0",
"data": {
   "pageIndex": 1,
   "pageSize": 1,
   "moreData": 0,
   "reportDataList": [
             {
            "firstName":"abc",
            "lastName":"def",
            "fullName":"abc def",
            "personCode":"123",
            "fullPath":"xxx",
            "date":"2024/01/01",
            "weekday":1,
            "timetableName":"Time Table Name",
            "checkInDate":"2024/01/01",
            "checkInTime":"09:00",
            "checkOutDate":"2024/01/01",
            "checkOutTime":"18:00",
            "clockInDate":"2024/01/01",
            "clockInTime":"09:00",
            "clockInSource":2,
            "clockInDevice":"",
        "clockInArea":"",
        "clockOutDate":"2024/01/01",
        "clockOutTime":"18:00",
        "clockOutSource":2,
        "clockOutDevice":"",
        "clockOutArea":"",
        "attendanceStatus":1,
        "workDuration":"00:00",
        "absenceDuration":"00:00",
        "lateDuration":"00:00",
        "earlyDuration":"00:00",
        "breakDuration":"00:00",
        "leaveDuration":"00:00",
        "overtimeDuration":"00:00",
        "workdayOvertimeDuration":"00:00",
        "weekendOvertimeDuration":"00:00"
       }
   ]
}
}
```

5.11 Maintenance Services

5.11.1 POST /api/hccgw/maintain/v1/offline/info/list

Search for resources that are offline within a specified time period.

Request URL

{areaDomain}/api/hccgw/maintain/v1/offline/info/list

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
areaId	Opt.	String	Body	Area ID. Defaults to the root node when this field is absent.
startTime	Req.	long	Body	Start time (UTC in milliseconds).
endTime	Req.	long	Body	End time (UTC in milliseconds).
orderBy	Opt.	integer	Body	Sorting type: 0 (device ID, default value), 1 (offline times), 2 (offline time duration).
pageSize	Req.	integer	Body	Number of records on each page, range: [1,100].
page	Req.	integer	Body	Page number, which starts from 1.
queryType	Req.	integer	Body	Resource type: 0 (device resource), 1 (logical resource).

Request Example

```
{
  "areaId": "xxx",
  "startTime": 1739796526000,
  "endTime": 1739796526000,
  "orderBy": 1,
  "pageSize": 50,
  "page": 1,
```

```
  "queryType": 0
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-92 data Object Description

Parameter	Req. or Opt.	Data Type	Description
total	Req.	Integer	Total number of search results.
pageSize	Req.	Long	Number of records on each page, range: [1,100].
page	Req.	String[]	Page number.
rows	Req.	***DeviceOfflineInfo***	Offline resource/device information.

Response Example

```
{
  "data": {
    "page": 1,
    "pageSize": 50,
    "total": 100,
    "rows": [
      {
        "id": "fjewiafew453215423j54kk325",
        "name": "menjin",
        "deviceSerial": "FK4599010",
        "areaId": "adeb59a933ea400e885e1c71384f2efd",
        "areaName": "group11111",
        "resourceType": 1002,
        "offlineCount": 1,
        "offlineDuration": 17459610
```

```
    }
   ]
  },
  "errorCode": "0"
}
```

5.11.2 POST /api/hccgw/maintenance/v1/list/device/detail

Get the device maintenance status details.

Request URL

{areaDomain}/api/hccgw/maintenance/v1/list/device/detail

Request Parameters

Parameter	Req. or Opt.	Data Type	Parameter Type	Description
Token	Req.	String	Header	The maximum length is 64.
page	Req.	Number	Body	Page number, the default value is 1.
pageSize	Opt.	Number	Body	Number of records on each page, the default value is 10.
areaId	Opt.	String	Body	Area ID, the default value is -1 (no device included).
includeSubArea	Opt.	String	Body	Whether to include the sub areas of **areaId**: 0 (not include), 1 (include).
exceptions	Opt.	Number[]	Body	Filter by exception type: 0 (all exceptions), 1 (device offline), 2 (disk exception), 3 (recording exception). No filtering when the array is empty.
filterName	Opt.	String	Body	Filter by device name, device serial number, version number, or area name.
deviceCategory	Req.	Number	Body	Device type: 2001 (encoding device).

Request Example

```
{
  "page": 1,
  "pageSize": 10,
  "areaId": "001",
  "includeSubArea": "1",
  "exceptions": [1, 2],
  "filterName": "Device A",
  "deviceCategory": 2001
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Error message.
data	Req.	Object	Data returned by the successful request. See details in the data Object Description below.

Table 5-93 data Object Description

Parameter	Req. or Opt.	Data Type	Description
page	Req.	number	Page number.
pageSize	Req.	number	Number of records on each page, range: [1,100].
totalNum	Req.	number	Total number of search results.
totalPage	Req.	number	Total number of pages.
hasNext	Req.	boolean	Whether there is a next page.
devices	Req.	***Device*** []	Device data.

Response Example

```
{
  "data": {
    "page": 1,
```

```
    "pageSize": 50,
    "total": 100,
    "rows": [{
      "id": "fjewiafew453215423j54kk325",
      "name": "menjin",
      "deviceSerial": "FK4599010",
      "areaId": "adeb59a933ea400e885e1c71384f2efd",
      "areaName": "group11111",
      "resourceType": 1002,
      "offlineCount": 1,
      "offlineDuration": 17459610
    }]
  },
  "errorCode": "0"
}
```


5.12 BI Related

5.12.1 POST /api/hccgw/bi/v1/store/report/peopleflow

Search for the customer traffic data.

Request URL

{areaDomain}/api/hccgw/bi/v1/store/report/peopleflow

Request Parameters

Table 5-94 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.

Table 5-95 Request Body

Parameter	Req. or Opt.	Data Type	Description
startTime	Req.	String	Start time. Format: yyyy-MM-dd HH:mm:ss.
endTime	Req.	String	End time. Format: yyyy-MM-dd HH:mm:ss.
storeAreaIds	Req.	List<String>	Store area ID list. Up to 16 IDs are allowed.
statisticType	Req.	Integer	Statistical type: 1-by hour, 2-by day.

Parameter	Req. or Opt.	Data Type	Description
resourceType	Req.	Integer	Resource type: 0-camera, 1-entrance/exit, 2-store.
timeType	Req.	Integer	Time type: 0 (search by data storage time), 1 (search by device upload time).

Request Example

```
{
  "startTime": "startTime_e46f317cc6c1",
  "endTime": "endTime_3b7b2967991b",
  "storeAreaIds": [
    "storeAreaIds_b0972a9ad833"
  ],
  "statisticType": 0,
  "resourceType": 0,
  "timeType": 0
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**statisticType**	Req.	String	Statistical type: 1-by hour, 2-by day.
-**storeDatas**	Req.	Object[]	Store statistics data.
--**cameraId**	Req.	String	Camera ID. It is returned when the **resourceType** = 0.
--**groupId**	Req.	String	Entrance/exit ID. It is returned when the **resourceType** = 1.
--**storeAreaId**	Req.	String	Store area ID.
--**countingDatas**	Req.	Object[]	Store statistics data.

Parameter	Req. or Opt.	Data Type	Description
---**startTime**	Req.	String	Start time. Format: yyyy-MM-dd HH:mm:ss.
---**endTime**	Req.	String	End time. Format: yyyy-MM-dd HH:mm:ss.
---**enterCount**	Req.	Integer	Number of people entered.
---**exitCount**	Req.	Integer	Number of people exited.
---**passCount**	Req.	Integer	Number of people passing by.
---**updateTime**	Req.	String	Record update time. Format: yyyy-MM-dd HH:mm:ss.

Response Example


```
{
 "errorCode":"0",
 "data":{
  "statisticType":"2",
  "storeDatas":[
   {
    "countingDatas":[
     {
      "startTime":"startTime_085cc36f252e",
      "endTime":"endTime_991da0a532fa",
      "enterCount":0,
      "exitCount":0,
      "passCount":0,
      "updateTime":"updateTime_ae7d778fc326"
     }
    ],
    "storeAreaId":"storeAreaId_77ca17c4b07f"
   }
  ]
 }
}
```


5.13 ANPR Related

5.13.1 POST /api/hccgw/bi/v1/anpr/nameList/list

Search for lists manually created by users on Hik Connect for Teams.

Request URL

{areaDomain}/api/hccgw/bi/v1/anpr/nameList/list

Request Parameters

Table 5-96 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Content type: application/json.

Table 5-97 Request Body

Parameter	Req. or Opt.	Data Type	Description
No request body parameters.			

Request Example

```
{ }
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded. See details in the data Object Description below.

Table 5-98 Data Object Description

Parameter	Req. or Opt.	Data Type	Description
data	Req.	Object	Response contents.
-id	Req.	String	Data ID.
-name	Req.	String	Data name.

Parameter	Req. or Opt.	Data Type	Description
-color	Req.	Integer	Labeled list color: red-1, yellow-2, orange-3, green-4, blue-5.
-remark	Req.	String	Descriptions.
-type	Req.	Integer	0-Blocklist, 1-Allowlist.
-licensePlateCount	Req.	Integer	Number of license plates.
-cameraList	Req.	Array	Camera list.
--cameraId	Opt.	String	Camera ID.
--cameraName	Opt.	String	Camera name.
--barrierGateOper	Opt.	Integer	Barrier gate control. 0-no operation, 1-open barrier gate.

Response Example


```
{
   "data": [
      {
         "cameraList": [],
         "id": "b0261a3fa993468a9f36a2c8e8bdfc8a",
         "licensePlateCount": 8,
         "name": "black",
         "remark": "",
         "type": 0
      },
      {
         "cameraList": [],
         "id": "71c71cc8dd90486db5217df4d93069d1",
         "licensePlateCount": 20,
         "name": "yjtest",
         "remark": "",
         "type": 1
      }
   ],
   "errorCode": "0"
}
```


5.13.2 POST /api/hccgw/bi/v1/licensePlate/add

Add license plates to a name list.

Request URL

{areaDomain}/api/hccgw/bi/v1/licensePlate/add

Note

If a license plate fails to be applied, call the re-apply API: ***POST /api/hccgw/anpr/v1/licensePlate/apply/manual*** to try again.

Request Parameters

Table 5-99 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Content type: application/json.
Token	Req.	String	Token. The maximum length is 64.

Table 5-100 Request Body

Parameter	Req. or Opt.	Data Type	Description
nameListId	Req.	String	Name list ID.
licensePlateList	Req.	Array	License plate list. It is recommended to apply no more than 100 license plates per batch.
licensePlate	Req.	String	License plate number. The maximum length is 32.
-**personName**	Opt.	String	Vehicle owner name. The maximum length is 32.
-**personPhone**	Opt.	String	Phone number. The maximum length is 32. Only digits are allowed.
-**startValidTime**	Req.	String	Validity start time in ISO 8601 format, which is represented by "yyyy-MM-ddTHH:mm:ss+current time zone", e.g., "2026-06-16T00:00:00+08:00".
-**endValidTime**	Req.	String	Validity end time in ISO 8601 format, which is represented by "yyyy-MM-ddTHH:mm:ss+current time zone", e.g., "2026-06-16T00:00:00+08:00".

Request Example

```
{
	"nameListId": "89e0f38fad6d4d35b2e587c866497a4a",
	"licensePlateList": [
	{
	"licensePlate": "A999",
	"personName": "bob",
	"personPhone": "123",
	"startValidTime": "2026-06-16T00:00:00+08:00",
	"endValidTime": "2028-06-16T23:59:59+08:00"
	}
	]
	}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
	"errorCode": "0"
	}
```

5.13.3 POST /api/hccgw/bi/v1/nameList/detail

Search for the details of a vehicle list.

Request URL

{areaDomain}/api/hccgw/bi/v1/nameList/detail

Request Parameters

Table 5-101 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Content type: application/json.
Token	Req.	String	Token. The maximum length is 64.

Table 5-102 Request Body

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	Name list ID. Required.
page	Opt.	Integer	Page number. If empty, the first page is returned by default. page*pageSize<= 10000.
pageSize	Opt.	Integer	Number of records per page. The default value is 20 when empty. A list can contain up to 10,000 license plates. A maximum of 100 records can be retrieved per page.

Request Example

```
{
   "id": "5f8d0d55-1234-5678-abcd-ef0123456789",
   "page": 1,
   "pageSize": 20
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.

Parameter	Req. or Opt.	Data Type	Description
data	Req.	Object	Data returned when the request succeeded.
-rows	Req.	Object[]	License plate record list.
--id	Req.	String	License plate ID.
--nameListId	Req.	String	Name list ID.
--licensePlate	Req.	String	License plate number.
--personName	Opt.	String	Vehicle owner name.
--personPhone	Opt.	String	Phone number.
--source	Opt.	Integer	License plate information source. 0-person, 1-manually added.
--startValidTime	Req.	String	Validity start time.
--endValidTime	Req.	String	Validity end time.
--status	Req.	Integer	License plate delivery status. 0-not delivered, 1-delivering, 2-delivered, 3-delivery failed.
--failedList	Opt.	Object[]	List of failed delivery records.
---cameraId	Opt.	String	ID of the camera where delivery failed.
---cameraName	Opt.	String	Camera name.
---areaName	Opt.	String	Area name.
---reason	Opt.	String	Failure reason.
-page	Req.	Integer	Current page number.
-pageSize	Req.	Integer	Number of records per page.
-total	Req.	Integer	Total number of records.
-totalPage	Req.	String	Total number of pages.

Response Example


```
{
   "errorCode": "0",
   "data": {
      "pageSize": 20,
      "rows": [
```

```
{
  "id": "ee98ae82aaa74e6a9472b8ae080039ba",
  "nameListId": "89e0f38fad6d4d35b2e587c866497a4a",
  "licensePlate": "ZC",
  "personName": "aa",
  "personPhone": "123",
  "source": 1,
  "startValidTime": "2026-06-16T00:00:00+08:00",
  "endValidTime": "2028-06-16T23:59:59+08:00",
  "status": 3,
  "failedList": [
    {
      "cameraId": "ed76286fde684dac8efff26523004715",
      "failedType": 0,
      "reason": "VMS051009"
    }
  ]
},
{
  "id": "0a6efe8714b64141ad465592d7b70994",
  "nameListId": "89e0f38fad6d4d35b2e587c866497a4a",
  "licensePlate": "1234561",
  "personName": "aa",
  "personPhone": "123",
  "source": 1,
  "startValidTime": "2026-06-16T00:00:00+08:00",
  "endValidTime": "2028-06-16T23:59:59+08:00",
  "status": 3,
  "failedList": [
    {
      "cameraId": "ed76286fde684dac8efff26523004715",
      "failedType": 0,
      "reason": "VMS051009"
    }
  ]
},
{
  "id": "20a009c4d2fa40c4a6573aa6f0c76e89",
  "nameListId": "89e0f38fad6d4d35b2e587c866497a4a",
  "licensePlate": "123456",
  "personName": "aa",
  "personPhone": "123",
  "source": 1,
  "startValidTime": "2026-06-16T00:00:00+08:00",
  "endValidTime": "2028-06-16T23:59:59+08:00",
  "status": 3,
  "failedList": [
    {
      "cameraId": "ed76286fde684dac8efff26523004715",
      "failedType": 0,
      "reason": "VMS051009"
    }
```

```
            ]
          }
        ],
        "total": 3,
        "totalPage": 1,
        "page": 1
    }
}
```


5.13.4 POST /api/hccgw/bi/v1/licensePlate/update

Edit a license plate.

Request URL

{areaDomain}/api/hccgw/bi/v1/licensePlate/update

Note

If a license plate fails to be applied, call the re-apply API: ***POST /api/hccgw/anpr/v1/licensePlate/apply/manual*** to try again.

Request Parameters

Table 5-103 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Content type: application/json.
Token	Req.	String	Token. The maximum length is 64.

Table 5-104 Request Body

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	License plate ID.
licensePlate	Req.	String	License plate number. The maximum length is 32.
nameListId	Req.	String	List ID.
personName	Opt.	String	Vehicle owner name. The maximum length is 32.
personPhone	Opt.	String	Phone number. The maximum length is 32. Only digits are allowed.

Parameter	Req. or Opt.	Data Type	Description
startValidTime	Req.	String	Validity start time in ISO 8601 format, which is represented by "yyyy-MM-ddTHH:mm:ss+current time zone", e.g., "2026-06-16T00:00:00+08:00".
endValidTime	Req.	String	Validity end time in ISO 8601 format, which is represented by "yyyy-MM-ddTHH:mm:ss+current time zone", e.g., "2026-06-16T00:00:00+08:00".

Request Example

```
{
	"id": "ee98ae82aaa74e6a9472b8ae080039ba",
	"nameListId": "89e0f38fad6d4d35b2e587c866497a4a",
	"licensePlate": "ZC1",
	"personName": "aa",
	"personPhone": "123",
	"startValidTime": "2026-06-16T00:00:00+08:00",
	"endValidTime": "2028-06-16T23:59:59+08:00"
	}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
	"errorCode": "0"
	}
```

5.13.5 POST /api/hccgw/anpr/v1/remove/scrip/licensePlate

Delete license plates.

Request URL

{areaDomain}/api/hccgw/anpr/v1/remove/scrip/licensePlate

Request Parameters

Table 5-105 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Content type: application/json.
Token	Req.	String	Token. The maximum length is 64.

Table 5-106 Request Body

Parameter	Req. or Opt.	Data Type	Description
idList	Req.	Array	License plate ID list. It is recommended to delete 20 license plates per batch.
id	Req.	String	License plate ID.
nameListId	Req.	String	Name list ID.

Request Example

```
{
        "idList": [
        {
        "id": "109db445af5d4fa0941a362558a23047",
        "nameListId": "89e0f38fad6d4d35b2e587c866497a4a"
        }
        ]
        }
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
        "errorCode": "0"
        }
```

5.13.6 POST /api/hccgw/anpr/v1/licensePlate/apply/manual

Re-apply license plates. It is recommended that you re-apply license plates to a single camera every 3 seconds.

Request URL

{areaDomain}/hccbi/anpr/v1/licensePlate/apply/manual

Request Parameters

Table 5-107 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Content type: application/json.
Token	Req.	String	Token. The maximum length is 64.

Table 5-108 Request Body

Parameter	Req. or Opt.	Data Type	Description
nameListId	Req.	String	Name list ID.
licensePlateId	Req.	String	License plate ID.
cameraIdList	Req.	String[]	List of failed camera IDs. A maximum of 3 cameras are allowed.

Request Example

```
{
        "nameListId": "89e0f38fad6d4d35b2e587c866497a4a",
        "licensePlateId": "ee98ae82aaa74e6a9472b8ae080039ba",
        "cameraIdList": [
        "71c71cc8dd90486db5217df4d93069d1",
        "71c71cc8dd90486db5217df4d93069d2"
        ]
        }
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
        "errorCode": "0"
        }
```

5.13.7 POST /api/hccgw/bi/v1/anpr/passing/record/search

Search for passing vehicle records. The recommended request frequency is 3 to 5 seconds.

Request URL

{areaDomain}/api/hccgw/bi/v1/anpr/passing/record/search

Request Parameters

Table 5-109 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.

Table 5-110 Request Body

Parameter	Req. or Opt.	Data Type	Description
allCamera	Req.	Boolean	Whether to search records of all cameras (logical resources).
cameraIdList	Opt.	String[]	Camera ID (logical resource ID). If **allCamera** = true, this field does not need to be configured.
timeType	Req.	Integer	0 (time of client), 1 (time of local device).

Parameter	Req. or Opt.	Data Type	Description
startTime	Req.	String	Start time in ISO 8601 format, which is represented by "yyyy-MMddTHH: mm:ss +current time zone", e.g., "2024-08-21T00:00:00+08:00". Refer to the datasheet for the supported search time range.
endTime	Req.	String	End time in ISO 8601 format, which is represented by "yyyy-MMddTHH: mm:ss +current time zone", e.g., "2024-08-21T00:00:00+08:00". Refer to the datasheet for the supported search time range.
licensePlate	Opt.	String	License plate number. 0 to 512 characters are allowed.
personName	Opt.	String	Vehicle owner name. 0 to 512 characters are allowed.
vehileModel	Opt.	Integer[]	Vehicle type: 1-bus, 2-truck, 3-sedan, 4-minivan, 5-small-sized truck, 6-two-wheeler, 7-tricycle, 8-medium-sized coach, 9-motor vehicle, 10-non-motor vehicle, 11-suv/mpv, 12-small-sized vehicle, 13-mini sedan, 14-pickup truck, 15-container truck, 16-micro truck, 17-dump truck, 18-crane, 19-oil tank truck, 20-concrete mixer, 21-flatbed tow truck, 22-two-box vehicle, 23-three-box vehicle, 24-sport sedan, 25-small-sized coach, 26-large-sized coach, 27-pedestrian, 28-light truck, 29-medium and heavy truck, 30-school bus, 31-ambulance, 32-garbage truck, 33-cleaning vehicle, 34-operation vehicle.
brand	Opt.	Integer[]	Vehicle brand. Refer to ***Vehicle Brand*** .
color	Opt.	Integer	Vehicle color: 1-white, 2-silver, 3-gray, 4-deep gray, 5-black, 6-red, 7-blue, 8-deepBlue, 9-yellow, 10-green, 11-brown, 12-pink, 13-purple, 14-cyan, 15-orange.

Parameter	Req. or Opt.	Data Type	Description
speedRangeStart	Opt.	Integer	Minimum vehicle speed (unit: km/h). It can be empty, value range: (0,1000).
speedRangeEnd	Opt.	Integer	Maximum vehicle speed (unit: km/h). It can be empty, value range: (0,1000).
country	Opt.	Integer	Country/region. Refer to for details.
direction	Opt.	Integer	Direction: -1 (unknown), 0 (reverse), 1 (forward).
pageSize	Opt.	Integer	Number of records on each page. It can be empty, and the default value is 20 when it is empty.
searchAfter	Opt.	Object[]	Pagination parameter. Directly use **nextSearchAfter** returned in response message. If this field is absent, it defaults to the first page.

Request Example

```
{
   "allCamera":false,
   "timeType":0,
   "startTime":"2024-08-21T00:00:00+08:00",
   "endTime":"2024-10-21T00:00:00+08:00",
   "licensePlate":"licensePlate_f1c2d883c2cd",
   "personName":"personName_8ca9a70c3752",
   "nameListId":"nameListId_4f56745564be",
   "vehileModel":[
      0
   ],
   "brand":[
      0
   ],
   "color":0,
   "speedRangeStart":0,
   "speedRangeEnd":0,
   "country":0,
   "direction":0,
   "pageSize":0,
   "searchAfter":[
      { }
   ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**total**	Req.	Integer	Number of total records.
-**pageSize**	Req.	Integer	Number of records on each page.
-**page**	Req.	Integer	Current page number.
-**rows**	Req.	Object[]	Passing vehicle record information.
--**id**	Req.	String	Passing vehicle record ID.
--**name**	Req.	String	Resource name, corresponding to the **resourceType**.
--**deviceSerial**	Req.	String	Device serial number.
--**areaId**	Req.	String	Area ID.
--**areaName**	Req.	String	Area name.
--**resourceType**	Req.	Integer	Resource type. For devices: 2001 (encoding device), 2002 (access control device), 2008 (video intercom), 2010 (networking device), 2020 (broadcast), 2021 (on-board device), 2031 (cloud storage box); For logical resources: 1001 (camera), 1002 (door), 1003 (zone).
--**offlineCount**	Req.	Integer	Offline times.
--**offlineDuration**	Req.	Long	Offline duration, unit: millisecond.
-**nextSearchAfter**	Req.	Object[]	Pagination parameter, used as a parameter for the next time search.

Response Example


```
{
   "data":{
      "rows":[
         {
            "id":"id_ebd543dee041",
            "areaId":"areaId_f426aee6795b",
            "areaName":"areaName_a41cc1413df4",
            "brand":0,
            "cameraId":"cameraId_b9f4057e503d",
            "cameraName":"cameraName_2729817a2a66",
            "carColor":0,
            "carUrl":"carUrl_aed7093b8b64",
            "licensePlateUrl":"licensePlateUrl_241f071845b1",
            "country":0,
            "dateTime":"dateTime_c5096ae06ec8",
            "dateTimeUTC":"dateTimeUTC_7b798cc8332a",
            "direction":0,
            "licensePlate":"licensePlate_b93e4857b7a3",
            "nameListId":"nameListId_bf121075b76f",
            "nameListName":"nameListName_607938ad69ef",
            "personName":"personName_46360e8a9799",
            "personPhone":"personPhone_a377bbbba9f0",
            "speed":0,
            "vehileModel":0,
            "timeDiff":0
         }
      ],
      "total":0,
      "totalPage":0,
      "page":0,
      "pageSize":0,
      "nextSearchAfter":[
         { }
      ]
   },
   "errorCode":"0"
}
```


5.13.8 POST /api/hccgw/bi/v1/anpr/barrierGate/control

Control the barrier gate.

Request URL

{areaDomain}/api/hccgw/bi/v1/anpr/barrierGate/control

Request Parameters

Table 5-111 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.

Table 5-112 Request Body

Parameter	Req. or Opt.	Data Type	Description
cameraId	Req.	String	Camera ID
controlMode	Req.	Integer	Control type: 1-open, 2-close, 3-remain open, 4-disable remain open. When the barrier is remained open, it is not allowed to open, you should disable remain open.

Request Example

```
{
   "cameraId": "xxx",
   "controlMode": 1
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
   "errorCode": "0"
}
```

5.14 Webhook Related

5.14.1 POST /api/hccgw/webhook/v1/config/query

Get the message push configuration.

Request URL

{areaDomain}/api/hccgw/webhook/v1/config/query

Request Parameters

Table 5-113 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Data format. Only "application/json" is supported.
Token	Req.	String	Token. The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
data	Req.	Object	Data returned when the request succeeded.
-**callbackUrl**	Req.	String	Callback push URL.
-**retryTimes**	Req.	Integer	Retry times
-**retryDelay**	Req.	Long	Retry interval (millisecond).

Response Example

```
{
   "data": {
      "callbackUrl": "https://xxx.com",
      "retryTimes": 3,
      "retryDelay": 1000
   },
```

```
  "errorCode": "0"
}
```

5.14.2 POST /api/hccgw/webhook/v1/config/save

Save message push configurations.

Notes

- Currently, only one Webhook configuration is allowed per account.
- Callback push URLs must use HTTPS protocol.
- After the retry attempts reached the limit, messages will be discarded and persisted for 1 month. Integrators can contact technical support to re-push the valid messages.
- Refer to ***Webhook Message Push*** for the detailed process of secret key signature configurations.

Request URL

{areaDomain}/api/hccgw/webhook/v1/config/save

Request Parameters

Table 5-114 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Data format. Only "application/json" is supported.
Token	Req.	String	Token. The maximum length is 64.

Table 5-115 Request Body

Parameter	Req. or Opt.	Data Type	Description
callbackUrl	Req.	String	Callback push address (must support both GET and POST requests, and require HTTPS protocol). The maximum length is 256 characters.
retryTimes	Opt.	Integer	Retry attempts. Range: [-1,5]. Default: 3. The value -1 indicates unlimited retries within 2 hours.
retryDelay	Opt.	Long	Retry interval (millisecond).
signSecret	Opt.	String	Secret key configuration for signatures (used for signing pushed information). Defaults to SecretKey (SK) if it is empty.

Parameter	Req. or Opt.	Data Type	Description
			The length is from 8 to 32 characters. Format: A combination of letters and digits.

Request Example

```
{
   "callbackUrl": "https://xxx.com",
   "retryTimes": 3,
   "retryDelay": 1000,
   "signSecret": "xxxx"
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

5.14.3 POST /api/hccgw/webhook/v1/config/delete

Delete message push configurations.

Request URL

{areaDomain}/api/hccgw/webhook/v1/config/delete

Request Parameters

Table 5-116 Request Header

Parameter	Req. or Opt.	Data Type	Description
Content-Type	Req.	String	Data format. Only "application/json" is supported.
Token	Req.	String	Token. The maximum length is 64.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

Response Example

```
{
   "errorCode": "0"
}
```

5.15 Access Level Related

5.15.1 POST /api/hccgw/acspm/v1/template/list

Get the schedule template list.

Request URL

{areaDomain}/api/hccgw/acspm/v1/template/list

Request Parameters

Table 5-117 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.
X-TenantId	Req.	String	Tenant ID, up to 64 characters are allowed.
X-UserId	Req.	String	User ID, up to 64 characters are allowed.

Table 5-118 Request Body

Parameter	Req. or Opt.	Data Type	Description
pageIndex	Opt.	Integer	Page number, default value: 1.
pageSize	Opt.	Integer	Number of records on each page. It defaults to return all results when the field is empty or the input is invalid.

Request Example

```
{
   "pageIndex": 1,
   "pageSize": 20
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**templateResponse**	Req.	Object	Schedule template response content.

Parameter	Req. or Opt.	Data Type	Description
--**pageIndex**	Req.	Integer	Page number, starting from 1.
--**pageSize**	Req.	Integer	Number of records on each page.
--**totalNum**	Req.	Integer	Total number of results.
--**templateList**	Req.	Object[]	Schedule template list.
---**id**	Req.	String	Schedule template ID.
---**name**	Req.	String	Schedule template name.
---**remark**	Req.	String	Remark.
---**weekSchedule**	Req.	Object	Weekly schedule information.
----**timeSettingList**	Req.	Object[]	Time setting list.
-----**dayIndex**	Req.	Integer	Day of the week: 0-Sunday, 1-Monday... 6-Saturday.
-----**timeSpanList**	Req.	Object[]	Time schedule list.
------**beginTime**	Req.	String	Start time.
------**endTime**	Req.	String	End time.
---**holidayScheduleList**	Req.	Object[]	Holiday schedule information.
----**id**	Req.	String	Holiday schedule ID.
----**name**	Req.	String	Holiday schedule name.
----**timeSpanList**	Req.	Object[]	Time schedule list.
-----**beginTime**	Req.	String	Start time.
-----**endTime**	Req.	String	End time.

Response Example


```
{
   "errorCode": "0",
   "message": "Ok",
   "data": {
      "templateResponse": {
         "pageIndex": 1,
         "pageSize": 20,
         "totalNum": 2,
         "templateList": [
            {
               "id": "645993118512059392",
               "name": "schedule01",
```

```
"remark": "",
"weekSchedule": {
  "timeSettingList": [
    {
      "dayIndex": 1,
      "timeSpanList": [
        {
          "beginTime": "03:00:00",
          "endTime": "18:30:00"
        }
      ]
    },
    {
      "dayIndex": 2,
      "timeSpanList": [
        {
          "beginTime": "03:00:00",
          "endTime": "06:00:00"
        }
      ]
    },
    {
      "dayIndex": 3,
      "timeSpanList": [
        {
          "beginTime": "03:00:00",
          "endTime": "07:00:00"
        },
        {
          "beginTime": "10:00:00",
          "endTime": "11:30:00"
        }
      ]
    },
    {
      "dayIndex": 4,
      "timeSpanList": [
        {
          "beginTime": "05:00:00",
          "endTime": "16:30:00"
        }
      ]
    },
    {
      "dayIndex": 5,
      "timeSpanList": [
        {
          "beginTime": "05:00:00",
          "endTime": "16:30:00"
        }
      ]
    },
```

```
                {
                  "dayIndex": 6,
                  "timeSpanList": [
                    {
                      "beginTime": "09:00:00",
                      "endTime": "12:30:00"
                    }
                  ]
                },
                {
                  "dayIndex": 0,
                  "timeSpanList": [
                    {
                      "beginTime": "09:30:00",
                      "endTime": "12:00:00"
                    }
                  ]
                }
              ]
            },
            "holidayScheduleList": [
              {
                "id": "132",
                "name": "Holiday01",
                "timeSpanList": [
                  {
                    "beginTime": "05:00:00",
                    "endTime": "20:00:00"
                  }
                ]
              }
            ]
          }
        ]
      }
    }
}
```


5.15.2 POST /api/hccgw/acspm/v1/access/level/add

Add an access level.

Request URL

{areaDomain}/api/hccgw/acspm/v1/access/level/add

Request Parameters

Table 5-119 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.

Table 5-120 Request Body

Parameter	Req. or Opt.	Data Type	Description
accessLevel	Req.	Object	Access level information.
-**name**	Req.	String	Access level name, up to 64 characters are allowed.
-**remark**	Opt.	String	Remark information, up to 128 characters are allowed.
-**timeSchedule**	Req.	Object	Schedule template information.
--**id**	Req.	String	Schedule template ID, up to 18 characters are allowed.
-**associateResList**	Req.	Object[]	Information about resources linked to the access level.
--**id**	Req.	String	Linked resource ID, up to 64 characters are allowed.

Request Example

```
{
   "accessLevel": {
      "name": "access_level_001",
      "remark": "access_level_001",
      "timeSchedule": {
         "id": "area_001"
      },
      "associateResList": [
         {
            "id": "res_001"
         },
         {
            "id": "res_002"
         }
      ]
```

```
  }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**accessLevel**	Req.	Object	Access level information.
--**id**	Req.	String	Access level ID.
--**name**	Req.	String	Access level name.
--**remark**	Req.	String	Remark.
--**areaInfo**	Req.	String	Area information.
---**id**	Req.	String	Area ID.
---**name**	Req.	String	Area name.
--**timeSchedule**	Req.	Object	Schedule template information.
---**id**	Req.	String	Schedule template ID.
---**name**	Req.	String	Schedule template name.
--**associateResList**	Req.	Object[]	Linked resource list.
---**id**	Req.	String	Linked resource ID.
---**name**	Req.	String	Linked resource name.

Response Example

```
{
  "data": {
    "accessLevel": {
      "id": "access_level_001",
      "name": "access_level_001",
      "remark": "access_level_001",
      "usageType": 1,
      "areaInfo": {
```

```
            "id": "area_001",
            "name": "area_001"
          },
          "timeSchedule": {
            "id": "area_001",
            "name": "area_001"
          },
          "associateResList": [
            {
              "id": "res_001",
              "name": "res_001",
              "type": 1
            },
            {
              "id": "res_002",
              "name": "res_002",
              "type": 1
            }
          ]
        }
    },
    "errorCode": "0"
}
```


5.15.3 POST /api/hccgw/acspm/v1/access/level/update

Edit the access level.

Note

- Always include full message details when editing an access level. For example, if an access level has linked 10 resources and only its name is edited, the information about linked 10 resources must also be included in the request.
- Submitting an empty resource list will result in the access level being deleted.

Request URL

{areaDomain}/api/hccgw/acspm/v1/access/level/update

Request Parameters

Table 5-121 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.

Table 5-122 Request Body

Parameter	Req. or Opt.	Data Type	Description
accessLevel	Req.	Object	Access level information.
-**id**	Req.	String	Access level ID.
-**name**	Opt.	String	Access level name, up to 64 characters are allowed.
-**remark**	Opt.	String	Remark information, up to 128 characters are allowed.
-**timeSchedule**	Req.	Object	Schedule template information.
--**id**	Req.	String	Schedule template ID.
-**associateResList**	Req.	Object[]	Linked resource list.
--**id**	Req.	String	Linked resource ID.

Request Example

```
{
   "accessLevel": {
      "id": "643163170894158848",
      "name": "3456789",
      "remark": "",
      "timeSchedule": {
         "id": "1"
      },
      "associateResList": [
         {
            "id": "58077d70228446ddb23e143d202254c5"
         }
      ]
   }
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
   "errorCode": "0",
   "message": "OK"
}
```

5.15.4 POST /api/hccgw/acspm/v1/access/level/{id}/delete

Delete an access level.

Request URL

{areaDomain}/api/hccgw/acspm/v1/access/level/{id}/delete

Table 5-123 URL Parameters

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	Access level ID. It cannot be empty.

Request Parameters

Table 5-124 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to

Parameter	Req. or Opt.	Data Type	Description
			Status and Error Code for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.

Response Example

```
{
   "errorCode": "0",
   "message": "Ok"
}
```

5.15.5 POST /api/hccgw/acspm/v1/access/level/{id}/res/add

Add resources to an access level.

Request URL

{areaDomain}/api/hccgw/acspm/v1/access/level/{id}/res/add

Table 5-125 URL Parameters

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	Access level ID. It cannot be empty.

Request Parameters

Table 5-126 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.

Table 5-127 Request Body

Parameter	Req. or Opt.	Data Type	Description
associateResList	Req.	Object[]	List of resource to link.
-**id**	Req.	String	ID of resource to link.

Request Example

```
{
   "associateResList": [
      {
         "id": "res_001"
      },
      {
         "id": "res_002"
      }
   ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**resFailedList**	Req.	Object[]	Failed resource list.
--**id**	Req.	string	Failed resource ID.
--**name**	Req.	string	Failed resource name.
--**errorCode**	Req.	string	Error code of failed adding.

Response Example

```
{
   "errorCode": "0",
   "data": {
      "resFailedList": [
         {
            "id": "res_001",
            "name": "res_001",
            "errorCode": "LAP000100"
         }
      ]
   }
}
```

5.15.6 POST /api/hccgw/acspm/v1/access/level/{id}/res/delete

Delete resources from an access level.

Note

- If all resources under an access level are deleted, the access level will be deleted automatically as well.
- Submitting an empty resource list in the request will not delete any resources. If the resources do not exist, a successful API calling will have no effect.

Request URL

{areaDomain}/api/hccgw/acspm/v1/access/level/{id}/res/delete

Table 5-128 URL Parameters

Parameter	Req. or Opt.	Data Type	Description
id	Req.	String	Access level ID. It cannot be empty.

Request Parameters

Table 5-129 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.

Table 5-130 Request Body

Parameter	Req. or Opt.	Data Type	Description
associateResList	Req.	Object[]	List of linked resources to delete.
-**id**	Req.	String	Linked resources to delete.

Request Example

```
{
   "associateResList": [
      {
         "id": "res_001"
      },
      {
         "id": "res_002"
```

```
      }
    ]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**resFailedList**	Req.	Object[]	Failed resource list.
--**id**	Req.	String	Failed resource ID
--**name**	Req.	String	Failed resource name.
--**errorCode**	Req.	String	Error code of failed deletion.

Response Example

```
{
   "errorCode": "0",
   "data": {
      "resFailedList": [
         {
            "id": "res_001",
            "name": "res_001",
            "errorCode": "LAP000100"
         }
      ]
   }
}
```

5.15.7 POST /api/hccgw/acspm/v1/access/level/delete

Batch delete access levels.

Note

- If the access level ID list in the request contains non-existent or deleted access level IDs, the API call result remains unaffected.
- If the field **accessLevelIdList** is absent or empty, all levels will be deleted.

Request URL

{areaDomain}/api/hccgw/acspm/v1/access/level/delete

Request Parameters

Table 5-131 Request Header

Parameter	Req. or Opt.	Data Type	Description
Token	Req.	String	Token. The maximum length is 64.
Content-Type	Req.	String	Data format. Only "application/json" is supported.

Table 5-132 Request Body

Parameter	Req. or Opt.	Data Type	Description
accessLevelIdList	Req.	String[]	List of access levels to be delete. **Note** If this field is empty, all access levels will be deleted.

Request Example

```
{
   "accessLevelIdList": ["access_level_001","access_level_002"]
}
```

Response Parameters

Parameter	Req. or Opt.	Data Type	Description
errorCode	Req.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details).

Parameter	Req. or Opt.	Data Type	Description
			Each code can contain up to 32 characters.
message	Opt.	String	Status or error description.
data	Req.	Object	Data returned when the request succeeded.
-**accessLevelFailedList**	Req.	Object[]	Failed access level list.
--**id**	Req.	string	Failed access level ID.
--**name**	Req.	string	Failed access level name.
--**errorCode**	Req.	string	Error code of failed deletion.

Response Example


```
{
   "errorCode": "0",
   "data": {
      "accessLevelFailedList": [
         {
            "id": "res_001",
            "name": "res_001",
            "errorCode": "LAP000100"
         }
      ]
   }
}
```

Appendix A. Appendixes

A.1 Data Dictionary

A.1.1 Alarm Category

Enumeration	Description
alarmCategoryAlarmDetection	Alarm Main Category: Alarm Detection
alarmCategoryMaintenance	Alarm Main Category: Maintenance
alarmCategoryVideo	Alarm Main Category: Video Security
alarmCategoryDriving	Alarm Main Category: On-Board Monitoring
alarmSubCategoryAlarmDevice	Alarm Sub Category: Alarm Device
alarmSubCategoryVehicle	Alarm Sub Category: Vehicle Linked to On-Board Device
alarmSubCategoryAlarmInput	Alarm Sub Category: Alarm Input
alarmSubCategoryBoxChannel	Alarm Sub Category: Channel Linked with Hik-ProConnect Box
alarmSubCategoryBoxDevice	Alarm Sub Category: Hik-ProConnect Box
alarmSubCategoryCamera	Alarm Sub Category: Camera
alarmSubCategoryEncodingDevice	Alarm Sub Category: Encoding Device
alarmSubCategoryMobileDevice	Alarm Sub Category: On-Board Device

A.1.2 Resource Type

Enumeration	Description
alarmInput	Alarm Input
alarmOutput	Alarm Output
camera	Camera
vehicle	Vehicle Linked to On-Board Device
door	Door

A.1.3 Device Category

Enumeration	Description
alarmDevice	Alarm Device
encodingDevice	Encoding device
mobileDevice	On-Board Device
accessControllerDevice	Access Control Device
videoIntercomDevice	Video Intercom Device

A.1.4 Alarm Type

Video Security

Event Code	Description
10001	Video Tampering
10002	Motion Detection
10016	Face Capture
10018	Face Recognition
10019	People Density Detection
10032	Fire and Smoke Detection
10033	Temperature Alarm
10034	Temperature Difference Alarm
10035	Multi-Target-Type Detection
10036	Temperature Pre-Alarm
10100	Line Crossing
10101	Region Entrance
10102	Region Exiting
10103	Intrusion
10106	Fast Moving
10500	License Plate BlockList

Event Code	Description
10501	License Plate Allowlist
10610	Queuing Time Alarm
10611	Number of Queuing People Detection
10621	Abnormal Number of People
10630	Police Absence
10635	Not Wearing Mask
10636	Distance Measurement Alarm
50000	Triggered by Alarm Input
100105	People Density
100657	Leaving Queue Detection
100375	Person and Vehicle Match
100376	Person and Vehicle Mismatch
50101	Device Offline
50120	Device Reconnected
50102	Encoding Device HDD Full
50110	Invalid Access of Encoding Device
50103	Encoding Device HDD R/W Error

Alarm Detection

Event Code	Description
20008	Restore Alarm Input
70001	Disarm
70002	Arming
70003	Instant Arming
70004	Stay Arming
70006	Alarm Clearing
100302	Bypass
100303	Bypass Restored

Maintenance

Event Code	Description
10000	Video Loss
10056	Camera Online
10057	Camera Offline
11016	On-Board Device Online
11017	On-Board Device Offline
20002	HDD Bad Sector
20003	HDD High Temperature
20005	HDD Impact Detection Event
20006	HDD Severe Failure
50002	Camera Recording Exception
70007	Late to Disarm
70113	Duress Alarm Report
70118	Keypad Locked
70119	Keypad Unlocked
70200	Device Tampering Alarm
70203	Mains Power Lost
70204	Low Battery Voltage
70205	Host Machine Reset
70213	Auto Arming Failed
70221	Expander Disconnected
70223	Cellular Network Disconnected
70224	Wired Network Disconnected
70250	Wireless Detector Disconnected
70253	Wireless Detector Low Battery
70255	Network Camera Disconnected
70302	IP Conflicted
70307	Wi-Fi Disconnected

Event Code	Description
70308	RF Exception
70309	Cellular Network Data Exceeded
70310	Wireless Sounder Low Battery
70311	Battery Fault
70402	Wireless Repeater Disconnected
70451	Wireless Peripheral Undervoltage
70452	Wireless Peripheral Disconnected
70453	Wireless Peripheral Deleted
70454	Wireless Peripheral Added
70502	Wireless Sounder Disconnected

Maintenance (On-Board Device)

Event Code	Description
50101	Device Offline
50109	HDD Full
50112	Read/Write Hard Disk Error
50104	Standard Mismatched
50111	Illegal Login
50120	Device Reconnected
300001	Normal Signal
300002	Signal Exception
300003	GPS Module Error

On-Board Monitoring

Event Code	Description
11009	Speeding
11010	Rollover
11011	Collision

Event Code	Description
11012	Sharp Turn
11013	Sudden Brake
11014	Sudden Acceleration
100351	Fence for Entry Detection
100352	Deviation
100359	Smoking
100360	Using Mobile Phone
100361	Fatigue Driving
100362	Distraction
100363	Seatbelt Unbuckled
100364	Forward Collision Warning
100365	Headway Monitoring Warning
100366	Lane Deviation Warning
100367	Pedestrian Collision Warning
100368	Speed Limit Warning
100369	Blind Spot Warning
100370	Emergency Alarm
100371	Alarm Input
100372	Yawning
100373	Wearing IR Interrupted Sunglasses
100374	Absence
100376	Person and Vehicle Mismatch
100377	Driving License Expired
100396	Video Tampering
100398	Entering Route
330407	ACC ON
330408	ACC OFF
330510	Front Passenger Detection

Card Swiping

Event Code	Description
80025	Access Granted by Card and Fingerprint
80021	Access Granted by Card, Fingerprint, and PIN
80001	Access Granted by Card
80002	Access Granted by Card and PIN
80032	Access Granted by Fingerprint
80034	Access Granted by Fingerprint and PIN
80036	Duress Alarm
80072	Access Granted by Face and Fingerprint
80075	Access Granted by Face and PIN
80078	Access Granted by Face and Card
80081	Access Granted by Face, PIN, and Fingerprint
80084	Access Granted by Face, Card, and Fingerprint
80093	Access Granted by Face
80147	Access Granted via Combined Authentication Modes
100344	Password Authenticated
100620	Access Granted by Bluetooth
100571	Access Granted via QR Code
80273	Access Granted via Keyfob
80008	Verifying Card Encryption Information Failed
80009	Max. Card Access Failed Attempts
80016	Card No. Expired
80017	Access Timed Out by Card and PIN
80018	Access Denied (Door Remained Locked or Inactive)
80020	Access Denied by Card and PIN
80022	Access Timed Out by Card, Fingerprint, and PIN

Event Code	Description
80023	Access Denied by Card, Fingerprint, and PIN
80024	Access Denied by Card and Fingerprint
80026	Access Timed Out by Card and Fingerprint
80027	No Access Level Assigned
80028	Card No. Does Not Exist
80029	Invalid Time Period
80030	Fingerprint Does Not Exist
80031	Access Denied by Fingerprint
80033	Access Denied by Fingerprint and PIN
80035	Access Timed Out by Fingerprint and PIN
80073	Access Denied by Face and Fingerprint
80074	Access Timed Out by Face and Fingerprint
80076	Access Denied by Face and PIN
80077	Access Timed Out by Face and PIN
80079	Access Denied by Face and Card
80080	Access Timed Out by Face and Card
80082	Access Denied by Face, PIN, and Fingerprint
80083	Access Timed Out by Face, PIN, and Fingerprint
80085	Access Denied by Face, Card, and Fingerprint
80086	Access Timed Out by Face, Card, and Fingerprint
80094	Access Denied by Face
80099	Live Facial Detection Failed
80148	Combined Authentication Timed Out
80152	Access Denied by Invalid M1 Card
80153	Verifying CPU Card Encryption Failed
80154	Access Denied (NFC Card Reading Disabled)
80155	EM Card Reading Not Enabled
80156	M1 Card Reading Not Enabled

Event Code	Description
80157	CPU Card Reading Disabled
80173	Authentication Mode Mismatch
80263	Password Mismatches
80264	Employee ID Does Not Exist
100345	Verifying Desfire Card Encryption Failed
100346	Absence
100348	Authentication Failed Due to Abnormal Features (e.g., Not Wearing Mask, Abnormal Skin-Surface Temperature)
100621	Access Denied by Bluetooth
100572	Access Denied by QR Code
100574	Verifying QR Code Secret Key Failed
80274	Access Denied via Keyfob

A.1.5 Alarm Source

Enumeration	Description
alarmInput	Alarm Input
camera	Camera
encodingDevice	Encoding Device
alarmDevice	Alarm Device
user	User
subSystem	Partition (Area)
vehicle	Vehicle Linked to On-Board Device
mobileDevice	On-Board Device

A.1.6 Message Type

Video Intercom

Enumeration Value	Description
Msg140001	Messages about video intercom events.

On-Board Monitoring

Enumeration Value	Description
Msg330001	GPS Data Report
Msg330101	Alarm Triggered by Panic Button
Msg330102	Alarm Input
Msg330201	Forward Collision Warning
Msg330202	Headway Monitoring Warning
Msg330203	Lane Deviation Warning
Msg330204	Pedestrian Collision Warning
Msg330205	Speed Limit Warning
Msg330301	Blind Spot Warning
Msg330401	Sharp Turn
Msg330402	Sudden Brake
Msg330403	Sudden Acceleration
Msg330404	Rollover
Msg330405	Speeding
Msg330406	Collision
Msg330407	ACC ON
Msg330408	ACC OFF
Msg330501	Smoking
Msg330502	Using Mobile Phone
Msg330503	Fatigue Driving
Msg330504	Distraction
Msg330505	Seatbelt Unbuckled

Enumeration Value	Description
Msg330506	Video Tampering
Msg330507	Yawning
Msg330508	Wearing IR Interrupted Sunglasses
Msg330509	Absence
Msg330510	Front Passenger Detection
Msg335000	Person and Vehicle Match
Msg335001	Person and Vehicle Mismatch

Authentication Event

Enumeration Value	Description
Msg 110001	Access Granted by Card and Fingerprint
Msg 110002	Access Granted by Card, Fingerprint, and PIN
Msg 110003	Access Granted by Card
Msg 110004	Access Granted by Card and PIN
Msg 110005	Access Granted by Fingerprint
Msg 110006	Access Granted by Fingerprint and PIN
Msg 110007	Duress Alarm
Msg 110008	Access Granted by Face and Fingerprint
Msg 110009	Access Granted by Face and PIN
Msg 110010	Access Granted by Face and Card
Msg 110011	Access Granted by Face, PIN, and Fingerprint
Msg 110012	Access Granted by Face, Card, and Fingerprint
Msg 110013	Access Granted by Face
Msg110018	Access Granted via Combined Authentication Modes
Msg110019	Skin-Surface Temperature Measured
Msg110020	Password Authenticated
Msg110022	Access Granted by Bluetooth
Msg110023	Access Granted via QR Code

Enumeration Value	Description
Msg110024	Access Granted via Keyfob
Msg110501	Verifying Card Encryption Failed
Msg110502	Max. Card Access Failed Attempts
Msg110505	Card No. Expired
Msg110506	Access Timed Out by Card and PIN
Msg110507	Access Denied (Door Remained Locked or Inactive)
Msg110509	Access Denied by Card and PIN
Msg110510	Access Timed Out by Card, Fingerprint, and PIN
Msg110511	Access Denied by Card, Fingerprint, and PIN
Msg110512	Access Denied by Card and Fingerprint
Msg110513	Access Timed Out by Card and Fingerprint
Msg110514	No Access Level Assigned
Msg110515	Card No. Does Not Exist
Msg110516	Invalid Time Period
Msg110517	Fingerprint Does Not Exist
Msg110518	Access Denied by Fingerprint
Msg110519	Access Denied by Fingerprint and PIN
Msg110520	Access Timed Out by Fingerprint and PIN
Msg110521	Access Denied by Face and Fingerprint
Msg110522	Access Timed Out by Face and Fingerprint
Msg110523	Access Denied by Face and PIN
Msg110524	Access Timed Out by Face and PIN
Msg110525	Access Denied by Face and Card
Msg110526	Access Timed Out by Face and Card
Msg110527	Access Denied by Face, PIN, and Fingerprint
Msg110528	Access Timed Out by Face, PIN, and Fingerprint
Msg110529	Access Denied by Face, Card, and Fingerprint
Msg110530	Access Timed Out by Face, Card, and Fingerprint

Enumeration Value	Description
Msg110531	Access Denied by Face
Msg110533	Live Facial Detection Failed
Msg110545	Combined Authentication Timed Out
Msg110546	Access Denied by Invalid M1 Card
Msg110547	Verifying CPU Card Encryption Failed
Msg110548	Access Denied (NFC Card Reading Disabled)
Msg110549	EM Card Reading Not Enabled
Msg110550	M1 Card Reading Not Enabled
Msg110551	CPU Card Reading Disabled
Msg110552	Authentication Mode Mismatch
Msg110554	Max. Card and Password Authentication Times
Msg110555	Password Mismatches
Msg110556	Employee ID Does Not Exist
Msg110557	Access Denied: Scheduled Sleep Mode
Msg110559	Verifying Desfire Card Encryption Failed
Msg110560	Absence
Msg110561	Authentication Failed Due to Abnormal Features (e.g., Not Wearing Mask, Abnormal Skin-Surface Temperature)
Msg110564	Access Denied by Bluetooth
Msg110565	Access Denied by QR Code
Msg110566	Verifying QR Code Secret Key Failed
Msg110567	Access Denied via Keyfob

A.1.7 Capability Set

Value	Description
2000	Video Loss
2001	Video Tampering Detection

Value	Description
2002	Motion Detection
2003	PIR Alarm
2004	Face Capture
2005	Area Crossing
2006	Region Entrance
2007	Region Exiting
2015	Scene Change Detection
2016	Focal Length Detection
2021	Line Crossing Detection
2022	Intrusion Detection
2023	Region Entrance Detection
2024	Region Exiting Detection
2027	Fast Moving Detection
2029	Unattended Baggage Detection
2030	Object Removal Detection

A.1.8 Country/Region Code

Country/Region Code	Description
-1	Unkonwn
1	Czech Republic
2	France
3	Germany
4	Spain
5	Italy
6	Netherlands
7	Poland
8	Slovakia

Country/Region Code	Description
9	Belarus
10	Moldova
11	Russia
12	Ukraine
13	Belgium
14	Bulgaria
15	Denmark
16	Finland
17	United Kingdom
18	Greece
19	Croatia
20	Hungary
21	Israel
22	Luxembourg
23	Macedonia (changed to North Macedonia in 2018)
24	Norway
25	Portuga
26	Romania
27	Serbia
28	Azerbaijan
29	Georgia
30	Kazakhstan
31	Lithuania
32	Turkmenistan
33	Uzbekistan
34	Latvia
35	Estonia
36	Albania

Country/Region Code	Description
37	Austria
38	Bosnia and Herzegovina
39	Ireland
40	Iceland
41	Vatican
42	Malta
43	Sweden
44	Switzerland
45	Cyprus
46	Turkey
47	Slovenia
48	Montenegro
49	Kosovo
50	Andorra
51	Armenia
52	Monaco
53	Liechtenstein
54	San Marino
55	Reserved
56	Reserved
57	Reserved
58	Reserved
59	China
60	Bahrain
61	South Korea
62	Lebanon
63	Nepal
64	Thailand

Country/Region Code	Description
65	Pakistan
66	United Arab Emirates
67	Bhutan
68	Oman
69	North Korea
70	Philippines
71	Cambodia
72	Qatar
73	Kyrgyzstan
74	Maldives
75	Malaysia
76	Mongolia
77	Saudi Arabia
78	Brunei
79	Laos
80	Japan
81	Turkey
82	Palestinian
83	Tajikistan
84	Kuwait
85	Syria
86	India
87	Indonesia
88	Afghanistan
89	Sri Lanka
90	Iraq
91	Vietnam
92	Iran

Country/Region Code	Description
93	Yemen
94	Jordan
95	Myanmar
96	Sikkim
97	Bangladesh
98	Singapore
99	Democratic Republic of Timor-Leste
100	Reserved
101	Reserved
102	Reserved
103	Reserved
104	Egypt
105	Libya
106	Sudan
107	Tunisia
108	Algeria
109	Morocco
110	Ethiopia
111	Eritrea
112	Somalia Democratic
113	Djibouti
114	Kenya
115	Tanzania
116	Uganda
117	Rwanda
118	Burundi
119	Seychelles
120	Chad

Country/Region Code	Description
121	Central African
122	Cameroon
123	Equatorial Guinea
124	Gabon
125	Congo
126	Democratic Republic of the Congo
127	Sao Tome and Principe
128	Mauritania
129	Western Sahara
130	Senegal
131	Gambia
132	Mali
133	Burkina Faso
134	Guinea
135	Guinea-Bissau
136	Cape Verde
137	Sierra Leone
138	Liberia
139	Ivory Coast
140	Ghana
141	Togo
142	Benin
143	Niger
144	Zambia
145	Angola
146	Zimbabwe
147	Malawi
148	Mozambique

Country/Region Code	Description
149	Botswana
150	Namibia
151	South Africa
152	Swaziland
153	Lesotho
154	Madagasca
155	Comoros
156	Mauritius
157	Nigeria
158	South Sudan
159	Saint Helena
160	Mayotte
161	Reunion
162	Canary Islands
163	AZORES
164	Madeira
165	Reserved
166	Reserved
167	Reserved
168	Reserved
169	Canada
170	Greenland Nuuk
171	Pierre and Miquelon
172	United State
173	Bermuda
174	Mexico
175	Guatemala
176	Belize

Country/Region Code	Description
177	El Salvador
178	Honduras
179	Nicaragua
180	Costa Rica
181	Panama
182	Bahamas
183	Turks and Caicos Islands
184	Cuba
185	Jamaica
186	Cayman Islands
187	Haiti
188	Dominican
189	Puerto Rico
190	United States Virgin Islands
191	British Virgin Islands
192	Anguilla
193	Antigua and Barbuda
194	Collectivité de Saint-Martin
195	Autonomous country
196	Saint-Barthélemy
197	Saint Kitts and Nevis
198	Montserrat
199	Guadeloupe
200	Dominica
201	Martinique
202	St. Lucia
203	Saint Vincent and the Grenadines
204	Grenada

Country/Region Code	Description
205	Barbados
206	Trinidad and Tobago
207	Curaçao
208	Aruba
209	Netherlands Antilles
210	Colombia
211	Venezuela
212	Guyana
213	Suriname
214	Guyane Francaise
215	Ecuador
216	Peru
217	Bolivia
218	Paraguay
219	Chile
220	Brazil
221	Uruguay
222	Argentina
223	Reserved
224	Reserved
225	Reserved
226	Reserved
227	Australia
228	New Zealand
229	Papua New Guinea
230	Salomonen
231	Vanuatu
232	New Caledonia

Country/Region Code	Description
233	Palau
234	Federated States of Micronesia
235	Marshall Island
236	Northern Mariana Islands
237	Guam
238	Nauru
239	Kiribati
240	Fidschi
241	Tonga
242	Tuvalu
243	Wallis et Futuna
244	Samoa
245	Eastern Samoa
246	Tokelau
247	Niue
248	Cook Islands
249	French Polynesia
250	Pitcairn Islands
251	Hawaii State

A.1.9 Vehicle Brand

Main Brand Value	Main Brand
1024	Others
1025	AC_Schnitzer
1026	Alfa,Romeo
1027	Aston Martin
1028	AUDI

Main Brand Value	Main Brand
1029	La Joya
1030	PORSCHE
1031	Buick
1032	BAIC
1033	BAW
1034	BAIC Weiwang
1035	BAIC Yinxiang
1036	BENZ
1037	BMW
1038	Baojun
1039	Baolong
1040	BENTLEY
1041	Brabus
1042	BUGATTI
1043	HONDA
1044	PEUGEOT
1045	BYD
1046	Changhe
1047	Changfeng Leopaard
1048	Changcheng
1049	Changan Saloon
1050	DS
1051	SOUTHEAST
1053	Volkswagen
1054	DADI
1055	Detroit Electric
1056	DODGE
1057	Dadi

Main Brand Value	Main Brand
1059	Dafa
1060	TOYOTA
1061	Fuqi
1062	FORMASARI
1063	FERRARI
1064	FORD
1066	FODAY
1067	FIAT
1068	Fisker
1069	Mitsuoka
1070	Mercury
1071	Trumpchi
1073	Guangsheng
1074	Qoros
1075	Huabei
1076	Huapu
1077	Huatai
1078	Huafei
1079	HUMMER
1080	Haima
1081	Hongqi
1083	GEELY
1084	JEEP
1085	JAGUAR
1086	Jiangnan
1088	CHRYSLER
1089	CADILLAC
1090	CARISSON

Main Brand Value	Main Brand
1091	KANDI
1092	KOENIGSEGG
1093	Lamborghini
1094	Lifan
1095	Rolls-Royce
1096	Lincoln
1097	Linian
1098	LOTUS
1099	Lancia
1100	Lotus
1101	LAND ROVER
1102	SUZUKI
1103	LAND WIND
1104	LEXUS
1105	RENAULT
1106	MG
1107	MINI
1108	MASERATI
1109	Meiya
1110	McLaren
1111	Maybach
1112	Mazda
1113	Morgan
1114	LUXGEN
1115	Nanjing Jinlong
1116	OPEL
1117	ACURA
1118	PGO

Main Brand Value	Main Brand
1119	Venucia
1120	CHERY
1121	KIA
1122	Qiantu
1123	Nissan
1124	RIICH
1125	ROEWE
1126	RUF
1127	SMART
1128	Mitsubishi
1129	MAXUS
1130	SPYKER
1131	Shuanghuan
1132	Shuanglong
1133	SUBARU
1134	SKODA
1135	SAAB
1136	CIIMO
1137	STARTECH
1138	Tianma
1139	Tesla
1140	TechArt
1141	Denza
1142	Wiesmann
1143	Rely
1144	VOLVO
1145	Weichai Enranger
1146	Xinkai

Main Brand Value	Main Brand
1147	Xin Da Di
1148	SOYAT
1149	Hyundai
1150	SEAT
1151	CHEVROLET
1152	CITROEN
1154	Jonway
1155	Eterniti
1156	Infiniti
1157	MUSTANG
1158	Youxia
1159	Yogomo
1160	Zhongxing
1161	Zhonghua
1162	ZK Huabei
1163	ZOTYE
1164	Zhidou
1165	Kaiyi
1166	Huasong
1167	Isuzu
1168	Borgward
1169	Tongjia
1170	Hanjiang
1171	Zhinuo
1172	GreenWheel
1173	Hanteng
1174	LEVDEO
1175	Changjiang

Main Brand Value	Main Brand
1176	SWM
1177	FQT Motor
1178	QOROS
1179	JMC
1180	BISU
1181	CAKY
1182	Haima
1183	Ourui
1537	Ankai
1538	Ayvip
1539	Beijing Nongyong
1540	Beiben
1541	NORTH Bus
1544	Balong
1546	Succeeded
1547	Changlong
1548	Chunlan Motor
1549	Changan Commercial
1552	Dongfeng
1554	Daewoo
1555	Dayun
1556	Dima
1557	Dongwo
1559	FOTON
1561	GMC
1562	GAC GONOW
1563	Hino Light Truck
1564	Hino Heavy Truck

Main Brand Value	Main Brand
1566	CAMC
1568	CHTC
1569	Hentong Bus
1570	Huizhong
1571	Higer
1573	Haiou
1574	Hangtian Yuantong
1575	SPACE AUTO
1576	Huanghai
1577	Heibao
1578	Jiulong
1579	JAC
1580	Jianghuan
1581	JMC
1582	JMC(invalid)
1583	GOLDEN DRAGON
1584	Jinbei
1585	KING LONG
1586	Kama
1587	Kawei
1588	Karry
1590	UAES
1592	MAN
1594	Agricultural Vehicle
1595	NAVECO
1596	Nanjun
1597	Isuzu
1598	Youngman Bus

Main Brand Value	Main Brand
1599	Sany Heavy Industry
1600	Tri-Ring Shitong
1602	Tricycle
1603	Hongyan
1604	Shangrao Bus
1605	Shili Bus
1606	Shaolin Bus
1607	Forland
1608	Shifeng
1609	SUNWIN
1610	Shenlong
1611	Shenye
1612	Shuchi Bus
1613	Shaanxi Auto
1614	Scania
1615	Tangjun
1616	Taihu Bus
1618	Tongxin Bus
1619	Wanfeng
1620	Wuzheng
1621	SGMW
1622	Wuyi
1624	Wuhuan
1626	Xugong
1629	FAW
1630	Yaxing
1631	Iveco
1632	Youyi Bus

Main Brand Value	Main Brand
1633	Yutong
1634	Yangzi
1635	Yantai
1636	Yuejin
1637	Yingtian
1639	CNHTC
1641	Zhongtong Bus
1642	Polarsun Motor
1643	CDW
1644	Zonda
1645	Zonda
1646	Jinggong Heavy Truck
1647	Wu Zhou Long
1648	Bus
1649	Light Truck
1650	Heavy Truck
1651	Pickup Truck
1652	Mudan
1653	Chufeng Motor
1654	Jijiang
1655	SAIC Yizheng
1656	Yuexi
1657	Shenma
1658	Jiangxi Xiaofang
1659	Shunfeng
1660	Hengshan
1674	Dong Fang Hong Motor
1675	NEOPLAN

Main Brand Value	Main Brand
1676	Qingqi
1677	Truck
1678	Special Vehicle
1679	Trailer
1681	Wanda Bus
1682	Chang'an Suzuki
1683	Guilin
1684	Sichuan Hyundai
1685	Aochi
1686	Denway Bus
1687	FAW-Liut
1688	Wanxiang
1690	Sojen
1691	Changan
1692	Zoomlion
1693	Yinlong
1694	Jiachuan Auto
1695	Yixing
1696	Xi'an Silver Bus
1697	Yangtse
1698	Suitong
1701	Qingdao Jiefang
1702	ZTRV
1703	Wanda
1704	Shangrao
1705	ZEV
1706	EVCRRC
1707	Zhongtong

Main Brand Value	Main Brand
1708	Gonglu Bus
1709	BAIC
1710	Beifang
1711	Neoplan
1712	Huachuan
1713	Youyi
1714	Tongxin
1715	MG
1716	Jiachuan
1717	Nvshen
1718	Shili
1719	Shaolin
1720	Chuanjiao
1721	Chuanma
1722	GAC
1723	Hino
1724	Kandi
1725	CHTC
1726	Hentong
1727	Forta
1728	NLM
1729	Chunlan
1730	Chufeng
1731	JMMC
1732	JMC
1733	Seagull
1734	Mudan
1735	Liebao

Main Brand Value	Main Brand
1736	Shenlong
1737	FORLAND
1738	Hongxing
1739	Shuchi
1740	Shudu
1741	Hengshan
1742	Yuexi
1743	Yuancheng
1744	Golden Dragon
1745	Changan Oushang
1746	YOUNGMAN
1747	Lynk & Co
1748	Feidie
1749	Feichi
1750	Lishan
1751	Denway
1752	Nanjing Auto
1753	Dahan
1754	Chunzhou
1755	Dearcc
1756	Wanshan
1757	Central Europe Benz RV
1758	Yudo
1759	Junma
1760	Guojin
1761	Weltmeiter
1762	Ora
1763	NIO

Main Brand Value	Main Brand
1764	Lada
1765	JETOUR
1766	FORO
1767	HICOM
1768	JAC2
1769	JEEP
1770	Jeep2
1771	Perodua
1772	UD
1773	Toyota2
1774	Toyota3
1775	Isuzu
1776	Rohens
1777	Beiben Heavy Truck
1778	SSANG YONG1
1779	SSANG YONG_old logo
1780	Haval
1781	Daihatsu2
1782	Daewoo2
1783	Proton1
1784	Proton2
1785	Proton3
1786	Emgrand
1787	Hino
1788	Unknown
1789	KIA1
1790	KIA_old logo
1791	KIA Borrego

Main Brand Value	Main Brand
1792	Alfa
1793	Equus_old logo
1794	Renault Samsung
1795	Malaysia_unknown1
1796	Oushang
1797	BONLUCK
1798	Qiling
1799	Wanxiang
1800	SATE
1801	FLM
1802	SRMXinyuan
1803	Geometry
1804	New Baojun
1805	NETA
1806	XPENG
1807	JETTA
1808	Leading Ideal
1809	Baic Yunnan Ruili
1810	RMarvel
1811	GAC Group
1812	SOL
1813	Maple
1814	Celis
1815	Expedition
1816	LEAPMOTOR
1817	HiPhi
1818	Nissan
1819	NOVAT

Main Brand Value	Main Brand
1820	EXEED
1821	AIWAYS
1822	Fuda
1823	Hongqi
1824	Skyworth
1825	Beijing Hyundai
1826	ZEDRIV
1827	Guangzhou Honda
1828	Ouling
1829	Zhengzhou Nissan
1830	Changan Lincoln
1831	Changan Auto
1832	FAW Linghe
1833	SGMW
1834	Fxauto
1835	BAIC Off-Road
1836	Huachen Xinri
1837	HYCAN
1838	DORCEN
1839	Dayun Motor
1840	ISUZU
1841	SITECH DEV
1842	JAC
1843	Changan Kaicheng
1844	Artega
1845	Faralli Mazzanti
1846	GTA
1847	KTM

Main Brand Value	Main Brand
1848	LUMMA
1849	MINI Coupe
1850	Noble
1851	WEY
1852	YAMAHA
1853	BEIJING
1854	FAW-Xiali
1855	Besturn
1856	SAIC Tangshan Bus
1857	SAIC MAXUSMAXUS
1858	SAIC Hongyan
1859	CNHTC Wangpai
1860	Toyota Crown
1861	Leshi
1862	PGO
1863	Lingbao
1864	Lifan Junma
1865	Lorinser
1866	BAIC Ruixiang
1867	NAC Changda
1868	Geely Gleagle
1869	Geely Emgrand
1870	Geely Englon
1871	Taihu
1872	Lantu
1873	Pagani
1874	Guangma
1875	Hengrui Auto

Main Brand Value	Main Brand
1876	Genesis
1877	Man
1878	Ranz
1879	Songsan
1880	Polestar
1881	ZEEKR
1882	ARCFOX
1883	BYD,Yuan
1884	BYD,Tang
1885	BYD,Song
1886	BYD,Han
1887	BYD,Qin
1888	Bike
1889	Weichai
1890	Ford Mustang
1891	Koenigsegg
1892	Yulu
1893	SALEEN
1894	MANSORY
1895	Suda
1896	Mustang EV
1897	GWM Huaguan
1898	LongRiverEV
1899	IAT
1900	Feifan
1901	LinkTour
1902	Feishen
1903	Qilu

Main Brand Value	Main Brand
1904	Apollo
1905	Caterham
1906	Conquest
1907	Dacia
1908	Zenvo
1909	BAICLITE
1910	AUX
1911	Proton
1912	SEAT
1913	BLUECAR
1914	NOMA
1915	Suzuki
1916	Tankar
1917	Valle
1918	VeiculoLongo
1919	TATA
1920	Ashok Leyland
1921	Mahindra
1922	Eicher
1923	BharatBenz
1924	Force Motors
1925	SML ISUZU
1926	MAN Trucks
1927	POCCO
1928	ASTON MARTIN
1929	YOGOMO
1930	BAIC Huansu
1931	Dongfeng Huashen

Main Brand Value	Main Brand
1932	DMC
1933	Dongfeng Fengshen
1934	CNHTC Haoman
1935	DORCEN
1936	Nanjun Bus
1937	Hyundai Truck & Bus
1938	SHACMAN Commercial Vehicle
1939	SHACMAN Light Truck
1940	C&C Trucks
1941	Horki
1942	Oulang
1943	ASTON,MARTIN
1944	GWM Haval
1945	SHACMAN Heavy Truck
1946	Diandongwu
1947	Dongfeng Liuqi Chenglong
1948	GWM WEY
1950	GAC AION
1951	FAW Jiefang
1953	Skyworth
1954	Xinyuan
1956	Feifan
1957	Dongfeng Fukang
1958	Geely Jialong
1959	Dongfeng,Ruitaite
1960	AC SCHNITZER

A.2 Time/Date Format

A.2.1 ISO 8601 Time Format Instruction

ISO 8601, Data Elements and Interchange Formats–Information Interchange–Representation of Dates and Times, is an international standard covering the exchange of date and time-related data format issued by ISO. An uppercase T should be added before an exact time to represent the combination of date and time. Beijing time 5:30:08 PM May 3rd, 2004 can be written as 2004-05-03T17:30:08+08:00 or 20040503T173008+08.

A.2.2 Date Format Type

Format	Description
yyyy/MM/dd	yyyy, the year of 4 digits containing era. MM, the month of 2 digits. The number zero is added to months of only one digit. dd, the date of a month. The number zero is added to dates of only one digit. E.g., 2024/01/31
yyyy-MM-dd	E.g., 2024-01-31
yyyy.MM.dd	E.g., 2024.01.31
dd/MM/yyyy	E.g., 31/01/2024
dd-MM-yyyy	E.g., 31-01-2024
MM-dd-yyyy	E.g., 01-31-2024
yy-MM-dd	yy, the year of 2 digits without era. The number zero is added to years of only one digit. E.g., 24-01-31
yy/MM/dd	E.g., 24/01/31
dd/MM/yy	E.g., 24.01.31
yy.MM.dd	E.g., 24.01.31
yyyyddMM	E.g., 20243101
yyyyMMdd	E.g., 20240131
MMddyyyy	E.g., 01312024

Format	Description
ddMMyyyy	E.g., 31012024
yyddMM	E.g., 243101
yyMMdd	E.g., 240131
MMddyy	E.g., 013124
ddMMyy	E.g., 310124

A.2.3 Time Format Type

Format	Description
HH:mm	HH, the hour in 24-hour format. The number zero is added to hours and minutes of only one digit. E.g., 13:30, 01:30
h:mm	h, the hour in 12-hour format. No zero is added to hours of only one digit. E.g., 1:30
hh:mm tt	tt, the indicator of AM/PM. hh, the hour in 12-hour format. The number zero is added to hours of only one digit. E.g., 01:30 AM
h:mm tt	E.g., 1:30 AM
HH:mm:ss	ss, the second. The number zero is added to seconds of only one digit. E.g., 01:30:05
h:mm:ss	E.g., 1:30:05
hh:mm:ss tt	E.g., 01:30:05 AM
h:mm:ss tt	E.g., 1:30:05 AM
HHmm	E.g., 1330
Hmm	H, the hour in 24-hour format. No zero is added to hours of only one digit. E.g., 130

Format	Description
HHmmss	E.g., 013005
hmmss	E.g., 13005

A.2.4 Time Duration Format Type

Format	Description
HH:MM	Duration in hour and minute. E.g., 01:30
MM	Duration in minute. E.g., 120

A.3 Object Description

A.3.1 AccessLevel

The table here shows the access level information.

Parameter Name	Req. or Opt.	Data Type	Description
accessLevelId	Req.	String	Access level ID. The maximum length is 64.
accessLevelName	Opt.	String	Access level name. The maximum length is 64.

A.3.2 AccessLevelFailed

The table here shows the failed access level information.

Parameter Name	Req. or Opt.	Data Type	Description
personId	Opt.	String	Person ID.
personName	Opt.	String	Person name.
accessLevelId	Opt.	Integer	Access level ID.

Parameter Name	Req. or Opt.	Data Type	Description
accessLevelName	Opt.	String	Access level name.
errorCode	Opt.	String	Error code.

A.3.3 AccessLevelInfo

The table here shows the access level information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Unique ID.
name	Opt.	String	Name.
remark	Opt.	String	Remark.
usageType	Opt.	Integer	Usage type: 0 (user), 1 (system). The default value is 0.
areaInfo	Opt.	***AreaInfo***	Area information.
timeSchedule	Opt.	***IdNameInfo***	Schedule template information.
associateResList	Opt.	***AssociateResInfo*** []	Associated resource information.

A.3.4 AccessLevelResponse

The table here shows the returned access level list information.

Parameter Name	Req. or Opt.	Data Type	Description
pageIndex	Opt.	Integer	The current page.
pageSize	Opt.	Integer	Number of records on each page.
totalNum	Opt.	Integer	The total number.
accessLevelList	Opt.	***AccessLevelInfo*** []	Access level information.

A.3.5 AccessLevelSearchCriteria

The table here shows the access level search criteria.

Parameter Name	Req. or Opt.	Data Type	Description
accessLevelName	Opt.	String	Access level name.
associateResInfoList	Opt.	***AssociateResId*** []	Door ID list.
timeScheduleIdList	Opt.	String[]	Schedule template ID list.
aresIdList	Opt.	String[]	Area ID list.
depthTraversal	Opt.	Integer	Whether to search by area depth: 1 (yes), 0 (no). The default value is 0.
aresSubNode	Opt.	Integer	Whether to return sub-area tree: 1 (yes), 0 (no). The default value is 0.

A.3.6 AccessLevelSearchRequest

Parameter	Req. or Opt.	Data Type	Description
pageIndex	Opt.	Integer	The current page. The default value is 0.
pageSize	Opt.	Integer	Number of records on each page.
searchCriteria	Opt.	***AccessLevelSearchCriteria***	Searching conditions.

A.3.7 AcsSnapPicInfo

Parameter Name	Req. or Opt.	Data Type	Description
snapPicUrl	Opt.	String	Picture URL, URL validity period 24 hours.
snapPicType	Opt.	Integer	Picture type, 0-visible light picture / normal picture, 1-thermal imaging picture.

A.3.8 AddDeviceResponse

The table here shows the returned information of adding a device.

Parameter Name	Req. or Opt.	Data Type	Description
taskId	Opt.	String	Task ID, which consists of up to 256 characters.
failed	Req.	Integer	Number of failed adding tasks, which consists of up to 16 characters.
succeeded	Req.	Integer	Number of successful adding tasks, which consists of up to 16 characters.
total	Req.	Integer	Total number of adding tasks, which consists of up to 16 characters.
deviceList	Opt.	***DeviceList*** []	Returned list of successfully added devices.
relatedVehicleInfo	Opt.	***VehicleInfo(1)***	Returned vehicle information.

A.3.9 AlarmCategory

The table here shows the alarm category information.

Parameter Name	Req. or Opt.	Data Type	Description
mainCategory	Opt.	String	Alarm main category, which consists of up to 64 characters. See details in ***Alarm Category*** .
subCategory	Opt.	String	Alarm sub category, which consists of up to 64 characters. See details in ***Alarm Category*** .

A.3.10 AlarmDeviceInfo

The table here shows the alarm device information.

Parameter Name	Req. or Opt.	Data Type	Description
devID	Opt.	Integer	Device ID.
devName	Opt.	String	Device name.
devCategory	Opt.	String	Device type.
deviceSerial	Opt.	String	Device serial No.

A.3.11 AlarmEventSource

The table here shows the information about alarm event source.

Parameter Name	Data Type	Description
eventType	Integer	Event type.
sourceID	String	Source ID.
sourceName	String	Source name.
sourceType	String	Source type.
areaID	String	Area ID.
areaName	String	Area name.
deviceInfo	***AlarmDeviceInfo***	Alarm device details.

A.3.12 AlarmFile

The table here shows the details about an alarm file .

Parameter Name	Req. or Opt.	Data Type	Description
type	Opt.	String	File format: 1-picture, 2-video.
URL	Opt.	String	URL of an alarm file (valid for 15 minutes).
saveState	Opt.	String	Saving status of an alarm file: 0-saving succeeded, 1-to be uploaded, 2-saving in process, 3-saving failed, 4-capturing in process, 5-capturing failed.
generationMode	Opt.	String	Generation mode of an alarm file: "1" (upload alarms), "2" (capture picture by event linkage).
encrypted	Opt.	String	Encryption status of an alarm file: "0" (unencrypted), "1" (encrypted).
extendInfo	Opt.	***AlarmFileExtendInfo***	Extended information of an alarm file.

A.3.13 AlarmFileExtendInfo

The table here shows the extended information of an alarm file.

Parameter Name	Req. or Opt.	Data Type	Description
sourceID	Opt.	String	Source ID of an alarm file.
sourceName	Opt.	String	Source name of an alarm file.
sourceType	Opt.	String	Source type of an alarm file.
captureIndex	Opt.	String	Captured picture type: "1" (take pictures before an event occurs), "2" (take pictures when an event occurs), "3" (take pictures after an event occurs).

Parameter Name	Req. or Opt.	Data Type	Description
humanId	Opt.	String	Human ID on the platform.
humanName	Opt.	String	Human name. It is valid only when the **fileType** = "face".
similarity	Opt.	Double	Similarity. It is valid only when the **fileType** = "face".
fileType	Opt.	String	Picture type: "capture" (captured picture), "face" (face pictue in the library), "bkg" (background picture).
faceLibName	Opt.	String	Face picture library name.
faceLibThreshold	Opt.	Double	Face picture library threshold.

A.3.14 AlarmFileInfo

The table here shows the alarm file information.

Parameter Name	Req. or Opt.	Data Type	Description
fileContent	Opt.	String	File content: "1"-picture included, "2"-video included, "1,2"-both included.
file	Opt.	***AlarmFile*** []	Alarm file.

A.3.15 AlarmInfo

The table here shows the alarm information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Camera ID.
name	Opt.	String	Camera name.
online	Opt.	String	Online status.
area	Opt.	***Area***	Area information.
device	Opt.	***DeviceByResource***	Device information.

A.3.16 AlarmInputChannel

The table here shows the information of an alarm input channel.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	ID.
name	Opt.	String	Name.
no	Opt.	String	Channel No.
online	Opt.	String	Online status.
area	Opt.	Object	Area information. See details in ***Area*** .

A.3.17 AlarmInputInfo

The table here shows the alarm input information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Req.	String	Physical resource ID of alarm input.
status	Req.	Integer	Status: 0-unknown, 1-activated, 2-not activated.
errorCode	Req.	String	Error code.

A.3.18 AlarmLinkageConfig

The table here shows the information of the alarm linkage.

Parameter Name	Data Type	Description
linkCamera	***LinkCamera***	Linked camera.
linkAlarmOutput	***LinkAlarmOutput***	Linked alarm output.

A.3.19 AlarmLinkage

The table here shows the information returned from alarm linkage rule operation.

Parameter Name	Data Type	Description
itemID	String	Alarm linkage ID.
alarmRuleID	String	Alarm rule ID.
linkageType	String	Linkage type.
errorCode	String	Error code.

A.3.20 AlarmMsg

The table here shows the information of an alarm event..

Parameter Name	Data Type	Description
guid	String	GUID.
dataRetransmission	Integer	Whether it is real-time alarm: 0-alarm uploaded via ANR, 1-alarm uploaded in real-time.
msgType	String	Alarm message type: "0" (end message), "1" (start message, or pulse, repeated GUID means pulse), "2" (confirm message), "3" (mark message).
alarmState	String	Whether the alarm is in start status: "1" (start), "0" (end).
pulseAlarm	String	Whether the alarm is pulse alarm: "0" (non-pulse alarm), "1" (pulse alarm).
alarmMainCategory	String	Alarm main category.
alarmSubCategory	String	Alarm sub category.
timeInfo	***AlarmTimeInfo***	Alarm time.
eventSource	***AlarmEventSource***	Alarm event source.
alarmRule	***AlarmRule***	Alarm rule.
alarmPriority	***AlarmPriority***	Alarm priority.
markState	String	Whether the alarm is tagged: "0" (untagged), "1" (tagged).
affirmedState	String	Whether the alarm is acknowledged: "0" (unacknowledged), "1" (acknowledged).
fileInfo	***AlarmFileInfo***	Alarm file details.

Parameter Name	Data Type	Description
linkageType	String[]	Linkage type: "0"-recording linkage, "1"-GIS map linkage, "2"-alarm output linkage, "3"-pop-up window linkage, "4"-door linkage.
linkageConfig	***AlarmLinkageConfig***	Linkage configuration.
vehicleRelatedInfo	***VehicleRelatedInfo***	Linked vehicle information.
queueRelatedInfo	***QueueRelatedInfo***	Queuing-alarm related information.
anprInfo	***ANPRInfo***	Vehicle blocklist/allowlist alarm event details.

A.3.21 AlarmOutputChannel

The table here shows the information of an alarm output channel.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	ID.
name	Opt.	String	Name.
no	Opt.	String	Channel No.
online	Opt.	String	Online status.
area	Opt.	Object	Area information. See details in ***Area*** .

A.3.22 AlarmOutputOperation

The table here shows information of alarm output control.

Parameter Name	Data Type	Description
alarmOutputID	String	Alarm output ID.
alarmOutputState	String	Alarm output status.
errorCode	String	Error code.

A.3.23 AlarmOutputState

The table here shows information about alarm output state.

Parameter Name	Data Type	Description
id	String	Alarm output ID.
status	Integer	Alarm output status: 0 (closed), 1 (open).
errorCode	String	Error code.

A.3.24 Alarmpriorities

The table here shows the details of an alarm priority.

Parameter Name	Data Type	Description
ID	String	Alarm priority ID.
level	String	Alarm priority level, which contains level 1 (the highest level), 2, and 3.
levelName	String	Priority level name.
color	String	Alarm priority level color, which is the value of RGB, for example: #F40B0B.
audioName	String	Alarm audio name.
audioURL	String	Alarm audio URL.

A.3.25 AlarmPriority

The table here shows the information displayed in an alarm priority list.

Parameter Name	Data Type	Description
ID	String	Alarm priority ID.
level	String	Alarm priority level, which contains level 1 (the highest level), 2, and 3.
levelName	String	Alarm priority name.
color	String	Alarm priority level color, which is the value of RGB, for example: #F40B0B.

A.3.26 AlarmResourceInfo

The table here shows the alarm resource information.

Parameter Name	Req. or Opt.	Data Type	Description
ID	Req.	String	Resource ID, which consists of up to 32 characters.
name	Opt.	String	Resource name, which consists of up to 64 characters.

A.3.27 AlarmRuleDetail

The table here shows the details of an alarm rule.

Parameter Name	Data Type	Description
ID	String	Alarm rule ID.
name	String	Alarm rule name.
description	String	Alarm rule description.
color	String	Alarm rule color.
enable	String	Whether to enable alarm rule: "0" (disable), "1" (enable).
state	String	Alarm rule status: "0" (normal), "1" (exception).
alarmMainCategory	String	Aalrm main category.
alarmSubCategory	String	Alarm sub category.
notification	***Notification***	Notification configuration.
schedule	***Schedule***	Alarm schedule template.
priority	***Priority***	Alarm priority.
ignoreRecurring	***IgnoreRecurring***	Auto-close alarming window.
eventSource	***EventSource***	Event source.

A.3.28 AlarmRuleOperation

The table here shows the information returned from alarm rule operation.

Parameter Name	Data Type	Description
id	String	Alarm rule ID.
name	String	Alarm rule name
errorCode	String	Error code, only returned for the operation of adding alarm rules, and not for the operation of updating alarm rules.

A.3.29 AlarmRule

The table here shows the information about alarm rules.

Parameter Name	Data Type	Description
id	String	Alarm rule ID.
name	String	Alarm rule name.
description	String	Alarm rule details.

A.3.30 AlarmTimeInfo

The table here shows the alarm time information.

Parameter Name	Data Type	Description
startTime	String	Alarm start time (refers to device local time), which is in ISO 8601 standard time format (see details in ***ISO 8601 Time Format Instruction***), e.g., "2021-12-12T12:12:12+08:00".
endTime	String	Alarm end time (refers to device local time), which is in ISO 8601 standard time format (see details in ***ISO 8601 Time Format Instruction***), e.g., "2021-12-12T12:12:12+08:00".

A.3.31 ANPRInfo

The table here shows the ANPR information.

Parameter Name	Data Type	Description
driveDirection	Integer	Driving direction: 0-backward, 1-forward.
licensePlate	String	License plate No.
pictureInfo	List< ***PictureInfo*** >	Captured picture and coordinates.
vehicleListType	Integer	List type: 0-blocklist, 1-allowlist.

A.3.32 Area

The table here shows the area information.

Parameter	Data Type	Description
id	String	Area ID.
name	String	Area name.

A.3.33 Area

The table here shows the information of an area.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Area ID.
name	Opt.	String	Area name.

A.3.34 AreaBrief

The table here shows the area information.

Parameter Name	Data Type	Description
areaId	String	Area ID.

A.3.35 AreaInfo

The table here shows the area information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Area ID.
name	Opt.	String	Area name.
area	Opt.	***IdNameInfo*** []	Sub-area information.

A.3.36 AssociateResId

The table here shows the associated resource ID.

Parameter Name	Req. or Opt.	Data Type	Description
resId	Opt.	String	Resource ID.

A.3.37 AssociateResInfo

The table here shows the associated resource information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Resource ID.
name	Opt.	String	Resource name.
type	Opt.	Integer	Resource type.
areaInfo	Opt.	***IdNameInfo***	Area information.

A.3.38 Attachment

The table here shows the attachment information.

Parameter Name	Data Type	Description
url	String	Attachment (pictures/videos) URL (valid for 15 minutes).

A.3.39 AuthRecord

The table here shows the authentication record information.

Parameter	Data Type	Description
supportLog	integer	Whether the device supports uploading the local log to Hik-Connect: 0 (not supported), 1 (supported).
authStatus	integer	Authorization status: 0 (unauthorized), 1 (authorized). The status can be displayed on the platform.
endTime	number	Authentication expiry time (timestamp).

A.3.40 Awake

The table here shows the device wakeup information.

Parameter	Data Type	Description
chargeValue	integer	Remaining battery of the solar-powered camera.
flowTotal	number	Used data.
flowType	number	Data unit: 1-MB, 2-GB, 3-TB.
lastChargeTime	string	Last report time of solar-powered camera battery.

A.3.41 BaseStatus

The table here shows the device basic information.

Parameter	Data Type	Description
id	string	Device ID.
deviceSerial	string	Device serial number.
deviceName	string	Device name.
deviceType	string	Device/resource type. Device: "Encoder" (encoder), "AccessController" (access control device), "AlarmHost" (security control panel), "VideoIntercom" (video intercom),

Parameter	Data Type	Description
		"MobileDevice" (on-board device), "CloudStorageBox" (cloud storage box), "Switch" (data communication device), "BusinessDisplay" (display), "Broadcast"; Logical resource: "Camera", "Door", "AlarmInput", "AlarmOutput", "Elevator", "SubSystem", "CardReader", "Vehicle", "IPSpeakerChannel".
status	number	Online status: 0-offline, 1-online, 2-unknown.
deviceVersion	string	Device version number.
updateTime	integer	Update time (int64).
deviceCategory	number	Device category: 2001-encoding device, 2021-on-board device.
mainCategory	number	Device main category.
subCategory	number	Device sub category.
serialNo	string	Long serial number.
deviceSourceType	integer	3-EZVIZ device, 0-others
exceptionTime	number	Exception time.
offlineTime	number	Offline time.
expireTime	number	Service expiration time.
upstreamBandwidth	number	Device uplink bandwidth (unit: Mbps).
lastUpstreamBWTime	number	Timestamp of the last uplink bandwidth detection.
permissions	number[]	Device permission list.

A.3.42 BasicInfo(1)

The table here shows event's basic information.

Parameter Name	Data Type	Description
occurrenceTime	String	Event time in ISO 8601 format. For example, 2021-08-01T12:30:00+08:30.
msgType	String	Event type.
resource	***Resource***	Resource information.
device	***DeviceBrief***	Device information.

A.3.43 BasicInfo(2)

The table here shows device information in authentication event of message subscription.

Parameter Name	Req. or Opt.	Data Type	Description
systemId	Opt.	String	System ID.
eventType	Opt.	Integer	Event type, delete prefix "Msg", type is Integer.
elementId	Opt.	String	Element ID.
elementType	Opt.	Integer	Element type, door (1002), alarm input (1003), access control (2002), two-way audio device (2008).
elementName	Opt.	String	Element name.
areaId	Opt.	String	Area ID.
areaName	Opt.	String	Area name.
occurTime	Opt.	String	Occurred time, ISO format.
deviceId	Opt.	String	Device ID.
deviceSerial	Opt.	String	Device serial No.
deviceName	Opt.	String	Device name.
channelNo	Opt.	Integer	Channel No.
currentEvent	Opt.	Integer	Whether the current event, 0: offline, 1: current. It is current event without this field.
serialNo	Opt.	Integer	Event serial No.
cardReaderId	Opt.	String	Card reader ID.

A.3.44 BriefArea

The table here shows the information of an area.

Parameter Name	Req. or Opt.	Data Type	Description
id	Req.	String	Area ID.
name	Req.	String	Area name.
parentAreaID	Opt.	String	Parent area ID.
existSubArea	Req.	Integer	Whether there are sub areas in the current area: 0 (no), 1 (yes).
areaPath	Req.	String	Detailed path starting from the origin area to the current area (e.g., root->a->b).
type	Opt.	Integer	Area type: 1 (normal), 2 (on-board), 3 (store).

A.3.45 Building

The table here shows the building information.

Parameter Name	Req. or Opt.	Data Type	Description
buildId	Req.	String	Building ID. The maximum length is 64.
buildName	Req.	String	Building name.
areaId	Req.	String	Area ID.
areaName	Req.	String	Area name.
totalRoom	Req.	Integer	Total number of rooms.
totalPerson	Req.	Integer	Total number of residents.
deviceNames	Opt.	String	Device name(s). Use comma to separate multiple items.

A.3.46 BuildingSearchCriteria

The table here shows the building search conditions.

Parameter Name	Req. or Opt.	Data Type	Description
areaId	Req.	String	Area ID: -1 (root area). The maximum length is 64.
isContainSubArea	Opt.	Integer	Whether the child areas are included: 0 (no), 1 (yes). The child areas are not included by default.
filterName	Opt.	String	Building name.

A.3.47 CameraChannel

The table here shows information of a camera channel.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Channel ID.
name	Opt.	String	Name.
no	Opt.	String	Channel No.
online	Opt.	String	Online status.
area	Opt.	Object	Area information. See details in ***Area*** .

A.3.48 CameraInfo

The table here shows the camera information.

Parameter Name	Data Type	Description
id	String	Camera ID.
name	String	Camera name.
abilitySet	String	The capability set of the camera. See details of specific values in ***Capability Set*** .
online	String	Online status: "1"-online, "0"-offline.
area	***Area***	Area information.
device	***DeviceByResource***	Device information.

A.3.49 Card(1)

The table here shows he failed card details returned by card information updating.

Parameter Name	Req. or Opt.	Data Type	Description
cardId	Opt	String	Card ID.
cardNo	Opt	String	Card No.
errorCode	Opt	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

A.3.50 Card(2)

The table here shows the card information linked with person information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt	String	Card ID.
cardNo	Opt	String	Card No.

A.3.51 CardFailed

The table here shows the failure information returned by card information updating.

Parameter Name	Req. or Opt.	Data Type	Description
personId	Opt.	String	Person ID.
personName	Opt.	String	Person name.
errorCode	Opt.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
cardList	Opt.	***Card(1)***	Failed card list.

A.3.52 CertificateInfo

The table here shows authentication event information of message subscription.

Parameter Name	Req. or Opt.	Data Type	Description
event	Opt.	***Event(2)***	Opening door event.

A.3.53 CertificateStatus

The table here shows the credential applying status.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Unique ID.
status	Opt.	String	Applying status: 0 (applied), 1 (to be applied), 2 (applying failed), 3 (deleting failed).
type	Opt.	Integer	Credential type: 0 (physical card), 1 (fingerprint), 2 (face), 3 (person). The default value is 2.
errorCode	Opt.	String	Error code.
message	Opt.	String	When the error code is VMS040112, this node is the employee No. when the fingerprint is duplicate.

A.3.54 ChannelInfo

The table here shows the channel information.

Parameter Name	Data Type	Description
id	String	Channel ID.
no	String	Channel No.

A.3.55 CloudStorage

The table here shows the overview of the cloud storage service.

Parameter Name	Data Type	Description
category	Integer	Cloud storage type: 1 (cloud storage via NVR), 2 (Hik-ProConnect box).
no	Integer	Channel No.
sn	String	Device serial No.

A.3.56 CloudStorageInfo

The table here shows the information of the cloud storage service.

Parameter Name	Req. or Opt.	Data Type	Description
usingAmountFor7Days	Opt.	String	Channel number of 7-day cloud storage service.
usingAmountFor30Days	Opt.	String	Channel number of 30-day cloud storage service.
remainingAmount	Opt.	String	Channel number of the remaining cloud storage service.

A.3.57 CloudStorageDetail

The table here shows the details of the cloud storage service.

Parameter Name	Req. or Opt.	Data Type	Description
storageType	Opt.	String	Cloud storage type: "7Days" (7-day cloud storage service), "30Days" (30-day cloud storage service).
purchaseAmount	Opt.	String	Channel number of the purchased cloud storage service, unit: day.

A.3.58 CombineBaseInfo

Parameter Name	Req. or Opt.	Data Type	Description
systemId	Req.	String	System ID.
occurrenceTime	Req.	String	Event time, in ISO 8601 standard time format: yyyy-MM-ddTHH:mm:ss +current zone, e.g., 2018-07- 26T15:00:00+08:00.
dataRetransmission	Opt.	Integer	Whether it is real-time alarm: 0-alarm uploaded in real-time, 1-alarm uploaded via ANR.
resourceInfo	Opt.	***CombineResourceInfo***	Resource information.

A.3.59 CombineDeviceInfo

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Device ID
deviceSerial	Req.	String	Device serial No.
name	Opt.	String	Device name.
category	Opt.	String	Device type.

A.3.60 CombineEvent

Parameter Name	Req. or Opt.	Data Type	Description
eventId	Req.	Integer	Event ID.
eventType	Req.	String	Event type. See details in .
basicInfo	Req.	***CombineBaseInfo***	Basic information.
evenData	Opt.	***CombineEventData***	Extended information for **eventType**. See details in the eventData Schemas information in .

A.3.61 CombineEventData

Parameter Name	Req. or Opt.	Data Type	Description
fileInfo	Opt.	***AlarmFileInfo***	Alarm picture information.
vehicleReletedInfo	Opt.	***VehicleRelatedInfo***	Information of vehicles linked with on-board devices.
queueReletedInfo	Opt.	***QueueRelatedInfo***	Queuing-related alarm information.
anprInfo	Opt.	***ANPRInfo***	ANPR information.
deviceTalkInfo	Opt.	***DeviceTalkInfo***	Video intercom information.

A.3.62 CombineResourceInfo

Parameter Name	Req. or Opt.	Data Type	Description
sourceID	Opt.	String	Resource ID.
sourceType	Opt.	String	Resource type.
sourceName	Opt.	Integer	Resource name.
areaID	Opt.	String	Area ID.
areaName	Opt.	String	Area name.
deviceInfo	Req.	***CombineDeviceInfo***	Device information.

A.3.63 CommonFailed

The table here shows common failure information.

Parameter Name	Req. or Opt.	Data Type	Description
personId	Opt.	String	Person ID.
message	Opt.	String	Error description.
errorCode	Opt.	String	Error code.

A.3.64 DataBean

The table here shows the event's extended information.

Parameter	Req. or Opt.	Data Type	Description
deviceTalkInfo	Opt.	***DeviceTalkInfo***	Video intercom event (140001) details.
vehicleRelatedInfo	Opt.	***VehicleRelatedInfo***	On-board monitoring event details.
openDoorInfo	Opt.	***CertificateInfo***	Authentication event information.
flowRelatedInfo	Opt.	Object[]	Customer traffic event and traffic flow event information.
-**passengerFlowInfo**	Opt.	Object[]	Customer traffic event information.
--**enterCount**	Opt.	Integer	Number of customer traffic (in).
--**exitCount**	Opt.	Integer	Number of customer traffic (out).
--**beginTime**	Opt.	String	Start time (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
--**endTime**	Opt.	String	End time (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
--**ageInfo**	Opt.	Object[]	Age attributes.
---**ageType**	Opt.	Integer	Age type: 0-child, 1-young, 2-middle age, 3-old, 4-unknown.
---**enterCount**	Opt.	Integer	Number of customer traffic (in).
--**genderInfo**	Opt.	Object[]	Gender attributes.
---**genderType**	Opt.	Integer	Gender: 0-female, 1-male, 2-unknown.
---**enterCount**	Opt.	Integer	Number of customer traffic (in).
-**vehicleFlowInfo**	Opt.	Object[]	Traffic flow event information.
--**areaID**	Opt.	String	Area ID.
--**areaName**	Opt.	String	Area name.
--**parentAreaId**	Opt.	String	Parent area ID.

Parameter	Req. or Opt.	Data Type	Description
--**parentAreaName**	Opt.	String	Parent area name.
--**forward**	Opt.	Object	Forward traffic flow data.
---**carCount**	Opt.	Integer	Number of cars.
---**truckCount**	Opt.	Integer	Number of trucks.
---**motorcycleCount**	Opt.	Integer	Number of motorcycles.
--**back**	Opt.	String	Reverse traffic flow data.
---**carCount**	Opt.	Integer	Number of cars.
---**truckCount**	Opt.	Integer	Number of trucks.
---**motorcycleCount**	Opt.	Integer	Number of motorcycles.
--**beginTime**	Req.	String	Start time (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.
--**endTime**	Req.	String	End time (in ISO 8601 format). Refer to ***ISO 8601 Time Format Instruction*** for details.

A.3.65 Device

The table here shows the information of a device.

Parameter Name	Req. or Opt.	Data Type	Description
id	Req.	String	Device ID.
name	Req.	String	Device name.
category	Opt.	String	Device type.
type	Opt.	String	Device model.
serialNo	Opt.	String	Device serial No.
version	Opt.	String	Firmware version.
timeZone	Opt.	String	Time zone No.
onlineStatus	Opt.	Integer	Network status: 0 (offline), 1 (online), 2 (unknown).
addTime	Opt.	String	Added time.

A.3.66 Device

The table here shows the device information.

Parameter	Data Type	Description
baseStatus	***BaseStatus***	Device basic status.
diskStatus	***DiskStatus***	Disk status.
deviceRecordStatus	***DeviceRecordStatus***	Device recording status.
area	***Area***	Information of area that the device belongs to.
awake	***Awake***	Wake-up status.
videoInfo	***VideoInfo***	Video information.
authRecord	***AuthRecord***	Authorization information.
hddStausList	***HddStatusList***	HDD status of the device.
hddAttributeList	***HddAttributeList***	HDD attribute status of the device.
solarEnergyRecord	***SolarEnergyRecord***	Solar-power camera status.

A.3.67 DeviceBaseInfo

The table here shows basic information about the device.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Device ID.
name	Opt.	String	Device name.
category	Opt.	String	Device type.
serialNo	Opt.	String	Device serial No. (short serial No.).
version	Opt.	String	Device firmware version.
type	Opt.	String	Device model.
streamEncryptEnable	Opt.	Integer	Whether to enable encryption of stream.
availableCameraChannelNum	Opt.	Integer	Number of available camera channels.

Parameter Name	Req. or Opt.	Data Type	Description
availableAlarmInputChannelNum	Opt.	Integer	Number of available alarm input channels.
availableAlarmOutputChannelNum	Opt.	Integer	Number of available alarm output channels.

A.3.68 DeviceBrief

The table here shows the device information.

Parameter Name	Data Type	Description
id	String	Device ID.
name	String	Device name.
category	String	Device category.
deviceSerial	String	Device serial No.

A.3.69 DeviceByResource

The table here shows the information about the device.

Parameter Name	Data Type	Description
devInfo	***DevInfo***	Device details. .
channelInfo	***ChannelInfo***	Channel details.

A.3.70 DeviceInfo

The table here shows the device information.

Parameter Name	Req. or Opt.	Data Type	Description
name	Req.	String	Device name, which consists of up to 64 characters.
ezvizSerialNo	Req.	String	Serial No., which consists of up to 30 characters.

Parameter Name	Req. or Opt.	Data Type	Description
ezvizVerifyCode	Req.	String	Verification code, which consists of up to 30 characters.
userName	Opt.	String	User name, which consists of up to 32 characters.
password	Opt.	String	Password, which consists of up to 16 characters.

A.3.71 DeviceInfo (2)

The table here shows the device information.

Parameter Name	Req. or Opt.	Data Type	Description
name	Req.	String	Device name, which consists of up to 32 characters.
id	Req.	String	Device ID, which consists of up to 32 characters.
userName	Opt.	String	User name, which consists of up to 32 characters.
password	Opt.	String	Password, which consists of up to 16 characters.

A.3.72 DeviceList

The table here shows the returned results of adding a device.

Parameter Name	Req. or Opt.	Data Type	Description
alias	Req.	String	Device alias, which consists of up to 32 characters.
deviceId	Req.	String	Device ID, which consists of up to 32 characters.
deviceSerial	Req.	String	Device serial No., which consists of up to 30 characters.
errorCode	Opt.	String	Error code, which consists of up to 16 characters.

A.3.73 DeviceOfflineInfo

The table here shows the offline resource/device information.

Parameter	Data Type	Description
id	String	Device/resource ID, which consists of up to 64 characters.
name	String	Device/resource name, which corresponds to the **resourceType**.
deviceSerial	String	Device serial No.
areaId	String	Group ID.
areaName	String	Group name.
resourceType	integer	Resource type. Device: 2001 (encoding device), 2002 (access control device), 2005 (alarm device), 2008 (video intercom), 2010 (data communication device), 2020 (broadcast), 2021 (on-board device), 2031 (cloud storage box); Logical resource: 1001 (camera), 1002 (door), 1003 (zone).
offlineCount	integer	Offline times.
offlineDuration	long	Offline duration (unit: ms).

A.3.74 DeviceRecordStatus

The table here shows the device recording status.

Parameter	Data Type	Description
overallRecordStatus	integer	Recording status: 0 (normal), 1 (abnormal), -1 (not supported).
channelName	string[]	Names of abnormal channels.

A.3.75 DeviceTalkInfo

The table here shows the video intercom event details.

Parameter Name	Req. or Opt.	Data Type	Description
userId	Opt.	String	User ID of the person added to the room that is called by the video intercom device. This field is empty when no user exists in the called room.
personId	Opt.	String	Person ID of the person added to the room that is called by the video intercom device. This field will be returned only when **callType** is 0 and **userId** is not empty.
roomNumber	Opt.	Integer	ID of the room that is called. This field will be returned only when **callType** is 0.
deviceSerial	Req.	String	Device serial No.
deviceName	Req.	String	Device name.
deviceId	Req.	String	Device ID.
msgId	Req.	String	Call record ID.
msgType	Req.	Integer	Call record type: 0 (pushed call), 1 (call answered by others), 2 (call hung up by the device), 3 (call canceled by the device because no one answers).
callType	Opt.	Integer	Call type: 0-from device to room, 1-from device to call management center.
doorInfos	Opt.	***DoorInfo*** []	Door information.

A.3.76 DevInfo

The table here shows the device details.

Parameter Name	Data Type	Description
id	String	Device ID.
category	String	Device main type.
serialNo	String	Device serial No.

A.3.77 DiskStatus

The table here shows the disk status information.

Parameter	Data Type	Description
status	number	Disk status: 0-unknown, 1-normal, 2-no disk, 3-error, 4-disk full
usage	number	Disk usage (free space of all disks / total capacity of all disks).
num	number	Number of disks.
loopEnable	number	Whether the video overwriting is enabled: 0-disabled, 1-enabled.
freeCapacity	number	Remaining space: -1 (not supported).
maxCapacity	number	Total space: -1 (not supported).

A.3.78 DistributionErrorInfo

Parameter Name	Data Type	Description
vehicleId	String	ID of vehicles failed to be applied.
vehicleName	String	Name of vehicles failed to be applied.
errorCode	String	Error code of applying failed.
deviceSerial	String	Device serial No.

A.3.79 DistributionInfo

Parameter Name	Data Type	Description
errorInfo	***DistributionErrorInfo*** []	Information of applying failed.

A.3.80 DoorChannel

The table here shows the information of a door channel.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	ID.
name	Opt.	String	Name.
no	Opt.	String	Channel No.
online	Opt.	String	Online status.
area	Opt.	Object	Area information. See details in ***Area*** .

A.3.81 DoorInfo

The table here shows the door information.

Parameter Name	Req. or Opt.	Data Type	Description
doorId	Req.	String	Door ID.
doorName	Req.	String	Door name.

A.3.82 DriverDistributionFail

Parameter Name	Data Type	Description
driverId	String	Driver ID.
driverName	String	Driver's name. .
licensePlate	String	License plate No. / vehicle name.
errorCode	String	Error code.
message	String	Error information.
deviceSerial	String	Device serial No.

A.3.83 DriverGroupInfo

Parameter Name	Data Type	Description
groupId	String	Driver group ID.
groupName	String	Driver group name.
areaId	String	Area ID.
areaName	String	Area name.
peopleCount	Integer	Number of drivers in the group.

A.3.84 DriverInfo (1)

Parameter Name	Req. or Opt.	Data Type	Description
driverName	Opt.	String	License plate No.
driverPhone	Opt.	String	Vehicle ID.
driverFacePic	Opt.	Integer	Speed limit (cm/h).
driverCode	Opt.	String	Driver code value.
id	Opt.	String	Driver ID.

A.3.85 DriverInfo (2)

Parameter Name	Data Type	Description
driverGroupId	String	Driver group No.
driverGroupName	String	Driver group name.
driverId	String	Driver ID.
ID	String	ID auto-generated by the system after the driver is added.
facepicUrl	String	Driver face picture URL.
driverName	String	Driver's name. .
driverCode	String	Driver No.
gender	String	gengder: 0 (unknown, 1 (man), 2 (female).

Parameter Name	Data Type	Description
phone	String	Phone No.
email	String	Email.
description	String	Description.
distributionStatus	Integer	Applying status: 0 (not applied), 1 (applying), 2 (applied), 3 (applying failed).
distributionInfo	***DistributionInfo***	Face picture applying information.
relatedVehicles	***RelatedVehicleInfo***	On-board monitoring related information.
driverLicenseInfo	***DriverLicenseInfo***	Driving license information.

A.3.86 DriverLicenseInfo

Parameter Name	Data Type	Description
licenseNo	String	Driving license No.
imageUrl	String	Driving license picture URL.
validTime	String	Validity, in ISO time format: yyyy-MM-ddTHH:mm:ss.

A.3.87 DriverLicenseAddInfo

Parameter Name	Data Type	Description
licenseNo	String	Driving license No.
imageData	String	Driving license picture data, encoded by Base64, max size: 5 MB.
validTime	String	Validity, in ISO time format: yyyy-MM-ddTHH:mm:ss.

A.3.88 DriverGroupInfo

Parameter Name	Data Type	Description
groupId	String	Driver group ID.
groupName	String	Driver group name.
areaId	String	Area ID.
areaName	String	Area name.
peopleCount	Integer	Number of drivers in the group.

A.3.89 ElementDetail

The table here shows the credential details.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Unique ID.
name	Opt.	String	Name.
type	Opt.	Integer	Resource type: 0 (door), 1 (device). The default value is 0.
elementStatus	Opt.	***ElementStatus***	Applying status of the resource.
certificateStatusList	Opt.	***CertificateStatus*** []	Applying status of the credential. It is returned when applying failed.

A.3.90 ElementStatus

The table here shows the applying status of the resource.

Parameter Name	Req. or Opt.	Data Type	Description
status	Opt.	Integer	Applying status: 0 (applied), 1 (to be applied), 2 (applying failed), 3 (deleting failed).
errorCode	Opt.	String	Error code.

A.3.91 Event(1)

The table here shows the event information.

Parameter Name	Req. or Opt.	Data Type	Description
uuid	Opt.	String	UUID of on-board monitoring messages.
update	Opt.	Boolean	Whether it is updated information: true-yes (added pictures/videos comparing to the previous upload), false-no.
basicInfo	Req.	***BasicInfo(1)***	Basic information.
picture	Opt.	***Attachment*** []	Picture information.
video	Opt.	***Attachment*** []	Video information.
data	Opt.	***DataBean***	Extended information.

A.3.92 Event(2)

The table here shows authentication event in authentication event information of message subcription.

Parameter Name	Req. or Opt.	Data Type	Description
basicInfo	Opt.	***BasicInfo(2)***	Device information.
intelliInfo	Opt.	***IntelliInfo***	Person information.

A.3.93 EventSource

The table here shows the event source information.

Parameter Name	Req. or Opt.	Data Type	Description
eventType	Opt.	String	Event type, which consists of up to 64 characters.
sourceID	Opt.	String	Alarm source ID, which consists of up to 64 characters.

Parameter Name	Req. or Opt.	Data Type	Description
sourceType	Opt.	String	Alarm source type, which consists of up to 64 characters. See details in ***Alarm Source*** .
sourceName	Opt.	String	Alarm source name, which consists of up to 64 characters.

A.3.94 FailedResult

The table here shows the information of the room where the number of persons exceeds the limit.

Parameter Name	Req. or Opt.	Data Type	Description
buildName	Req.	String	Building name, for identifying the rooms with limit-reached number of persons.
roomNum	Req.	Integer	Room No.
roomName	Req.	String	Room name.
errorCode	Req.	String	Error code (VMS038005 supported only currently).

A.3.95 Finger(1)

The table here shows the failed fingerprint details returned by fingerprint information updating.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt	String	Fingerprint ID.
failedName	Opt	String	Fingerprint name.
errorCode	Opt	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.

A.3.96 Finger(2)

The table here shows the fingerprint information linked with person information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt	String	Fingerprint ID.
name	Opt	String	Fingerprint name.
data	Opt	String	Fingerprint data.

A.3.97 FingerFailed

The table here shows failure information returned by fingerprint information updating.

Parameter Name	Req. or Opt.	Data Type	Description
personId	Opt.	String	Person ID.
personName	Opt.	String	Person name.
errorCode	Opt.	String	Response status or error code: 0-succeeded, other codes-failed (refer to ***Status and Error Code*** for details). Each code can contain up to 32 characters.
fingerList	Opt.	***Finger(1)***	Failed fingerprint list.

A.3.98 GetDeviceInfo

The table here shows the returned information of device details.

Parameter Name	Req. or Opt.	Data Type	Description
baseInfo	Opt.	Object	Device information. See details in ***DeviceBaseInfo*** .
cameraChannel	Opt.	***CameraChannel*** []	Camera list.
alarmInputChannel	Opt.	***AlarmInputChannel*** []	Alarm input list.
alarmOutputChannel	Opt.	***AlarmOutputChannel*** []	Alarm output list.

Parameter Name	Req. or Opt.	Data Type	Description
doorChannel	Opt.	***DoorChannel*** []	List of doors.
relatedVehicleInfo	Opt.	***VehicleInfo(1)***	Information of the linked vehicle.
onlineStatus	Opt.	Integer	Device online status, which consists of 1 character.
timeZoneID	Opt.	String	Time zone ID, which consists of up to 8 characters.

A.3.99 GetDevicesResVo

The table here shows the device list structure.

Parameter Name	Req. or Opt.	Data Type	Description
totalCount	Opt.	Integer	Total number of pages.
pageIndex	Opt.	Integer	Current page No.
pageSize	Opt.	Integer	Number of items per page.
device	Opt.	***Device*** []	Information of device list.

A.3.100 GPSInfo

The table here shows the GPS information.

Parameter Name	Req. or Opt.	Data Type	Description
ew	Req.	String	E-east longitude, W-west longitude.
lng	Req.	String	Longitude (e.g., 120.218048) (unit: degree).
ns	Req.	String	N-north latitude, S-south latitude.
lat	Req.	String	Latitude (unit: degree).
direction	Req.	Integer	Direction (unit: degree, calculated clockwise from due north (0)).

Parameter Name	Req. or Opt.	Data Type	Description
height	Opt.	Integer	Height (unit: cm)
speed	Req.	Integer	Speed (cm/h).

A.3.101 HddAttributeList

The table here shows the device HDD attributes.

Parameter	Data Type	Description
hddNo	integer	HDD No.
status	integer	0-normal, 1-abnormal.
statusExceptionTime	number	
attributeId	string	

A.3.102 HddStatusList

The table here shows the device HDD status information.

Parameter	Data Type	Description
temperature	integer	Temperature.
hddNo	integer	Disk No.
powerOnday	integer	Operating days (unit: day).
selfEvaluatingStatus	integer	Self-test status.
selfEvaluatingExceptionTime	number	
allEvaluatingStatus	integer	Comprehensive evaluation status.
allEvaluatingExceptionTime	number	
offlineDuration	long	Offline duration (unit: milliseconds).

A.3.103 IdNameInfo

The table here shows the ID and name information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Unique ID.
name	Opt.	String	Name.

A.3.104 IgnoreRecurring

The table here shows the information of an auto-closing alarming window.

Parameter Name	Req. or Opt.	Data Type	Description
enable	Req.	String	Whether to enable auto-close alarming window: 0 (disable), 1 (enable), which consists of up to 1 character.
timeValue	Opt.	String	Time, which consists of up to 16 characters.

A.3.105 ImportToArea

The table here shows whether to import to area automatically.

Parameter Name	Req. or Opt.	Data Type	Description
enable	Opt.	Intger	Whether to import device resources to area (channel, alarm input, and alarm output) automatically: 0 (no), 1 (yes). And the field consists of 1 character.
areaID	Opt.	String	When area ID is empty, the area will be created according to device name. And the field consists of up to 32 characters.

A.3.106 IntelliInfo

The table here shows person information in openning door event of message subscription.

Parameter Name	Req. or Opt.	Data Type	Description
cardNumber	Opt.	String	Card No.
personId	Opt.	String	Person ID.

Parameter Name	Req. or Opt.	Data Type	Description
firstName	Opt.	String	Person first name.
lastName	Opt.	String	Person last name.
fullPath	Opt.	String	Person department full path.
phoneNum	Opt.	String	Phone number.
personPicUrl	Opt.	String	Person picture URL.
groupId	Opt.	String	Person group ID.
attendanceStatus	Opt.	Integer	Person attendance status, 0-undefined, 1-on work, 2-off work, 3-break starts, 4-break ends, 5-overtime starts, 6-overtime ends.
authResult	Opt.	Integer	Authentication result, whether swiping card succeeded, 1-true, 0-false.

A.3.107 LicenseInfo

Parameter Name	Req. or Opt.	Data Type	Description
licenseNo	Opt.	String	License plate No.
invalidTime	Opt.	String	License validity.
imageUrl	Opt.	String	License profile picture.

A.3.108 LinkageAlarmOutput

The table here shows the information of an alarm output linked to an alarm.

Parameter Name	Req. or Opt.	Data Type	Description
autoClose	Opt.	Integer	Types of closing alarm window : 0 (manually closing alarm window), 1 (automatically

Parameter Name	Req. or Opt.	Data Type	Description
			closing alarm window), which consists of up to 1 character.
autoCloseTime	Opt.	Integer	The time of auto-closing alarm window, which consists of up to 16 characters.
camera	/	***AlarmResourceInfo*** []	Alarm resource parameters.

A.3.109 LinkageCamera

The table here shows the information of an linked camera .

Parameter Name	Req. or Opt.	Data Type	Description
preRecordTime	Opt.	String	Pre-record time, which consists of up to 64 characters.
postRecordTime	Opt.	String	Post-record time, which consists of up to 64 characters.
camera	Opt.	***AlarmResourceInfo*** []	Alarm resource information.
relateType	Req.	Integer	Linked alarm type: 1 (link to the corresponding camera), 2 (link to another camera); this node consists of up to 16 characters.
selfRelated	Opt.	***SelfRelated***	Related storage information.

A.3.110 LinkageConfig

The table here shows the alarm linkage information.

Parameter Name	Data Type	Description
linkCamera	***LinkageCamera***	Camera linked to the alarm.
linkCapturePicture	***LinkCapturePicture***	Captured pictures linked to the alarm.

Parameter Name	Data Type	Description
linkEmail	***LinkEmail***	Email linked to the alarm.
linkAlarmOutput	***LinkageAlarmOutput***	Alarm outputs linked to the alarm.

A.3.111 LinkageItem

The table here shows the linkage of an alarm.

Parameter Name	Req. or Opt.	Data Type	Description
linkageType	Opt.	String	Linkage type, which consists of up to 64 characters.
linkageConfig	/	***LinkageConfig***	Linkage configuration.

A.3.112 LinkAlarmOutput

The table here shows the linked alarm output.

Parameter Name	Data Type	Description
alarmOutput	***AlarmResourceInfo*** []	Alarm resource information.

A.3.113 LinkCamera

The table here shows the information of an linked camera.

Parameter Name	Data Type	Description
preRecordTime	String	Pre-record time.
postRecordTime	String	Post-record time.
camera	***AlarmResourceInfo*** []	Alarm resource information.

A.3.114 LinkCapturePicture

The table here shows the information of an captured picture linked to an alarm.

Parameter Name	Req. or Opt.	Data Type	Description
captureInterval	Opt.	Integer	Capture interval, unit: second, which consists of up to 16 characters.
captureMode	Opt.	String	Capture mode: "1" (capture the picture when the event occurs), "2" (capture each picture before, when, and after the event occurs, and), which consists of up to 1 character.
camera	Opt.	***AlarmResourceInfo*** []	Alarm resource information.

A.3.115 LinkEmail

The table here shows the information of an email template linked to an alarm.

Parameter Name	Req. or Opt.	Data Type	Description
emailTemplateId	Opt.	String	Email template ID, which consists of up to 64 characters.
emailTemplateName	Opt.	String	Email template name, which consists of up to 64 characters.

A.3.116 LocalStorage

The table here shows the local storage information.

Parameter Name	Data Type	Description
recordingStreamType	Integer	Record stream type.
scheduleTemplateId	String	Template ID of local storage schedule.
preRecord	Integer	Whether to enable pre-record: 0 (disable), 1 (enable).
postRecordTime	Integer	Post-record time, unit: second.
anr	Integer	Whether to enable ANR: 0 (disable), 1 (enable).
storageTime	Integer	Storage retention period of records, unite: day. If the value "-1" is returned, it means the records have no limited storage retention period.

A.3.117 Notification

The table here shows the information of an alarm notification.

Parameter Name	Req. or Opt.	Data Type	Description
enable	Req.	Integer	Whether to enable notification: 0 (disable), 1 (enable).
recipients	/	***Recipients*** []	User list for receiving notifications.

A.3.118 PackageDetails

The table here shows the details of a service package.

Parameter Name	Req. or Opt.	Data Type	Description
servicePackage	Opt.	***ServicePackage*** []	Details of a service package.

A.3.119 PackageOverview

The table here shows the overview of the service package.

Parameter Name	Req. or Opt.	Data Type	Description
servicePackageOverview	Opt.	***ServicePackageOverview*** []	Service package overview.

A.3.120 Person

The table here shows the person information.

Parameter Name	Req. or Opt.	Data Type	Description
personId	Req.	String	Person ID.
firstName	Req.	String	Person's first name.
lastName	Req.	String	Person's last name.
phone	Req.	String	Phone No.

Parameter Name	Req. or Opt.	Data Type	Description
email	Req.	String	Email.
isExpired	Req.	String	Status: 0 (normal), 1 (expired).
photoUrl	Req.	String	URL of the face picture to be applied to the device.
headPicUrl	Req.	String	URL of the profile photo.
roomList	Req.	***RoomDTO*** []	Resident's room information.

A.3.121 PersonBaseInfo(1)

Parameter Name	Req. or Opt.	Data Type	Description
fullPath	Opt.	String	Person group path.
firstName	Opt.	String	First name.
lastName	Opt.	String	Last name.
personCode	Opt.	String	Employee No.
phoneNum	Opt.	String	Phone number.
photoUrl	Opt.	String	Photo URL.
gender	Opt.	Integer	0-female, 1-male, 2-unknown.
email	Opt.	String	Email.

A.3.122 PersonBaseInfo(2)

Parameter Name	Req. or Opt.	Data Type	Description
groupId	Req.	String	Person group ID.
personCode	Req.	String	Employee No., 1-16 characters, digits and letters allowed.
firstName	Req.	String	First name, no more than 255 characters. First name and last name should be no more than 255 characters.

Parameter Name	Req. or Opt.	Data Type	Description
lastName	Req.	String	Last name, no more than 255 characters. First name and last name should be no more than 255 characters.
gender	Req.	Integer	0-female, 1-male, 2-unknown.
phone	Opt.	String	Phone number, no more than 32 characters.
email	Opt.	String	Email address, no more than 64 characters.
description	Opt.	String	Description, no more than 128 characters.
startDate	Req.	String	Validity period start date, ISO time format, e.g.: 2022-10-21T11:08:23+08:00
endDate	Req.	String	Validity period end date, ISO time format, e.g.: 2023-10-21T11:08:23+08:00. The year should be no more than 2037. After the validity period, platform will not delete. You can delete by yourself or renew.

A.3.123 PersonDTO

The table here shows the resident basic information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Person ID, not required for adding new residents and required for selecting existing residents; required for updating resident information.
personCode	Opt.	String	Person code.

Parameter Name	Req. or Opt.	Data Type	Description
			Note Update Resident: This node should be empty. Add Resident: This node should be empty if you add new person information for the resident, while this node is required if you add a resident from existing persons.
groupId	Opt.	String	Department ID, for adding or updating person information.
firstName	Req.	String	Person's first name. The maximum length is 128.
lastName	Req.	String	Person's last name. The maximum length is 128.
gender	Req.	Integer	0 (female), 1 (male), 2 (unknown).
phone	Opt.	String	Phone No.
email	Req.	String	Email.
description	Opt.	String	Remark.
startDate	Req.	String	Start time of effective period in ISO 8601 time format.
endDate	Req.	String	End time of effective period in ISO 8601 time format.

A.3.124 PersonGroup

The table here shows the department information.

Parameter Name	Data Type	Description
groupId	String	Department ID.
groupName	String	Department name.
parentId	String	Root department ID.
childNodeExist	Boolean	Whether child departments exist.
permissionState	Boolean	Permission: 0 (no permission), 1 (with permission).
description	String	Description.
areaList	***AreaBrief*** []	Area ID list.
groupFullPath	String	Full path.

A.3.125 PersonInfo(1)

The table here shows basic information linked to person.

Parameter	Req. or Opt.	Data Type	Description
personId	Opt.	String	Person ID.
groupId	Opt.	String	Person group ID.
firstName	Opt.	String	First name.
lastName	Opt.	String	Last name.
gender	Opt.	Integer	0-female, 1-male, 2-unknown.
phone	Opt.	String	Phone number.
email	Opt.	String	Email address.
description	Opt.	String	Description information.
startDate	Opt.	Long	Validity period start date, timestamp format, e.g.: 1659490699376
endDate	Opt.	Long	Validity period end date, timestamp format, e.g.: 1659490699376.

Parameter	Req. or Opt.	Data Type	Description
personCode	Opt.	String	Employee No.
headPicUrl	Opt.	String	Face picture URL.

A.3.126 PersonInfo(2)

Parameter Name	Req. or Opt.	Data Type	Description
id	Opt.	String	Person unique ID.
baseInfo	Opt.	***PersonBaseInfo(1)***	Baisc information.

A.3.127 PictureInfo

The table here shows the captured picture information.

Parameter Name	Data Type	Description
pictureURL	String	Captured picture.
plateRect	***PlateRect***	Coordinates.

A.3.128 PlateRect

The table here shows the coordinate information.

Parameter Name	Data Type	Description
X	Integer	X-coordinate.
Y	Integer	Y-coordinate.
width	Integer	Width.
height	Integer	Height.

A.3.129 Priority

The table here shows the alarm priority information.

Parameter Name	Req. or Opt.	Data Type	Description
ID	Req.	String	Alarm priority ID, which consists of up to 64 characters.
level	Opt.	String	Alarm priority level, which contains level 1 (the highest level), 2, and 3. It consists of up to 64 characters.
levelName	Opt.	String	Level name, which consists of up to 64 characters.
color	Opt.	String	Alarm priority level color, which is the value of RGB, for example: #F40B0B. It consists of up to 64 characters.

A.3.130 QueueInfo

The table here shows the information of leaving queue detection alarms.

Parameter Name	Req. or Opt.	Data Type	Description
regionID	Opt.	String	Queuing area ID.
regionName	Opt.	String	Queuing area name.
queueThreshold	Opt.	Integer	Queuing time threshold.
peopleTargetId	Opt.	Integer	Target persons whose queuing time has exceeded the alarm threshold.
waitTime	Opt.	Long	The actual waiting duration for the person (unit: second).
startTime	Opt.	String	Queuing start time in ISO 8601 format, which is represented by "yyyy-MM-ddTHH:mm:ss+current time zone", e.g., "2018-07-26T15:00:00+08:00".
endTime	Opt.	String	Queuing end time in ISO 8601 format, which is represented by "yyyy-MM-ddTHH:mm:ss+current time zone", e.g., "2018-07-26T15:00:00+08:00".

A.3.131 QueueRelatedInfo

The table here shows the specific queuing-related alarms.

Parameter Name	Req. or Opt.	Data Type	Description
queueInfo	Opt.	***QueueInfo***	Leaving queue detection alarms.

A.3.132 ReceivingSchedule

The table here shows the information of an arming schedule template.

Parameter Name	Data Type	Description
ID	String	ID of an arming schedule template.
name	String	Name of an arming schedule template name.
systemTemplate	Integer	Template type: 0 (custom template), 1 (default template).
timeSetting	***TimeSetting*** []	Time settings.

A.3.133 Recipients

The table here shows the recipient information.

Parameter Name	Req. or Opt.	Data Type	Description
userID	Opt.	String	User ID, which consists of up to 32 characters.
userName	Opt.	String	User name, which consists of up to 64 characters.

A.3.134 RecordInfo

The table here shows the information of card swiping record.

Parameter Name	Req. or Opt.	Data Type	Description
recordGuid	Opt.	String	Unique ID.
elementId	Opt.	String	Access control point ID.
elementName	Opt.	String	
elementPicUrl	Opt.	String	Access control point picture URL, URL validity period 2 hours.
elementType	Opt.	Integer	Element type, door: 1002, access control device: 2002, two-way audio device: 2008.
areaId	Opt.	String	
areaName	Opt.	String	
deviceId	Opt.	String	
deviceName	Opt.	String	
acsSnapPicList	Opt.	***AcsSnapPicInfo*** []	
associatedCameraList	Opt.	String	
cardReaderId	Opt.	String	
cardReaderName	Opt.	String	
occurTime	Opt.	String	
deviceTime	Opt.	String	
eventType	Opt.	Integer	Event type, refers to ***Event(2)*** .
swipeAuthResult	Opt.	Integer	Authentication result, 0: failed, 1: success.
eventMainType	Opt.	Integer	Event main type, 0: normal event, 1: temperature measurement event.
devSerialNo	Opt.	Integer	Event serial No.
hasCameraSnapPic	Opt.	Integer	Whether it has capture linkage.
hasDevVideoRecord	Opt.	Integer	Whether it has device recording.
cardNumber	Opt.	String	
personInfo	Opt.	***PersonInfo(2)***	

Parameter Name	Req. or Opt.	Data Type	Description
temperatureInfo	Opt.	***TemperatureInfo***	
masksStatus	Opt.	Integer	Mask status, 1-unknown, 2-no mask, 3-wearing mask.
attendanceStatus	Opt.	Integer	Attendance status, 0-undefined, 1-on work, 2-off work, 3-break starts, 4-break ends, 5-overtime starts, 6-overtime ends.
direction	Opt.	Integer	Direction: 0-no, 1-entrance, 2-exit. When this field does not exit, it indicates that it is empty.
recordTime	Opt.	String	Time of writing the event to database.

A.3.135 RecordListInfo

Parameter Name	Req. or Opt.	Data Type	Description
beginTime	Opt.	String	Start time, in the format of yyyy-MM-ddTHH:mm:ss+08:00.
endTime	Opt.	String	End time, in the format of yyyy-MM-ddTHH:mm:ss+08:00.
targetType	Opt.	String	0 (local device), 1 (cloud storage).

A.3.136 RecordSetting

The table here shows the record settings.

Parameter Name	Data Type	Description
cameraID	String	Camera ID.
enableLocalStorage	Integer	Whether to enable local recording schedule: 0 (disable), 1 (enable).
localStorage	***LocalStorage***	Local storage information.

Parameter Name	Data Type	Description
enableCloudStorage	Integer	Whether to enable cloud storage schedule: 0 (disable), 1 (enable).
cloudStorage	***CloudStorage***	Cloud storage schedule.

A.3.137 RelatedVehicleInfo

Parameter Name	Data Type	Description
plateLicense	String	License plate No. / vehicle name.
vehicleId	String	Vehicle ID.
deviceSerial	String	Device serial No.

A.3.138 RemoteControl

The table here shows the operation of remote control.

Parameter Name	Req. or Opt.	Data Type	Description
actionType	Req.	Integer	Operation type: 1 (unlock door), 2 (lock door), 3 (remain unlocked), 4 (remain locked).
elementlist	Opt.	String[]	Door ID list. All doors are included if this node is empty.
direction	Opt.	Integer	Direction: 0 (enter), 1 (exit). The default value is 0.
areaId	Opt.	String	Area ID. All areas are included if the value is -1.
depthTraversal	Opt.	Integer	Whether to include child areas or not: 1 (yes), 0 (no). The default value is 0.

A.3.139 RemoteControlResponse

The table here shows the results of door control.

Parameter Name	Req. or Opt.	Data Type	Description
elementId	Req.	String	Door ID.
elementName	Req.	String	Door name.
areaId	Req.	String	Area ID.
areaName	Req.	String	Area name.
errorCode	Req.	String	Error code.

A.3.140 ResidentFilter

The table here shows the detailed conditions for resident search.

Parameter Name	Req. or Opt.	Data Type	Description
name	Opt.	String	Resident name.
roomNum	Opt.	Integer	Room No.
email	Opt.	String	Email.
phone	Opt.	String	Phone No.
type	Opt.	Integer	Resident type: 1 (householder), 0 (family member).
isExpired	Opt.	Integer	Status: 0 (normal), 1 (expired). Residents of all status are included if this node is empty.

A.3.141 ResidentSearchRequest

The table here shows the resident search conditions.

Parameter Name	Req. or Opt.	Data Type	Description
areaId	Req.	String	Area ID: -1 (root area). The maximum length is 64.
buildId	Opt.	String	Building ID. The maximum length is 64.

Parameter Name	Req. or Opt.	Data Type	Description
isContainSubArea	Opt.	Integer	Whether the child areas are included: 0 (no), 1 (yes). The child areas are not included by default.
filter	Opt.	***ResidentFilter***	Detailed search conditions.

A.3.142 Resource

The table here shows the resource information.

Parameter Name	Data Type	Description
type	String	Resource type.
id	String	Resource ID.
name	String	Resource name.
areaID	String	Area ID.
areaName	String	Area name.

A.3.143 ResourceAddResult

The table here shows the information about an area.

Parameter Name	Data Type	Description
id	String	Resource ID.
name	String	Resource name.
resourceType	String	Resource type. See details in ***Resource Type*** , e.g., "camera", "alarmInput" (alarm input), "alarmOutput" (alarm output).
channelID	String	Device channel ID.
errorCode	String	Error code: "0" (succeeded), other codes (failed). See details in ***Status and Error Code*** .

A.3.144 RoomDTO

The table here shows the room information.

Parameter Name	Req. or Opt.	Data Type	Description
roomId	Req.	String	Room ID.
roomName	Opt.	String	Room name, which is required for searching residents and is optional for adding/updating residents.
roomNum	Opt.	Integer	Room No., which is required for searching residents and is optional for adding/updating residents.
buildId	Req.	String	Building ID.
buildName	Opt.	Integer	Building name, which is required for searching residents and is optional for adding/updating residents.
areaId	Req.	Integer	Area ID.
areaName	Opt.	String	Area name, which is required for searching residents and is optional for adding/updating residents.
accountType	Req.	Integer	Resident type: 1 (householder), 0 (family member).

A.3.145 RoomFilter

The table here shows the detailed conditions for room search.

Parameter Name	Req. or Opt.	Data Type	Description
roomNum	Opt.	Integer	Room No.
roomName	Opt.	String	Room name.
personAmount	Opt.	Integer	Number of residents.
email	Opt.	String	Email.
mainAccount	Opt.	String	Householder name.

A.3.146 RoomSearchCriteria

The table here shows the room search conditions.

Parameter Name	Req. or Opt.	Data Type	Description
areaId	Req.	String	Area ID: -1 (root area). The maximum length is 64.
buildId	Opt.	String	Building ID. The maximum length is 64.
isContainSubArea	Opt.	Integer	Whether the child areas are included: 0 (no), 1 (yes). The child areas are not included by default.
filter	Opt.	***RoomFilter***	Detailed search conditions.

A.3.147 RoomVO

The table here shows the room information.

Parameter Name	Req. or Opt.	Data Type	Description
roomId	Req.	String	Room ID.
roomName	Req.	String	Room name.
roomNum	Req.	Integer	Room No.
buildId	Req.	String	Building ID.
buildName	Req.	Integer	Building name.
areaId	Req.	Integer	Area ID.
areaName	Req.	String	Area name.

Parameter Name	Req. or Opt.	Data Type	Description
personAmount	Req.	Integer	The number of residents.
mainAccount	Req.	String	Householder name.
email	Req.	String	Email.
phone	Opt.	String	Phone No.

A.3.148 Schedule

The table here shows the information of an alarm schedule template.

Parameter Name	Req. or Opt.	Data Type	Description
timeSchedule	Opt.	***TimeSchedule***	Alarm schedule template.
type	Opt.	String	Schedule type, which consists of up to 64 characters.

A.3.149 SelfRelated

The table here shows the related information of an linked camera.

Parameter Name	Req. or Opt.	Data Type	Description
storageType	Opt.	Integer	Storage type, which consists of up to 16 characters.

A.3.150 ServicePackage

The table here shows the information of service(s) in a service package.

Parameter Name	Req. or Opt.	Data Type	Description
serviceType	Opt.	String	Service type: "serviceVideo" (video management service), "serviceVehicle" (on-board monitoring service),

Parameter Name	Req. or Opt.	Data Type	Description
			"serviceAlarmDetection" (alarm detection service).
packageType	Opt.	String	Service package type: "1" (free service package), "2" (on-trial service package), "3" (purchased service package), "4" (complimentary service package).
purchaseAmount	Opt.	Integer	Channel number of the purchased service(s).
activationTime	Opt.	String	Activation time, which is in ISO 8601 standard time format, see details in ***ISO 8601 Time Format Instruction*** .
expiredTime	Opt.	String	Expiry time, which is in ISO 8601 standard time format, see details in ***ISO 8601 Time Format Instruction*** .
cloudStorage	Opt.	***CloudStorageDetail*** []	Details of the purchased cloud storage service.

A.3.151 ServicePackageOverview

The table here shows the overview of the service(s) in a service package.

Parameter Name	Data Type	Description
serviceType	String	Service type: "serviceVideo" (video management service), "serviceVehicle" (on-board monitoring service), "serviceAlarmDetection" (alarm detection service).
packageType	String	Service package type: "1" (free service package), "2" (on-trial service package), "3" (purchased service package), "4" (complimentary service package).
usingAmount	String	Channel number of the in-using service(s).
remainingAmount	String	Channel number of the remaining service(s).
totalAmount	String	Channel number of the purchased service(s).
lastExpiredTime	String	Expiry time of the latest service.

Parameter Name	Data Type	Description
packageStatus	Integer	Status of the service package: 0 (normal), 1 (exceeded limit), 2 (to be expired), 3 (expired).
cloudStorage	***CloudStorageInfo***	Cloud storage service of the video management service package.

A.3.152 SolarEnergyRecord

The table here shows the solar-powered camera information.

Parameter	Data Type	Description
temperature	integer	Temperature.
batteryPercentage	integer	Remaining battery percentage, ranges from 0 to 100.
state	string	Battery state: discharging (not charging / discharging), charging (charging), idle (idle), abnormal (abnormal).
current	integer	Current.
sleepStatus	integer	Sleep status: 0 (unknown), 1 (waken up), 2 (sleep).

A.3.153 TempAuth

The table here shows the temporary pass information.

Parameter Name	Req. or Opt.	Data Type	Description
id	Req.	String	Temporary pass ID.
openCount	Req.	Integer	Allowed passes for each door.
name	Req.	String	Temporary pass name.
startTime	Req.	Long	Start time (millisecond value). For example, 1672370265000.

Parameter Name	Req. or Opt.	Data Type	Description
endTime	Req.	Long	End time (millisecond value). For example, 1672370265000.
creatorId	Req.	String	Creator ID.
creatorName	Req.	String	Creator name.
creatorEmail	Req.	String	Creator email.
expiredStatus	Req.	Integer	Status: 1 (expired), 0 (normal).
password	Req.	String	Password for opening the door.

A.3.154 TempAuthFilter

The table here shows the detailed conditions for temporary pass search.

Parameter Name	Req. or Opt.	Data Type	Description
name	Req.	String	Temporary pass name or creator name for fuzzy search. The maximum length is 64.

A.3.155 TempAuthSearchRequest

The table here shows the temporary pass search conditions.

Parameter Name	Req. or Opt.	Data Type	Description
filter	Opt.	***TempAuthFilter***	Search conditions.

A.3.156 TemperatureInfo

Parameter Name	Req. or Opt.	Data Type	Description
temperatureData	Opt.	String	Temperature data.
temperatureStatus	Opt.	Integer	Temperature status value, 1-normal, 2-exception, 3-unknown.
temperatureUnit	Opt.	Integer	Temperature unit, 0: Centigrade (°C), 1: Fahrenheit (°F), 2: Kelvin (K)

A.3.157 TimeRange

The table here shows the time range parameters for time-related alarm log search.

Parameter Name	Req. or Opt.	Data Type	Description
beginTime	Req.	String	Start time, which is represented by "yyyy-MM-dd HH:mm:ss", e.g., "2018-07-26 15:00:00".
endTime	Req.	String	End time, which is represented by "yyyy-MM-dd HH:mm:ss", e.g., "2018-07-26 15:00:00".

A.3.158 TimeSchedule

The table here shows the details of an alarm schedule template.

Parameter Name	Req. or Opt.	Data Type	Description
ID	Opt.	String	ID of an alarm schedule template, which consists of up to 32 characters.
Name	Opt.	String	Name of an alarm schedule template, which consists of up to 64 characters.

A.3.159 TimeSetting

The table here shows the time information of an arming schedule template.

Parameter Name	Data Type	Description
dayOfWeek	String	Day of a week.
timeSpan	***TimeSpan*** []	Time range.

A.3.160 TimeSpan

The table here shows the time range of an arming schedule template.

Parameter Name	Data Type	Description
beginTime	String	Start time.
endTime	String	End time.

A.3.161 TimeZone

The table here shows information about time zone.

Parameter Name	Req. or Opt.	Data Type	Description
id	Req.	String	Time zone ID, which consists of up to 8 characters.
applyToDevice	Req.	String	Whether to apply to device: "0" (not apply to device), "1" (apply to device). And the field consists of 1 character.

A.3.162 TimeZoneInfo

The table here shows the information about time zone.

Parameter Name	Data Type	Description
id	String	ID.
standardName	String	Standard time zone name.

Parameter Name	Data Type	Description
displayName	String	Displayed time zone name.
bias	Integer	Time difference with GMT, unit: minute.
dst	***TimeZoneDst***	DST settings.

A.3.163 TimeZoneDst

The table here shows time zone DST settings.

Parameter Name	Data Type	Description
daylightBias	String	Time difference with DST, unit: minute.
daylightDate	String	DST start time.
standardDate	String	Standard time, which is the end time of DST.
enable	Integer	Whether to enable DST: 0 (no), 1 (yes).

A.3.164 TotalTimeCardReportData

The table here shows the Total Time Card report data.

Parameter Name	Req. or Opt.	Data Type	Description
firstName	Req.	String	Person's first name.
lastName	Req.	String	Person's last name.
fullName	Req.	String	Person's full name.
personCode	Req.	String	Person's employee No.
groupName	Req.	String	Department name.
date	Req.	String	Date.
weekday	Req.	Integer	Day of a week: 0-Sunday, 1-Monday, 2-Tuesday, 3-Wednesday, 4-Thursday, 5-Friday, 6-Saturday.

Parameter Name	Req. or Opt.	Data Type	Description
timetableName	Req.	String	Time period name.
checkInDate	Req.	String	Required check-in date.
checkInTime	Req.	String	Required check-in time.
checkOutDate	Required	String	Required check-out date.
checkOutTime	Req.	String	Required check-out time.
clockInDate	Req.	String	Actual clock-in date.
clockInTime	Req.	String	Actual clock-in time.
clockInSource	Req.	Integer	Actual clock-in source: 0-unknown, 1-original record, 2-correction application, 3-check-in/out via mobile client, 4-check-in/out not required.
clockInDevice	Req.	String	Actual clock-in device name.
clockInArea	Req.	String	Actual clock-in area name.
clockOutDate	Req.	String	Actual clock-out date.
clockOutTime	Req.	String	Actual clock-out time.
clockOutSource	Req.	Integer	Actual clock-out source: 0-unknown, 1-original record, 2-correction application, 3-check-in/out via mobile client, 4-check-in/out not required.
clockOutDevice	Req.	String	Actual clock-out device name.
clockOutArea	Req.	String	Actual clock-out area name.
attendanceStatus	Req.	Integer	Attendance status: 1-normal, 2-late, 3-early leave, 4-late and early leave, 5-absense, 6-leave.
workDuration	Req.	String	Work hours.
absenceDuration	Req.	String	Absence duration.
lateDuration	Req.	String	Late duration.
earlyDuration	Req.	String	Early leave duration.
breakDuration	Req.	String	Break duration.
leaveDuration	Req.	String	Leave duration.

Parameter Name	Req. or Opt.	Data Type	Description
overtimeDuration	Req.	String	Overtime duration.
workdayOvertimeDuration	Req.	String	Weekday overtime duration.
weekendOvertimeDuration	Req.	String	Weekend overtime duration.

A.3.165 User

The table here shows the user information.

Parameter Name	Data Type	Description
ID	String	User ID.
name	String	User name.

A.3.166 VehicleInfo(1)

The table here shows the vehicle information.

Parameter	Req. or Opt.	Data Type	Description
id	Opt.	String	Vehicle ID.
licensePlateNo	Req.	String	License plate No.
vehicleType	Req.	Integer	Vehicle type: 0-others, 1-car, 2-truck, 3-bus.
driverFirstName	Opt.	String	Driver's first name.
driverLastName	Opt.	String	Driver's last name.
driverPhoneNo	Opt.	String	Driver's phone No.
pictureUrl	Opt.	String	Vehicle picture URL.
extend	Opt.	String	Annotations.
speedLimit	Req.	Integer	Speed limit (cm/h).

A.3.167 VehicleInfo(2)

The table here shows the vehicle information.

Parameter Name	Req. or Opt.	Data Type	Description
licensePlateNo	Req.	String	License plate No.
id	Req.	String	Vehicle ID.
speedLimit	Req.	Integer	Speed limit (cm/h).
driverInfos	Opt.	***DriverInfo (1)*** []	Driver information list.

A.3.168 VehicleInfo(3)

The table here shows the vehicle information.

Parameter Name	Req. or Opt.	Data Type	Description
vehicleID	Opt. (Req.)	String	Vehicle ID, the only required parameter to be entered when you link on-board devices with existing vehicles. If the vehicle ID is not empty, linking with the existing vehicle will be prior to adding a new vehicle.
licensePlateNo	Opt. (Req.)	String	License plate No., required with the optional parameters below for adding new vehicles to be linked with on-board devices.
vehicleType	Opt.	Integer	Vehicle type: 0-others, 1-car, 2-truck, 3-bus.
driverFirstName	Opt.	String	Driver's first name.
driverLastName	Opt.	String	Driver's last name.
driverPhoneNo	Opt.	String	Driver's phone No.
pictureKey	Opt.	String	Vehicle picture key.
extend	Opt.	String	Annotations.

A.3.169 VehicleRelatedInfo

The table here shows the information of vehicles linked with on-board devices.

Parameter Name	Req. or Opt.	Data Type	Description
gpsInfo	Opt.	***GPSInfo***	GPS-related information.
vehicleInfo	Opt.	***VehicleInfo(2)***	Vehicle-related information.

A.3.170 VideoInfo

The table here shows the video information.

Parameter	Data Type	Description
playBackNumber	integer	Number of playback channels: 0 (not supported).

A.4 Status and Error Code

Internal Errors

Error Code	Error Description	Debug Suggestion
CCF000001	Parameter error.	Compare documents to check if the parameter is correct.
CCF000004	Database operation failed.	Check the database operation.
CCF000005	No permission to operate this resource.	Check your permissions.
CCF000007	Internal calling failed.	Check request parameters according to the error message.
CCF038002	Name length exceeded limit.	Adjust name length.
CCF038005	Name cannot contain special characters.	Remove special characters.
CCF038007	User is not assigned with the access level.	Contact the platform to check person's access level.
CCF038009	Person group does not exist.	Person group does not exist.

Error Code	Error Description	Debug Suggestion
CCF038014	Invalid first name of person.	Check and edit the first name of person.
CCF038015	Invalid family name of person.	Check and edit the family name of person.
CCF038016	Invalid person ID.	Check the person's personCode.
CCF038017	Invalid person's full name.	Check the person's full name.
CCF038019	Invalid person email.	Check the email.
CCF038020	Invalid person's phone No.	Check the phone No.
CCF038021	Invalid person's description.	Check the person's description.
CCF038022	Invalid person's validity.	Check the person's validity.
CCF038023	Person does not exist.	Person does not exist.
CCF038024	Person ID already exists.	Check the person 's personCode.
CCF038025	Person ID does not exist.	Check the person 's personCode.
CCF038026	Person's picture does not exist.	Check the person's picture.
CCF038028	Saving the person's picture failed.	Check if the picture information is correct.
CCF038029	No more persons are allowed.	Check the number of added persons (free:100, fee-paying: 50,000.
CCF038031	Adding person failed.	Check all information of added persons.
CCF038032	No more cards for a person are allowed.	Check the number of cards for a person (max. 2).
CCF038034	Duplicate card No.	Duplicate card No.
CCF038035	Card does not exist.	Card does not exist.
CCF038036	Card No. length exceeded limit.	Card No. length exceeded limit.
CCF038037	Card No. is empty.	Check if empty string is entered for card No.

Error Code	Error Description	Debug Suggestion
CCF038038	Invalid card No.	Check if card No. meets the requirement.
CCF038039	No more fingerprints for a person are allowed.	Check the number of fingerprints for a person (max. 2).
CCF038042	Fingerprint does not exist.	Fingerprint does not exist.
CCF038052	Email address already exist (remote calling error code).	Email address already exist.
CCF038055	Duplicate person's PIN code.	Set PIN code again.
CCF038059	Updating card failed.	Check the card data.
CCF038060	Updating fingerprint failed.	Check the fingerprint data.
CCF038061	Updating additional attribute failed.	Check if the PIN code configuration is appropriate. Modify the PIN code and try again.
CCF038062	Updating picture failed.	Check the picture data.
CCF038064	No matched department by search condition.	Check if search condition is valid.
CCF038065	Device does not exist.	Check if the device is on the platform.
CCF038066	Fingerprint data length exceeded limit.	Check fingerprint data length.
CCF038067	Duplicate fingerprint.	Check fingerprint.
CCF038068	Duplicate profile picture.	Check profile picture.
CCF038084	Collecting card No. by device failed.	Check if the device is on the platform.
CCF038085	Collecting fingerprint by device failed.	Check if the device is on the platform.
CCF038089	Phone No. has been occupied.	Check the phone No.
CCF021103	Area name already exists.	Modify the area name.
CCF021307	Device does not exist.	Device does not exist.

Error Code	Error Description	Debug Suggestion
CCF021008	Not supported by current device version.	Check if the device supports the function.
EVZ20002	Device does not exist.	Incorrect device registration region or the device does not exist. Please enter the correct device serial number.
EVZ20007	Device offline.	Device offline. Please check its network connection.
EVZ20008	Device response timed out.	Device response timed out.
EVZ20010	Incorrect device verification code.	Incorrect device verification code. Please check the device verification code and try again.
EVZ20013	The device has been added by another account.	The device is already added to a Hik-Connect account or another Hik-ProConnect account.
EVZ20014	Incorrect device serial No.	Incorrect device serial number. Please check the device serial number and try again.
EVZ20017	The device has been added by yourself.	The device has been added by yourself.
LAP000001	Parameter error.	Check API parameters.
LAP000004	Service calling blow exception.	Calling timed out. Please call again.
VMS000000	System error.	/
VMS000001	Parameter error.	Check API parameters.
VMS000003	No resource found or resource does not exist.	Check if resource exists.
VMS000004	Database operation failed.	Check the database operation.
VMS000005	No permission to operate this resource.	Apply for permission to operate the resource.
VMS000007	Internal calling failed.	Check the system environment.
VMS000008	Redis operation failed.	Check if Redis is normal or check if the request sent to Redis is correct.

Error Code	Error Description	Debug Suggestion
VMS000009	Concurrent requests (distributed lock is enabled).	Please try again later, or check if the distributed operations are locked.
VMS001000	Gateway error.	Please try again later, or check if the gateway is normal.
VMS001001	Service instance unavailable. Service is overloaded.	Please try again later, or check if the network is normal.
VMS003001	This email has been registered on the platform.	Please register with another email.
VMS003002	The user does not exist.	Check if the user exists or apply for a new user account.
VMS004004	Invalid role ID.	Check the role ID.
VMS004005	No permission.	Apply for the corresponding permission.
VMS020007	Get information from Hik-Connect.	Check if the device is offline or the registration failed.
VMS021008	The device version is not supported.	Check the device version or change to another device.
VMS021102	The area already exists.	Check if the area already exists.
VMS021103	The area name already exits.	Change the area name.
VMS021104	No more areas can be added.	Delete some areas or cancel adding areas.
VMS021105	Maximum area levels reached.	Switch the area level.
VMS021106	No more logical resources can be added to the VMS system.	Delete some logical resources from the VMS system or cancel adding logical resources to the VMS system.
VMS021107	No more logical resources can be added to the area.	Delete some logical resources from the area or cancel adding logical resources to the area.
VMS021108	Duplicate license plate No.	License plate No. already exists.

Error Code	Error Description	Debug Suggestion
VMS021109	Device already linked with another vehicle.	Device already linked with another vehicle.
VMS021110	Vehicle does not exist.	/
VMS021301	Adding the device...	Please try again later.
VMS021302	The device has been added.	Check if the device has been added.
VMS021303	The device already exits in the system.	Check if the device already exists in the system.
VMS021305	The device name already exists.	Change the device name.
VMS021306	Adding the device timed out.	Please try again later.
VMS021307	The device does not exist.	Check if the device exists.
VMS021308	Refreshing the device...	Please try again later.
VMS021309	Incorrect device type.	Check the device type.
VMS021311	No more devices can be added.	Delete some devices or cancel adding devices.
VMS021314	Device offline.	Check if the device is online.
VMS021315	Invalid serial No.	Check if the serial No. is valid.
VMS021316	The device belongs to another user.	Check if the device belongs to yourself.
VMS021337	Importing resource failed.	Importing resource failed for adding device.
VMS022531	Ezviz response error.	/
VMS022533	Device response error.	/
VMS022535	Not supported by device.	/
VMS022543	Device offline.	/
VMS022553	Invalid operation.	/
VMS023001	Sending the email failed.	Please try again later.
VMS023002	Duplicate color.	Please try again later.

Error Code	Error Description	Debug Suggestion
VMS023003	The priority name already exits.	Change the priority name.
VMS023004	The alarm category name already exists.	Change the alarm category name.
VMS023005	The email template name already exists.	Change the email template name.
VMS023006	The system email is not configured.	Configure the system email first.
VMS023007	Repeatedly acknowledging the alarm.	Check if the alarm is acknowledged.
VMS023008	The alarm configuration already exists.	Check if the alarm configuration already exists.
VMS038005	Number of persons in the room exceeds limit.	Check if the number of persons in the room exceeds the limit.
VMS038009	Adding person failed.	This error message will be sent by the person group when the employee ID is not obtained by the internal protocol.
VMS038011	Wrong person type added to the room.	Check if a householder is added to a room with an existing householder or a family member is added to a room without a householder.
VMS038012	No permission for adding persons to the room.	Check if the person who wants to add persons is the householder.
VMS038014	Resident already in the room.	The resident is already in the room.
VMS038019	The calling record does not exist.	Check the calling record ID.
VMS038026	Email address already exists.	Email address already exists.
VMS038027	Call answered.	Call answered.
VMS038028	Resident does not exist.	Resident does not exist.
VMS038029	Call from device canceled.	Call from device canceled.

Error Code	Error Description	Debug Suggestion
VMS040002	Duplicate name.	Edit name.
VMS040003	Name length exceeded limit.	Edit name.
VMS040004	Name is empty	Edit name.
VMS040005	Name contains special characters.	Edit name.
VMS040011	No more access schedule templates are allowed.	Delete access schedule templates.
VMS040012	The default schedule template cannot be modified	Do not modify the default schedule template.
VMS040013	No more access levels are allowed on the platform.	Delete access levels.
VMS040014	No more holidays are allowed.	Delete holiday schedules.
VMS040015	Select at least one access point.	The access point parameter cannot be empty.
VMS040016	Access level does not exist.	Check if the access point exists.
VMS040017	No more than 4 access schedules can be linked with one person for an access point.	No more than 4 access schedules can be configured for a single person on a single device.
VMS040018	No valid credential for the person.	Check credential information for the person.
VMS040020	The current device is in applying process... Please try again later.	Wait for the current applying to finish.
VMS040101	No more schedule templates are allowed on device.	Delete schedule templates on device.
VMS040102	No more holiday groups are allowed on device.	Delete holiday group schedules on device.
VMS040103	No more holidays are allowed on device.	Delete holiday schedules on device.

Error Code	Error Description	Debug Suggestion
VMS040104	No more weekly schedules are allowed on device.	Delete weekly schedules on device.
VMS040105	Access group settings are not applied to device.	Please contact technical support.
VMS040106	Fingerprint length mismatch.	
VMS040107	No valid card reader for the fingerprint currently.	
VMS040108	Applying fingerprint failed.	Please contact technical support.
VMS040109	Fingerprint module offline	
VMS040110	Quality of fingerprint is low.	
VMS040111	No more fingerprints are allowed on card reader.	
VMS040112	Duplicate fingerprint.	
VMS040113	Duplicate fingerprint ID.	
VMS040114	Invalid fingerprint ID.	
VMS040115	Fingerprint module does not require configuration.	
VMS040116	Device does not support applying fingerprints	
VMS040117	Fingerprint card reader version too old (employee No. not supported).	
VMS040118	Fingerprint type not supported.	
VMS040119	No valid card reader for the face picture currently.	
VMS040120	Visit schedule template does not exist.	
VMS040121	Password length mismatch.	

Error Code	Error Description	Debug Suggestion
VMS040122	The current device only supports 6-digit password.	
VMS051025	ANPR resource limit.	/
VMS051026	The camera ID is empty.	/
VMS051027	Invalid time format.	/
VMS051028	The start time must be ealier than the end time.	/
VMS051002	The license plate ID does not exist.	Check the existing license plate ID from the name list details.
VMS051001	The license plate already exists in the current name list.	The license plate is unique within the same name list and cannot be added repeatedly.
VMS051070	The start time format is invalid.	/
VMS051072	The end time format is invalid.	/
VMS051010	The name list ID does not exist.	The name list ID does not exist. Check the correct name list ID entered in the system.
THD_ISAPI_0x20000004	Device busy.	During fingerprint or card collecting, if the fingerprint or card information are not entered in the request, this error will occur. Please collect information in the regular course.
THD_ISAPI_0x60000003	XML message error (e.g., incorrect value of node).	Please contact technical support.
THD_ISAPI_0x60000017	JSON message error.	Please contact technical support.
THD_ISAPI_0x60000019	Missing parameters in the message.	Please contact technical support.
THD_ISAPI_0x6000001C	Containing invalid characters.	/
THD_ISAPI_0x6000001D	Name too long.	/

Error Code	Error Description	Debug Suggestion
THD_ISAPI_0x60000025	The parameter value exceeded limit.	/
THD_ISAPI_0x6000002D	Number of face picture libraries exceeded limit.	/
THD_ISAPI_0x6000002E	Number of face pictures exceeded limit.	/
THD_ISAPI_0x6000002F	Picture data detection failed.	/
THD_ISAPI_0x60000030	Invalid face picture data PID.	/
THD_ISAPI_0x60000031	Invalid face picture library ID.	/
THD_ISAPI_0x60000032	Data library version of face picture library mismatch.	/
THD_ISAPI_0x60000033	Incorrect verification code.	/
THD_ISAPI_0x60000034	Face picture library data error.	/
THD_ISAPI_0x60000035	Multi-face target error (multiple valid targets exist among pictures imported to face picture library, and are not differentiated by coordinates).	/
THD_ISAPI_0x60000036	No target detected in the picture.	/
THD_ISAPI_0x60000037	Sub-picture modeling failed.	/
THD_ISAPI_0x60000038	Incorrect name.	/
THD_ISAPI_0x60000039	Name already exists.	/
THD_ISAPI_0x6000003A	Importing pictures to face picture library...	/
THD_ISAPI_0x6000003B	Invalid picture format.	/
THD_ISAPI_0x6000003C	Invalid picture resolution.	

Error Code	Error Description	Debug Suggestion
THD_ISAPI_0x6000003D	Picture size too large.	
THD_ISAPI_0x6000003E	Picture size too small.	
THD_ISAPI_0x6000005F	The maximum length of password is 16.	
THD_ISAPI_0x60000060	Password mismatch.	
THD_ISAPI_0x60000063	Deleting failed.	
THD_ISAPI_0x60000068	No data returned from face picture comparison search.	
THD_ISAPI_0x60000069	No data returned from face picture library search.	
THD_ISAPI_0x6000006A	Concurrent processing is not supported. The device is performing operation of picture modeling.	
THD_ISAPI_0x6000006B	No data to be modeled in face picture library.	
THD_ISAPI_0x6000006C	The upper layer applied duplicate custom face picture library ID.	
THD_ISAPI_0x6000006D	The upper layer applied duplicate custom person ID.	
THD_ISAPI_0x6000006E	Downloading URL failed.	
THD_ISAPI_0x6000006F	Downloading URL not started yet.	
THD_ISAPI_0x60000071	Internal device modeling error.	
THD_ISAPI_0x60000072	Face picture modeling error.	
THD_ISAPI_0x60000073	Face picture categorization error.	
THD_ISAPI_0x60000074	Face feature modeling error.	

Error Code	Error Description	Debug Suggestion
THD_ISAPI_0x60000075	Face picture analysis modeling error.	
THD_ISAPI_0x60000082	Pupil distance parameter error (the min. value is larger than the max. value, or the configured max. value is smaller than the min value).	
THD_ISAPI_0x60000083	Duplicate alarm linkage name.	
THD_ISAPI_0x60006000	Overlapped time periods.	
THD_ISAPI_0x60006001	Overlapped holiday schedules.	
THD_ISAPI_0x60006002	Card No. is not sorted in order.	
THD_ISAPI_0x60006003	Card No. does not exist.	
THD_ISAPI_0x60006004	Incorrect card No.	
THD_ISAPI_0x60006008	No more cards are allowed.	
THD_ISAPI_0x60006009	Downloading holiday group failed.	
THD_ISAPI_0x60006014	Multiple cards for a single person is not supported.	
THD_ISAPI_0x60006015	Face picture to be deleted does not exist.	
THD_ISAPI_0x60006019	Incorrect finger No.	
THD_ISAPI_0x6000601a	Incorrect fingerprint type.	
THD_ISAPI_0x6000601b	Fingerprint is not linked with employee No. or card No. (the employee No. or card No. field is empty).	
THD_ISAPI_0x6000601c	Fingerprint already exists.	
THD_ISAPI_0x6000601d	Fingerprint module does not require configuration.	

Error Code	Error Description	Debug Suggestion
THD_ISAPI_0x6000601e	Card reader does not support deleting fingerprint by pressing fingerprint ID.	
THD_ISAPI_0x6000601f	Employee No. does not exist.	
THD_ISAPI_0x60006020	Employee No. already exists.	
THD_ISAPI_0x60006033	Card No. already exists.	
THD_ISAPI_0x60006034	The length of fingerprint data is 0.	
THD_ISAPI_0x60006035	Incorrect card reader No.	
THD_ISAPI_0x60006036	Incorrect employee No.	
THD_ISAPI_0x60006039	Admin password not configured yet (for prompting on configuring activation code on device).	
THD_ISAPI_0x6000603a	Picture does not exist.	
THD_ISAPI_0x6000603b	Ocular distance too narrow.	
THD_ISAPI_0x6000603c	Face picture data less than 1 KB.	
THD_ISAPI_0x6000603d	Picture information verification failed.	
THD_ISAPI_0x6000603e	Face rating failed.	
THD_ISAPI_0x6000603f	Converting QR code picture failed.	
THD_ISAPI_0x60006040	Number of fingerprints reached limit.	
THD_ISAPI_0x60007000	Number of persons reached limit.	

openAPI Errors

Error Code	Error Description	Debug Suggestion
OPEN000000	System internal errors.	/
OPEN000001	The AK does not exist.	Check if the AK is correct.
OPEN000002	Incorrect SK.	Check if the SK is correct.
OPEN000003	The user does not exists.	Check if the user exists.
OPEN000004	The system does not exist.	Check if the system exists.
OPEN000005	Linking the HCC account with the AK and SK failed.	Check the parameters or try again later.
OPEN000006	Token expired.	Please try again later.
OPEN000007	Token exception.	Check if the token is correct.
OPEN000008	Parameter conversion exception.	Check the parameters.
OPEN000009	Network exception.	Please try again later.
OPEN000010	Parameter verification exception.	Check the parameters.
OPEN000011	The requested resources are not available yet.	Check if the requested resources are available.
OPEN000012	The message submission ID (batchId) does not exist.	Check the submission ID or try again later.
OPEN000013	The alarm offset AK does not exist.	Check the alarm offset AK or try again later.
OPEN000014	Incorrect format of alarm picture URL.	Check the format of alarm picture URL or try again later.
OPEN000015	Alarm message conversion failed.	Please try again later.
OPEN000016	The alarm information is not subscribed.	Check if the alarm information is subscribed.
OPEN000017	Adding resource failed.	Adding resource failed.
OPEN000018	Hik-Connect server error.	Hik-Connect server error.
OPEN000019	Hik-Connect server response error.	Hik-Connect server response error.

Error Code	Error Description	Debug Suggestion
OPEN000020	Saving file failed.	Saving file failed.
OPEN000021	No permission for viewing the resource	No permission for viewing the resource
OPEN000022	No permission for managing the source.	No permission for managing the source.
OPEN000023	Reading Dynamo failed.	Reading Dynamo failed.
OPEN000024	Number of resources for request exceeded limit.	Reduce the number of resources for request.
OPEN000025	Number of records on each page exceeded limit.	The number of records on each page should be from 1 to 500.
OPEN000026	Incorrect time format.	The time should be represented by "yyyy-MM-ddTHH:mm:ss".
OPEN000027	The time range set for search exceeded limit.	The time range for search should be no more than a day.
OPEN000028	Area ID is empty.	Enter an area ID.
OPEN000029	Incorrect request volume.	Check the parameter description.
OPEN000030	Start time of search is later than end time of search.	Set the start time of search earlier than the end time of search.
OPEN000031	Area does not exist.	Check if **areaID** is correct.
OPEN000501	Device does not exist.	Check if the input parameter is correct.
OPEN000502	Cloud storage configuration information not found.	Check if cloud storage is configured.
OPEN000503	Camera resource does not exist.	Check if the input resource request parameter is correct.
OPEN000504	Adding area failed.	Check the parameter according to error information.
OPEN000505	Adding resource failed.	Check the parameter according to error information.
OPEN000510	Area already exists.	Edit area name.

Error Code	Error Description	Debug Suggestion
OPEN000511	Resource already exists.	Do not add the same resource twice.
OPEN000550	No response to request.	Check if the device supports this function.
OPEN000552	Error returned from request.	Troubleshoot according to error information.
OPEN000554	Device offline.	Check the device status.
OPEN000555	Device response timed out.	Check if the device supports this function.
OPEN000556	Device capturing failed.	Check the device status and if the device supports this function.
OPEN000601	Adding device failed.	Check the error message.
OPEN010001	Adding driver failed.	Check the parameters.
OPEN010002	Editing driver failed.	Check the parameters.
OPEN010003	Batch searching for driver information failed.	Check the parameters.
OPEN010004	Adding driver group failed.	Check the parameters.
OPEN010005	Editing driver group failed.	Check the parameters.
OPEN010006	Batch searching for driver group information failed.	Check the parameters.
OPEN010007	Applying driver's face picture failed.	Check the parameters.


See Far, Go Further