

Search Labs

☐

..

☐	6-STATIC ROUTE.unl	23 Aug 2026 12:20
☐	5-LAB ROUTING.unl	20 Aug 2026 15:56
☐	AD.unl	27 Jul 2026 08:40
☐	9-LAB SUBNETTING.unl	16 Jun 2026 03:29
☐	1-LAB LAN.unl	13 May 2026 16:30
☐	2-LAB SWITCH.unl	16 Dec 2025 14:11
☐	8-LAB DHCP-RELAY.unl	04 Sep 2025 09:17
☐	7-LAB SERVERSERVICES.unl	04 Sep 2025 09:17
☐	3-LAB ROUTE TABLE.unl	04 Sep 2025 09:07
☒	4-LAB ROUTER CONFIGURATION.unl	04 Sep 2025 09:07

Lab Preview

```
graph LR; Router[ROUTER] --- e0_0((e0/0)) --- e0((e0)) --- Win[Win]; Router --- IP1[50.0.0.1]; Win --- IP2[50.0.0.10];
```


Router Configuration_LAB 4

OpenEditDelete

Lab Name : 4-LAB ROUTER CONFIGURATION

Author : 1

Version : 1

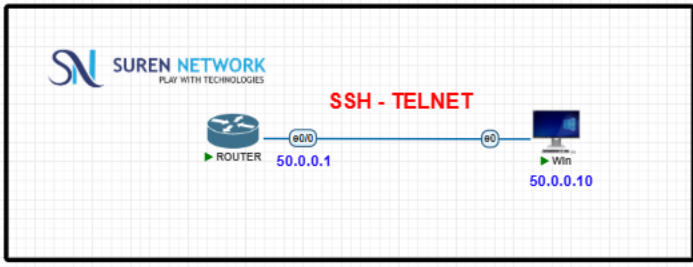

Network Topology

Router Configuration

TERMINAL (2)

Physical 01 : 00 : 00 START

Router Initial configuration

Router Modes

Router > user execution mode
Router # Privilege
Router (config)# Global configuration mode

Interface IP configuration

Router > enable (To move from user execution mode to privilege mode)
Router # configure terminal (To move from privilege to global configuration mode)
Router(config)# interface ethernet 0/0 (To select interface)
Router(config-if)# ip address 50.0.0.1 255.0.0.0 (To assign ip address)
Router(config-if)# no shutdown (To on interface)
Router(config-if)# exit
Router(config)# exit
Router# show ip interface brief (To check interface details)

Create console password

Router(config)# username console password console (To create database)
Router(config)# line console 0 (To enter in console port)
Router(config-line)# password testconsole
Router(config-line)# login local or login (If we give login local it will ask username & password)
(If we give login it will ask only password test console)
Router(config-line)# exit
Router(config)#

Create enable secret password

Router(config)# enable secret enable (To set password from uem to privilege mode)

Enable telnet

Router(config)# line vty 0 4 (To enable virtual terminal)
Router(config-line)# transport input telnet (To enable telnet)
Router(config-line)# password telnet (To create password)
Router(config-line)# login
Router(config-line)# exit
Router(config)#

50.0.0.1 - PuTTY

User Access Verification

Username: Admin

Password:

ROUTER>en

Password:

ROUTER#sh ip int br

Interface	IP-Address	OK?	Method	Status	Prot
Ethernet0/0	50.0.0.1	YES	manual	up	up
Ethernet0/1	unassigned	YES	TFTP	down	down
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

ROUTER#

labs.surennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuYW11lloiUk9VVEVSliwi...

Router Win

```
ROUTER(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    50.0.0.1        YES manual  up          up
Ethernet0/1    unassigned      YES TFTP   down        down
Ethernet0/2    unassigned      YES TFTP   down        down
Ethernet0/3    unassigned      YES TFTP   down        down
ROUTER(config)#ping 50.0.0.1
^
% Invalid input detected at '^' marker.

ROUTER(config)#exit
ROUTER#
*Sep  3 11:16:13.225: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#
ROUTER#
ROUTER#ping 50.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 50.0.0.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 4/4/5 ms
ROUTER#
```

34°C Mostly cloudy

Search

Taskbar icons: File Explorer, Edge, WhatsApp, etc.

04:46 pm 03-09-2026

```
ROUTER#
```

ROUTER x Win x

Administrator: Command Prompt

C:\Users\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Reply from 50.0.0.10: bytes=32 time<1ms TTL=128

Reply from 50.0.0.10: bytes=32 time<1ms TTL=128

Reply from 50.0.0.10: bytes=32 time<1ms TTL=128

Reply from 50.0.0.10: bytes=32 time<1ms TTL=128

Ping statistics for 50.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:

Reply from 50.0.0.1: bytes=32 time=1ms TTL=255

Reply from 50.0.0.1: bytes=32 time=1ms TTL=255

Reply from 50.0.0.1: bytes=32 time=1ms TTL=255

Reply from 50.0.0.1: bytes=32 time=1ms TTL=255

Ping statistics for 50.0.0.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:


Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\user>



11:23 AM



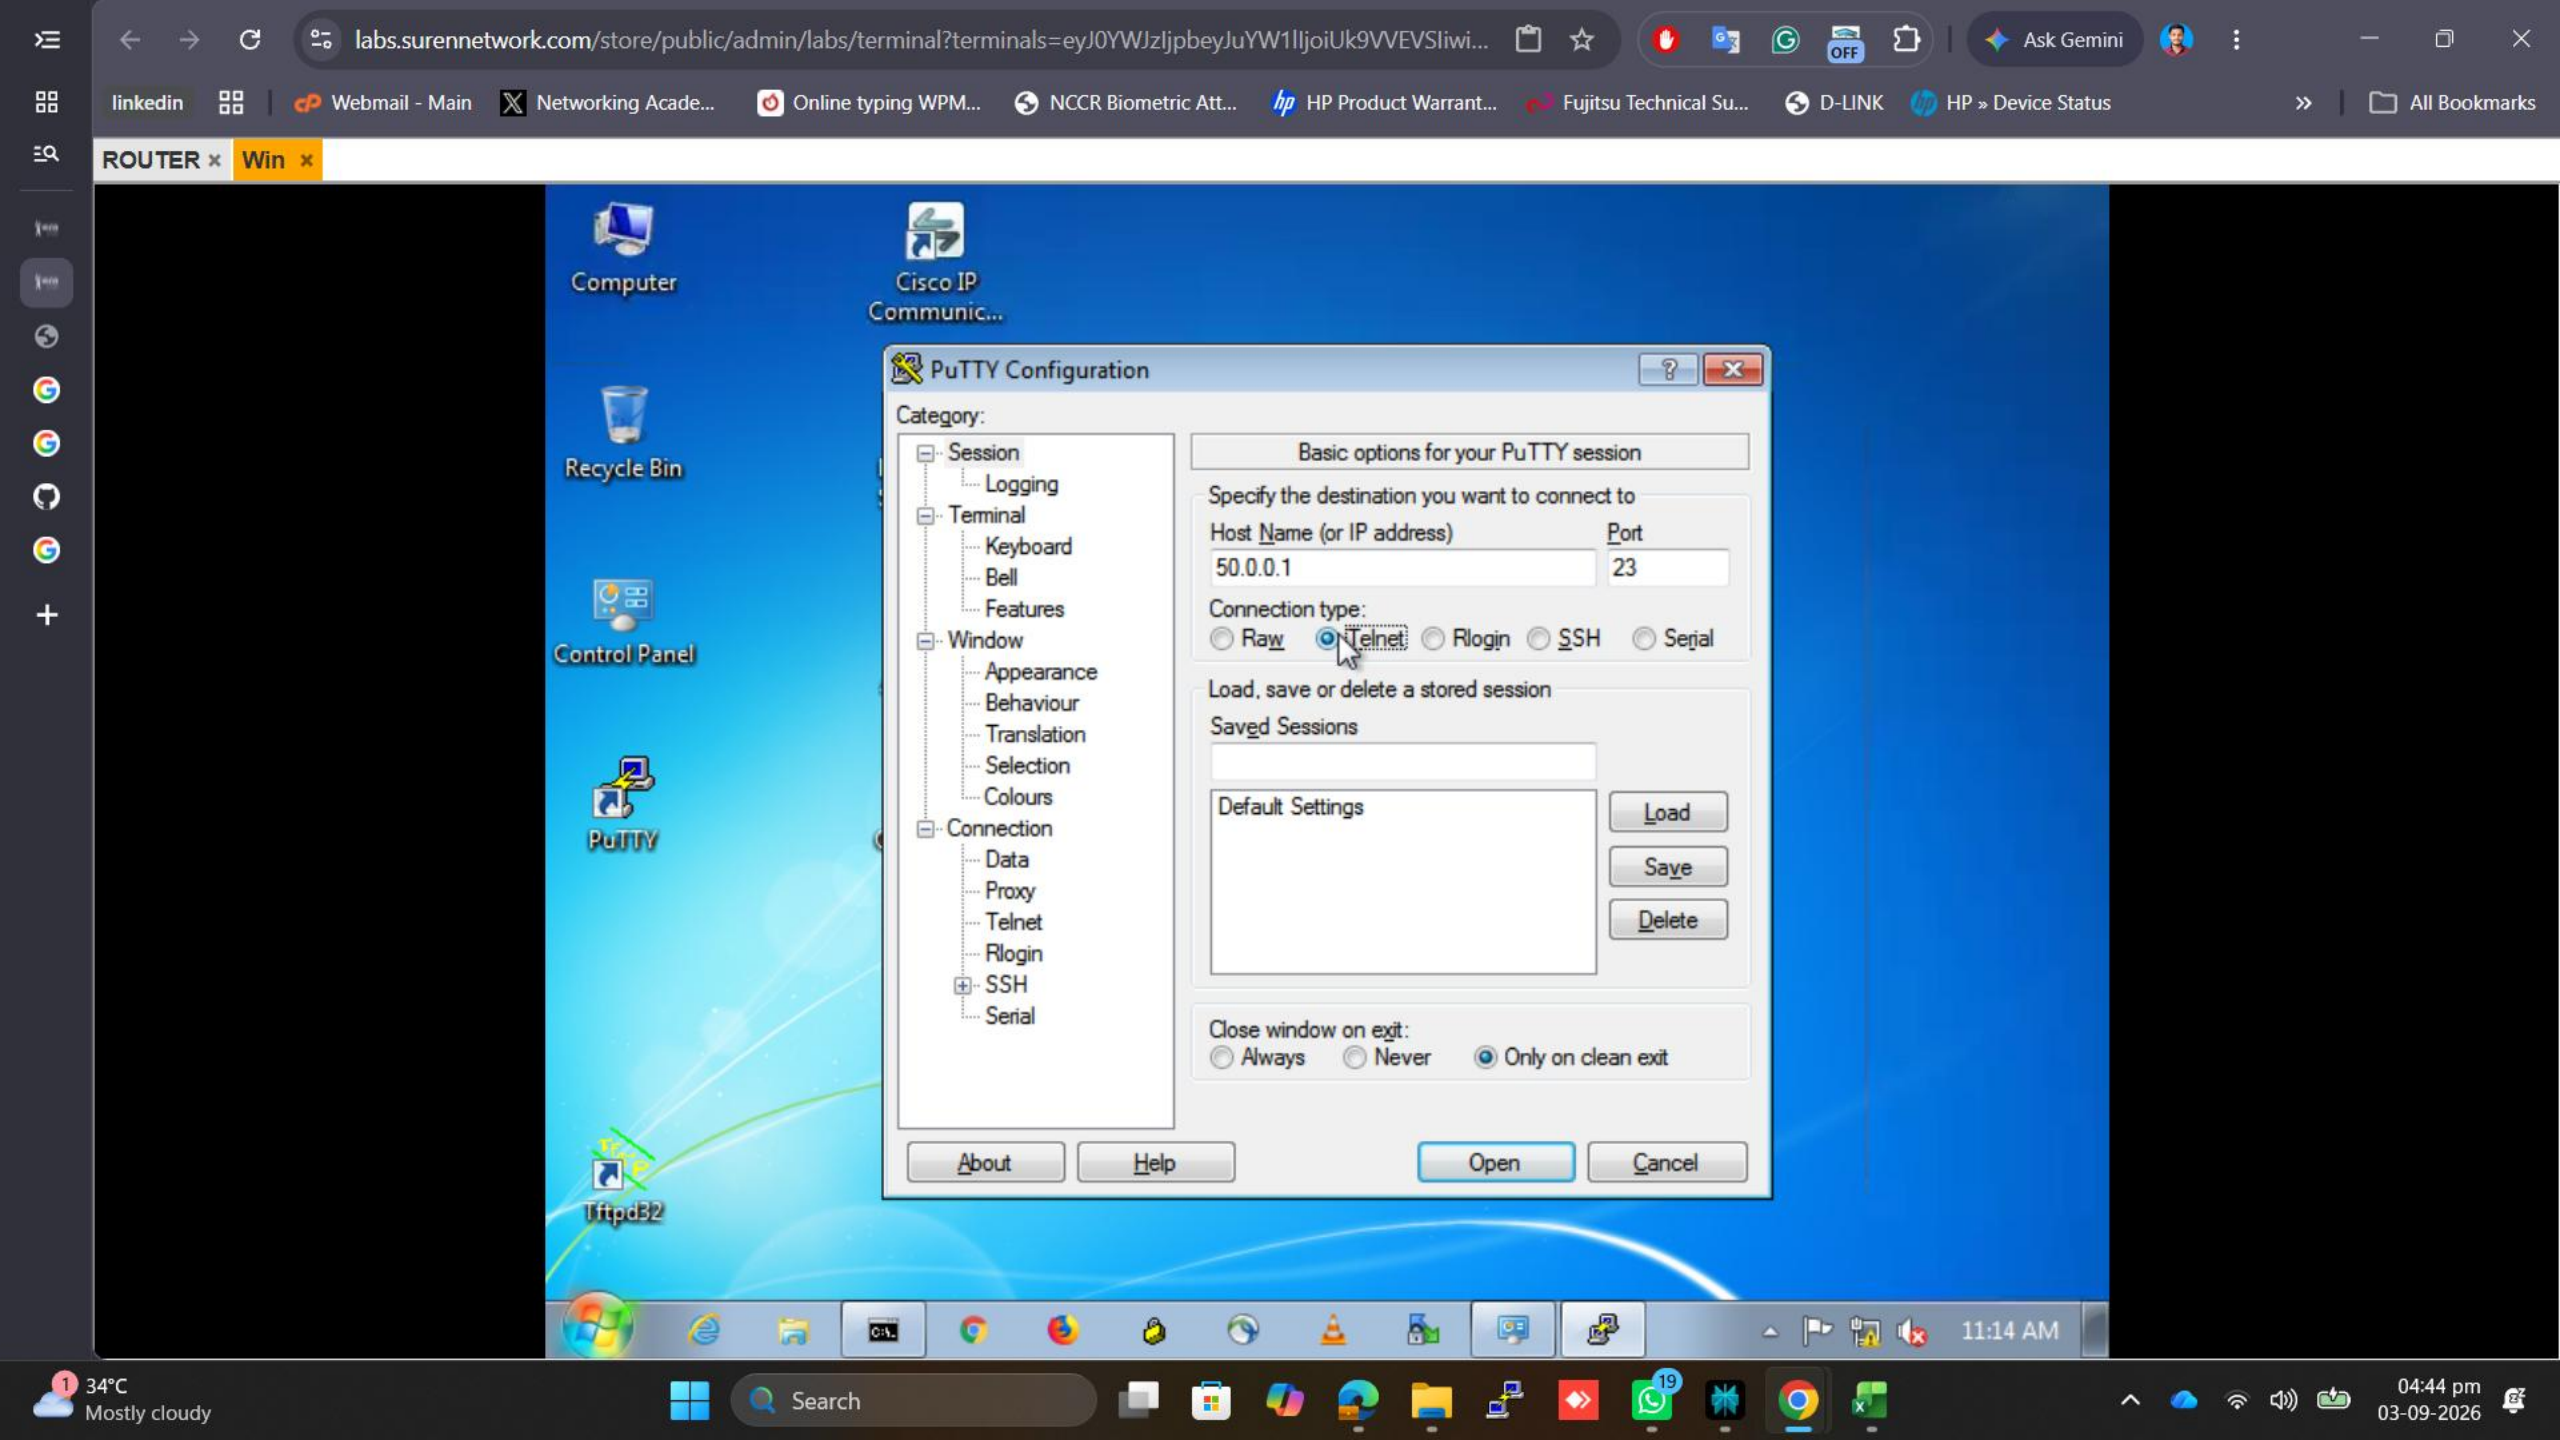

labs.surrennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuYW1lIjojUk9VVEVSlwi...

Router x Win x

50.0.0.1 - PuTTY

User Access Verification
Username: Admin
Password:
ROUTER>en
Password:
ROUTER#sh ip int br

Interface	IP-Address	OK?	Method	Status	Prot
Ethernet0/0	50.0.0.1	YES	manual	up	up
Ethernet0/1	unassigned	YES	TFTP	down	down
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

ROUTER#

Tftpd32

Using SSH through PuTTY

34°C Mostly cloudy

Search

04:45 pm 03-09-2026