



Assignment No : 15

Title : Create a serverless computing service


Step 1: Search lambda in the search bar and then click on create function.

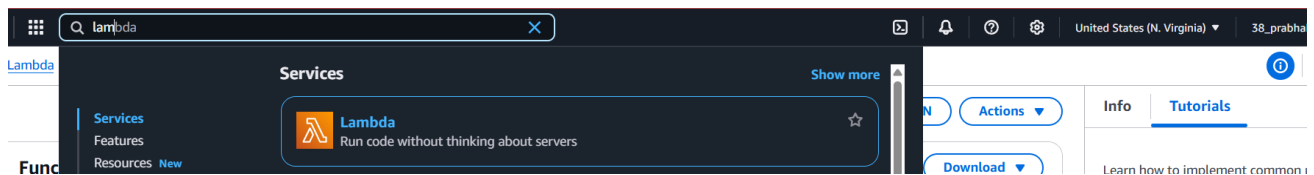


Step 2: Give function name and keep other details unchanged.

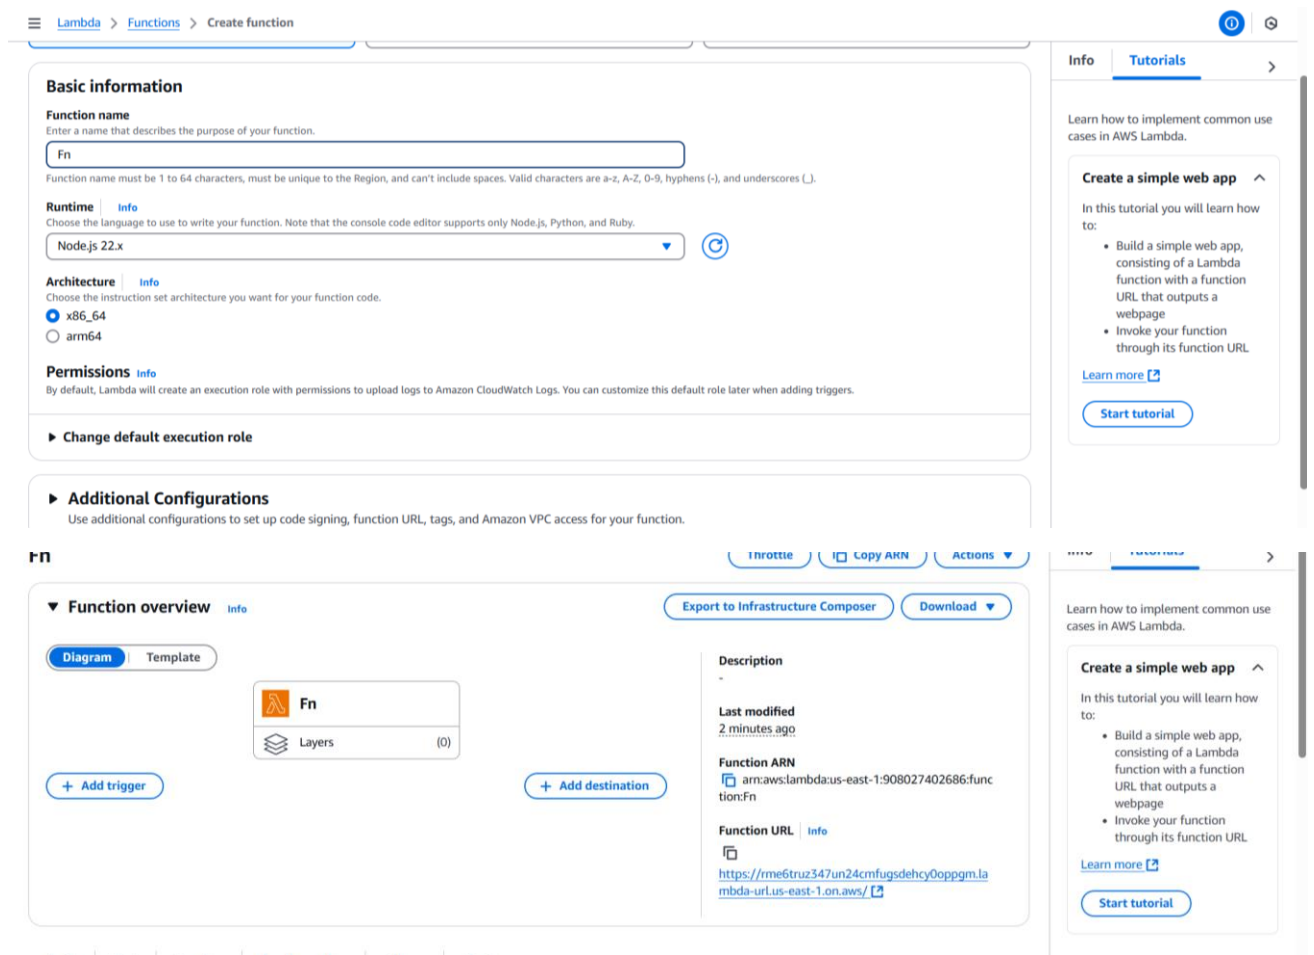


Step 3: Scroll down to the Code option to edit the code and deploy it.

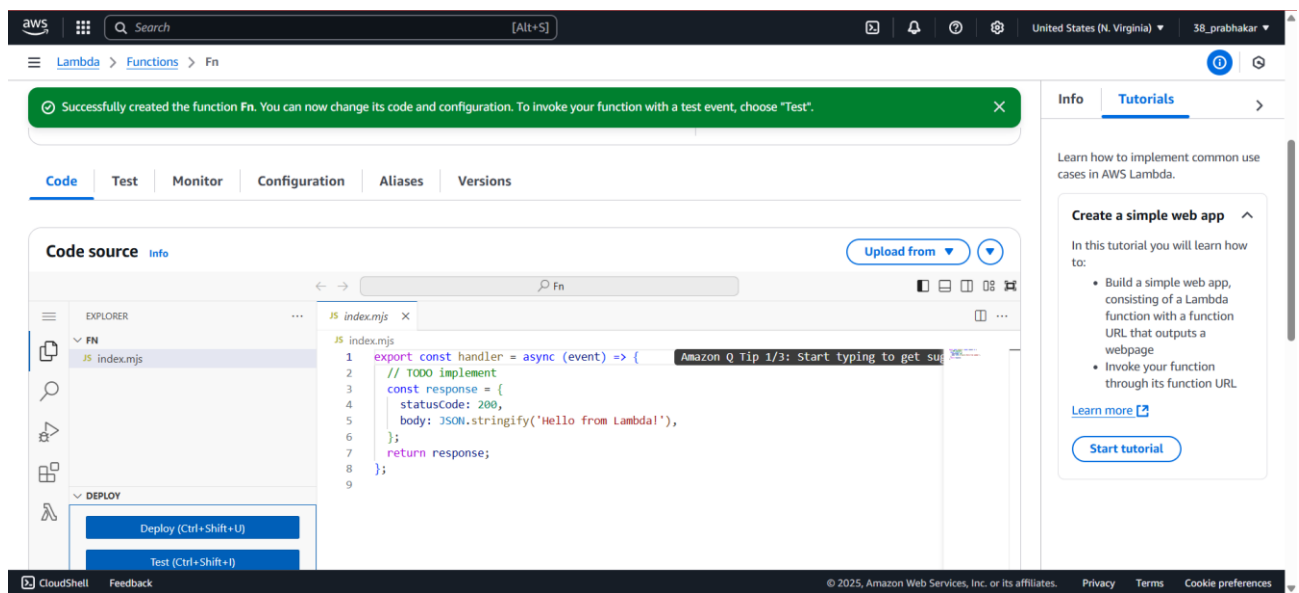


Step 4: Click the Test under Deploy > Create new test event > name the event and save it. Go to Test option

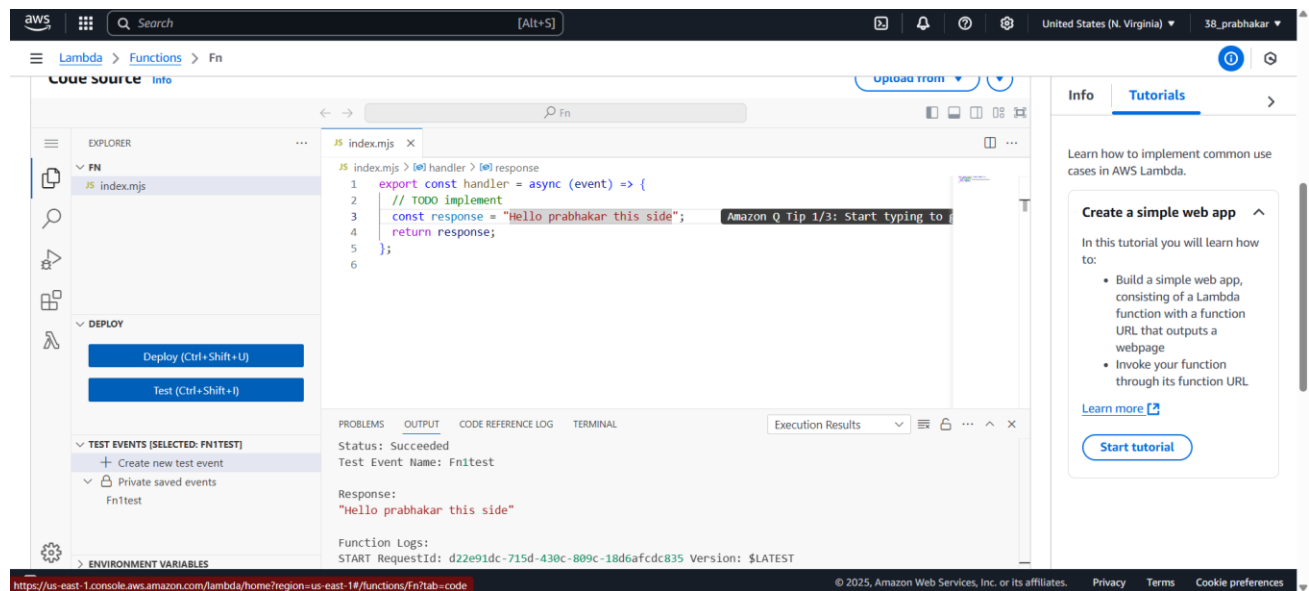

Step 5: After testing, a successful notification will pop up in the Test option.

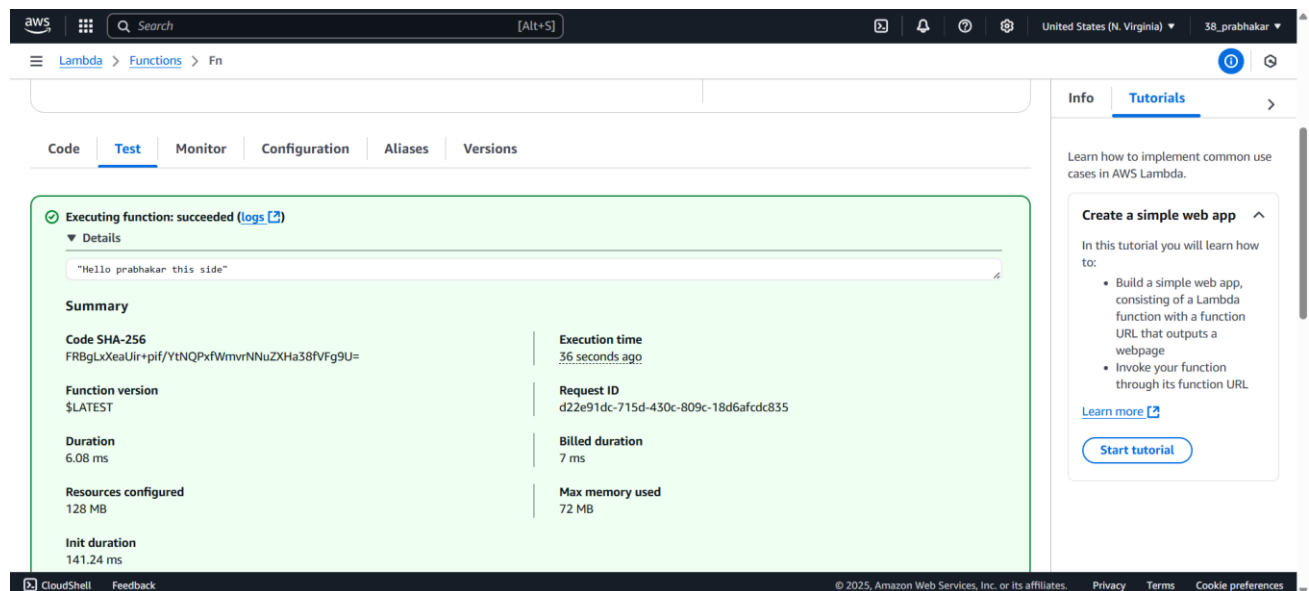

Step 6: Go to configuration > Function URL and click on Create URL.

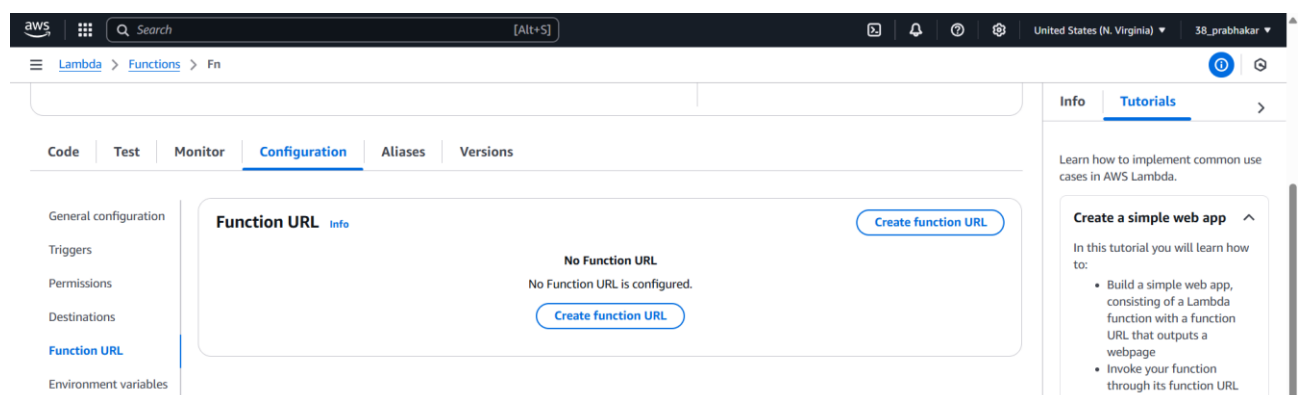

Step 7: Click on none and save the URL. Now copy the function URL and paste it in a new tab.

Configure Function URL

Function URL [Info](#)
Use function URLs to assign HTTP(S) endpoints to your Lambda function.

Auth type
Choose the auth type for your function URL. [Learn more](#)

☐ AWS_IAM
Only authenticated IAM users and roles can make requests to your function URL.

☒ NONE
Lambda won't perform IAM authentication on requests to your function URL. The URL endpoint will be public unless you implement your own authorization logic in your function.

Function URL permissions

When you choose auth type **NONE**, Lambda automatically creates the following resource-based policy and attaches it to your function. This policy makes your function public to anyone with the function URL. You can edit the policy later. To limit access to authenticated IAM users and roles, choose auth type **AWS_IAM**.

View policy statement

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "StatementId": "FunctionURLAllowPublicAccess",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": "lambda:InvokeFunctionUrl",
9       "Resource": "arn:aws:lambda:us-east-1:908027402686:function:Fn",
10      "Condition": {
11        "StringEquals": {
12          "aws:PrincipalOrgId": "095525538010"
13        }
14      }
15    }
16  ]
17 }
```

Configuration

Function URL [Info](#) [Delete](#) [Edit](#)

Your function URL is public. Anyone with the URL can access your function.

Function URL https://me6truz347un24cmfugsdehcy0oppgm.lambda-url-us-east-1.on.aws/	Auth type NONE	Invoke mode Info BUFFERED
Creation time in 4 seconds	Last modified in 4 seconds	
CORS (Not enabled)		

me6truz347un24cmfugsdehcy0oppgm.lambda-url-us-east-1.on.aws

Hello prabhakar this side

Step 8: Again go to code and edit the it and deploy it afterwards.

Code Source [Info](#)

EXPLORER

- FN
 - index.mjs

DEPLOY

[Deploy \(Ctrl+Shift+U\)](#) [Test \(Ctrl+Shift+I\)](#)

```
1 export const handler = async (event) => {
2   // TODO implement
3   const response = Math.random();
4   return response;
5 };
6
```

Step 9: Now refresh the URL.

me6truz347un24cmfugsdehcy0oppgm.lambda-url-us-east-1.on.aws

0.8874620759060454