




Assignment : 9


Deploy a project from GitHub to EC2.

Step 1: Ensure that there is a repository with files needed to host a site example: "index.js" , "package.json".

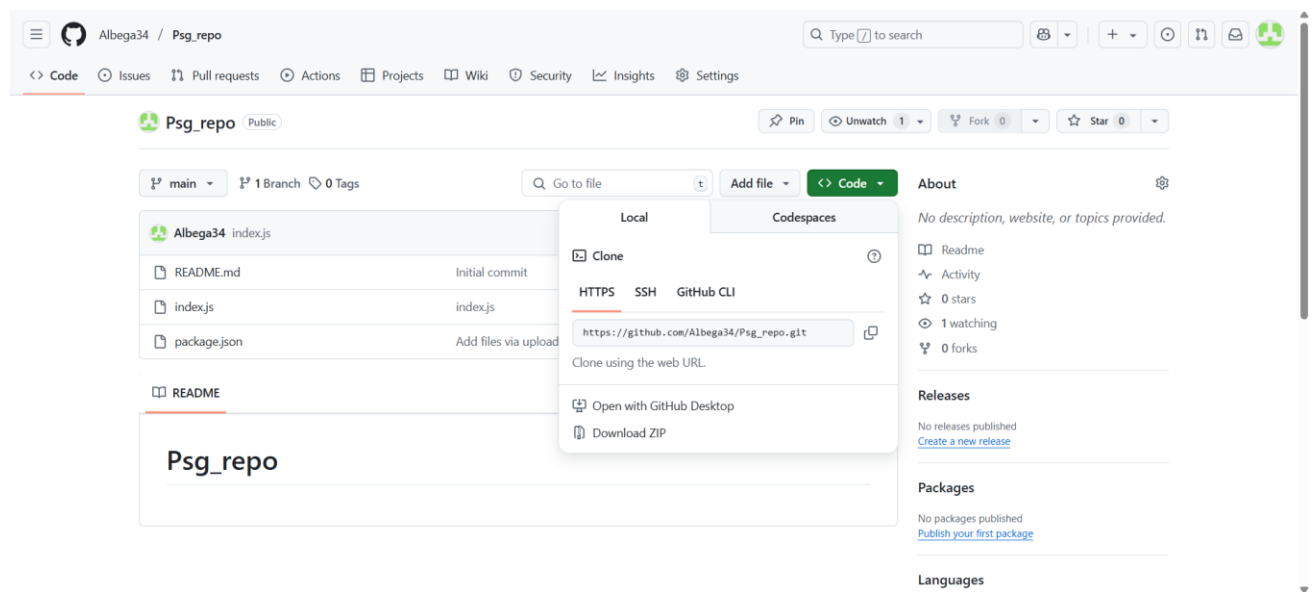


Step 2: Now we create a new EC2 instance and copy the IP.

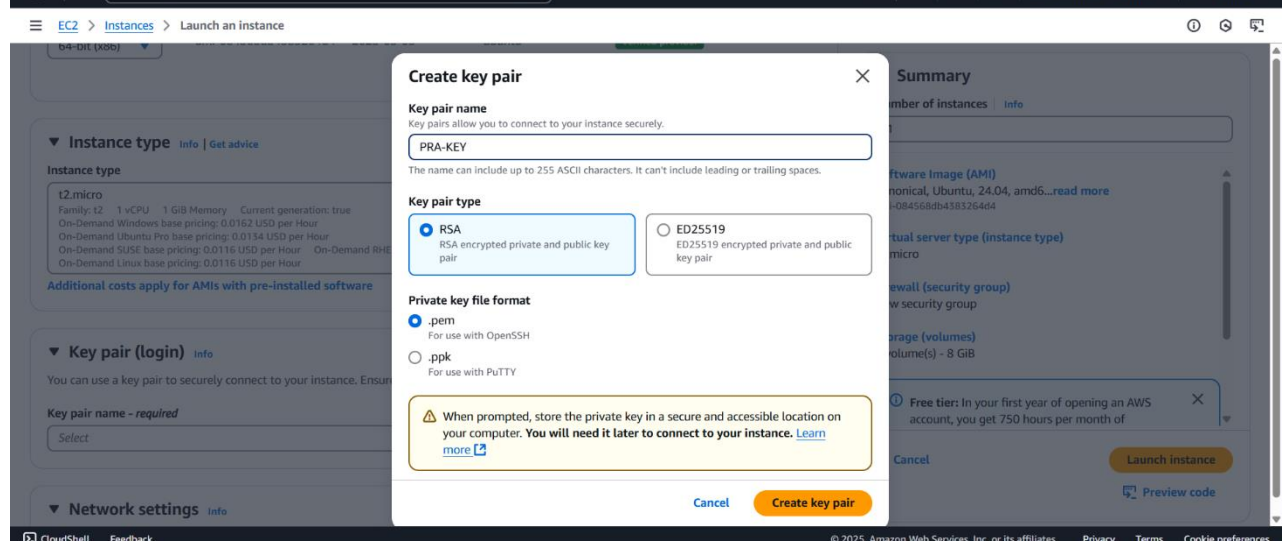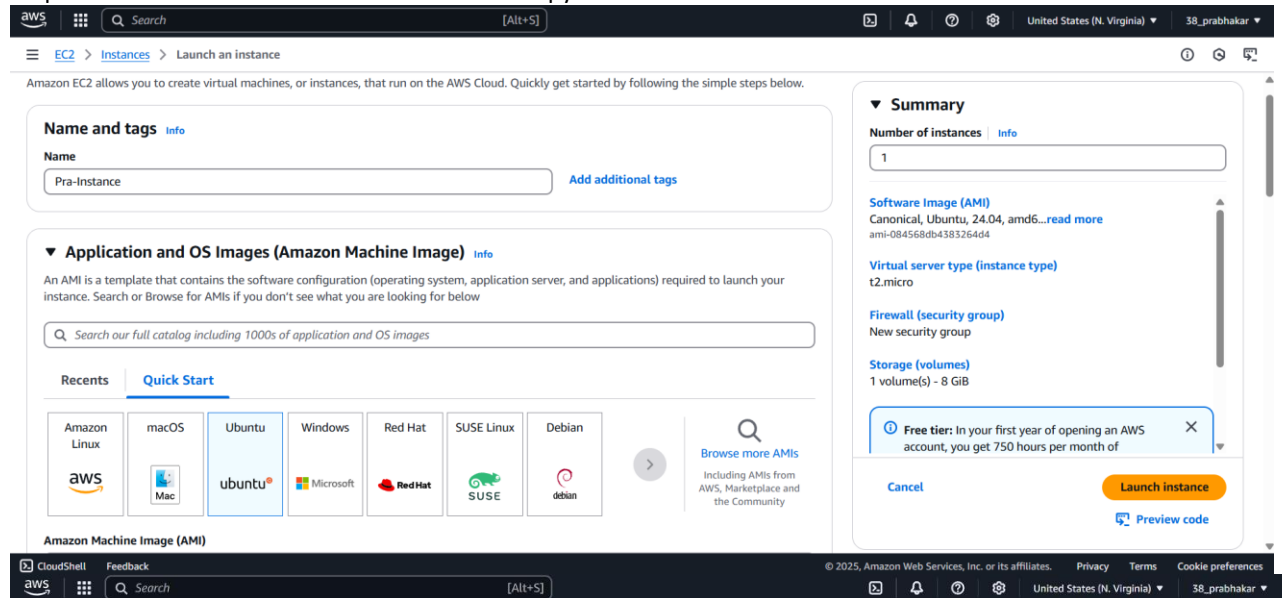


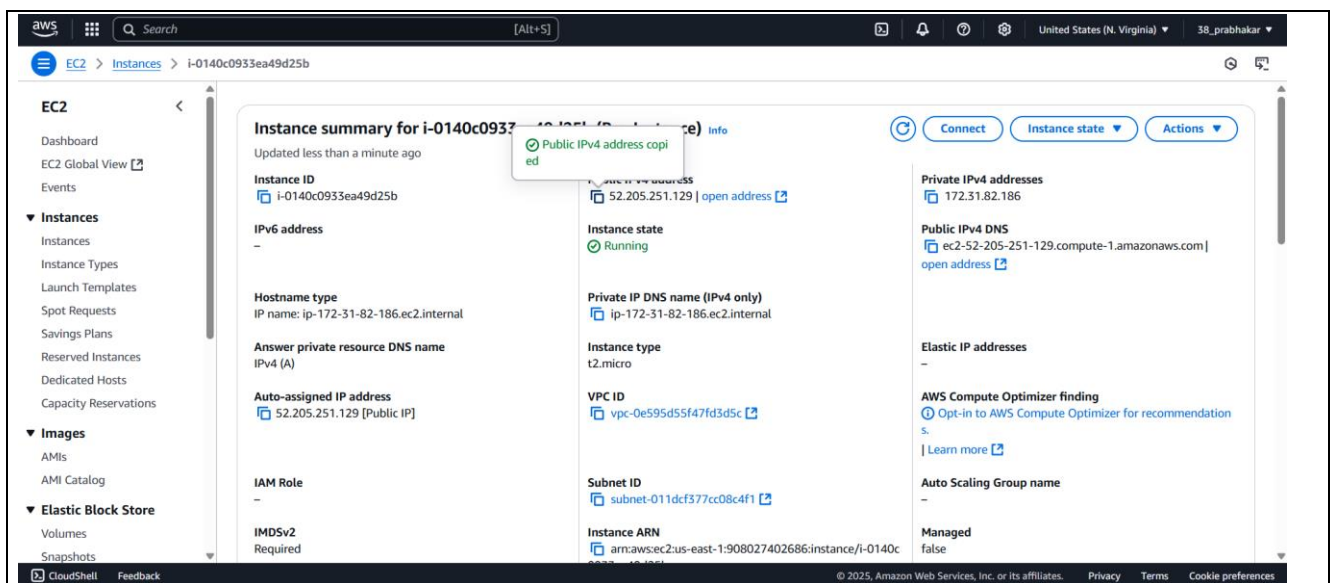


Step 3: Now open Bitwise SSH Client and copy the IP in Host then import the client key.

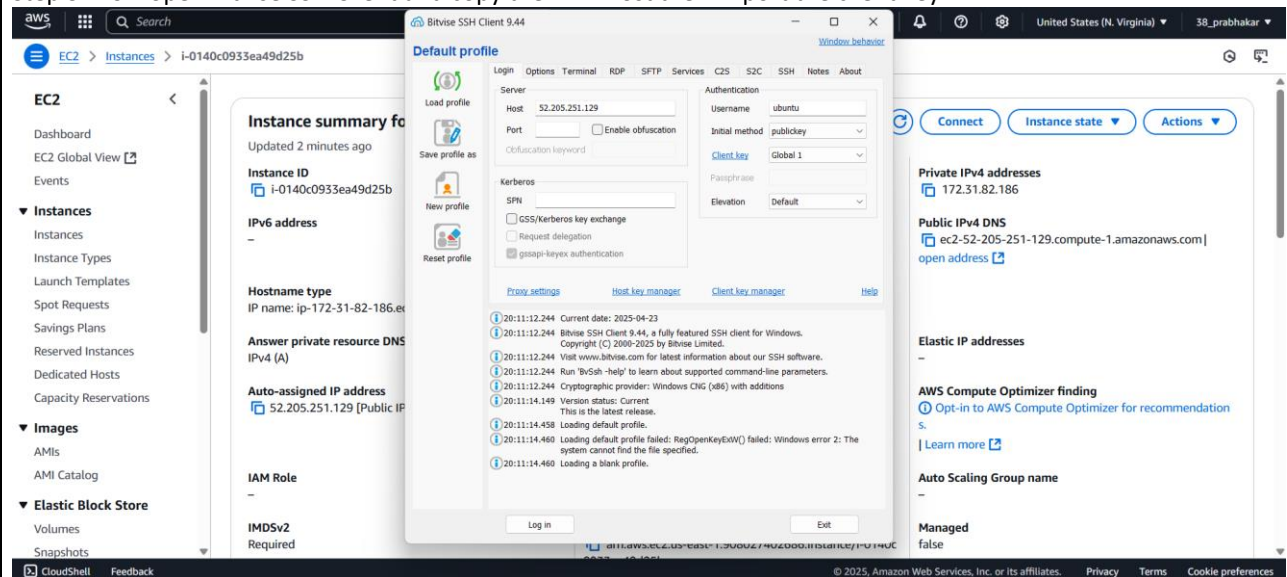


Step 4: After importing client key give username as "ubuntu" and log in.

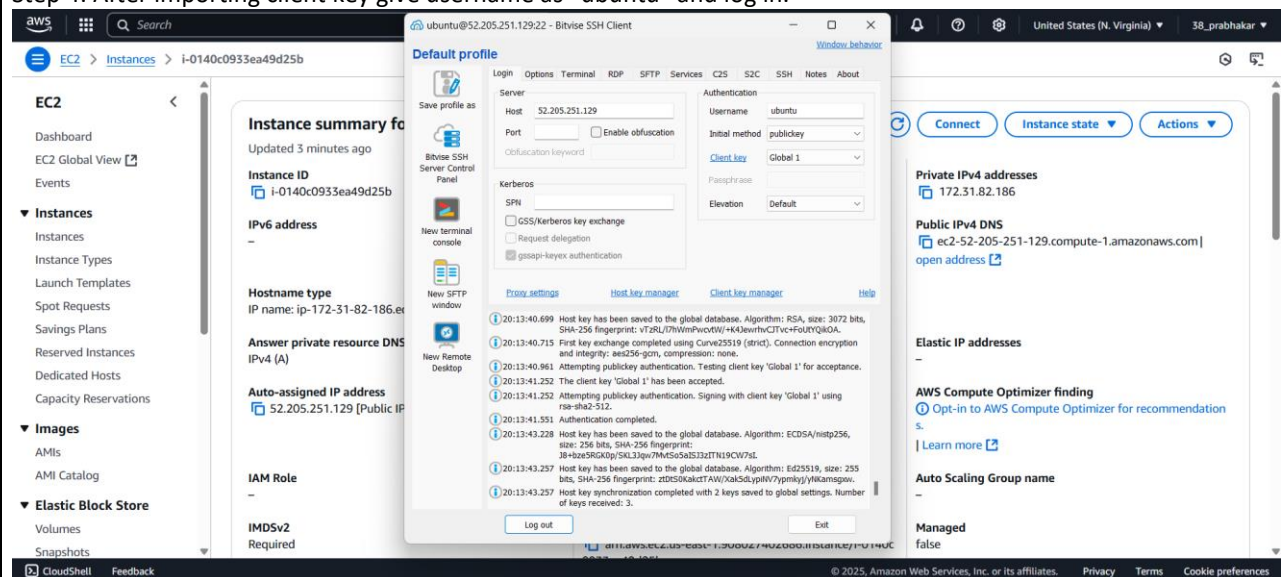


Step 5: Open the terminal console then use the command "sudo apt-get update".

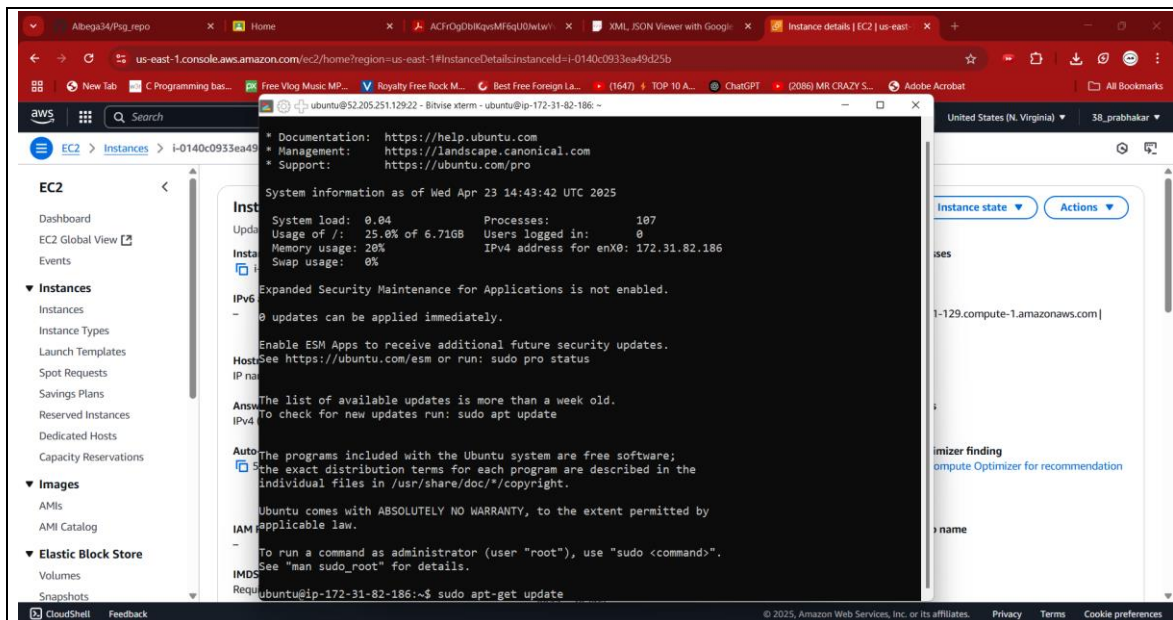


Step6: Now type the command “sudo apt-get upgrade”.

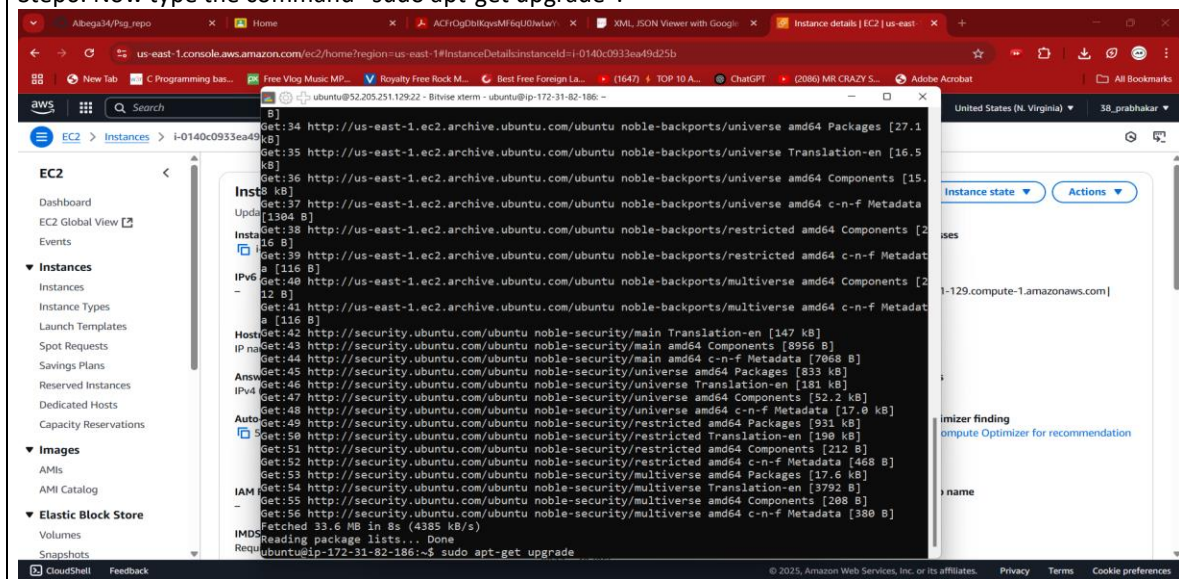


Step 7: Now type the command “sudo apt-get install nginx”

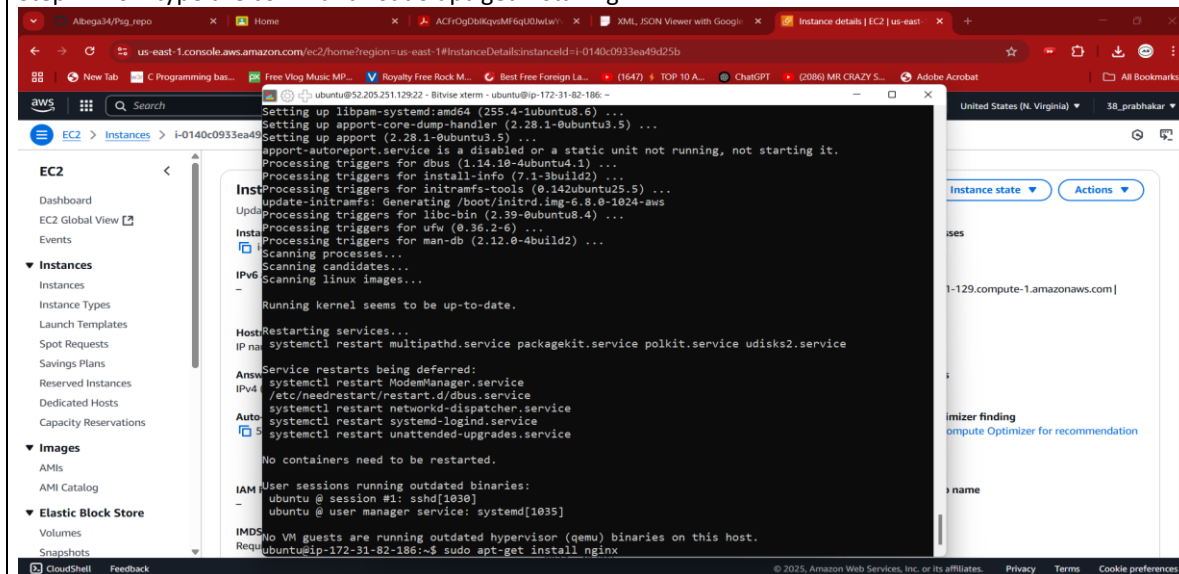


Step 8: Now type the command “curl -sL https://deb.nodesource.com/setup_18.x | sudo -E bash -”

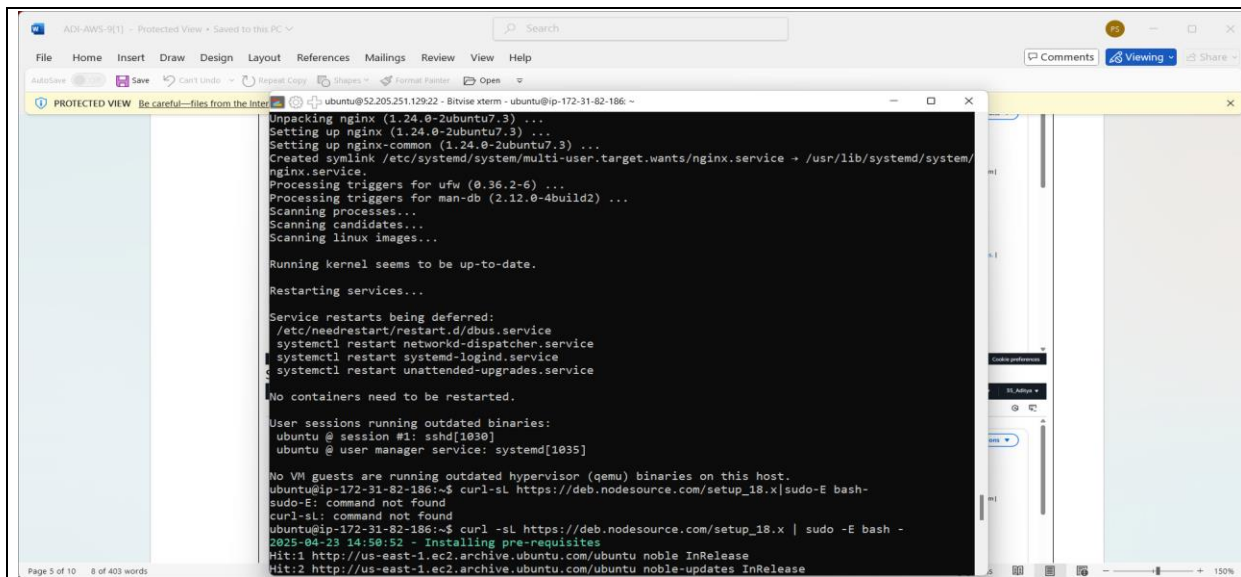


Step 9: Now type the command “sudo apt install nodejs”

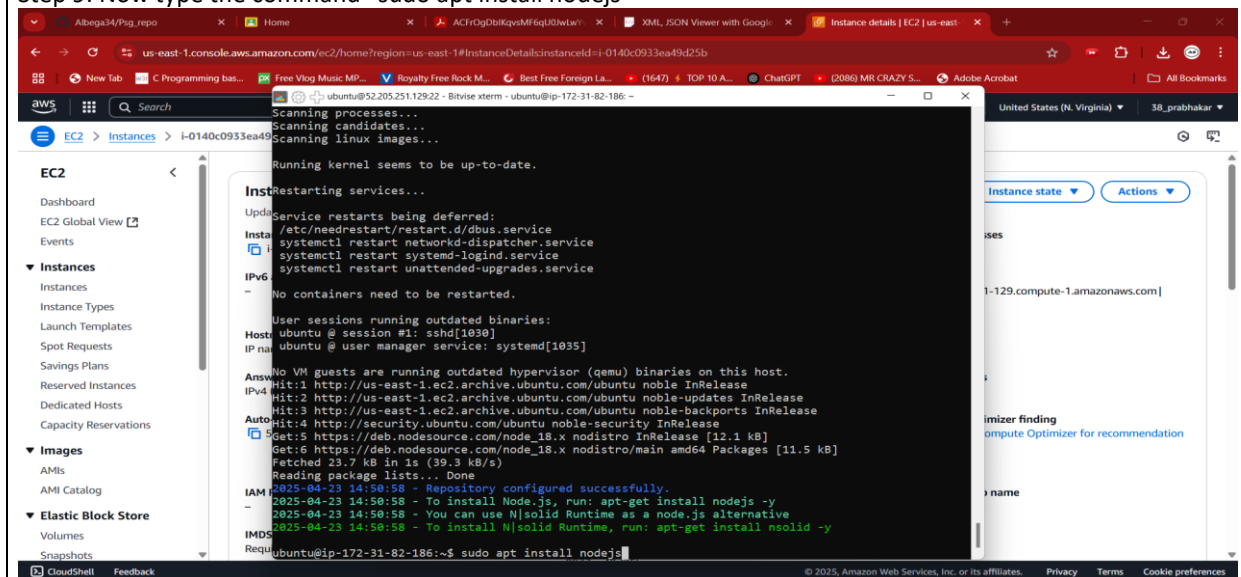


Step 10: Now copy the repository URL and git clone it in the terminal:

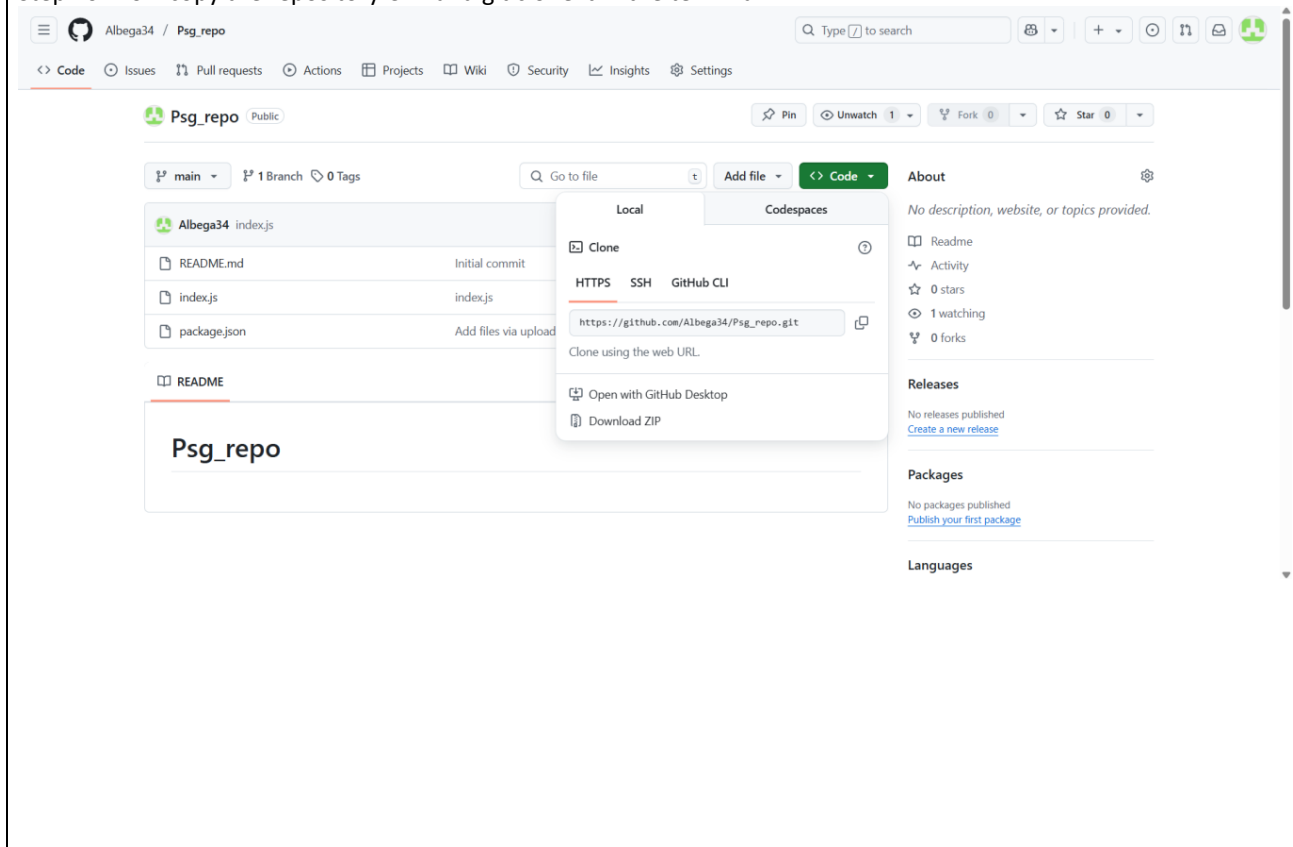


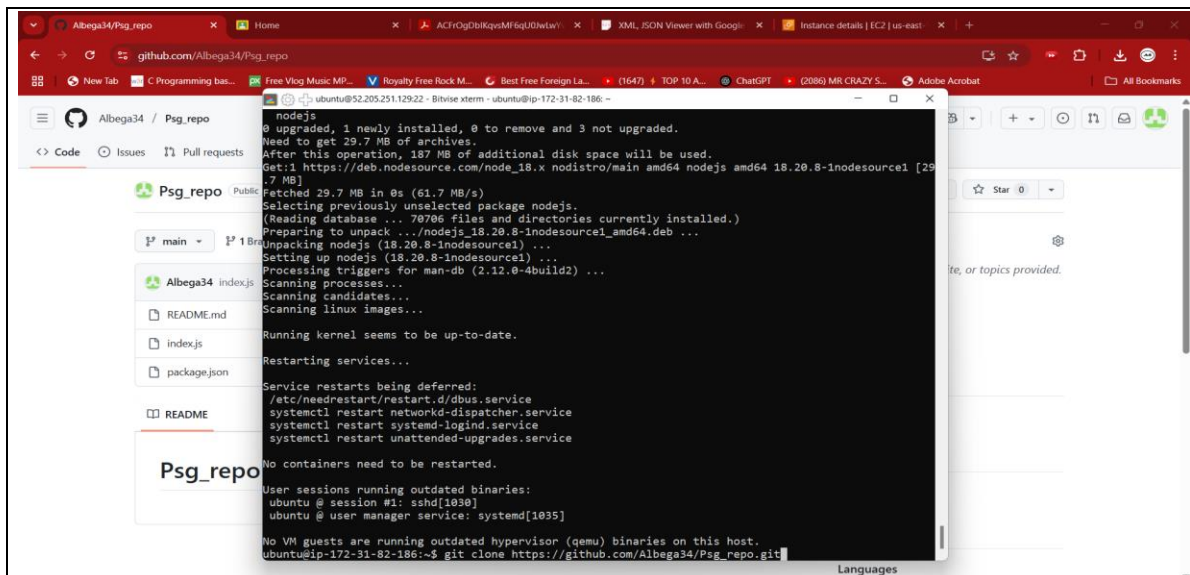


Step 11: Now we check if the files from the repository are cloned or not by changing directories.

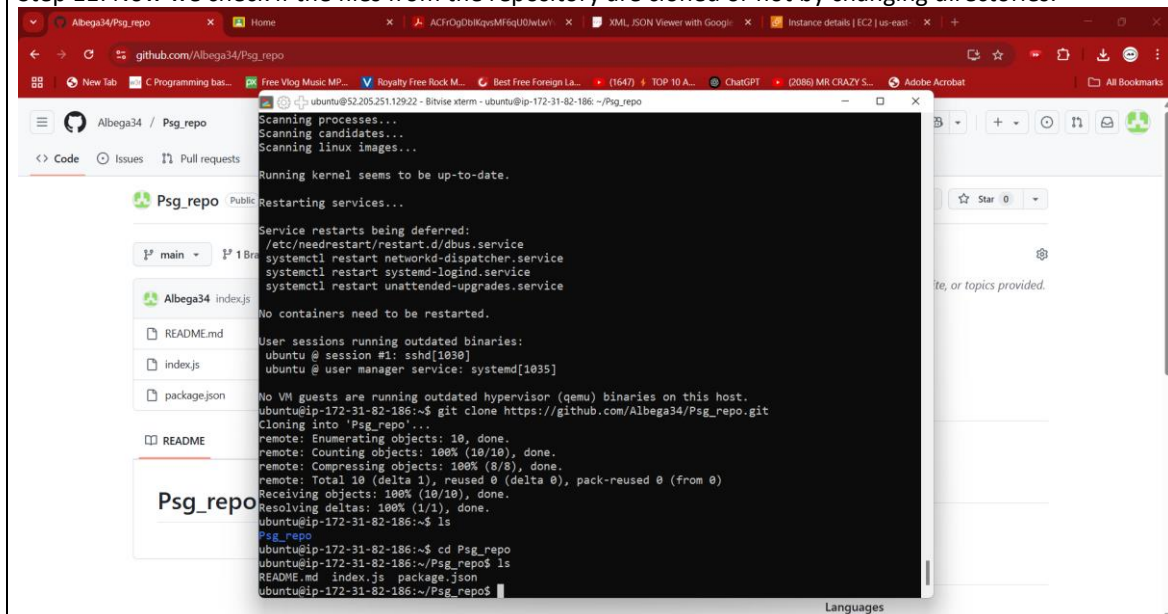


Step 12: Now type the command "npm install".

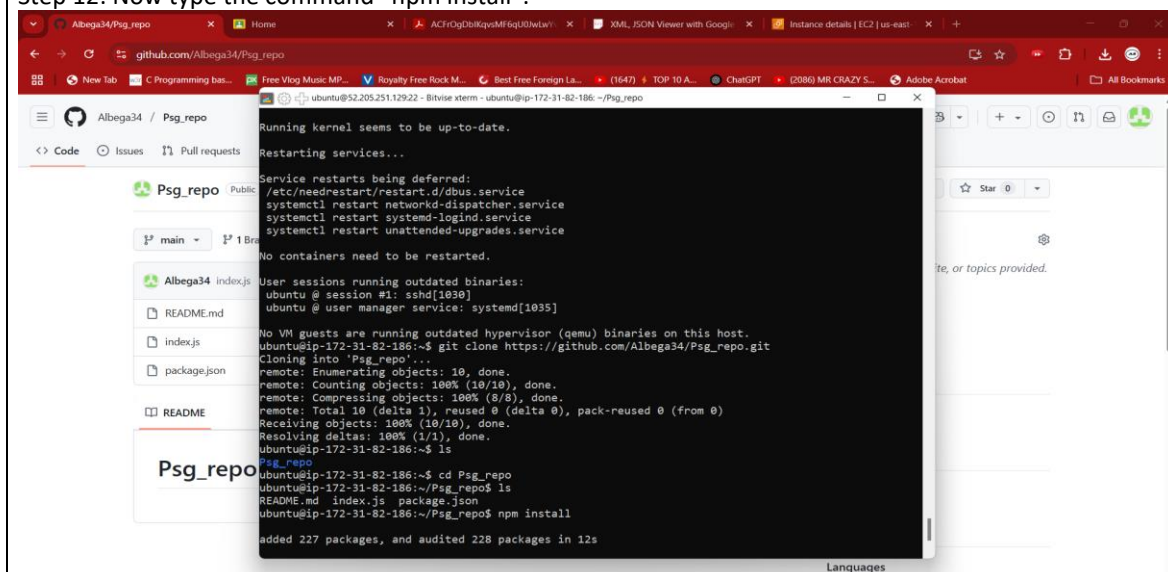


Step 13: Now we start the server using command “node index.js”.

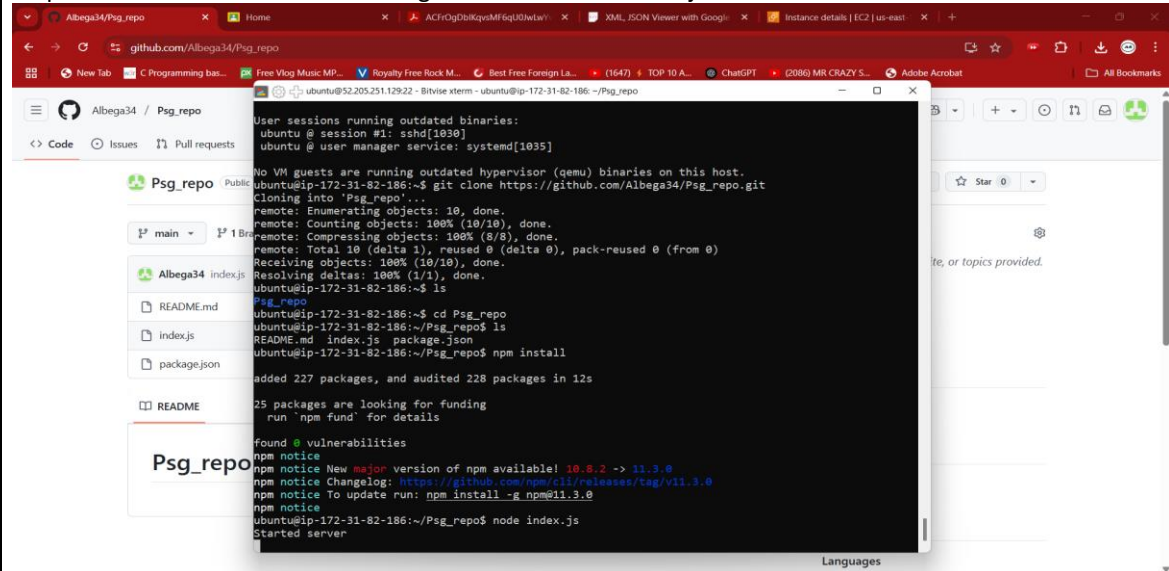

Step 14: Now we open the IP in incognito mode.

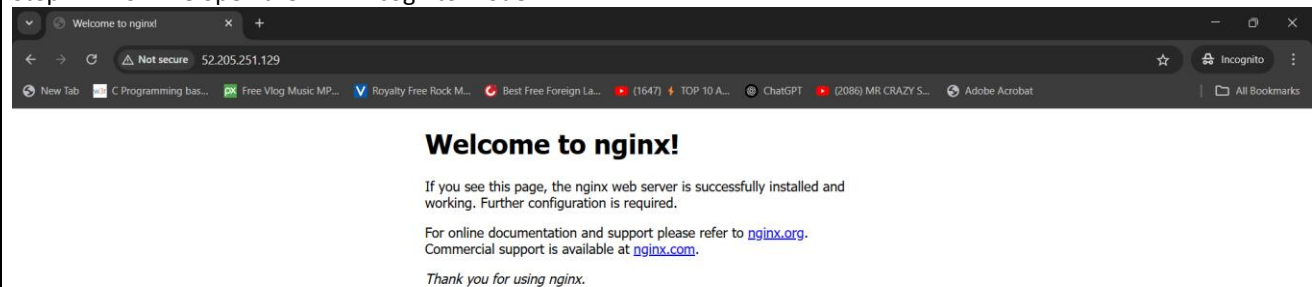

Step 15: Now we go to instance then Security. Then open “security groups” and click on Edit Inbound rules.

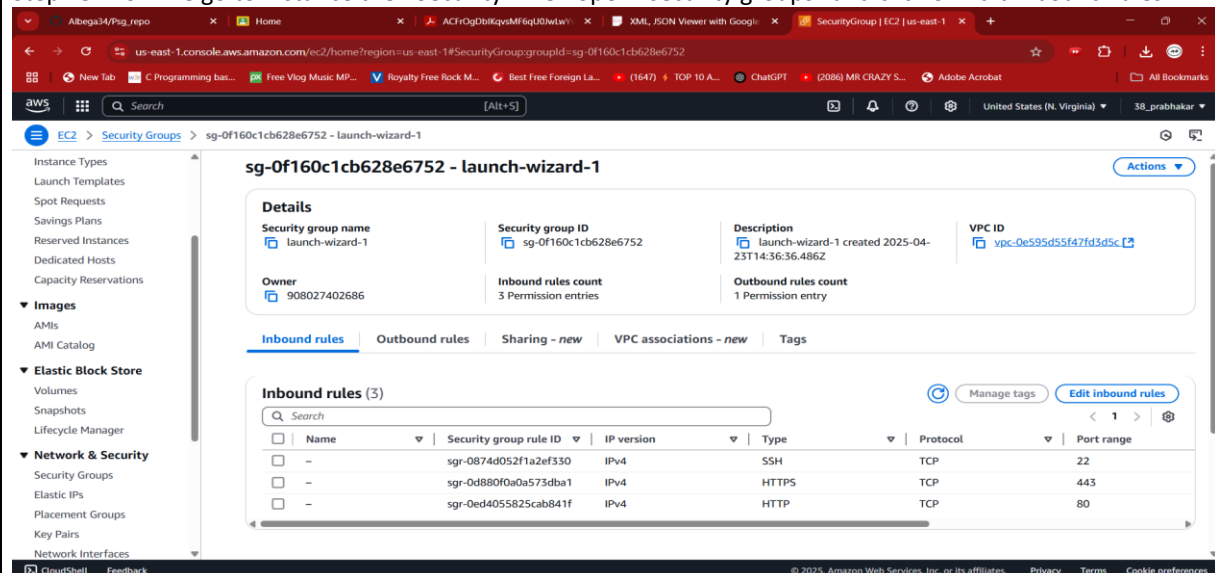

Step 16: Now we Edit inbound rules for SSH,HTTP,HTTPS we change source to “Anywhere-IPV4”.

aws [Search] [Alt+S] United States (N. Virginia) 38_prabhakar

EC2 > Security Groups > sg-0f160c1cb628e6752 - launch-wizard-1 > Edit inbound rules

Edit inbound rules Info

Inbound rules control the incoming traffic that's allowed to reach the instance.

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
sgr-0874d052f1a2ef330	SSH	TCP	22	Anyw...	0.0.0.0/0	Delete
sgr-0d880f0a0a573dba1	HTTPS	TCP	443	Anyw...	0.0.0.0/0	Delete
sgr-0ed4055825cab841f	HTTP	TCP	80	Anyw...	0.0.0.0/0	Delete
-	Custom TCP	TCP	4000	Anyw...	0.0.0.0/0	Delete

[Add rule](#)

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Step 17: Now we add rule "Custom TCP" and set port range to 4000. And save rules

aws [Search] [Alt+S] United States (N. Virginia) 38_prabhakar

EC2 > Security Groups > sg-0f160c1cb628e6752 - launch-wizard-1 > Edit inbound rules

Edit inbound rules Info

Inbound rules control the incoming traffic that's allowed to reach the instance.

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
sgr-0874d052f1a2ef330	SSH	TCP	22	Anyw...	0.0.0.0/0	Delete
sgr-0d880f0a0a573dba1	HTTPS	TCP	443	Anyw...	0.0.0.0/0	Delete
sgr-0ed4055825cab841f	HTTP	TCP	80	Anyw...	0.0.0.0/0	Delete
-	Custom TCP	TCP	4000	Anyw...	0.0.0.0/0	Delete

[Add rule](#)

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Step 18: Now we again copy the IP to incognito mode and add ":4000" at the end of IP address.

13.233.152.125:4000

Not secure 13.233.152.125:4000

Hello MCKVIE

And we have successfully deployed a site from github to EC2 the running in server.

Step 19: Now we open the repository in Github. Then click on the "index.js" file. Then edit the file and make some changes. Then save the edit by commit the change with a message as user preferred.

Albega34 / Psg_repo

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Files

- main
- Go to file
- README.md
- index.js
- package.json

Psg_repo / index.js

Albega34 index.js 0e8a611 · now History


Code Blame 15 lines (12 loc) · 267 Bytes Code 55% faster with GitHub Copilot

```

1 const express = require('express')
2 const app = express()
3
4 app.get('/', function (req, res) {
5   res.send('Prabhakar hello')
6 })
7
8 app.get('/courses', function (req, res) {
9   res.send('Print all courses')
10 })
11
12 app.listen(4000, () => {
13   console.log('Started server')
14 })
15 
```

Commit changes

Step 20: Now that we have edited the file in the repo we need to retrieve the latest changed file in our directory in server by using the command “git pull”. And run the server again using “node index.js”.

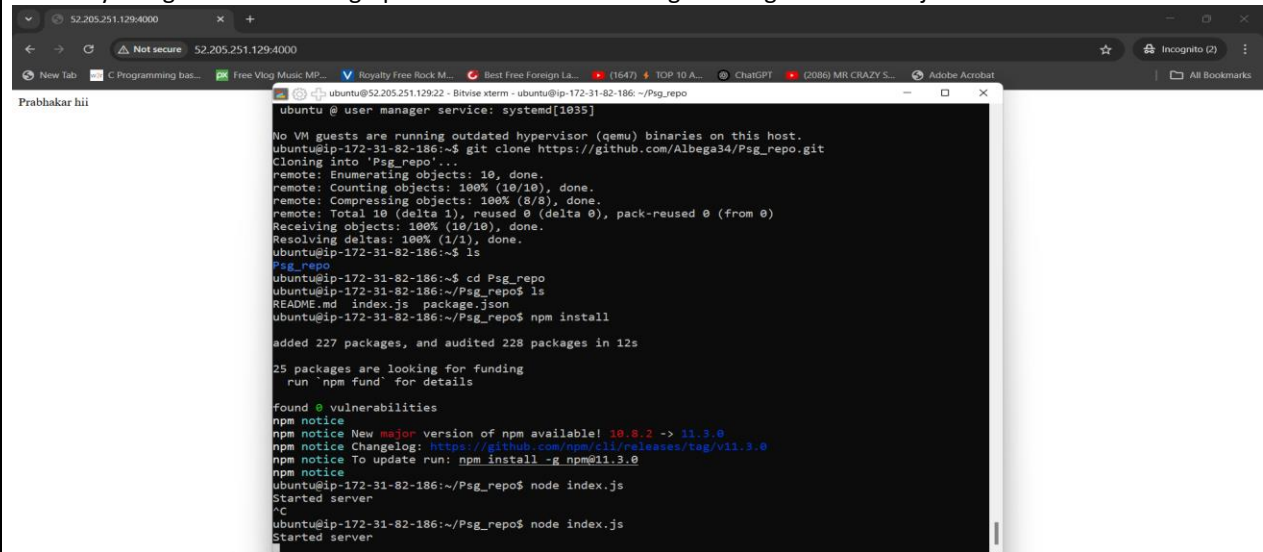

```
Prabhakar hii
ubuntu @ user manager service: systemd[1035]
No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-82-186:~$ git clone https://github.com/Albega34/Psg_repo.git
Cloning into 'Psg_repo'...
remote: Enumerating objects: 10, done.
remote: Counting objects: 100% (10/10), done.
remote: Compressing objects: 100% (8/8), done.
remote: Total 10 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (10/10), done.
Resolving deltas: 100% (1/1), done.
ubuntu@ip-172-31-82-186:~$ ls
Psg_repo
ubuntu@ip-172-31-82-186:~$ cd Psg_repo
ubuntu@ip-172-31-82-186:~/Psg_repo$ ls
README.md index.js package.json
ubuntu@ip-172-31-82-186:~/Psg_repo$ npm install
added 227 packages, and audited 228 packages in 12s
25 packages are looking for funding
  run `npm fund` for details
found 0 vulnerabilities
npm notice New major version of npm available! 10.8.2 -> 11.3.0
npm notice Changelog: https://github.com/npm/cli/releases/tag/v11.3.0
npm notice To update run: npm install -g npm@11.3.0
npm notice
ubuntu@ip-172-31-82-186:~/Psg_repo$ node index.js
Started server
^C
ubuntu@ip-172-31-82-186:~/Psg_repo$ node index.js
Started server
```

Step 21: Now if we again paste IP in incognito mode we can see the changed content on the server.

