

Standards for subjectoriented specification of systems

Standardisation Gang

August 2018

Contents

1	Background	1
1.1	Subject Orientation and PASS	1
1.1.1	Subject-driven Business Processes	2
1.1.2	Subject Interaction and Behavior	3
1.1.3	Subjects and Objects	6
1.2	Introduction to Ontologies and OWL	7
1.3	Introduction to Abstract State Machines	9
2	Structure of a PASS Description	11
2.1	Informal Description	11
2.1.1	Subject	11
2.1.2	Subject-to-Subject Communication	13
2.1.3	Message Exchange	15
2.2	OWL Description	18
2.2.1	PASS Process Model	18
2.2.2	Data Describing Component	20
2.2.3	Interaction Describing Component	21
2.3	ASM Description	22
3	Execution of a PASS Model	23
3.1	Informal Description of Subject Behavior and its Execution . .	23
3.1.1	Sending Messages	23
3.1.2	Receiving Messages	24
3.1.3	Subject Behavior	28
3.2	Ontology of Subject Behavior Description	30
3.3	ASM Definition of Subject Execution	32
A	Classes and Property of the PASS Ontology	33
A.1	All Classes (95)	33
A.2	Data Properties (27)	50
A.3	Object Properties (42)	59

Chapter 1

Background

Structure of PASS descriptions and its relation to the execution semantics defined as Abstract State Machines (ASM).

- Start Event
- Intermediate Event
- End Event

Structure of each chapter document

- Informal description of PASS aspects
- OWL Description of these aspects
- ASM Sematic

In order to facilitate the understanding of the following sections we will introduce the philosophy of subjectorienting modelling which is the underlying PASS concept (PASS = Parallel Activity Specification Scheme). Additionally we will give a short introduction to ontologies especially OWL (Web Ontology Language) and ASM (Abstract State Machines).

1.1 Subject Orientation and PASS

In this section we lay ground for PASS as a language for describing processes in a subjectoriented way. This section is not a complete description of all PASS features it only gives a first impression about subject orientation and the specification language PASS. The advanced features are defined in the upcoming chapters.

1.1.1 Subject-driven Business Processes

Subjects represent the behavior of an active entity. A specification of a subject does not say anything about the technology used to execute the described behavior. This is different to other encapsulation approaches, such as multi-agent systems.

Subjects communicate with each other by exchanging messages. Messages have a name and a payload. The name should express the meaning of a message informally and the payloads are the data (business objects) transported. Internally, subjects execute local activities such as calculating a price, storing an address etc. A subject sends messages to other subjects, expects messages from other subjects, and executes internal actions. All these activities are done in sequences which are defined in a subject's behavior specification. Subject-oriented process specifications are embedded in a context. A context is defined by the business organization and the technology by which a business process is executed. Subject-oriented system development integrates established theories and concepts. It has been inspired by various process algebras (see e.g. [2], [3], [4]), by the basic structure of nearly all natural languages (Subject, Predicate, Object) and the systemic sociology developed by Niklas Luhmann (an introduction can be found in [5]). According to the organizational theory developed by Luhmann the smallest organization consists of communication executed between at least two information processing entities [5]. The integrated concepts have been enhanced and adapted to organizational stakeholder requirements, such as providing a simple graphical notation, as detailed in the following sections.

1.1.2 Subject Interaction and Behavior

We introduce the basic concepts of process modeling in S-BPM using a simple order process. A customer sends an order to the order handling department of a supplier. He is going to receive an order confirmation and the ordered product by the shipment company. Figure 1.3 shows the communication structure of that process. The involved subjects and the messages they exchange can easily be grasped.

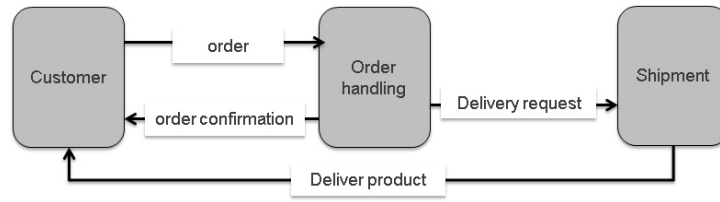


Figure 1.1: The Communication Structure in the Order Process

Each subject has a so-called input pool which is its mail box for receiving messages. This input pool can be structured according to the business requirements at hand. The modeler can define how many messages of which type and/or from which sender can be deposited and what the reaction is if these restrictions are violated. This means the synchronization through message exchange can be specified for each subject individually. Messages have an intuitive meaning expressed by their name. A formal semantic is given by their use and the data which are transported with a message. Figure 1.2 depicts the behavior of the subjects "customer" and "order handling".

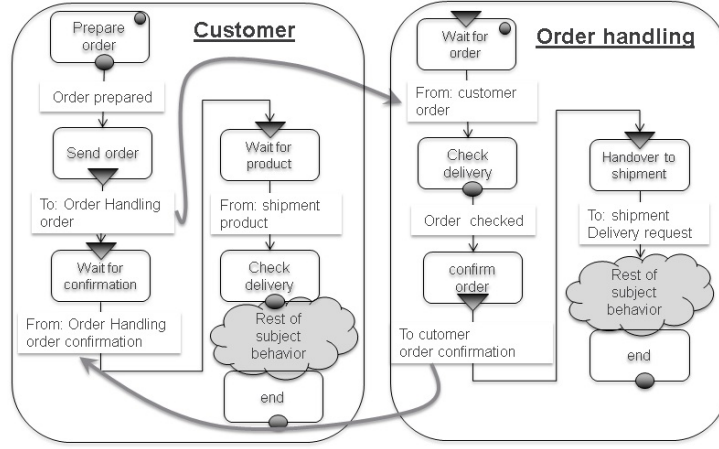


Figure 1.2: The Behavior of Subjects

In the first state of its behavior the subject "customer" executes the internal function "Prepare order". When this function is finished the transition "order prepared" follows. In the succeeding state "send order" the message "order" is sent to the subject "order handling". After this message is sent (deposited in the input pool of subject "order handling"), the subject "Customer" goes into the state "wait for confirmation". If this message is not in the input pool the subject stops its execution, until the corresponding message arrives in the input pool. On arrival the subject removes the message from the input pool and follows the transition into state "Wait for product" and so on.

The subject "Order Handling" waits for the message "order" from the subject "customer". If this message is in the input pool it is removed and the succeeding function "check order" is executed and so on.

The behavior of each subject describes in which order it sends messages, expects (receives) and performs internal functions. Messages transport data from the sending to the receiving subject, and internal functions operate on internal data of a subject. These data aspects of a subject are described in section 1.1.3 In a dynamic and fast changing world, processes need to be able to capture known but unpredictable events. In our example let us assume that a customer can change an order. This means the subject "customer" may send the message "Change order" at any time. Figure 1.3 shows the corresponding communication structure, which now contains the message "change order".

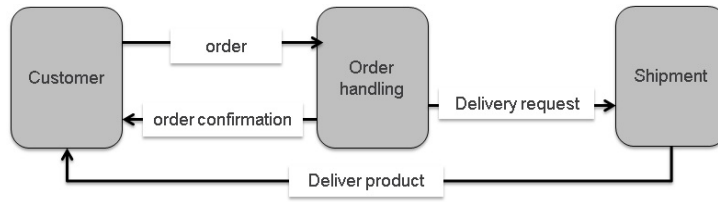


Figure 1.3: The Communication Structure with Change Message

Due to this unpredictable event the behavior of the involved subjects needs also to be adapted. Figure 1.4 illustrates the respective behavior of the customer.

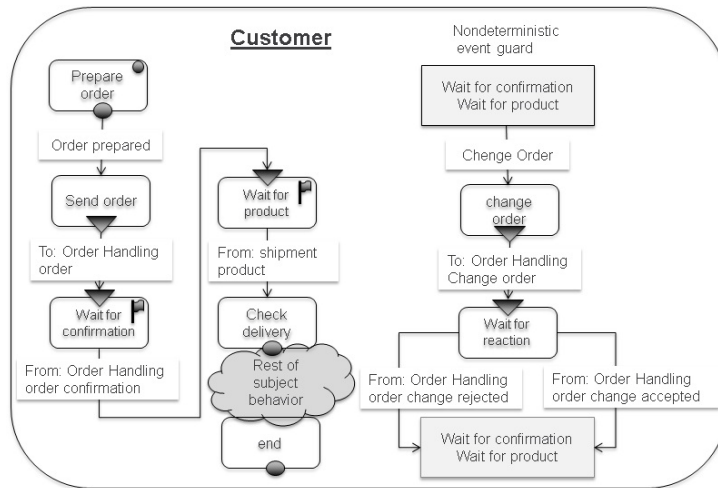


Figure 1.4: Customer is allowed to Change Orders

The subject "customer" may have the idea to change its order in the state "wait for confirmation" or in the state "wait for product". The flags in these states indicate that there is a so-called behavior extension described by a so-called nondeterministic event guard [12, 22]. The non-deterministic event created in the subject is the idea "change order". If this idea comes up, the current states, either "wait for confirmation" or "wait for product", are left, and the subject "customer" jumps into state "change order" in the guard behavior. In this state the message "change order" is sent and the subject waits in state "wait for reaction". In this state the answer can either be "order change accepted" or "order change rejected". Independently of the received message the subject "customer" moves to the state "wait for product". The message "order change accepted" is considered as confirmation, if a confirmation has not arrived yet (state "wait for confirmation").

If the change is rejected the customer has to wait for the product(s) he/she has ordered originally. Similar to the behavior of the subject "customer" the behavior of the subject "order handling" has to be adapted.

1.1.3 Subjects and Objects

Up to now we did not mention data or the objects with their predicates, in order to get complete sentences comprising subject, predicate, and object. Figure 1.5 displays how subjects and objects are connected. The internal function "prepare order" uses internal data to prepare the data for the order message. This order data is sent as payload of the message "order".

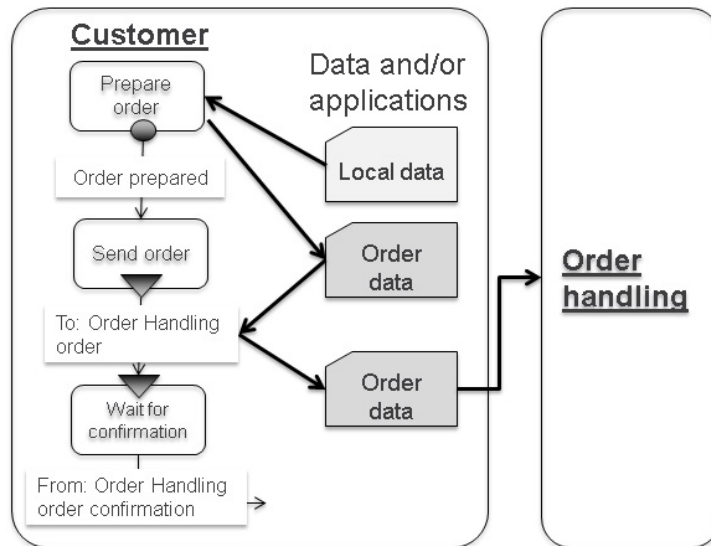


Figure 1.5: Subjects and Objects

The internal functions in a subject can be realized as methods of an object or functions implemented in a service, if a service-oriented architecture is available. These objects have an additional method for each message. If a message is sent, the method allows receiving data values sent with the message, and if a message is received the corresponding method is used to store the received data in the object [22]. This means either subjects are the entities which use synchronous services as implementation of functions or asynchronous services are implemented through subjects or even through complex processes consisting of several subjects. Consequently, the concept Service Oriented Architecture (SOA) is complementary to S-BPM: Subjects are the entities which use the services offered by SOAs (cf. [25]).

1.2 Introduction to Ontologies and OWL

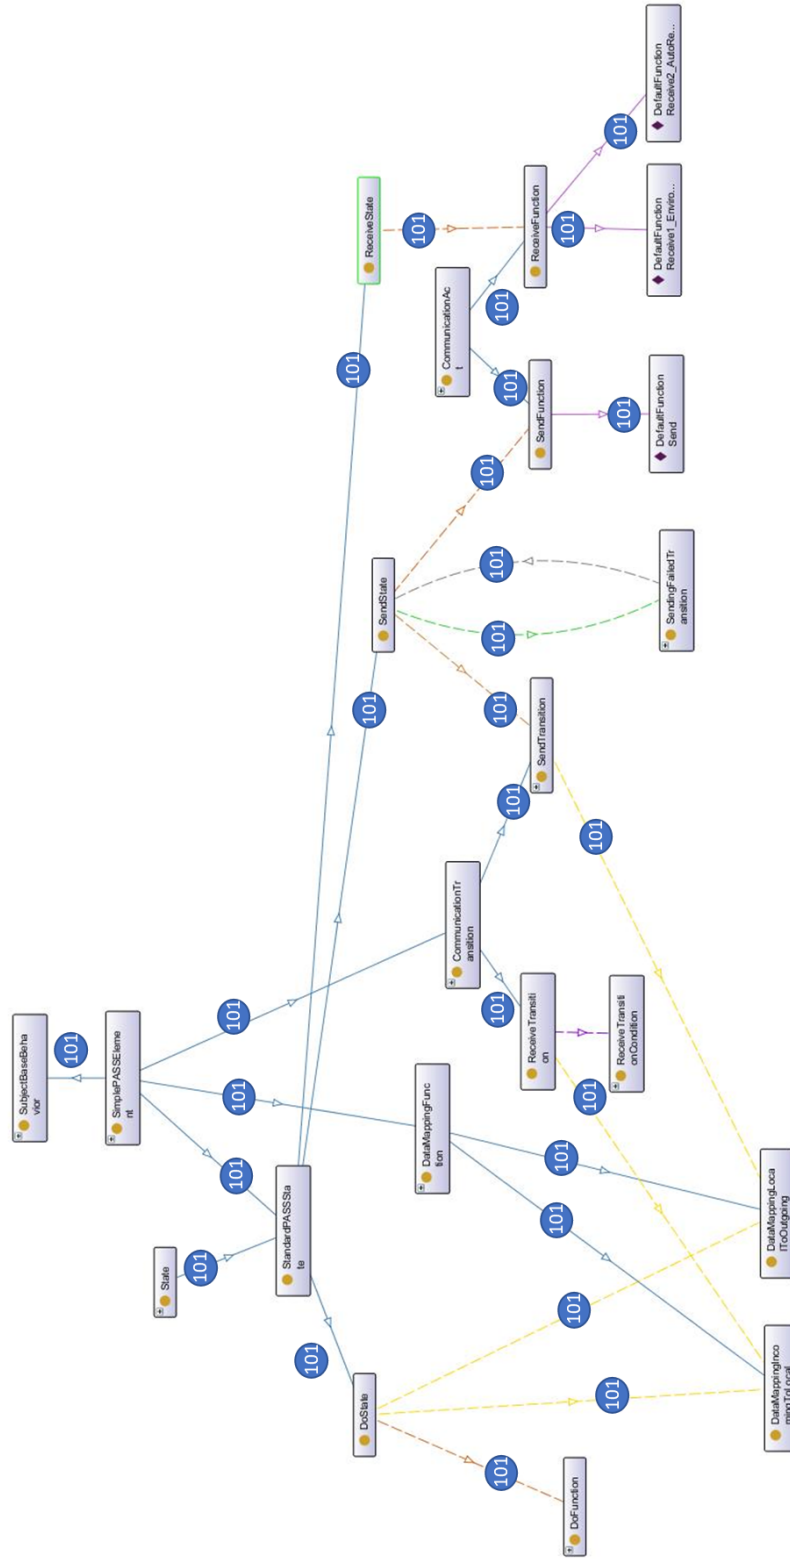


Figure 1.6: Subject Behavior

1.3 Introduction to Abstract State Machines

Chapter 2

Structure of a PASS Description

In this chapter we describe the structure of a PASS specification. The structure of a PASS description consists of the subjects and the messages they exchange.

2.1 Informal Description

2.1.1 Subject

Subjects represent the behavior of an active entity. A specification of a subject does not say anything about the technology used to execute the described behavior. Subjects communicate with each other by exchanging messages. Messages have a name and a payload. The name should express the meaning of a message informally and the payloads are the data (business objects) transported. Internally subjects execute local activities such as calculating a price, storing an address etc. A subject sends messages to other subjects, expects messages from other subjects, and executes internal actions. All these activities are done in sequences which are defined in a subject's behavior specification.

In the following we use an example for the informal definition of subjects. In the simple scenario of the business trip application, we can identify three subjects, namely the employee as applicant, the manager as the approver, and the travel office as the travel arranger.

There are the following types of subjects:

- Fully specified subjects

- Multisubjects
- Single subject
- Interface subjects

Fully specified Subjects

This is the standard subject type. A subject communicates with other subjects by exchanging messages. Fully specified subjects consists of following components:

- Business Objects
Each subjects has some business objects. A basic structure of business objects consists of an identifier, data structures, and data elements. The identifier of a business object is derived from the business environment in which it is used. Examples are business trip requests, purchase orders, packing lists, invoices, etc. Business objects are composed of data structures. Their components can be simple data elements of a certain type (e.g., string or number) or even data structures themselves.
- Sent messages
Messages which a subject sends to other subjects. Each message has a name and may transport some data objects as a payload. The values of these payload data objects are copied from internal business objects of a subject.
- Received messages
Messages received by a subject. The values of the payload objects are copied to business objects of the receiving subject.
- Input Pool
Messages sent to a subjects are deposited in the input pool of the receiving subject.
- Behavior
The behavior of each subject describes in which order it sends messages, expects (receives) and performs internal functions. Messages transport data from the sending to the receiving subject, and internal functions operate on internal data of a subject.

Multisubjects and Multiprocesses

Multisubjects are similar to Fully specified subjects. If in a process model several identical subjects are required e.g. in order to increase the throughput these subjects can be modelled by a multi subject. If several communicating subjects in a process model are multi subjects they can be combined to a multi process.

In a business process, there may be several identical sub-processes that perform certain similar tasks in parallel and independently. This is often the case in a procurement process, when bids from multiple providers are solicited. A process or sub-process is therefore executed simultaneously or sequentially multiple times during overall process execution. A set of type-identical, independently running processes or sub-processes are termed multi-process. The actual number of these independent sub-processes is determined at runtime. Multi-processes simplify process execution, since a specific sequence of actions can be used by different processes. They are recommended for recurring structures and similar process flows. An example of a multi-process can be illustrated as a variation of the current booking process. The travel agent should simultaneously solicit up to five bids before making a reservation. Once three offers have been received, one is selected and a room is booked. The process of obtaining offers from the hotels is identical for each hotel and is therefore modeled as a multi-process.

Single subjects

Single subjects can be instantiated only once. They are used if for the execution of a subject a resource is required which is only available once.

Interface Subjects

Interface subjects are used as interfaces to other process systems. If a subject of a process system sends or receives messages from a subject which belongs to another process system. These so-called interface subjects represent fully described subjects which belong to that other process system. This means to each interface subject belongs a fully described subject in another process system. Interface subjects specifications contain the sent messages, received messages and the reference to the fully described subject which they represent.

2.1.2 Subject-to-Subject Communication

After the identification of subjects involved in the process (as process-specific roles), their interaction relationships need to be represented. These are the

messages exchanged between the subjects. Such messages might contain structured information—so-called business objects (see Section xxxxxxxx).

The result is a model structured according to subjects with explicit communication relationships, which is referred to as a Subject Interaction Diagram (SID) or, synonymously, as a Communication Structure Diagram (CSD) (see figure 2.1).

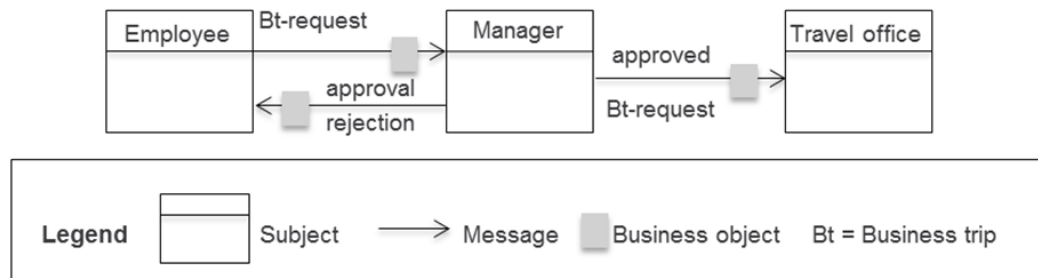


Figure 2.1: Subject interaction diagram for the process ‘business trip application’

Messages represent the interactions of the subjects during the execution of the process. We recommend naming these messages in such a way that they can be immediately understood and also reflect the meaning of each particular message for the process. In the sample ‘business trip application’, therefore, the messages are referred to as ‘business trip request’, ‘rejection’, and ‘approval’.

Messages serve as a container for the information transmitted from a sending to a receiving subject. There are two options for the message content:

- **Simple data types:** Simple data types are string, integer, character, etc. In the business trip application example, the message ‘business trip request’ can contain several data elements of type string (e.g., destination, reason for traveling, etc.), and of type number (e.g., duration of trip in days).
- **Business Objects:** Business Objects in their general form are physical and logical ‘things’ that are required to process business transactions. We consider data structures composed of elementary data types, or even other data structures, as logical business objects in business processes. For instance, the business object ‘business trip request’ could consist of the data structures ‘data on applicants’, ‘travel data’, and ‘approval data’—with each of these in turn containing multiple data elements.

2.1.3 Message Exchange

In the previous subsection, we have stated that messages are transferred between subjects and have described the nature of these messages. What is still missing is a detailed description of how messages can be exchanged, how the information they carry can be transmitted, and how subjects can be synchronized. These issues are addressed in the following sub-sections.

Synchronous and Asynchronous Exchange of Messages

In the case of synchronous exchange of messages, sender and receiver wait for each other until a message can be passed on. If a subject wants to send a message and the receiver (subject) is not yet in a corresponding receive state, the sender waits until the receiver is able to accept this message. Conversely, a recipient has to wait for a desired message until it is made available by the sender.

The disadvantage of the synchronous method is a close temporal coupling between sender and receiver. This raises problems in the implementation of business processes in the form of workflows, especially across organizational borders. As a rule, these also represent system boundaries across which a tight coupling between sender and receiver is usually very costly. For long-running processes, sender and receiver may wait for days, or even weeks, for each other.

Using asynchronous messaging, a sender is able to send anytime. The subject puts a message into a message buffer from which it is picked up by the receiver. However, the recipient sees, for example, only the oldest message in the buffer and can only accept this particular one. If it is not the desired message, the receiver is blocked, even though the message may already be in the buffer, but in a buffer space that is not visible to the receiver. To avoid this, the recipient has the alternative to take all of the messages from the buffer and manage them by himself. In this way, the receiver can identify the appropriate message and process it as soon as he needs it. In asynchronous messaging, sender and receiver are only loosely coupled. Practical problems can arise due to the in reality limited physical size of the receive buffer, which does not allow an unlimited number of messages to be recorded. Once the physical boundary of the buffer has been reached due to high occupancy, this may lead to unpredictable behavior of workflows derived from a business process specification. To avoid this, the input-pool concept has been introduced in PASS.

Exchange of Messages via the Input Pool

To solve the problems outlined in asynchronous message exchange, the input pool concept has been developed. Communication via the input pool is considerably more complex than previously shown; however, it allows transmitting an unlimited number of messages simultaneously. Due to its high practical importance, it is considered as a basic construct of PASS. Consider the input pool as a mail box of work performers, the operation of which is specified in detail. Each subject has its own input pool. It serves as a message buffer to temporarily store messages received by the subject, independent of the sending communication partner. The input pools are therefore inboxes for flexible configuration of the message exchange between the subjects. In contrast to the buffer in which only the front message can be seen and accepted, the pool solution enables picking up (= removing from the buffer) any message. For a subject, all messages in its input pool are visible.

The input pool has the following configuration parameters (see figure 2.2):

- Input-pool size: The input-pool size specifies how many messages can be stored in an input pool, regardless of the number and complexity of the message parameters transmitted with a message. If the input pool size is set to zero, messages can only be exchanged synchronously.
- Maximum number of messages from specific subjects: For an input pool, it can be determined how many messages received from a particular subject may be stored simultaneously in the input pool. Again, a value of zero means that messages can only be accepted synchronously.
- Maximum number of messages with specific identifiers: For an input pool, it can be determined how many messages of a specifically identified message type (e.g., invoice) may be stored simultaneously in the input pool, regardless of what subject they originate from. A specified size of zero allows only for synchronous message reception.
- Maximum number of messages with specific identifiers of certain subjects: For an input pool, it can be determined how many messages of a specific identifier of a particular subject may be stored simultaneously in the input pool. The meaning of the zero value is analogous to the other cases.

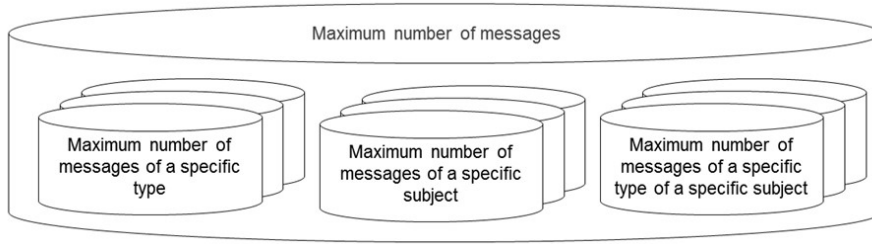


Figure 2.2: Configuration of Input Pool Parameters

By limiting the size of the input pool, its ability to store messages may be blocked at a certain point in time during process runtime. Hence, messaging synchronization mechanisms need to control the assignment of messages to the input pool. Essentially, there are three strategies to handle the access to input pools:

- Blocking the sender until the input pool's ability to store messages has been reinstated: Once all slots are occupied in an input pool, the sender is blocked until the receiving subject picks up a message (i.e. a message is removed from the input pool). This creates space for a new message. In case several subjects want to put a message into a fully occupied input pool, the subject that has been waiting longest for an empty slot is allowed to send. The procedure is analogous if corresponding input pool parameters do not allow storing the message in the input pool, i.e., if the corresponding number of messages of the same name or from the same subject has been put into the input pool.
- Delete and release of the oldest message: In case all the slots are already occupied in the input pool of the subject addressed, the oldest message is overwritten with the new message.
- Delete and release of the latest message: The latest message is deleted from the input pool to allow depositing of the newly incoming message. If all the positions in the input pool of the addressed subject are taken, the latest message in the input pool is overwritten with the new message. This strategy applies analogously when the maximum number of messages in the input pool has been reached, either with respect to sender or message type.

2.2 OWL Description

The various building blocks of a PASS description and their relations are defined in a ontology. The following figure 2.3 gives an overview of the structure of PASS specifications.

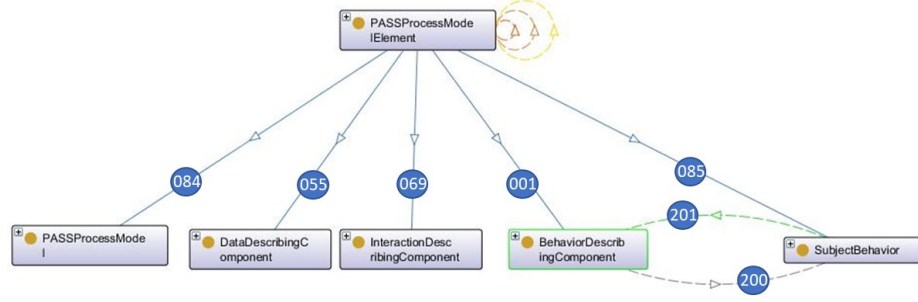


Figure 2.3: Elements of PASS Process Models

The class `PASSProcessModelElement` has 5 subclasses (subclass relations 084, 055, 069, 001 and 085 in figure 2.3). Only the classes `PASSProcessModel`, `DataDescriptionComponent`, `InteractionDescribingComponent` are used for defining the structural aspects of a process specification in PASS. The classes `BehaviorDescribingComponent` and `SubjectBehavior` define the dynamic aspects. In which sequences messages are sent and received or internal actions are executed. These dynamic aspects are considered in detail in Chapter 3.

2.2.1 PASS Process Model

The central entities of a PASS process model are subjects which represents the active elements of a process and the messages they exchange. Messages transport data from one subject to others (payload). The following figure 2.4 shows the corresponding ontology for the PASS Process models.

`PASSProcessModelElements` and `PASSProcessModells` have a name. This is described with the property `hasAdditionalAttribute` (property 208 in 2.3). The class `subject` and the class `MessageExchange` have the relation `hasRelationtoModelComponent` to the class `PASSProcessModel` (property 226 in 2.3). The properties `hasReceiver` and `hasSender` express that a message has a sending and receiving subject (properties 225 and 227 in 2.3) whereas the properties `hasOutgoingMessageExchange` and `hasIncomingMessageExchange` define which messages are sent or received by a subject. Property `hasStartSubject` (property 229 in 2.3) defines a start subject for a `PASSProcessModell`. A start subject is a subclass of the class `subject` (subclass relation 122 in 2.3).

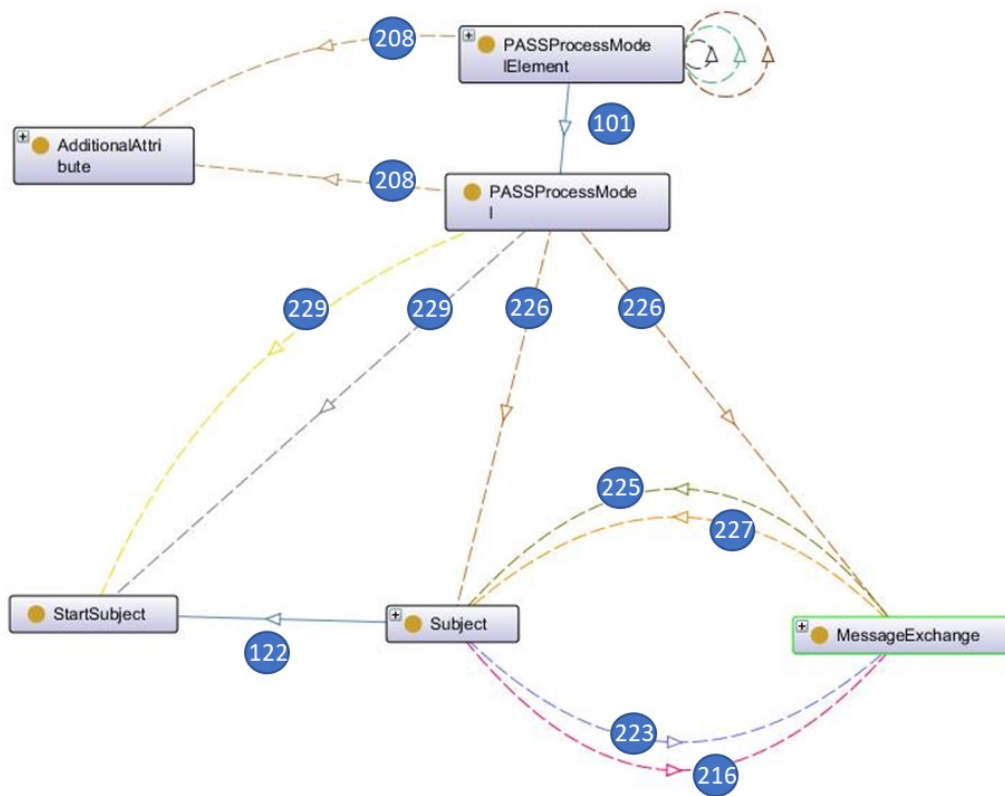


Figure 2.4: PASS Process Modell

2.2.2 Data Describing Component

Each subject encapsulate data (business objects). The values of these data elements can be transfered to other subjects. The following figure 2.5 shows the ontology of this part of the PASS-ontology.

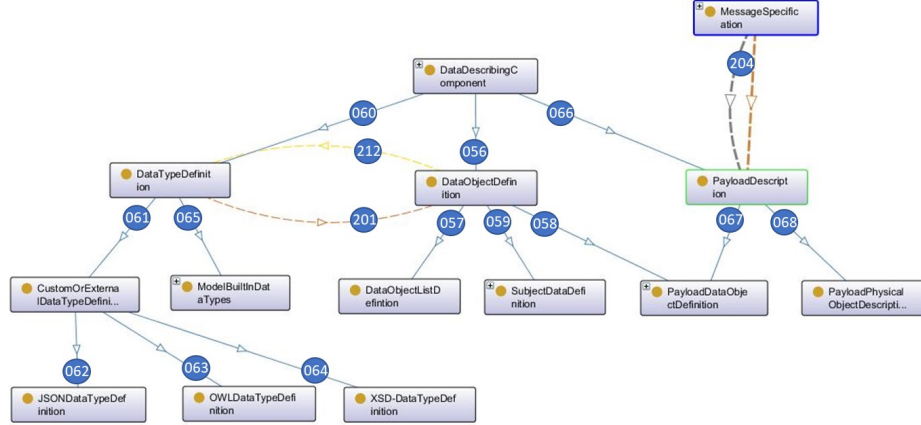


Figure 2.5: Data Description Component

From class `DataDescribingComponent` three subclasses are derived (in figure 2.5 are these the relations 060, 056 and 066). Subclass `PayloadDescription` are the data transported by messages. The relation of `PayloadDescriptions` to messages is defined by property `ContainsPayloadDescription` (in figure 2.5 number 204).

There are two types of payloads. The class `PayloadPhysicalObjectDescription` is used if a message will be later implemented by a physical transport like a parcel. The class `PayloadDataObjectDefinition` is used to transport normal data (Subclass relations 068 and 67 in figure 2.5). These payload objects are also a subclass of class `DataObjectDefinition` (Subclass relation 058 in figure 2.5).

Data objects have a certain type. Therefore class `DataObjectDefinition` has the relation `hasDatatype` to class `DataTypeDefinition` (property 212 in figure 2.5). Class `DataTypeDefinition` has two subclasses (subclass relations 061 and 065 in figure 2.5). The subclass `ModelBuiltInDataTypes` are user defined data types whereas the class `CustomOfExternalDataTypeDefinition` is the superclass of JSON, OWL or XML based data type definitions (subclass relations 062, 63 and 064 in figure 2.5).

derived (see next sections). From class `InteractionDescribingComponent` all the classes required for describing the structure of a process system are derived.

2.3 ASM Description

In this chapter only the structure of a PASS model is considered. Execution has not been considered. Because ASM only considers execution aspects in this chapter an ASM specification of the structural aspects does not make sense. The execution semantic is part of chapter 4.

Chapter 3

Execution of a PASS Model

3.1 Informal Description of Subject Behavior and its Execution

The execution of subject means sending and receiving messages and executing internal activities in the defined order. In the following sections it is described what sending and receiving messages and executing internal functions means.

3.1.1 Sending Messages

Before sending a message, the values of the parameters to be transmitted need to be determined. In case the message parameters are simple data types, the required values are taken from local variables or business objects of the sending subject, respectively. In case of business objects, a current instance of a business object is transferred as a message parameter.

The sending subject attempts to send the message to the target subject and store it in its input pool. Depending on the described configuration and status of the input pool, the message is either immediately stored or the sending subject is blocked until a delivery of the message is possible.

In the sample business trip application, employees send completed requests using the message ‘send business trip request’ to the manager’s input pool. From a send state, several messages can be sent as an alternative. The following example shows a send state in which the message M1 is sent to the subject S1, or alternatively the message M2 is sent to S2, therefore referred to as alternative sending (see Figure 3.1). It does not matter which message is attempted to be sent first. If the send mechanism is successful, the corresponding state transition is executed. In case the message cannot be stored in the input pool of the target subject, sending is interrupted automatically,

and another designated message is attempted to be sent. A sending subject will thus only be blocked if it cannot send any of the provided messages.

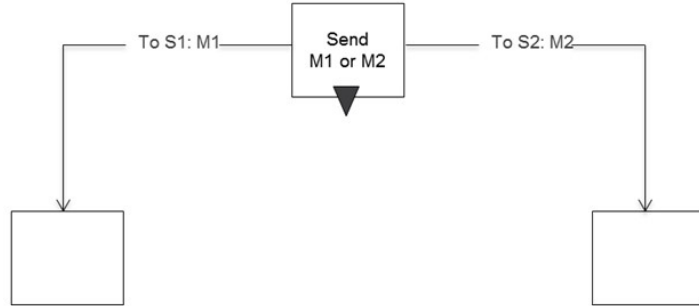


Figure 3.1: Example of alternative sending

By specifying priorities, the order of sending can be influenced. For example, it can be determined that the message M1 to S1 has a higher priority than the message M2 to S2. Using this specification, the sending subject starts with sending message M1 to S1 and then tries only in case of failure to send message M2 to S2. In case message M2 can also not be sent to the subject S2, the attempts to send start from the beginning.

The blocking of subjects when attempting to send can be monitored over time with the so-called timeout. The example in Figure 3.2 shows with ‘Timeout: 24 h’ an additional state transition which occurs when within 24 hours one of the two messages cannot be sent. If a value of zero is specified for the timeout, the process immediately follows the timeout path when the alternative message delivery fails completely.

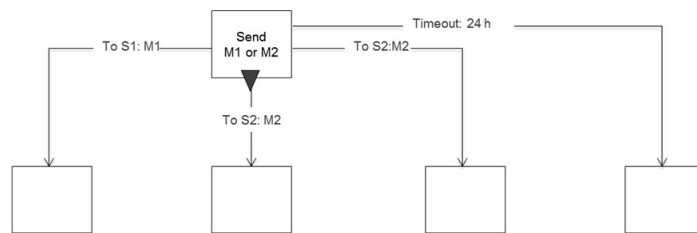


Figure 3.2: Send using time monitoring

3.1.2 Receiving Messages

Analogously to sending, the receiving procedure is divided into two phases, which run inversely to send.

The first step is to verify whether the expected message is ready for being picked up. In case of synchronous messaging, it is checked whether the sending subject offers the message. In the asynchronous version, it is checked whether the message has already been stored in the input pool. If the expected message is accessible in either form, it is accepted, and in a second step, the corresponding state transition is performed. This leads to a takeover of the message parameters of the accepted message to local variables or business objects of the receiving subject. In case the expected message is not ready, the receiving subject is blocked until the message arrives and can be accepted.

In a certain state, a subject can expect alternatively multiple messages. In this case, it is checked whether any of these messages is available and can be accepted. The test sequence is arbitrary, unless message priorities are defined. In this case, an available message with the highest priority is accepted. However, all other messages remain available (e.g., in the input pool) and can be accepted in other receive states.

Figure 3.3 shows a receive state of the subject ‘employee’ which is waiting for the answer regarding a business trip request. The answer may be an approval or a rejection.

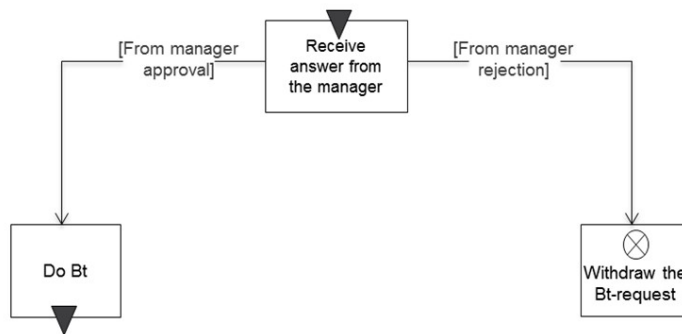


Figure 3.3: Example of alternative receiving

Just as with sending messages, also receiving messages can be monitored over time. If none of the expected messages are available and the receiving subject is therefore blocked, a time limit can be specified for blocking. After the specified time has elapsed, the subject will execute the transition as it is defined for the timeout period. The duration of the time limit may also be dynamic, in the sense that at the end of a process instance the process stakeholders assigned to the subject decide that the appropriate transition should be performed. We then speak of a manual timeout.

Figure 3.4 shows that, after waiting three days for the manager's answer, the employee sends a corresponding request.

Instead of waiting for a message for a certain predetermined period of time, the waiting can be interrupted by a subject at all times. In this case, a reason for abortion can be appended to the keyword 'breakup'. In the example shown in Figure 3.5, the receive state is left due to the impatience of the subject.

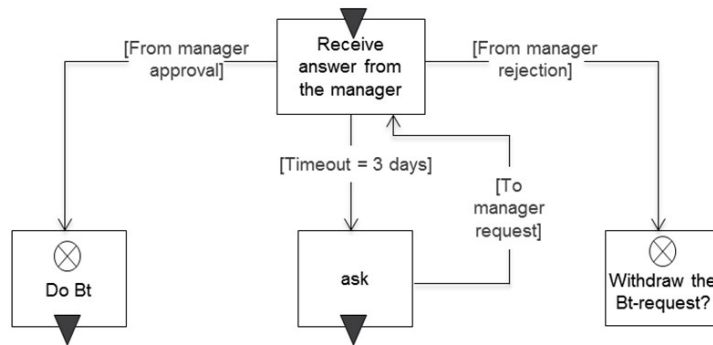


Figure 3.4: Time monitoring for message reception

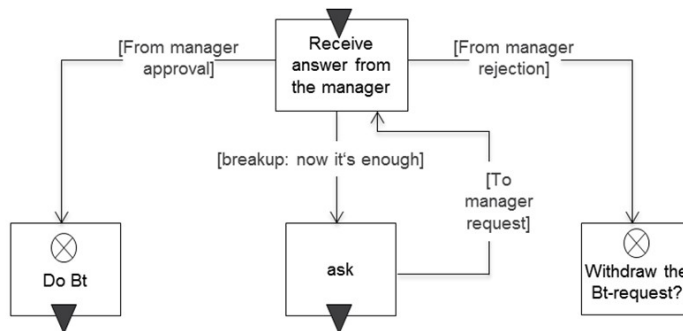


Figure 3.5: Message reception with manual interrupt

3.1.3 Subject Behavior

The possible sequences of a subject's actions in a process are termed subject behavior. States and state transitions describe what actions a subject performs and how they are interdependent. In addition to the communication for sending and receiving, a subject also performs so-called internal actions or functions.

States of a subject are therefore distinct: There are actions on the one hand, and communication states to interact with other subjects (receive and send) on the other. This results in three different types of states of a subject. Figure 3.6 shows the different types of states with the corresponding symbols.

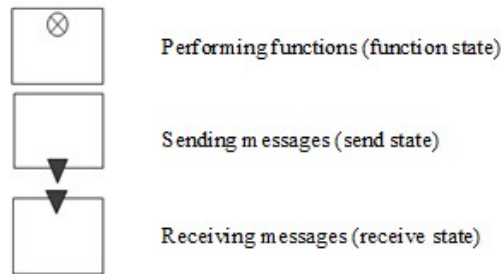


Figure 3.6: State types and corresponding symbols

In S-BPM, work performers are equipped with elementary tasks to model their work procedures: sending and receiving messages and immediate accomplishment of a task (function state). In case an action associated with a state (send, receive, do) is possible, it will be executed, and a state transition to the next state occurs. The transition is characterized through the result of the action of the state under consideration: For a send state, it is determined by the state transition to which subject what information is sent. For a receive state, it becomes evident in this way from what subject it receives which information. For a function state, the state transition describes the result of the action, e.g., that the change of a business object was successful or could not be executed.

The behavior of subjects is represented by modelers using Subject Behavior Diagrams (SBD). Figure 3.7 shows the subject behavior diagram depicting the behavior of the subjects 'employee', 'manager', and 'travel office', including the associated states and state transitions.

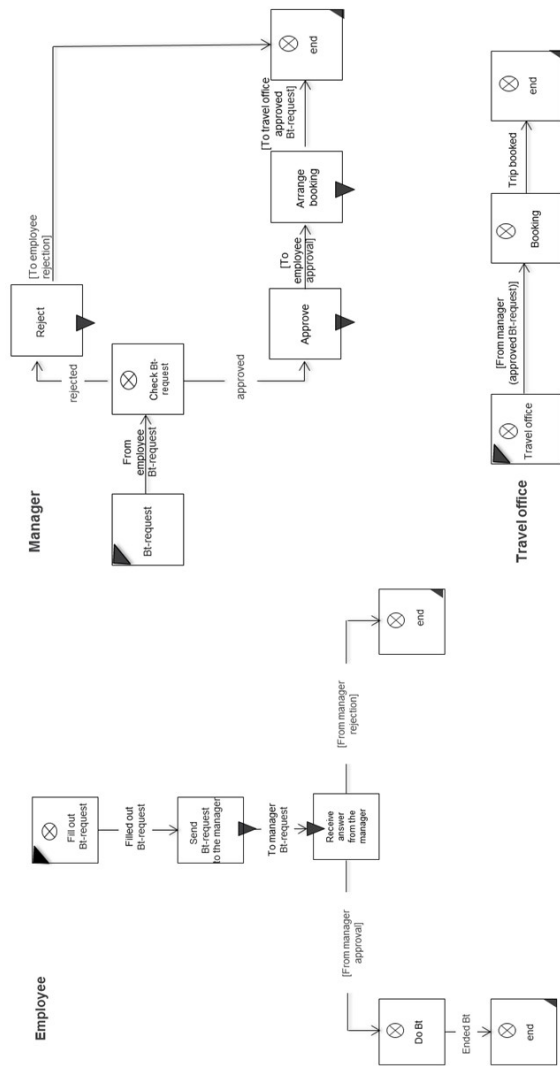


Figure 3.7: Subject behavior diagram for the subjects ‘employee’, ‘manager’, and ‘travel office’

3.2 Ontology of Subject Behavior Description

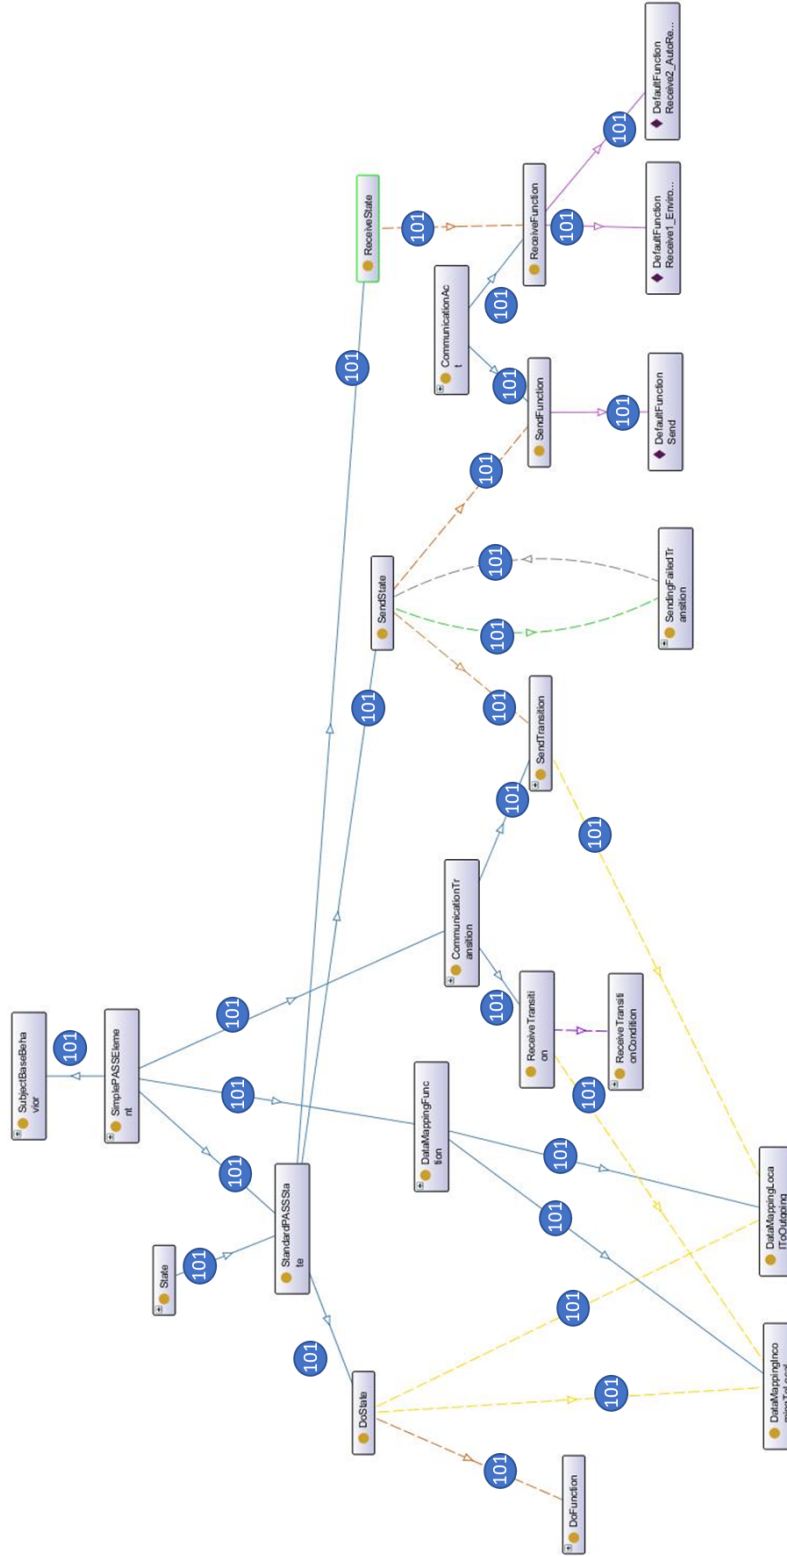


Figure 3.8: Behavior of subjects

3.3 ASM Definition of Subject Execution

Appendix A

Classes and Property of the PASS Ontology

A.1 All Classes (95)

- SRN = Subclass Reference Number; Is used for marking the corresponding relations in the following figures. The number identifies the subclass relation to the next level of super class.
- PASSProcessModelElement
 - BehaviorDescribingComponent; SRN: 001
Group of PASS-Model components that describe aspects of the behavior of subjects
 - * Action; SRN: 002
An Action is a grouping concept that groups a state with all its outgoing valid transitions
 - * DataMappingFunction ; SRN: 003
Standard Format for DataMappingFunctions must be define: XML? OWL? JSON? Definitions of the ability/need to write or read data to and from a subject's personal data storage. DataMappingFunctions are behavior describing components since they define what the subject is supposed to do (mapping and translating data) Mapping may be done during reception of message, where data is taken from the message/Business Object (BO) and mapped/put into the local data field. It may be done during sending of a message where data is taken from the local vault and put into a BO. Or it may occur during ex-

ecuting a *do* function, where it is used to define *read(get)* and *write(set)* functions for the local data.

- *DataMappingIncomingToLocal* ; SRN: 004

A DataMapping that specifies how data is mapped from an external source (message, function call etc.) to a subject's private defined data space.

- *DataMappingLocalToOutgoing* ; SRN: 005

A DataMapping that specifies how data is mapped from a subject's private data space to an external destination (message, function call etc.)

- * *FunctionSpecification* ; SRN: 006

A function specification for state denotes

Concept: Definitions of calls of (mostly technical) functions (e.g. Web-service, Scripts, Database access,) that are not part of the process model.

*Function Specifications are more than "Data Properties"? –
- If special function types (e.g. Defaults) are supposed to be reused, having them as explicit entities is a the better OWL-modeling choice.*

- *CommunicationAct* ; SRN: 007

A super class for specialized FunctionSpecification of communication acts (send and receive)

- *ReceiveFunction* ; SRN: 008

Specifications/descriptions for Receive-Functions describe in detail what the subject carrier is supposed to do in a state.

DefaultFunctionReceive1_EnvoironmentChoice : *present the surrounding execution environment with the given exit choices/conditions currently available depending on the current state of the subjects in-box. Waiting and not executing the receive action is an option.*

DefaultFunctionReceive2_AutoReceiveEarliest: *automatically execute the according activity with the highest priority as soon as possible. In contrast to DefaultFunctionReceive1, it is not an option to prolong the reception and wait e.g. for another message.*

- *SendFunction* ; SRN: 009

Comments have to be added

- *DoFunction* ; SRN: 010

Specifications or descriptions for Do-Functions describe

in detail what the subject carrier is supposed to do in an according state. The default DoFunction

1: present the surrounding execution environment with the given exit choices/conditions and receive choice of one exit option – \dot{z} define its Condition to be fulfilled in order to go to the next according state. The default DoFunction

2: execute automatic rule evaluation (see DoTransition-Condition - ToDo) More specialized Do-Function Specifications may contain Data mappings denoting what of a subjects internal local Data can and should be:

a) read: in order to simply see it or in order to send it of to an external function (e.g. a web service)

b) write: in order to write incoming Data from e.g. a web Service or user input, to the local data fault

* ReceiveType ; SRN: 011

Comments have to be added

* SendType ; SRN: 012

Comments have to be added

* State ; SRN: 013

A state in the behavior descriptions of a model

· ChoiceSegment ; SRN: 014

ChoiceSegments are groups of defined ChoiceSegement-Paths. The paths may contain any amount of states. However, those states may not reach out of the bounds of the ChoiceSegmentPath.

· ChoiceSegmentPath ; SRN: 015

ChoiceSegments are groups of defined ChoiceSegement-Paths. The paths may contain any amount of states. However, those states may not reach out of the bounds of the ChoiceSegmentPath. The path may contain any amount of states but may those states may not reach out of the bounds of the choice segment path. Similar to an initial state of a behavior a choice segment path must have one determined initial state. A transition within a choice segment path must not have a target state that is not inside the same choice segment path.

· MandatoryToEndChoiceSegmentPath ; SRN: 016

Comments have to be added

· MandatoryToStartChoiceSegmentPath ; SRN: 017

Comments have to be added

- OptionalToEndChoiceSegmentPath ; SRN: 018
Comments have to be added
- OptionalToStartChoiceSegmentPath ; SRN: 019
ChoiceSegmentPath and (isOptionalToEndChoiceSegmentPath value false)
- EndState ; SRN: 020
An end state a behavior. A subject behavior may have one or more end states. Only Do and Receive states may be end states. Send States cannot be end states. There are no individual end states that are not Do, Send, or Receive States at the same time.
- GenericReturnToOriginReference ; SRN: 021
Comments have to be added
- InitialStateOfBehavior ; SRN: 022
The initial state of a behavior
- InitialStateOfChoiceSegmentPath ; SRN: 023
Similar to an initial state of a behavior a choice segment path must have one determined initial state
- MacroState ; SRN: 024
A state that references a macro behavior that is executed upon entering this state. Only after executing the macro behavior this state is finished also.
- StandardPASSState ; SRN: 025
A super class to the standard PASS states: Do, Receive and Send
 - DoState ; SRN: 026
The standard state in a PASS subject behavior diagram denoting an action or activity of the subject in itself.
 - ReceiveState ; SRN: 027
The standard state in a PASS subject behavior diagram denoting an receive action or rather the waiting for a receive possibility.
 - SendState ; SRN: 028
The standard state in a PASS subject behavior diagram denoting a send action
- StateReference ; SRN: 029
A state reference is a model component that is a reference to a state in another behavior. For most modeling aspects it is a normal state.

* Transition ; SRN: 030

An edge defines the transition between two states. A transition can be traversed if the outcome of the action of the state it originates from satisfies a certain exit condition specified by it's "Alternative"

· CommunicationTransition ; SRN: 031

A super class for the CommunicationTransitions.

· ReceiveTransition ; SRN: 032

Comments have to be added

· SendTransition ; SRN: 033

Comments have to be added

· DoTransition ; SRN: 034

Comments have to be added

· SendingFailedTransition ; SRN: 035

Comments have to be added

· TimeTransition ; SRN: 036

Generic super calls for all TimeTransitions, transitions with conditions based on time events. E.g. passing of a certain time duration or the (reoccurring) calendar event.

· ReminderTransition ; SRN: 037

Reminder transitions are transitions that can be traverses if a certain time based event or frequency has been reached. E.g. a number of months since the last traversal of this transition or the event of a certain pre-set calendar date etc.

· CalendarBasedReminderTransition ; SRN: 038

A reminder transition, for defining exit conditions measured in calendar years or months

Conditions are e.g.: reaching of (in model) preset calendar date (e.g. 1st of July) or the reoccurrence of a a long running frequency ("every Month", "2 times a year")

· TimeBasedReminderTransition ; SRN: 039

Comments have to be added

· TimerTransition ; SRN: 040

Generic super calls for all TimeTransitions, transitions with conditions based on time events. E.g. passing of a certain time duration or the (reoccurring) calendar event.

- **BusinessDayTimerTransition ; SRN: 041**
Timer transitions, denote time outs for the state they originate from. The condition for a timer transition is that a certain amount of time has passed since the state it originates from has been entered.
The time unit for this timer transition is measured in business days. The definition of a business day depends on a subject's relevant or legal location
- **DayTimeTimerTransition ; SRN: 042**
Timer Transitions, denoting time outs for the state they originate from. The condition for a timer transition is that a certain amount of time has passed since the state it originates from has been entered.
Day or Time Timers are measured in normal 24 hour days. Following the XML standard for time and day duration. They are to be differed from the timers that are timeout in units of years or months.
- **YearMonthTimerTransition ; SRN: 044**
Timer transitions, denote time outs for the state they originate from. The condition for a timer transition is that a certain amount of time has passed since the state it originates from has been entered.
Year or Month timers measure time in calendar years or months. The exact definitions for years and months depends on relevant or legal geographical location of the subject.
- **UserCancelTransition ; SRN: 045**
A user cancel transition denotes the possibility to exit a receive state without the reception of a specific message.
The user cancel allows for an arbitrary decision by a subject carrier/processor to abort a waiting process.
- **TransitionCondition ; SRN: 046**
natives which in turn is given for a state. An alternative (to leave the state) is only a real alternative if the exit condition is fulfilled (technically: if that according function returns "true").
Note: Technically and during execution exit conditions belong to states. They define when it is allowed to leave that state. However, in PASS models exit conditions for states are defined and connected to the according transi-

tion edges. Therefore transition conditions are individual entities and not *DataProperties*.

The according matching must be done by the model execution environment.

By its existence, an edge/transition defines one possible follow up "state" for its state of origin. It is coupled with an "Exit Condition" that must be fulfilled in the originating state in order to leave the state.

- DoTransitionCondition ; SRN: 047

A TransitionCondition for the according DoTransitions and DoStates.

- MessageExchangeCondition ; SRN: 048

MessageExchangeCondition is the super class for Send End Receive Transition Conditions the both require either the sending or receiving (exchange) of a message to be fulfilled.

- ReceiveTransitionCondition ; SRN: 049

ReceiveTransitionConditions are conditions that state that a certain message must have been taken out of a subjects in-box to be fulfilled.

These are the typical conditions defined by Receive Transitions.

- SendTransitionCondition ; SRN: 050

SendTransitionConditions are conditions that state that a certain message must have been successfully passed to another subjects in-box to be fulfilled.

These are the typical conditions defined by Send transitions.

- SendingFailedCondition ; SRN: 051

Comments have to be added

- TimeTransitionCondition ; SRN: 052

A condition that is deemed 'true' and thus the according edge is gone, if: a surrounding execution system has deemed the time since entering the state and starting with the execution of the according action as too long (predefined by the outgoing edge)

A condition that is true if a certain time defined has passed since the state this condition belongs to has been entered. (This is the standard Timeout Exit condition)

- ReminderEventTransitionCondition ; SRN: 053

Comments have to be added

- TimerTransitionCondition ; SRN: 054

Comments have to be added

- DataDescribingComponent ; SRN: 055

Subject-Oriented PASS Process Models are in general about describing the activities and interaction of active entities. Yet these interactions are rarely done without data that is being generated by activities and transported via messages. While not considered by Börger's PASS interpreter, the community agreed on adding the ability to integrate the means to describe data objects or data structures to the model and enabling their connection to the process model. It may be defined that messages or subject have their individual DataObjectDefinition in form of a SubjectDataDefinition in the case of FullySpecifiedSubjects and PayloadDataObjectDefinition in the case of MessageSpecifications In general, it expected that these DataObjectDefinition list on or more data fields for the message or subject with an internal data type that is described via a DataTypeDefinition. There is a rudimentary concept for a simple build-in data type definition closely oriented at the concept of ActNConnect. Otherwise, the principle idea of the OWL standard is to allow and employ existing or custom technologies for the serialized definition of data structures (CustomOrExternalDataTypeDefinition) such as XML-Schemata (XSD), according elements with JSON or directly the powerful expressiveness of OWL itself.

- * DataObjectDefinition ; SRN: 056

Data Object Definitions are model elements used to describe that certain other model elements may posses or carrier Data Objects.

E.G. a message may carrier/include a Business Objects. Or the private Data Space of a Subject may contain several Data Objects.

A Data Objects should refer to a DataTypeDefinition denoting its DataType and structure.

DataObject: states that a data item does exist (similar to a variable in programming)DataType: the definition of an Data Object's structure.

- DataObjectListDefintion ; SRN: 057

Data definition concept for PASS model build in capabili-

ties of data modeling. Defines a simple list structure.

- PayloadDataObjectDefinition ; SRN: 058

Messages may have a description regarding their payload (what is transported with them).

This can either be a description of a physical (real) object or a description of a (digital) data object

- SubjectDataDefinition ; SRN: 059

Comments have to be added

- * DataTypeDefinition ; SRN: 060

Data Type Definitions are complex descriptions of the supposed structure of Data Objects.

DataObject: states that a data item does exist (similar to a variable in programming).

DataType: the definition of an Data Object's structure.

- CustomOrExternalDataTypeDefinition ; SRN: 061

Using this class, tool vendors can include their own custom data definitions in the model.

- JSONDataTypeDefinition ; SRN: 062

Comments have to be added

- OWLDataTypeDefinition ; SRN: 63

Comments have to be added

- XSD-DataTypeDefinition ; SRN: 064

XML Schemata Description (XSD) is an established technology for describing structure of Data Objects (XML documents) with many tools available that can verify a document against the standard definition

- ModelBuiltInDataTypes ; SRN: 065

Comments have to be added

- * PayloadDescription ; SRN: 066

Comments have to be added

- PayloadDataObjectDefinition ; SRN: 067

Messages may have a description regarding their payload (what is transported with them).

This can either be a description of a physical (real) object or a description of a (digital) data object

- PayloadPhysicalObjectDescription ; SRN: 068

Messages may have a description regarding their payload (what is transported with them).

This can either be a description of a physical (real) object

or a description of a (digital) data object

- InteractionDescribingComponent ; SRN: 069

This class is the super class of all model elements used to define or specify the interaction means within a process model

- * InputPoolConstraint ; SRN: 070

Subjects do implicitly possess input pools.

During automatic execution of a PASS model in a work-flow engine this message box is filled with messages.

Without any constraints models this message in-box is assumed to be able to store an infinite amount of messages.

For some modeling concepts though it may be of importance to restrict the size of the input pool for certain messages or senders.

This is done using several different Type of InputPoolConstraints that are attached to a fully specified subject.

Should a constraint be applicable, an "InputPoolConstraintHandlingStrategy" will be executed by a work-flow engine to determine what to do with the message that does not fit in the pool.

Limiting the input pool for certain reasons to size 0 together with the InputPoolConstraintStrategy-Blocking is effectively modeling that a communication must happen synchronously instead of the standard asynchronous mode. The sender can send his message only if the receiver is in an according receive state, so the message can be handled directly without being stored in the in-box.

- MessageSenderTypeConstraint ; SRN: 071

An InputPool constraint that limits the number of message of a certain type and from a certain sender in the input pool.

E.g. "Only one order from the same customer" (during happy hour at the bar)

- MessageTypeConstraint ; SRN: 072

An InputPool constraint that limits the number of message of a certain type in the input pool.

E.g. You can accept only "three request at once

- SenderTypeConstraint ; SRN: 073

An InputPool constraint that limits the number of message from a certain Sender subject in the input pool.

E.g. as long as a customer has non non-fulfilled request of any type he may not place messages

- * `InputPoolConstraintHandlingStrategy` ; SRN: 074
Should an `InputPoolConstraint` be applicable, an "`InputPoolConstraintHandlingStrategy`" will be executed by a work-flow engine to determine what to do with the message that does not fit in the pool.
There are types of `HandlingStrategies`.
`InputPoolConstraintStrategy-Blocking` - No new message will be added until the need to be repeated until successful
`InputPoolConstraintStrategy-DeleteLatest` - The new message will be added, but the last message to arrive before that applicable to the same constraint will be overwritten with the new one. (LIFO deleting concept)
`InputPoolConstraintStrategy-DeleteOldest` - The message will be added, but the earliest message in the input pool applicable to the same constraint will be deleted (FIFO deleting concept)
`InputPoolConstraintStrategy-Drop` - Sending of the message succeeds. However the new message will not be added to the in-box. Rather it will be deleted directly.
- * `MessageExchange` ; SRN: 075
A message exchange is an element in the interaction description section that specifies exactly one possibility of exchanging messages in the given process context of the model.
A message exchange is a triple of, a sender, a receiver, and the specification of the message that may be exchanged.
While message exchanges are singular occurrences, they may be grouped in `MessageExchangeLists`
- * `MessageExchangeList` ; SRN: 076
While `MessageExchanges` are singular occurrences, they may be grouped in `MessageExchangeLists`.
In graphical PASS modeling that is usually the case when one arrow between two subjects contains more than one message and thereby specifies more than one possible message exchange channel between the two subjects.
- * `MessageSpecification` ; SRN: 077
`MessageSpecification` are model elements that specify the existence of a message. At minimum its name and id.
It may contain additional specification for its payload (contained Data, exact form etc.)
- * `Subject` ; SRN: 078
The subject is the core model element of a subject-oriented

PASS process model.

- FullySpecifiedSubject ; SRN: 079
Fully specified Subjects in a PASS graph are entities that, in contrast to interface subjects, linked to one or more Behaviors (they possess a behavior).
- InterfaceSubject ; SRN: 080
Interface Subjects are Subjects that are not linked to a behavior. In contrast, they may refer to FullySpecified-Subjects that are described in other process models.
- MultiSubject ; SRN: 081
The Multi-Subject is term for a subject that "has a maximum subject instantiation restriction" within a process context larger than 1.
- SingleSubject ; SRN: 082
Single Subject are subject with a maximumInstanceRestriction of 1
- StartSubject ; SRN: 083
*Subjects that start their behavior with a Do or Send state are active in a process context from the beginning instead of requiring a message from another subject.
Usually there should be only one Start subject in a process context.*
- PASSProcessModel ; SRN: 084
The main class that contains all relevant process elements
- SubjectBehavior ; SRN: 085
*Additional to the subject interaction a PASS Model consist of multiple descriptions of subject's behaviors. These are graphs described with the means of BehaviorDescribingComponents
A subject in a model may be linked to more than one behavior.*
- * GuardBehavior ; SRN: 086
A guard behavior is a special usually additional behavior that guards the Base Behavior of a subject. It starts with a (guard) receive state denoting a special interrupting message. Upon reception of that message the subject will execute the according receive transition and the follow up states until it is either redirected to a state on the base behavior or terminates in an end-state within the guard behavior
- * MacroBehavior ; SRN: 087
A macro behavior is a specialized behavior that may be entered

and exited from a function state in another behavior.

- * SubjectBaseBehavior ; SRN: 088
The standard behavior model type

- SimplePASSElement ; SRN: 089
Comments have to be added
- CommunicationTransition ; SRN: 090
A super class for the CommunicationTransitions.
 - * ReceiveTransition ; SRN: 091
Comments have to be added
 - * SendTransition ; SRN: 092
Comments have to be added
- DataMappingFunction ; SRN: 093
Definitions of the ability/need to write or read data to and from a subject's personal data storage.
DataMappingFunctions are behavior describing components since they define what the subject is supposed to do (mapping and translating data)
Mapping may be done during reception of message, where data is taken from the message/Business Object (BO) and mapped/put into the local data field.
It may be done during sending of a message where data is taken from the local vault and put into a BO.
Or it may occur during executing a do function, where it is used to define read(get) and write (set) functions for the local data.
 - * DataMappingIncomingToLocal ; SRN: 094
A DataMapping that specifies how data is mapped from an external source (message, function call etc.) to a subject's private defined data space.
 - * DataMappingLocalToOutgoing ; SRN: 095
A DataMapping that specifies how data is mapped from a subject's private data space to an external destination (message, function call etc.)"
- DoTransition ; SRN: 096
Comments have to be added
- DoTransitionCondition ; SRN: 097
A TransitionCondition for the according DoTransitions and DoStates.

– EndState ; SRN: 098

An end state a behavior. A subject behavior may have one or more end states. Only Do and Receive states may be end states. Send States cannot be end states.

There are no individual end states that are not Do, Send, or Receive States at the same time.

– FunctionSpecification ; SRN: 099

A function specification for state denotes

Concept: Definitions of calls of (mostly technical) functions (e.g. Web-service, Scripts, Database access,) that are not part of the process model.

Function Specifications are more than "Data Properties"? –j - If special function types (e.g. Defaults) are supposed to be reused, having them as explicit entities is a the better OWL-modeling choice.

* CommunicationAct ; SRN: 100

A super class for specialized FunctionSpecification of communication acts (send and receive)

· ReceiveFunction ; SRN: 101

Specifications/descriptions for Receive-Functions describe in detail what the subject carrier is supposed to do in a state.

DefaultFunctionReceive1_EnvironmentChoice : present the surrounding execution environment with the given exit choices/conditions currently available depending on the current state of the subjects in-box. Waiting and not executing the receive action is an option.

DefaultFunctionReceive2_AutoReceiveEarliest: automatically execute the according activity with the highest priority as soon as possible. In contrast to DefaultFunction-Receive1, it is not an option to prolong the reception and wait e.g. for another message.

· SendFunction ; SRN: 102

Comments have to be added

* DoFunction ; SRN: 103

Specifications or descriptions for Do-Functions describe in detail what the subject carrier is supposed to do in an according state.

The default DoFunction 1: present the surrounding execution environment with the given exit choices/conditions and receive

choice of one exit option –j define its Condition to be fulfilled in order to go to the next according state.

The default DoFunction 2: execute automatic rule evaluation (see DoTransitionCondition).

More specialized Do-Function Specifications may contain Data mappings denoting what of a subjects internal local Data can and should be:

a) read: in order to simply see it or in order to send it of to an external function (e.g. a web service)

b) write: in order to write incoming Data from e.g. a web Service or user input, to the local data fault

- InitialStateOfBehavior ; SRN: 104

The initial state of a behavior

- MessageExchange ; SRN: 105

A message exchange is an element in the interaction description section that specifies exactly one possibility of exchanging messages in the given process context of the model.

A message exchange is a triple of, a sender, a receiver, and the specification of the message that may be exchanged.

While message exchanges are singular occurrences, they may be grouped in MessageExchangeLists

- MessageExchangeCondition ; SRN: 106

MessageExchangeCondition is the super class for Send End Receive Transition Conditions the both require either the sending or receiving (exchange) of a message to be fulfilled.

- * ReceiveTransitionCondition ; SRN: 107

ReceiveTransitionConditions are conditions that state that a certain message must have been taken out of a subjects in-box to be fulfilled.

These are the typical conditions defined by Receive Transitions.

- * SendTransitionCondition ; SRN: 108

SendTransitionConditions are conditions that state that a certain message must have been successfully passed to another subjects in-box to be fulfilled.

These are the typical conditions defined by Send transitions.

- MessageExchangeList ; SRN: 109

While MessageExchanges are singular occurrences, they may be grouped in MessageExchangeLists.

In graphical PASS modeling that is usually the case when one arrow between two subjects contains more than one message and thereby specifies more than one possible message exchange channel between the two subjects.

- MessageSpecification ; SRN: 110
*MessageSpecification are model elements that specify the existence of a message. At minimum its name and id.
 It may contain additional specification for its payload (contained Data, exact form etc.)*
- ModelBuiltInDataTypes ; SRN: 111
Comments have to be added
- PayloadDataObjectDefinition ; SRN: 112
*Messages may have a description regarding their payload (what is transported with them).
 This can either be a description of a physical (real) object or a description of a (digital) data object*
- StandardPASSState ; SRN: 113
A super class to the standard PASS states: Do, Receive and Send
 - * DoState ; SRN: 114
The standard state in a PASS subject behavior diagram denoting an action or activity of the subject in itself.
 - * ReceiveState ; SRN: 115
The standard state in a PASS subject behavior diagram denoting an receive action or rather the waiting for a receive possibility.
 - * SendState ; SRN: 116
The standard state in a PASS subject behavior diagram denoting a send action
- Subject ; SRN: 117
The subject is the core model element of a subject-oriented PASS process model.
 - * FullySpecifiedSubject ; SRN: 118
Fully specified Subjects in a PASS graph are entities that, in contrast to interface subjects, linked to one or more Behaviors (they possess a behavior).
 - * InterfaceSubject ; SRN: 119
Interface Subjects are Subjects that are not linked to a behavior. In contrast, they may refer to FullySpecifiedSubjects that are described in other process models.

- * MultiSubject ; SRN: 120
The Multi-Subject is term for a subject that "has a maximum subject instantiation restriction" within a process context larger than 1.
- * SingleSubject ; SRN: 121
Single Subject are subject with a maximumInstanceRestriction of 1
- * StartSubject ; SRN: 122
*Subjects that start their behavior with a Do or Send state are active in a process context from the beginning instead of requiring a message from another subject.
Usually there should be only one Start subject in a process context.*
- SubjectBaseBehavior ; SRN: 123
The standard behavior model type

A.2 Data Properties (27)

Property name		Domain-Range	Comments	Reference
hasBusinessDayDurationTimeOutTime	Domain: Range:			
hasCalendarBasedFrequencyOrDate	Domain: Range:			
hasDataMappingString	Domain: Range:			
hasDayTimeDurationTimeOutTime	Domain: Range:			
hasDurationTimeOutTime	Domain: Range:			
hasFeelExpressionAsDataMapping	Domain: Range:		See https://www.omg.org/spec/DMN for specification of Feel-Statement-Strings The idea of these ex- pression is to map data fields from and to the internal Data storage of a subject	

Property name		Domain-Range	Comments	Reference
hasGraphicalRepresentation	Domain:		The process models are in principle abstract graph structures. Yet the visualization of process models is very important since many process models are initially created in a graphical form using a graphical graph editor (e.g. MS Visio, yEd, etc.) that was created to foster human comprehensibility. If available any process element may have a graphical representation attached to it	
	Range:			
hasKey	Domain:			
	Range:			
hasLimit	Domain:			
	Range:			
hasMaximumSubjectInstanceRestriction	Domain:			
	Range:			

Property name		Domain-Range	Comments	Reference
hasMetaData	Domain: Range:			
hasModelComponentComment	Domain: Range:		equivalent rdfs:comment to	
hasModelComponentID	Domain: Range:		The unique ID of a PASSProcessModel- Component	
hasModelComponentLabel	Domain: Range:		The human legible la- bel or description of a model element.	

Property name	Domain-Range	Comments	Reference
hasPriorityNumber	<p>Domain:</p> <p>Range:</p>	Transitions or Behaviors have numbers that denote their execution priority in situations where two or more options could be executed. This is important for automated execution. E.g. when two messages are in the inbox and could be followed, the message denoted on the transition with the higher priority (lower priority number) is taken out and processed. Similarly, SubjectBehaviors with higher priority (lower priority number) are to be executed before Behaviors with lower priority.	

Property name	Domain-Range	Comments	Reference
hasReoccurrenceFrequencyOrDate	Domain:	A data field meant for the two classes ReoccurrenceTime-OutTransition and ReoccurrenceTimeOutExitCondition. ToDo: Define the ac-cording data format for describing the itera-tion frequencies or re-occurring dates. Opin-ion: rather complex: expressive capabilities should cover expres-sions like: "every 2nd Monday of Month at 7:30 in Morning." Ev-ery 29th of July" or "Every Hour", "ever 25 Minuets" , "once each day", "twice each week" etc	
	Range:		

Property name		Domain-Range	Comments	Reference
hasSVGRepresentation	Domain:		The Scalable Vector Graphic (SVG) XML format is a text based standard to describe vector graphics. Adding according image information as XML literals is therefor a suitable, yet not necessarily easily changeable option to include the graphical representation of model elements in the an OWL file.	
hasTimeBasedReoccurrenceOrder	Range:			
hasTimeValue	Domain:		Generic super class for all data properties of time based transitions.	
	Range:			

Property name		Domain-Range	Comments	Reference
hasToolSpecificDefinition	Domain:		<p>This is a placeholder DataProperty meant as a tie in point for tool vendors to include tool specific data values/properties into models.</p> <p>By denoting their own data properties as subclasses to this one the according data fields can easily be recognized as such. However, this is only an option and a place holder to remind that something like this is possible.</p>	
	Range:			
hasValue	Domain:			
	Range:			
hasYearMonthDurationTimeOutTime	Domain:			
	Range:			
isOptionalToEndChoiceSegmentPath	Domain:			
	Range:			

Property name		Domain-Range	Comments	Reference
isOptionalToStartChoiceSegmentPath	Domain: Range:			
owl:topDataProperty	Domain: Range:			
PASSModelDataProperty	Domain: Range:		Generic super class of all DataProperties that PASS process model elements may have.	
SimplePASSDataProperties	Domain: Range:		Every element/sub-class of SimplePASS-DataProperties is also a Child of PASSModelDataProperty. This is simply a surrogate class to group all simple elements together	

A.3 Object Properties (42)

Property name		Domain-Range	Comments	Reference
belongsTo	Domain: Range:	PASSProcessModelElement PASSProcessModelElement	Generic ObjectProperty that links two process elements, where one is contained in the other (inverse of contains).	200
contains	Domain: Range:	PASSProcessModelElement PASSProcessModelElement	Generic ObjectProperty that links two model elements where one contains another (possible multiple)	201
containsBaseBehavior	Domain: Range:	Subject SubjectBehavior		202
containsBehavior	Domain: Range:	Subject SubjectBehavior		203
containsPayload- Description	Domain: Range:	MessageSpecification PayloadDescription		204
guardedBy	Domain: Range:	State, Action GuardBehavior		205

Property name		Domain-Range	Comments	Reference
guardsBehavior	Domain:	GuardBehavior	Links a GuardBehavior to another SubjectBehavior. Automatically all individual states in the guarded behavior are guarded by the guard behavior. There is an SWRL Rule in the ontology for that purpose.	206
	Range:	SubjectBehavior		
guardsState	Domain:	State, Action		207
	Range:	guardedBy		
hasAdditionalAttribute	Domain:	PASSProcessModelElement		208
	Range:	AdditionalAttribute		
hasCorrespondent	Domain:		Generic super class for the ObjectProperties that link a Subject with a MessageExchange either in the role of Sender or Receiver.	209
	Range:	Subject		
hasDataDefinition	Domain:	DataObjectDefinition		210
	Range:			

Property name		Domain-Range	Comments	Reference
hasDataMapping-Function	Domain: Range:	state, SendTransition, ReceiveTransition DataMappingFunction		211
hasDataType	Domain: Range:	PayloadDescription or DataObjectDefinition DataTypeDefinition		212
hasEndState	Domain: Range:	SubjectBehavior or Choice- SegmentPath State, not SendState		213
hasFunction-Specification	Domain: Range:	State FunctionSpecification		214
hasHandlingStrategy	Domain: Range:	InputPoolConstraint InputPoolConstraint- HandlingStrategy		215
hasIncomingMessage-Exchange	Domain: Range:	Subject MessageExchange		216
hasIncomingTransition	Domain: Range:	State Transition		217
hasInitialState	Domain: Range:	SubjectBehavior or Choice- SegmentPath State		218

Property name		Domain-Range	Comments	Reference
hasInputPoolConstraint	Domain: Range:	Subject InputPoolConstraint		219
hasKeyValuePair	Domain: Range:			220
hasMessageExchange	Domain: Range:	Subject	Generic super class for the ObjectProperties linking a subject with either incoming or outgoing MessageExchanges.	221
hasMessageType	Domain: Range:	MessageTypeConstraint or MessageSenderTypeConstraint or MessageExchange change MessageSpecification		222
hasOutgoingMessageExchange	Domain: Range:	Subject MessageExchange		223
hasOutgoingTransition	Domain: Range:	State Transition		224
hasReceiver	Domain: Range:	MessageExchange Subject		225

Property name		Domain-Range	Comments	Reference
hasRelationToModel-Component	Domain:	PASSProcessModelElement	Generic super class of all object properties in the standard-pass-ont that are used to link model elements with one-another.	226
	Range:	PASSProcessModelElement		
hasSender	Domain: Range:	MessageExchange Subject		227
hasSourceState	Domain: Range:	Transition State		228
hasStartSubject	Domain: Range:	PASSProcessModel StartSubject		229
hasTargetState	Domain Range	Transition State		230
hasTransitionCondition	Domain Range	Transition TransitionCondition		231
isBaseBehaviorOf	Domain:	SubjectBaseBehavior	A specialized version of the "belongsTo" Object-Property to denote that a -SubjectBehavior belongs to a Subject as its BaseBehavior	232
	Range:			
isEndStateOf	Domain: Range:	State and not SendState SubjectBehavior or Choice-SegmentPath		233

Property name		Domain-Range	Comments	Reference
isInitialStateOf	Domain: Range:	State SubjectBehavior or Choice- SegmentPath		234
isReferencedBy	Domain: Range:			235
references	Domain: Range:			236
referencesMacroBehavior	Domain: Range:	MacroState MacroBehavior		237
refersTo	Domain: Range:	CommunicationTransition MessageExchange	Communication transitions (send and receive) should refer to a message exchange that is defined on the interaction layer of a model.	238
requiresActiveReception- OfMessage	Domain: Range:	ReceiveTransitionCondition MessageSpecification		239
requiresPerformed- MessageExchange	Domain: Range:	MessageExchangeCondition MessageExchange		240

