

# Regular Expressions

## Chapter 11



Python for Informatics: Exploring Information  
[www.pythonlearn.com](http://www.pythonlearn.com)



# Regular Expressions

In computing, a regular expression, also referred to as “regex” or “regexp”, provides a concise and flexible means for matching strings of text, such as particular characters, words, or patterns of characters. A regular expression is written in a formal language that can be interpreted by a regular expression processor.

[http://en.wikipedia.org/wiki/Regular\\_expression](http://en.wikipedia.org/wiki/Regular_expression)

# Regular Expressions

Really clever “wild card” expressions for matching  
and parsing strings

[http://en.wikipedia.org/wiki/Regular\\_expression](http://en.wikipedia.org/wiki/Regular_expression)



Really smart "Find" or "Search"

# Understanding Regular Expressions

- Very powerful and quite cryptic
- Fun once you understand them
- Regular expressions are a language unto themselves
- A language of “marker characters” – programming with characters
- It is kind of an “old school” language – compact

WHENEVER I LEARN A NEW SKILL I CONCOCT ELABORATE FANTASY SCENARIOS WHERE IT LETS ME SAVE THE DAY.

OH NO! THE KILLER MUST HAVE FOLLOWED HER ON VACATION!



BUT TO FIND THEM WE'D HAVE TO SEARCH THROUGH 200 MB OF EMAILS LOOKING FOR SOMETHING FORMATTED LIKE AN ADDRESS!



IT'S HOPELESS!

EVERYBODY STAND BACK.



I KNOW REGULAR EXPRESSIONS.



# Regular Expression Quick Guide

<code>^</code>	Matches the <b>beginning</b> of a line
<code>\$</code>	Matches the <b>end</b> of the line
<code>.</code>	Matches <b>any</b> character
<code>\s</code>	Matches <b>whitespace</b>
<code>\S</code>	Matches any <b>non-whitespace</b> character
<code>*</code>	<b>Repeats</b> a character zero or more times
<code>*?</code>	<b>Repeats</b> a character zero or more times (non-greedy)
<code>+</code>	<b>Repeats</b> a character one or more times
<code>+?</code>	<b>Repeats</b> a character one or more times (non-greedy)
<code>[aeiou]</code>	Matches a single character in the listed <b>set</b>
<code>[^XYZ]</code>	Matches a single character <b>not in</b> the listed <b>set</b>
<code>[a-z0-9]</code>	The set of characters can include a <b>range</b>
<code>(</code>	Indicates where string <b>extraction</b> is to start
<code>)</code>	Indicates where string <b>extraction</b> is to end

# The Regular Expression Module

- Before you can use regular expressions in your program, you must import the library using `'import re'`
- You can use `re.search()` to see if a string matches a regular expression, similar to using the `find()` method for strings
- You can use `re.findall()` extract portions of a string that match your regular expression similar to a combination of `find()` and slicing:  
`var[5:10]`



# Using `re.search()` like `find()`

```
hand = open('mbox-short.txt')
for line in hand:
    line = line.rstrip()
    if line.find('From:') >= 0:
        print line
```

```
import re

hand = open('mbox-short.txt')
for line in hand:
    line = line.rstrip()
    if re.search('From:', line) :
        print line
```

# Using `re.search()` like `startswith()`

```
hand = open('mbox-short.txt')
for line in hand:
    line = line.rstrip()
    if line.startswith('From:') :
        print line
```

```
import re

hand = open('mbox-short.txt')
for line in hand:
    line = line.rstrip()
    if re.search('^From:', line) :
        print line
```

We fine-tune what is matched by adding special characters to the string

# Wild-Card Characters

- The dot character matches any character
- If you add the asterisk character, the character is “any number of times”

**X-Sieve:** CMU Sieve 2.3

**X-DSPAM-Result:** Innocent

**X-DSPAM-Confidence:** 0.8475

**X-Content-Type-Message-Body:** text/plain

^X.\*:

# Wild-Card Characters

- The **dot** character matches any character
- If you add the **asterisk** character, the character is “any number of times”

```
X-Sieve: CMU Sieve 2.3
X-DSPAM-Result: Innocent
X-DSPAM-Confidence: 0.8475
X-Content-Type-Message-Body: text/plain
```

Match the start of the line

Many times

Match any character

# Fine-Tuning Your Match

- Depending on how “clean” your data is and the purpose of your application, you may want to narrow your match down a bit


**X-Sieve:** CMU Sieve 2.3

**X-DSPAM-Result:** Innocent

**X-Plane is behind schedule:** two weeks

Match the start of the line

Many times

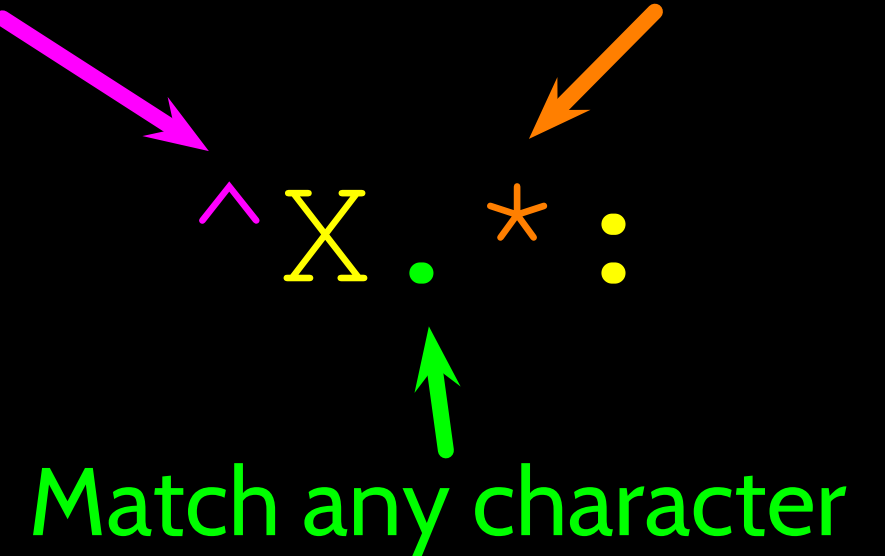A diagram illustrating regex symbols. A purple caret (^) is shown with a purple arrow pointing to it from the text 'Match the start of the line'. A yellow 'X' is shown. A green dot (.) is shown with a green arrow pointing to it from the text 'Match any character'. An orange asterisk (\*) is shown with an orange arrow pointing to it from the text 'Many times'. A yellow colon (:) is shown.

# Fine-Tuning Your Match

- Depending on how “clean” your data is and the purpose of your application, you may want to narrow your match down a bit


**X-Sieve:** CMU Sieve 2.3

**X-DSPAM-Result:** Innocent

X-Plane is behind schedule: two weeks

Match the start of the line

One or more  
times

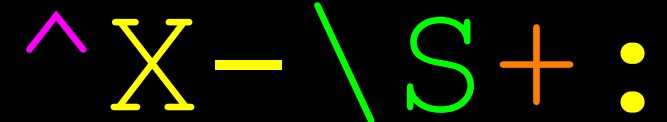  
^X-\S+:

Match any non-whitespace character

# Matching and Extracting Data

- The `re.search()` returns a True/False depending on whether the string matches the regular expression
- If we actually want the matching strings to be extracted, we use `re.findall()`

`[0-9]+`



One or more digits

```
>>> import re
>>> x = 'My 2 favorite numbers are 19 and 42'
>>> y = re.findall('[0-9]+', x)
>>> print y
['2', '19', '42']
```

# Matching and Extracting Data

- When we use `re.findall()`, it returns a list of zero or more sub-strings that match the regular expression

```
>>> import re
>>> x = 'My 2 favorite numbers are 19 and 42'
>>> y = re.findall('[0-9]+', x)
>>> print y
['2', '19', '42']
>>> y = re.findall('[AEIOU]+', x)
>>> print y
[]
```



# Warning: Greedy Matching


- The **repeat** characters (**\*** and **+**) push **outward** in both directions (greedy) to match the largest possible string

```
>>> import re
>>> x = 'From: Using the : character'
>>> y = re.findall('^F.+:', x)
>>> print y
['From: Using the :']
```

Why not 'From:' ?

First character in the match is an F

Last character in the match is a :

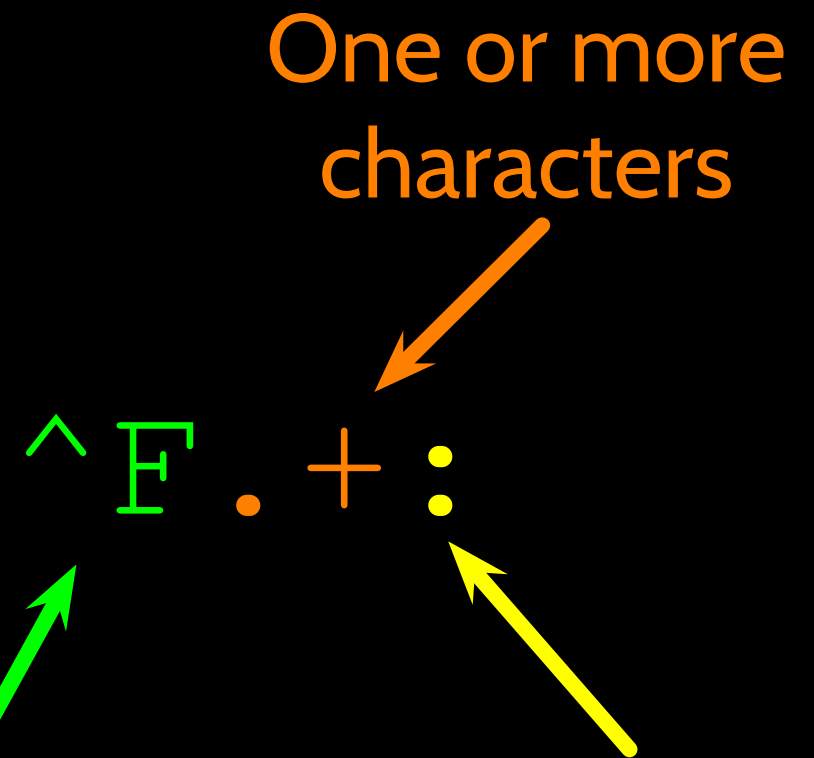

# Non-Greedy Matching

- Not all regular expression repeat codes are greedy! If you add a ? character - the + and \* chill out a bit...

```
>>> import re
>>> x = 'From: Using the : character'
>>> y = re.findall('^F.+?:', x)
>>> print y
['From:']
```

One or more  
characters but  
not greedy

^ F . + ? :

First character in the  
match is an F

Last character in the  
match is a :


# Fine-Tuning String Extraction

- You can refine the match for `re.findall()` and separately determine which portion of the match is to be extracted by using parentheses

From `stephen.marquard@uct.ac.za` Sat Jan 5 09:14:16 2008

```
>>> y = re.findall('\S+@\S+', x)
>>> print y
['stephen.marquard@uct.ac.za']
```

`\S+@\S+`

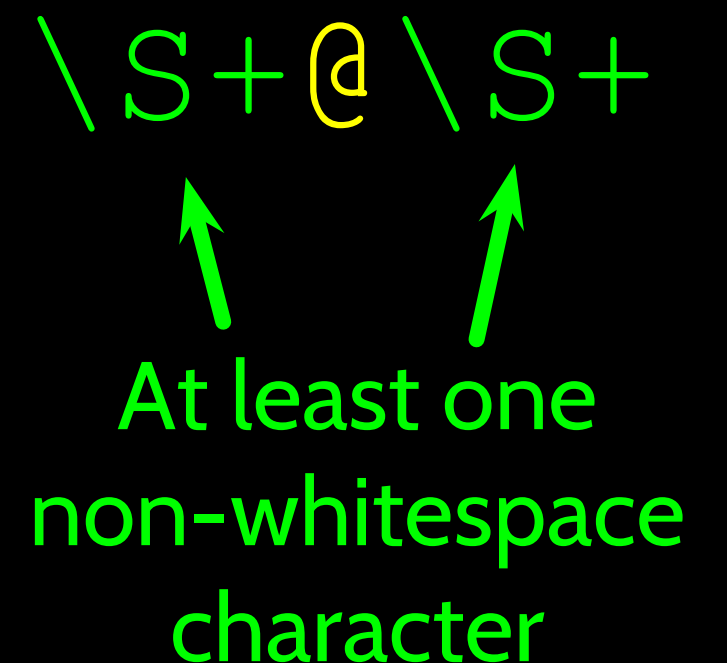

At least one  
non-whitespace  
character

# Fine-Tuning String Extraction

- **Parentheses** are not part of the match - but they tell where to **start** and **stop** what string to extract

From **stephen.marquard@uct.ac.za** Sat Jan 5 09:14:16 2008

```
>>> y = re.findall('\S+@\S+', x)
```

```
>>> print y
```


```
['stephen.marquard@uct.ac.za']
```

```
>>> y = re.findall('^From:.*? (\S+@\S+)', x)
```

```
>>> print y
```

```
['stephen.marquard@uct.ac.za']
```

^From ( \S+@\S+ )

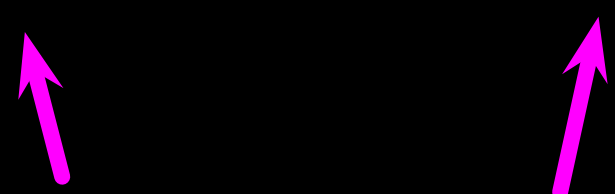

21                      31  
↓                      ↓  
From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
>>> data = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
>>> atpos = data.find('@')
>>> print atpos
21
>>> sppos = data.find(' ', atpos)
>>> print sppos
31
>>> host = data[atpos+1 : sppos]
>>> print host
uct.ac.za
```

Extracting a host  
name - using find  
and string slicing

# The Double Split Pattern

- Sometimes we split a line one way, and then grab one of the pieces of the line and split that piece again

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
words = line.split()
email = words[1]
pieces = email.split('@')
print pieces[1]
```


```
stephen.marquard@uct.ac.za
['stephen.marquard', 'uct.ac.za']
'uct.ac.za'
```

# The Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('@([^\s]*)', lin)
print y
['uct.ac.za']
```

'@([^\s]\*)'



Look through the string until you find an at sign

# The Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('@([ ^ ]*)', lin)
print y
['uct.ac.za']
```

'@([ ^ ]\*)'

Match non-blank character

Match many of them



# The Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('@([^\s]*)', lin)
print y
```

```
['uct.ac.za']
```

'@([^\s]\*)'

Extract the non-blank characters

# Even Cooler Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('^From .*@([ ^]*)', lin)
print y
['uct.ac.za']
```

'^From .\*@([ ^]\*)'

Starting at the beginning of the line, look for the string 'From'

# Even Cooler Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('^From .*@([ ^]*)', lin)
print y
['uct.ac.za']
```

'^From . \* @ ( [ ^ ] \* ) '

Skip a bunch of characters, looking for an at sign

# Even Cooler Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('^From .*@([ ^]*)', lin)
print y
['uct.ac.za']
```

'^From .\*@([ ^]\*)'



Start extracting

# Even Cooler Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('^From .*@([ ^]*)', lin)
print y
['uct.ac.za']
```

'^From .\*@([ ^]\*)'

Match non-blank character      Match many of them

# Even Cooler Regex Version

From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008

```
import re
lin = 'From stephen.marquard@uct.ac.za Sat Jan 5 09:14:16 2008'
y = re.findall('^From .*@([ ^]*)', lin)
print y
['uct.ac.za']
```

'^From .\*@([ ^]\*)'



Stop extracting

# Spam Confidence

```
import re
hand = open('mbox-short.txt')
numlist = list()
for line in hand:
    line = line.rstrip()
    stuff = re.findall('^X-DSPAM-Confidence: ([0-9.]+)', line)
    if len(stuff) != 1 : continue
    num = float(stuff[0])
    numlist.append(num)
print 'Maximum:', max(numlist)
```

python ds.py  
Maximum: 0.9907

# Regular Expression Quick Guide

<code>^</code>	Matches the <b>beginning</b> of a line
<code>\$</code>	Matches the <b>end</b> of the line
<code>.</code>	Matches <b>any</b> character
<code>\s</code>	Matches <b>whitespace</b>
<code>\S</code>	Matches any <b>non-whitespace</b> character
<code>*</code>	<b>Repeats</b> a character zero or more times
<code>*?</code>	<b>Repeats</b> a character zero or more times (non-greedy)
<code>+</code>	<b>Repeats</b> a character one or more times
<code>+?</code>	<b>Repeats</b> a character one or more times (non-greedy)
<code>[aeiou]</code>	Matches a single character in the listed <b>set</b>
<code>[^XYZ]</code>	Matches a single character <b>not in</b> the listed <b>set</b>
<code>[a-z0-9]</code>	The set of characters can include a <b>range</b>
<code>(</code>	Indicates where string <b>extraction</b> is to start
<code>)</code>	Indicates where string <b>extraction</b> is to end



# Escape Character

- If you want a special regular expression character to just behave **normally** (most of the time) you prefix it with `'\'`


```
>>> import re
>>> x = 'We just received $10.00 for cookies.'
>>> y = re.findall('\$[0-9.]+', x)
>>> print y
['$10.00']
```

At least one  
or more

\ \$ [ 0 - 9 . ] +

A real dollar sign

A digit or period

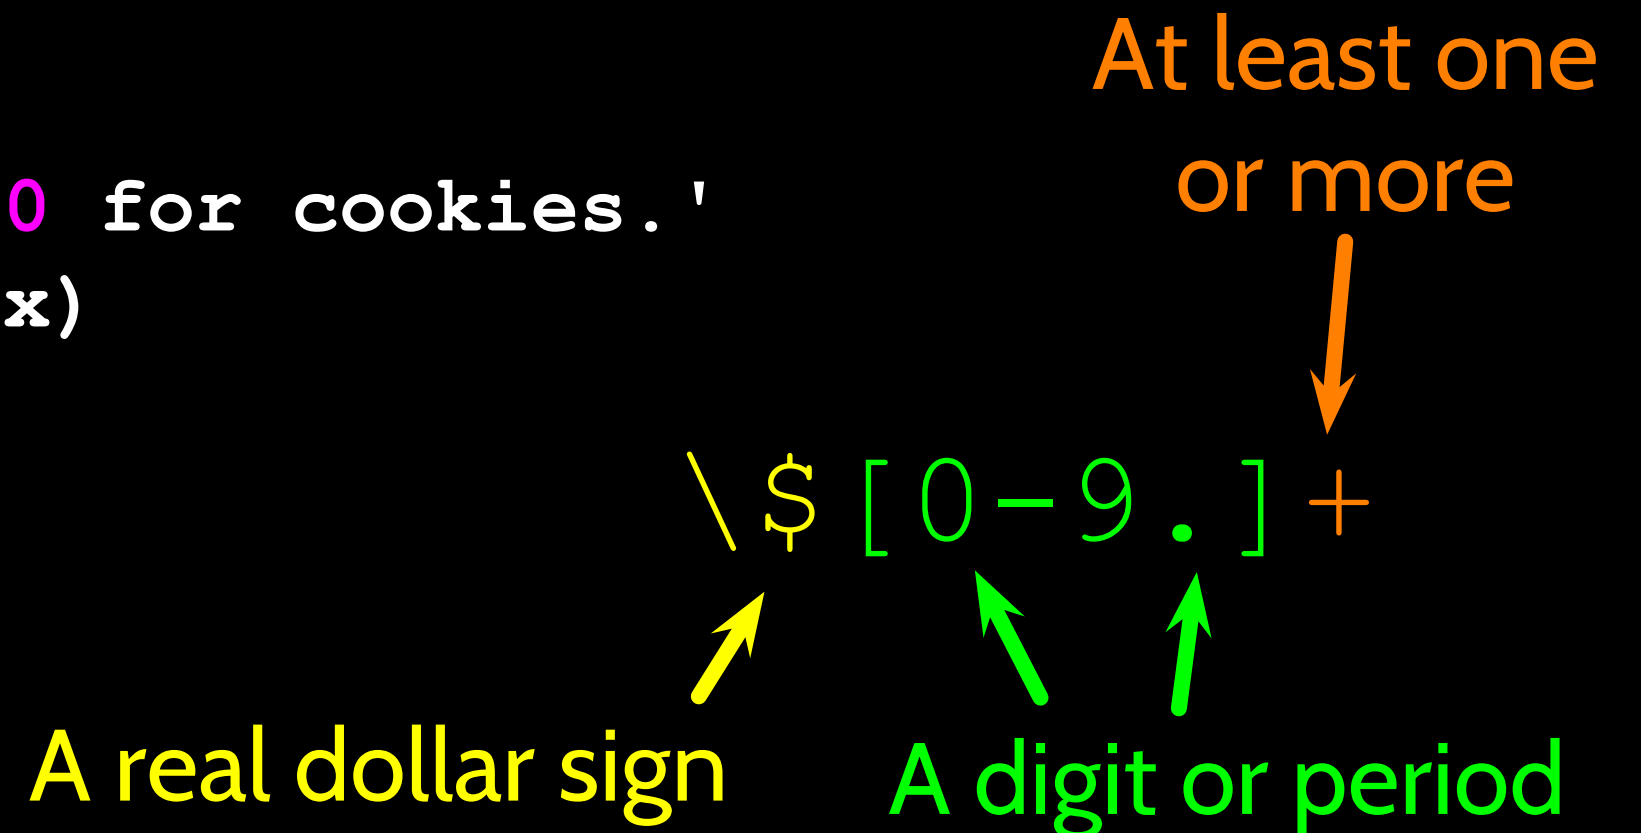

# Summary

- Regular expressions are a cryptic but powerful language for matching strings and extracting elements from those strings
- Regular expressions have special characters that indicate intent



# Acknowledgements / Contributions



These slides are Copyright 2010- Charles R. Severance ([www.dr-chuck.com](http://www.dr-chuck.com)) of the University of Michigan School of Information and [open.umich.edu](http://open.umich.edu) and made available under a Creative Commons Attribution 4.0 License. Please maintain this last slide in all copies of the document to comply with the attribution requirements of the license. If you make a change, feel free to add your name and organization to the list of contributors on this page as you republish the materials.

Initial Development: Charles Severance, University of Michigan School of Information

... Insert new Contributors and Translations here

...