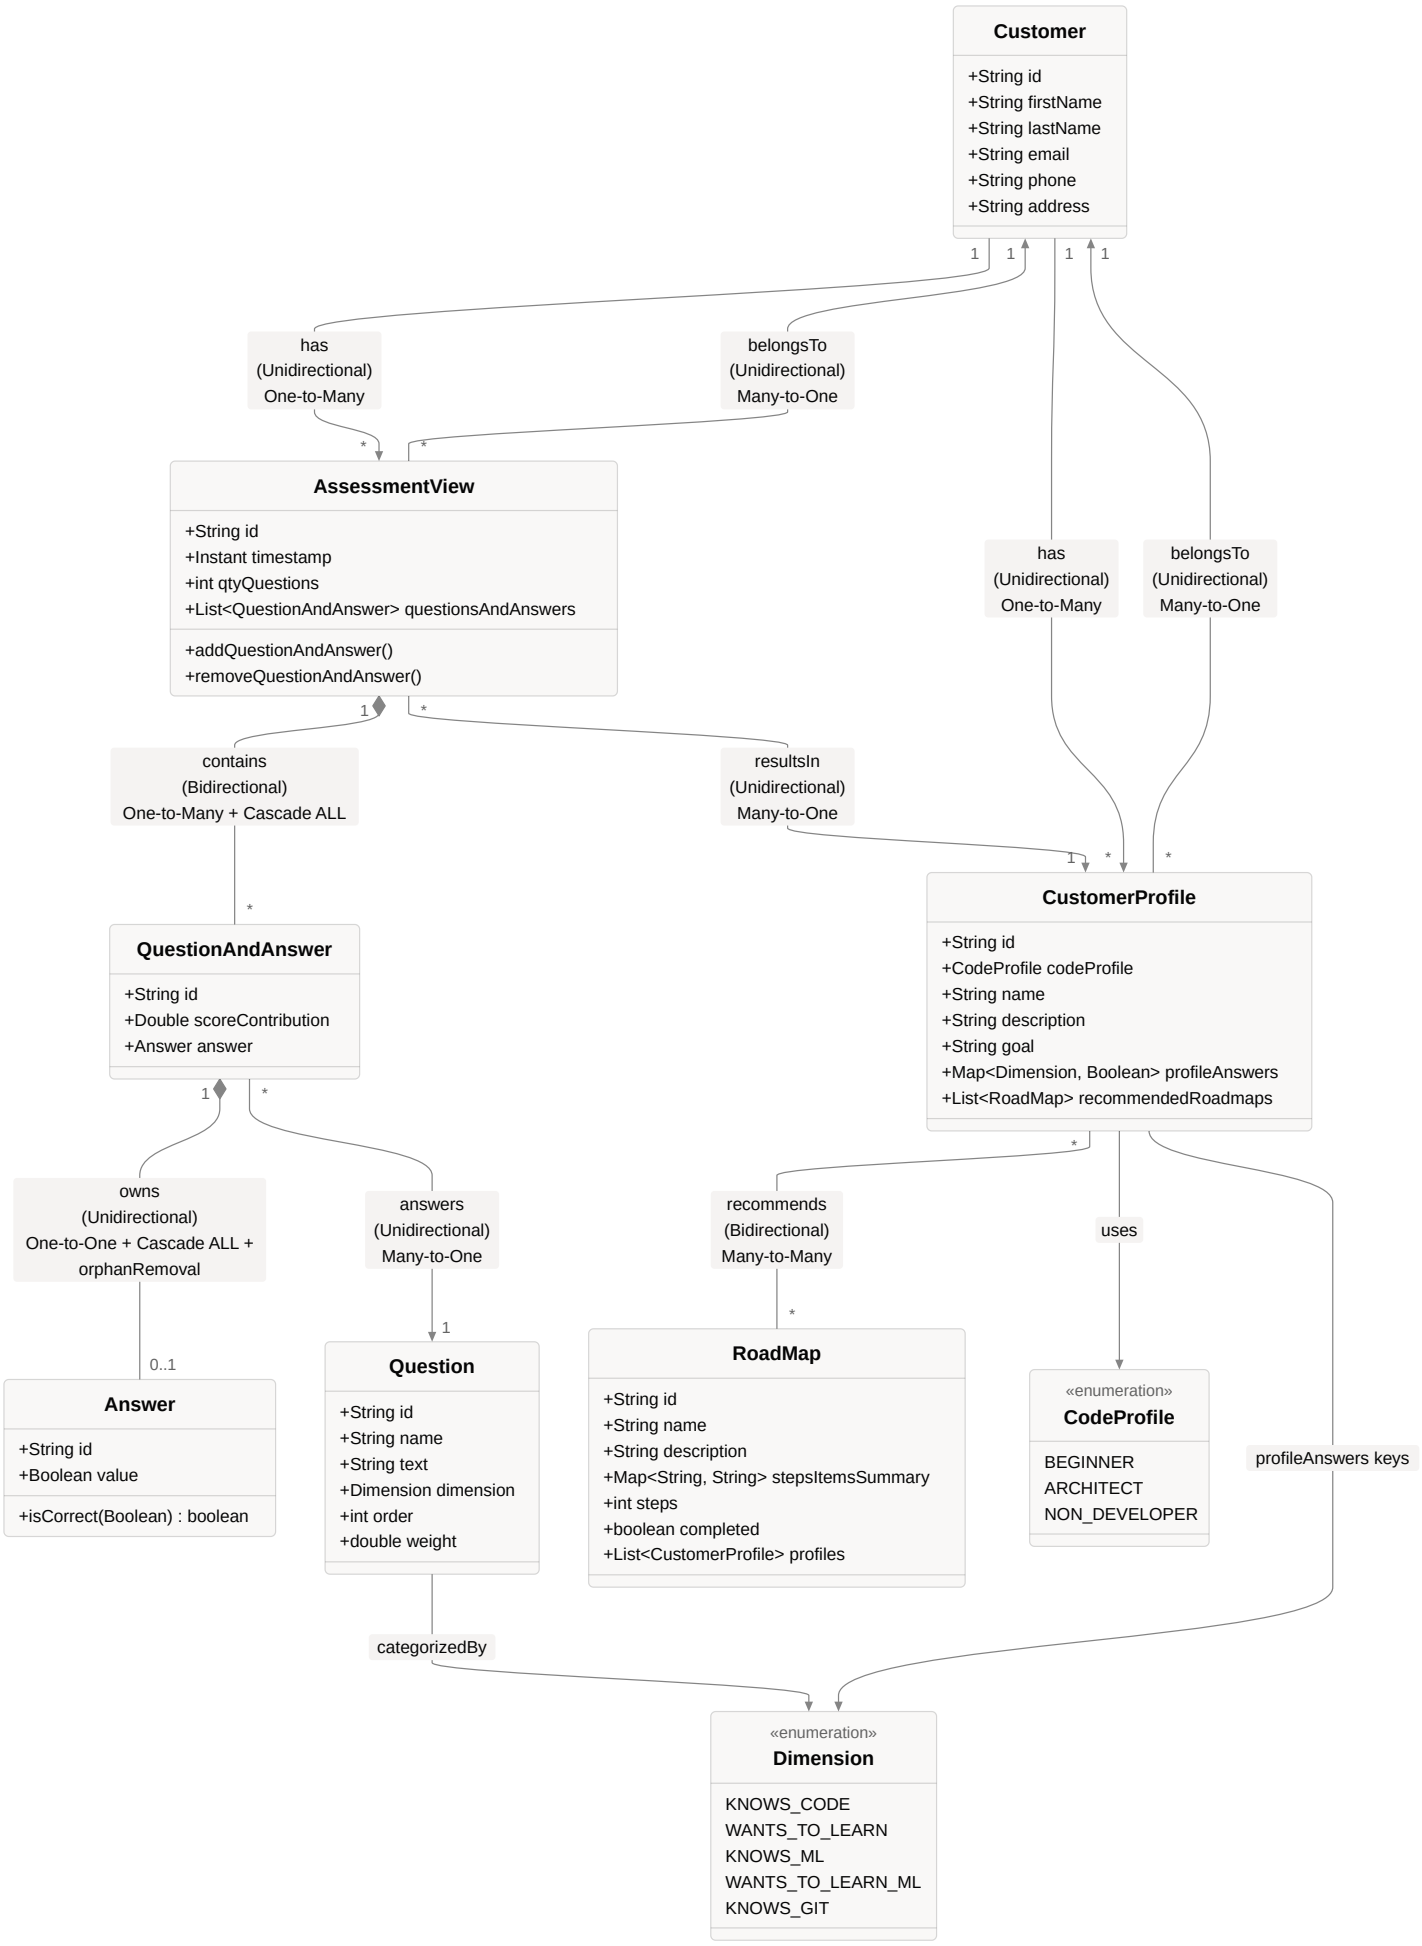
Customer
+String id
+String firstName
+String lastName
+String email
+String phone
+String address
1
1
1
1
has
(Unidirectional)
One-to-Many
belongsTo
(Unidirectional)
Many-to-One
*
*
AssessmentView
+String id
+Instant timestamp
+int qtyQuestions
+List<QuestionAndAnswer> questionsAndAnswers
+addQuestionAndAnswer()
+removeQuestionAndAnswer()
has
(Unidirectional)
One-to-Many
belongsTo
(Unidirectional)
Many-to-One
1
*
contains
(Bidirectional)
One-to-Many + Cascade ALL
resultsIn
(Unidirectional)
Many-to-One
1
*
*
*
QuestionAndAnswer
+String id
+Double scoreContribution
+Answer answer
CustomerProfile
+String id
+CodeProfile codeProfile
+String name
+String description
+String goal
+Map<Dimension, Boolean> profileAnswers
+List<RoadMap> recommendedRoadmaps
1
*
*
owns
(Unidirectional)
One-to-One + Cascade ALL +
orphanRemoval
answers
(Unidirectional)
Many-to-One
recommends
(Bidirectional)
Many-to-Many
uses
profileAnswers keys
0..1
1
*
Answer
+String id
+Boolean value
+isCorrect(Boolean) : boolean
Question
+String id
+String name
+String text
+Dimension dimension
+int order
+double weight
RoadMap
+String id
+String name
+String description
+Map<String, String> stepsItemsSummary
+int steps
+boolean completed
+List<CustomerProfile> profiles
«enumeration»
CodeProfile
BEGINNER
ARCHITECT
NON_DEVELOPER
categorizedBy
«enumeration»
Dimension
KNOWS_CODE
WANTS_TO_LEARN
KNOWS_ML
WANTS_TO_LEARN_ML
KNOWS_GIT