

4.2. Crear y gestionar usuarios

Comando recomendado en Ubuntu:

`sudo adduser nombre`

Para modificar usuario:

`sudo usermod -aG grupo usuario`

`sudo usermod -s /bin/bash usuario`

`sudo usermod -d /nueva/ruta usuario`

```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo adduser alumno4  
New password:  
Retype new password:  
passwd: password updated successfully  
Changing the user information for alumno4  
Enter the new value, or press ENTER for the default  
Full Name []: MS  
Room Number []:  
Work Phone []:  
Home Phone []:  
Other []:  
Is the information correct? [Y/n]  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo usermod -aG alumnos alumno4  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo usermod -s /bin/zsh alumno4  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo usermod -d /home/Pringadillo alumno4  
jcsantos at JCSantos-Ubuntu in ~  
└─○ id alumno4  
uid=1009(alumno4) gid=1009(alumno4) groups=1009(alumno4),100(users),1006(alumnos)  
jcsantos at JCSantos-Ubuntu in ~  
└─○ cat /etc/passwd | grep "alumno4"  
alumno4:x:1009:1009:MS,,,:/home/Pringadillo:/bin/zsh  
jcsantos at JCSantos-Ubuntu in ~  
└─○
```

Para eliminar:

`sudo deluser usuario`

`sudo deluser --remove-home usuario`

```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser --remove-home alumno4  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser alumno4  
fatal: The user 'alumno4' does not exist.  
jcsantos at JCSantos-Ubuntu in ~  
└─○ cat /etc/passwd | grep "alumno4"  
jcsantos at JCSantos-Ubuntu in ~  
└─○
```

4.3. Crear y gestionar grupos

Crear grupos:

```
sudo groupadd docentes
```

```
sudo groupadd alumnos
```

Añadir usuario a un grupo:

```
sudo usermod -aG docentes juan
```

Listar grupos:

```
groups juan
```

```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo groupadd docentes  
groupadd: group 'docentes' already exists  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo groupadd alumnos  
groupadd: group 'alumnos' already exists  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo usermod -aG docentes profesor1  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo usermod -aG alumnos alumno1  
jcsantos at JCSantos-Ubuntu in ~  
└─○ groups alumno1  
alumno1 : alumno1 users alumno alumnos
```

getent group

```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ getent group docentes  
docentes:x:1009:profesor1  
jcsantos at JCSantos-Ubuntu in ~  
└─○ getent group alumnos  
alumnos:x:1010:alumno1  
jcsantos at JCSantos-Ubuntu in ~  
└─○
```

```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo groupdel docentes  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo groupdel alumnos  
jcsantos at JCSantos-Ubuntu in ~  
└─○ getent group alumnos  
alumnos:x:1010:alumno1  
jcsantos at JCSantos-Ubuntu in ~  
└─○ getent group docentes  
docentes:x:1009:profesor1  
jcsantos at JCSantos-Ubuntu in ~  
└─○  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser alumno1  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser alumno2  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser alumno3  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser alumno4  
fatal: The user 'alumno4' does not exist.  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser profesor1  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser profesor2  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo deluser profesor3  
fatal: The user 'profesor3' does not exist.  
jcsantos at JCSantos-Ubuntu in ~  
└─○
```

✓ EJERCICIOS BÁSICOS (1–10)

1. Crear un usuario llamado alumno1

sudo adduser alumno1

```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo adduser alumno1  
New password:  
Retype new password:  
passwd: password updated successfully  
Changing the user information for alumno1  
Enter the new value, or press ENTER for the default  
Full Name []: JC  
Room Number []:  
Work Phone []:  
Home Phone []:  
Other []:  
Is the information correct? [Y/n] y  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo adduser alumno2  
New password:  
Retype new password:  
passwd: password updated successfully  
Changing the user information for alumno2  
Enter the new value, or press ENTER for the default  
Full Name []: Ana  
Room Number []:  
Work Phone []:  
Home Phone []:  
Other []:  
Is the information correct? [Y/n]  
jcsantos at JCSantos-Ubuntu in ~  
└─○
```

2. Crear un grupo llamado profesores

sudo groupadd profesores


```
jcsantos@JCSantos-Ubuntu:~  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo addgroup alumnos  
jcsantos at JCSantos-Ubuntu in ~  
└─○ sudo addgroup profesores  
jcsantos at JCSantos-Ubuntu in ~  
└─○ id alumnos  
uid=1006(alumnos) gid=1006(alumnos) groups=  
jcsantos at JCSantos-Ubuntu in ~  
└─○ getent group alumnos  
alumnos:x:1006:  
jcsantos at JCSantos-Ubuntu in ~  
└─○ getent group profesores  
profesores:x:1007:  
jcsantos at JCSantos-Ubuntu in ~  
└─○
```

3. Añadir alumno1 al grupo profesores

`sudo usermod -aG profesores alumno1`

4. Mostrar la información del usuario

`id alumno1`

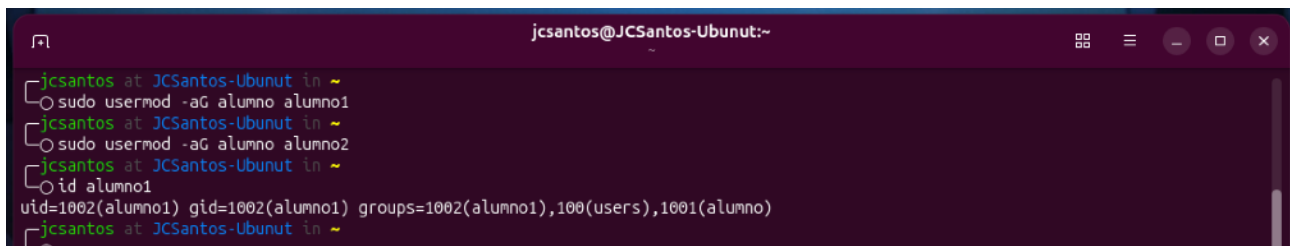

```
jcsantos@JCSantos-Ubunut:~  
jcsantos at JCSantos-Ubunut in ~  
└─○ sudo usermod -aG alumno alumno1  
jcsantos at JCSantos-Ubunut in ~  
└─○ sudo usermod -aG alumno alumno2  
jcsantos at JCSantos-Ubunut in ~  
└─○ id alumno1  
uid=1002(alumno1) gid=1002(alumno1) groups=1002(alumno1),100(users),1001(alumno)  
jcsantos at JCSantos-Ubunut in ~  
└─○
```


5. Crear un archivo y comprobar sus permisos

`touch prueba.txt`

`ls -l prueba.txt`

6. Cambiar permisos del archivo prueba.txt a 644

`chmod 644 prueba.txt`

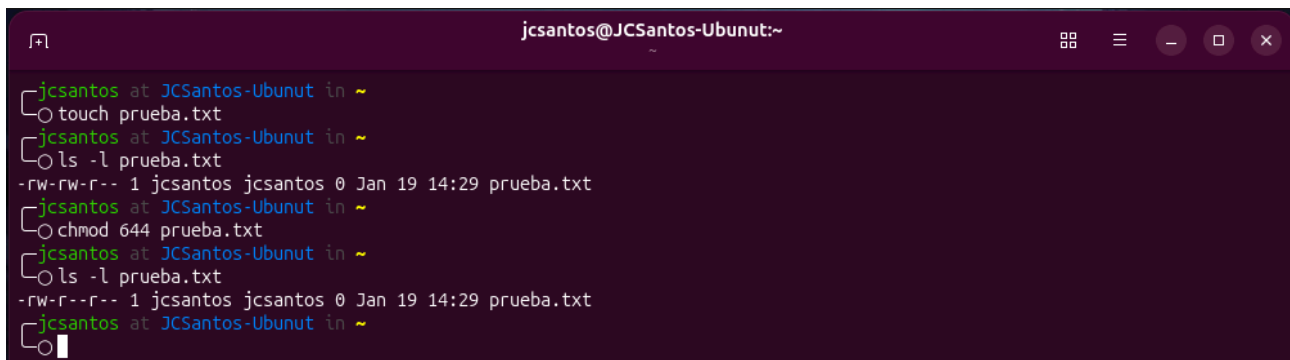


```
jcsantos@JCSantos-Ubunut:~  
jcsantos at JCSantos-Ubunut in ~  
└─○ touch prueba.txt  
jcsantos at JCSantos-Ubunut in ~  
└─○ ls -l prueba.txt  
-rw-rw-r-- 1 jcsantos jcsantos 0 Jan 19 14:29 prueba.txt  
jcsantos at JCSantos-Ubunut in ~  
└─○ chmod 644 prueba.txt  
jcsantos at JCSantos-Ubunut in ~  
└─○ ls -l prueba.txt  
-rw-r--r-- 1 jcsantos jcsantos 0 Jan 19 14:29 prueba.txt  
jcsantos at JCSantos-Ubunut in ~  
└─○
```

7. Crear un directorio llamado compartida

`mkdir compartida`

8. Poner permisos 755 al directorio compartida

`chmod 755 compartida`

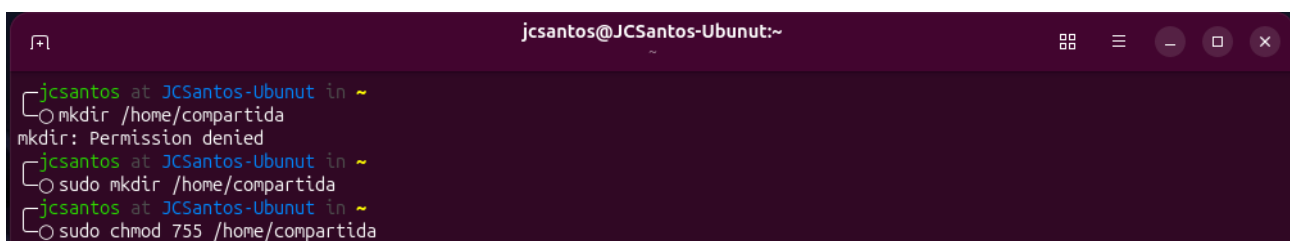


```
jcsantos@JCSantos-Ubunut:~  
jcsantos at JCSantos-Ubunut in ~  
└─○ mkdir /home/compartida  
mkdir: Permission denied  
jcsantos at JCSantos-Ubunut in ~  
└─○ sudo mkdir /home/compartida  
jcsantos at JCSantos-Ubunut in ~  
└─○ sudo chmod 755 /home/compartida
```

9. Cambiar propietario del archivo prueba.txt a alumno1

sudo chown alumno1 prueba.txt

10. Cambiar grupo del archivo prueba.txt a profesores

sudo chown :profesores prueba.txt

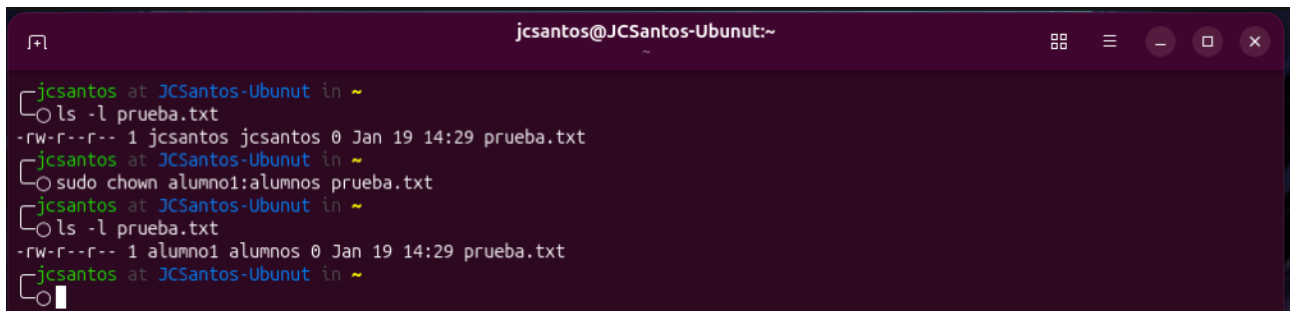

```
jcsantos@JCSantos-Ubunut:~  
└─┐ jcsantos at JCSantos-Ubunut in ~  
    └─┐ ls -l prueba.txt  
        -rw-r--r-- 1 jcsantos jcsantos 0 Jan 19 14:29 prueba.txt  
└─┐ jcsantos at JCSantos-Ubunut in ~  
    └─┐ sudo chown alumno1:alumnos prueba.txt  
└─┐ jcsantos at JCSantos-Ubunut in ~  
    └─┐ ls -l prueba.txt  
        -rw-r--r-- 1 alumno1 alumnos 0 Jan 19 14:29 prueba.txt  
└─┐ jcsantos at JCSantos-Ubunut in ~  
    └─┐
```