

iGEO's PDI documentation for developers

Changelog

Version: 25.7.0
Date: 2026-07-07
Fixed: • OTHER Minor fixes.
Added: • IMPORT Entity 'toma de datos'. ○ Added support for importing circuits and deposits for ACS (hot water), SCI (fire protection), and AFCH (air conditioning) systems. ○ Added new fields for circuits and deposits: brand, model, volume, and location. ○ The location field accepts only uppercase values: INTERIOR or EXTERIOR.

1. Introduction	9
2. Credentials	9
3. Web console	9
4. Virtual Host Configuration	10
5. API REST to read/write from queues	14
6. Data mapping	14
Invoicing method codes	15
Payment methods map (metodoPago)	16
Collection methods map (formaCobro)	17
Application Methods Map(from Orden De Trabajo)	19
Customer / Site activities	20
States / Counties	27
Fiscal zone codes	27
7.Data import	30
8. Data export	33
9. Export payloads	35
'Cliente' (customer)	35
'actividad' { } (Activity)	42
'cuentas' [{ }] (Bank accounts)	42
'datosBaseDelegacion' { } (Branch)	42
'datosClienteFacturae' { } (Client electronic invoicing data)	43
'datosContacto' { } (Contact details)	43
'datosFacturacion' { } (Billing data address)	44
'gestionadoPor' { } (Managed by)	45
'idioma' { } (Language)	45
'personaContacto' { } (Contact person)	45
'provincia' { } (Province (county, district))	46
Payload: 'Cliente' (customer)	46
'Contacto' (Contact person)	49
Payload: 'Contacto' (Contact person)	49
'Contrato' (contract)	50
'gestionadoPor' { } (Managed by)	58
'lineasContrato' [{ }] (Contract Lines)	59
'serieFacturacion' [{ }] (Invoicing Series)	60
Payload: 'Contrato' (contract)	60
'Deficiencia' (Deficiency)	62
'nombresZonas' [{ }] (Area Names)	64
'Delegacion' (Branch)	64
'datosContacto' { } (Contact details)	65
'datosPostales' { } (Postal data)	65
'Documento' (Document)	66
Payload: 'Documento' (Document)	66
'Factura' (invoice)	67

‘cliente’ { }	(Customer info)	72
‘actividad’ { }	(Activity)	79
‘cuentas’ [{}]	(Bank accounts)	79
‘datosBaseDelegacion’ { }	(Branch)	79
‘datosClienteFacturae’ { }	(Client electronic invoicing data)	80
‘datosContacto’ { }	(Contact details)	80
‘datosFacturacion’ { }	(Billing data address)	81
‘gestionadoPor’ { }	(Managed by)	82
‘idioma’ { }	(Language)	82
‘personaContacto’ { }	(Contact person)	82
‘provincia’ { }	(Province (county, district))	83
‘contrato’ { }	(Contract)	83
‘cuentaCliente’ { }		84
‘datosFacturacionEmisor’ { }	(Issuer billing Info)	84
‘datosFacturacionReceptor’ { }	(Customer billing Info)	85
‘lineas’ { }		86
‘descuento’ { }	(Discount)	88
‘impuestoConcreto’ { }	(extra VAT data)	88
‘Impuesto’		88
‘lineaFacturaRetencionesDto’ { }	(Withholding applied to this line)	88
‘datosPostales’ { }	(Postal data)	89
‘lineasImpuestos’ { }		89
‘lineasRetenciones’ []		90
‘recibos’ []		90
‘cuentaBancaria’ { }	(Bank Account)	92
‘cuentaBancariaCliente’ { }	(Client Bank Account)	92
‘serieFacturacion’ { }		93
‘datosBaseDelegacion’ { }	(Branch)	93
‘impuestoConcretoForzado’ { }		94
‘Impuesto’		94
‘venta’ { }	(Sale)	94
Payload: ‘Factura’	(invoice)	94
‘Jornada Laboral’	(work day record)	110
‘Orden de trabajo’	(work order)	111
‘cliente’ { }	(Customer Minimum info)	115
‘contrato’ { }	(Contracts Minimum Info)	116
‘delegacion’ { }	(Branch office’s Minimum info)	116
‘horarios’ [{ }]	(List of planned or executed timetables)	116
‘lineaNegocio’ { }	(line of Business’s Minimum info)	117
‘lineasProducto’ [{ }]	(Product Line Minimum info)	118
‘zonas’[{}]	(Areas)	119
‘lineasTratamiento’ [{ }]	(minimum information on a Treatment line)	119
‘zonas’ [{ }]	(minimum information on the Install Area)	119
‘operaciones’ [{ }]	(Collection of Minimum Operation Data)	119

`preguntasRespuestas` [{ }] (Collection of Questions & Answers)	120
`proveedor` { } (Vendor's minimum info)	120
`sede` { } (Minimum info on Customer Site)	121
`venta` { } (Sale's minimum Info)	121
`zonaComercial` { } (Commercial area's minimum info)	122
Payload: `Orden de trabajo` (work order)	122
`Linea tratamiento ODT` (treatment line)	124
`zonas` [{}] (Areas to be treated)	125
Payload: `Linea tratamiento ODT` (treatment line)	125
`OrdenDeTrabajoRevisiones` (WO's Inspections)	126
`tiposPuntoControl` [{}] (Types of control point)	126
`puntosControlRevisados` [{}] (control points checked)	126
`revisiones` [{}] (Inspections)	127
`respuestas` [{}] (Answers)	127
`Especies` [{}] (Species)	127
Payload: `OrdenDeTrabajoRevisiones` (WO's Inspections)	128
`OrigenCliente` (Customer origin)	129
`datosFacturacion` { } (Billing data address)	130
Payload: `OrigenCliente` (Customer origin)	131
`Proveedor` (vendor)	133
`cuentas` [{}] (Bank accounts)	135
`datosContacto` { } (Contact details)	135
`datosFacturacion` { } (Billing data address)	136
`personaContacto` { } (Contact person)	137
`provincia` { } (Province (county, district))	137
Payload: `Proveedor` (vendor)	138
`Sede` (site)	139
`actividad` { } (Activity)	142
`datosBaseDelegacion` { } (Branch)	142
`datosContacto` { } (Contact details)	143
`datosPostales` { } (Postal data)	143
`datosPostalesEnvio` { } (Postal data Invoicing Info)	143
`gestionadoPor` { } (Managed by)	144
`idioma` { } (Language)	144
`zonas` [{}] (Areas)	144
Payload: `Sede` (site)	145
10. Import payloads	146
`Almacen` (Warehouse)	146
`datosPostales` { } (Postal data)	147
Payload: `Almacen` (Warehouse)	147
`Cliente` (customer)	148
`actividad` { } (Activity)	156
`cuentas` [{}] (Bank accounts)	156
`delegacion` { } (Branch)	156

'datosContacto' { }	(Contact details)	156
'datosFacturacion' { }	(Billing data address)	157
'gestionadoPor' { }	(Managed by)	158
'idioma' { }	(Language)	158
'personaContacto' { }	(Contact person)	158
'lineasRetencionGlobal' [{}]	(withholdings)	159
Payload: 'Cliente' (customer)		163
'Cliente potencial' (prospective customer)		165
'datosContacto' { }	(Contact details)	169
'datosEnvio' { }	(Billing data address)	170
'datosPostales' { }	(Postal data)	170
Payload: 'Cliente potencial' (prospective customer)		171
'Contacto' (Contact person)		173
Payload: 'Contacto' (Contact person)		174
'Contrato' (contract)		174
'gestionadoPor' { }	(Managed by)	183
'lineasContrato' [{}]	(Contract Lines)	183
'asignadoA' [{}]	(Assigned To)	184
'lineasRetencionGlobal' [{}]	(withholdings)	184
Payload: 'Contrato' (contract)		188
'Deficiencia' (Deficiency)		192
'nombresZonas' [{}]	(Area Names)	194
'Delegacion' (Branch)		194
'datosContacto' { }	(Contact details)	195
'datosPostales' { }	(Postal data)	195
Payload: 'Delegacion' (Branch)		196
'Dimension' (Dimension, only for orders from Navision)		197
'Documentacion' (Documentation)		197
Payload: 'Documentacion' (Documentation)		197
'Empleado' (Employee)		198
'datosContactoEmpresariales' { }	(Business contact details)	202
'datosContactoPersonales' { }	(Personal contact details)	202
'datosPostales' { }	(Postal data)	203
'lineaTituloFormativos' [{}]	(Training title line)	203
'tramosHorarios' [{}]	(Workday time slots)	203
Payload: 'Empleado' (Employee)		204
'Estado Contrato' (Contract status)		207
'Factura' (invoice)		207
'lineas' { }		208
'impuestosVenta' { }	(sales taxes)	209
'recibos' []		210
Payload: 'Factura' (invoice)		211
'Linea de contrato' (contract lines)		213
Collection of [{}'ZonasContratadas']		214

Payload: 'Linea de contrato' (contract lines)	214
'Linea de negocio' (Lines of business)	215
'Orden de trabajo' (work order)	217
'cliente' { } (Customer Minimum info)	221
'contrato' { } (Contracts Minimum Info)	221
'delegacion' { } (Branch office's Minimum info)	221
'horarios' [{ }] (List of planned or executed timetables)	221
'lineaNegocio' { } (line of Business's Minimum info)	222
'lineasProducto' [{ }] (Product Line Minimum info)	223
'lineasTratamiento' [{ }] (minimum information on a Treatment line)	223
'zonas' [{ }] (minimum information on the Install Area)	223
'operaciones' [{ }] (Collection of Minimum Operation Data)	223
'preguntasRespuestas' [{ }] (Collection of Questions & Answers)	224
'sede' { } (Minimum info on Customer Site)	224
'zonaComercial' { } (Commercial area's minimum info)	225
Payload: 'Orden de trabajo' (work order)	225
'Linea tratamiento ODT' (treatment line)	226
'zonasATratar' [{ }] (Areas to be treated)	227
Payload: 'Linea tratamiento ODT' (treatment line)	227
'Operacion legionella' (Legionella operations)	228
Payload: 'Operacion legionella' (Legionella operations)	229
'OrigenCliente' (Customer origin)	229
'datosFacturacion' { } (Billing data address)	230
Payload: 'OrigenCliente' (Customer origin)	231
'Producto_Proveedor' (Product-Service_vendor)	232
Payload: 'Producto_Proveedor' (Product-Service_vendor)	232
'Producto' (Product-Service)	233
'impuestosVenta' { } (sales taxes)	240
'unidadMedidaAlmacenaje' { } (Storage's unit of measurement)	240
'unidadMedidaCompra' { } (Purchase's unit of measurement)	240
'unidadMedidaVenta' { } (Sales/consumption's unit of measurement)	241
Payload: 'Producto' (Product-Service)	241
'Proveedor' (vendor)	243
'cuentas' [{ }] (Bank accounts)	245
'datosContacto' { } (Contact details)	246
'datosFacturacion' { } (Billing data address)	246
'personaContacto' { } (Contact person)	247
Payload: 'Proveedor' (vendor)	247
'Sede' (site)	249
'actividad' { } (Activity)	252
'delegacion' { } (Branch)	252
'datosContacto' { } (Contact details)	252
'datosPostales' { } (Postal data)	253
'datosPostalesEnvio' { } (Postal data Invoicing Info)	253

'gestionadoPor' { } (Managed by)	253
'idioma' { } (Language)	254
Payload: 'Sede' (site)	254
'Toma datos' (Data collection)	256
'CircuitoAFCH' { }	257
'DepositoAFCH' { }	259
'CircuitoACS' { }	260
'Acumulador' { }	262
'CircuitoSCI' { }	263
'DepositoSCI' { }	264
Payload: 'Toma datos' (Data collection)	265
'Zona comercial' (Commercial areas)	265
Payload: 'Zona comercial' (Commercial areas)	265

1. Introduction

Companies working with iGEO can send data to us or retrieve data generated by us through what is called the **PDI** or **Integration Platform**. This tool is essentially a queue system based on **RabbitMQ**, where iGEO collects and deposits information for its customers.

iGEO clients who wish to send data to iGEO (whether for an initial data migration or for regular data transfers) or who wish to extract data from iGEO, must develop a small tool (or use an existing connector) that connects to the PDI to send or collect this data. The data that can be imported or exported is what we call Entities. Entities are the different objects handled by iGEO, such as Customer, Invoice, Contract, Work Order, etc.

iGEO is constantly listening to the PDI queues (RabbitMQ) so that when a company sends information to iGEO, we collect and process it in real time.

Similarly, iGEO exports the Entities that companies expect in real time, and companies can collect this data in real time (if they connect using the AMQP protocol) or by polling the queues every x minutes (if they use the RabbitMQ REST API).

RabbitMQ offers a web console, which is ideal for testing before putting systems into production. To access the RabbitMQ web console and start using the PDI, you can log in at:

- **Production environment:** <https://pdi.igeoapp.com:15671/>
- **Pre-production environment:** <https://pdi.pre.igeoapp.com:15671/>

2. Credentials

Every time a company signs up for the PDI, two environments are created: one for pre-production and another for production. The former is used for testing before deploying the final solution. These two environments are set up by creating two Virtual Hosts, which is the concept RabbitMQ uses to segregate each company's data.

iGEO will provide a username and password to access both virtual hosts (production and pre-production). If needed, these credentials can be differentiated between the environments. However, by default, both environments will share the **same username and password** for simplicity.

3. Web console

iGEO provides a web console that allows companies to monitor and manage their message queues. For each customer, **two virtual hosts** will be created:

1. A **production** virtual host.
2. A **pre-production** virtual host, prefixed with **pre_**.

The pre-production virtual host is specifically designed for testing purposes. Once testing is complete and everything is working as expected, the transition to production is seamless: customers only need to change the virtual host name by removing the `pre_` prefix.

4. Virtual Host Configuration

In each Virtual Host, iGEO configures the Exchanges and the queues.

An Exchange is like a "post office" where messages arrive, but from there, they are forwarded to the corresponding queue based on defined criteria. Messages remain in the queue until someone consumes or extracts them.

iGEO is responsible for this configuration of Exchanges and Queues.

- **Exchanges:**

- `exportaciones_exchange` (for outgoing messages from iGEO).
- `importaciones_exchange` (for incoming messages to iGEO).

- **Queues:**

- On the `exportaciones_exchange`, a queue named `exportaciones` will be created to handle export data.
- On the `importaciones_exchange`, a queue named `importaciones` will be created to handle import data.

Companies do not need to modify anything regarding this Exchange and Queue configuration. We simply provide information on how the setup will look so that, when developing their connection tools, they have a clear understanding of the PDI structure.

If necessary, we can study the possibility of creating additional queues and routing messages to different queues based on defined criteria.

Queues

▼ All queues (2)

Pagination

Page of 1 - Filter: ☐ Regex [?](#)

Overview				Messages			Message rates			+/-
Virtual host	Name	Features	State	Ready	Unacked	Total	incoming	deliver / get	ack	
pre_vhost_722	exportaciones	D	idle	0	0	0				
vhost_722	exportaciones	D	idle	0	0	0				

▼ Add a new queue

Virtual host:

Name:

Durability:

Auto delete: [?](#)

Arguments: =

Add [Message TTL](#) [?](#) | [Auto expire](#) [?](#) | [Max length](#) [?](#) | [Max length bytes](#) [?](#) | [Overflow behaviour](#) [?](#)
[Dead letter exchange](#) [?](#) | [Dead letter routing key](#) [?](#) | [Maximum priority](#) [?](#)
[Lazy mode](#) [?](#) [Master locator](#) [?](#)

Add queue

List of queues displayed to a company using iGEO's PDI

By clicking on the names of the queues (both named **exportaciones** or 'exports' in the example above), you can monitor their activity, view incoming and outgoing messages, and even publish messages directly from the web console.

While users have the ability to create and delete queues, it is strongly advised not to do so. Once the service is in production, we recommend disabling access to the web console entirely to enhance security and prevent unauthorized actions.

Queue exportaciones in virtual host pre_vhost_722

Overview

Queued messages **last minute** ?



Message rates **last minute** ?

Currently idle


Details

Features	State	Messages	Total	Ready	Unacked	In n
Policy	State: idle	0	0	0	0	
Operator policy	Consumers: 0	0B	0B	0B		
Effective policy definition	Consumer utilisation: 0%	13kB				

- Consumers
- Bindings
- Publish message
- Get messages
- Delete
- Purge
- Runtime Metrics (Advanced)

Options within each message queue

Users may choose to work with both virtual hosts, or only with one:

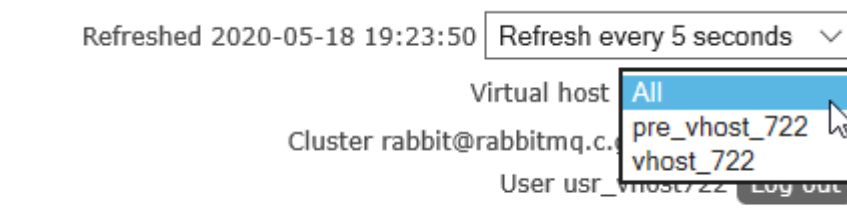

During the development phase, we recommend using only the **pre-production virtual host** (the one with the **pre_** prefix) to ensure all testing is isolated from the production environment.

RabbitMQ automatically creates a set of default exchanges for each virtual host. While these exchanges will not be used for the current integration, they **must not be modified**. Additionally, iGEO will generate an exchange called **exportaciones_exchange** on both virtual hosts. This

exchange is critical to the system's functionality and should not be altered under any circumstances.

You can find different libraries to connect to Rabbit with the AMQP protocol on this URL:
<https://www.rabbitmq.com/client-libraries/devtools>

 3.7.8 Erlang 21.2.6

OverviewConnectionsChannelsExchangesQueuesAdmin

Exchanges

▼ All exchanges (16)

Pagination

Page 1 of 1 - Filter: ☐ Regex ?

Virtual host	Name	Type	Features	Message rate in	Message rate out	+/-
pre_vhost_722	(AMQP default)	direct	D			
pre_vhost_722	amq.direct	direct	D			
pre_vhost_722	amq.fanout	fanout	D			
pre_vhost_722	amq.headers	headers	D			
pre_vhost_722	amq.match	headers	D			
pre_vhost_722	amq.rabbitmq.trace	topic	D I			
pre_vhost_722	amq.topic	topic	D			
pre_vhost_722	exportaciones_exchange	direct	D			
vhost_722	(AMQP default)	direct	D			
vhost_722	amq.direct	direct	D			
vhost_722	amq.fanout	fanout	D			
vhost_722	amq.headers	headers	D			
vhost_722	amq.match	headers	D			
vhost_722	amq.rabbitmq.trace	topic	D I			
vhost_722	amq.topic	topic	D			
vhost_722	exportaciones_exchange	direct	D			

► Add a new exchange

HTTP APIServer DocsTutorialsCommunity SupportCommunity SlackCommercial Support

List of exchanges for each company using the PDI

5. API REST to read/write from queues

RabbitMQ is designed to ideally be connected via the AMQP protocol, which keeps the connection open so that as soon as a message is received in the queue, it is processed instantly. However, RabbitMQ offers an API REST to read/write from queues. Logically, we recommend using libraries to work in an event driven programming model, but, if you want, you may check the queue every X minutes to see if there are any messages.

There is additional information in the API documentation in this URL:

<https://www.rabbitmq.com/docs/http-api-reference>

By doing so, Rabbit returns an array of JSON objects. Each of them has the following structure:

- payload_bytes
- redelivered
- exchange
- routing_key
- message_count
- properties
- payload

Of all of them, the one on which you need to focus is the 'payload', where the message generated by iGEO is located. But this is set as a string, so it needs to be converted to a JSON object, which will contain what iGEO exported.

This is an example of how Rabbit returns messages when they are requested through this API:

```
{
  "payload_bytes": 3555,
  "redelivered": true,
  "exchange": "",
  "routing_key": "exportaciones",
  "message_count": 0,
  "properties": {
    "delivery_mode": 1,
    "headers": {}
  },
  "payload": "\r\n\r\n\"codigoEntidadIgeo\": \"CO-101\", \r\n  \"idEntidadIgeo\": 10001, \r\n  \"claseEntidadIgeo\": \"COMPRA\", \r\n  \"parentId\": 1, \r\n  \"parentCode\": \"PRO-101\", \r\n  \"datos\": {\r\n    \"numeroFactura\": \"F1-2020\", \r\n    \"fechaRegistro\": \"24/11/2020\", \r\n    \"fechaEmision\": \"24/11/2020\", \r\n    \"fechaVencimiento\": null, \r\n    \"facturaANombreDe\": null, \r\n    \"facturaANumeroCliente\": null, \r\n    \"importeSinImpuestos\": null, \r\n    \"importe\": 121, \r\n    \"formaCobro\": null, \r\n    \"metodoPago\": null, \r\n    \"numeroFacturaCorregida\": null, \r\n    \"codigoLineaNegocio\": null, \r\n    \"cuota\": 21, \r\n    \"datosEnvioFacturacionEmisor\": {\r\n      \"nombreFacturacion\": \"Proveedor de biocidas SL\", \r\n      \"codigoIdentificacion\": \"B-34235...\"
    }
  }
}
```

As it can be seen in the red text, the payload is a string with all special characters escaped (double quotation marks, carriage returns, etc.).

6. Data mapping

When exporting or importing data, certain master details will require mapping. iGEO does not know the codes each company assigns to them, but below we present these master tables with the codes assigned by iGEO, so that they are easily translated by the company using the PDI.

The way entities reference one another is always through the entity code (never via the database ID).

Thus, if a Site (Sede) is sent for import, you must provide the code (and not the ID) of the client it belongs to. Consequently, that client with that specific code must already exist. Naturally, the site must also include its own code, as it is a mandatory field.

However, some master data are defined by iGEO, and the codes used are those set by iGEO. Therefore, if data is being sent to iGEO, these codes must be used, which typically implies that the codes from the source system must be translated or mapped to the codes required by iGEO.

The attributes whose codes must be mapped are:

- Invoicing methods
- Invoicing frequency
- Payment methods
- Collection methods
- Product application methods
- Customer / Site activities
- States
- Countries
- Fiscal zones

Invoicing method codes

(‘**formaFacturacion**’ attribute of customer, contract, and invoice)

Code in iGEO	Payment method name
Puntual	A single invoice for the whole contract
Periodica	Multiple invoices with a specific frequency
sobreServicio	An invoice for each planned service
Recapitulativa	No invoices are generated, they will be created whenever you want, and the services performed until that moment will be included.

When the invoicing method is set as ‘**Puntual**’ (a single invoice), the field `fechaPuntualFactura` is selected, and it accepts the following values:

- `fechaInicioContrato` (the invoice will have the contract’s start date as its planned issue date)
- `fecha` (you must specify a concrete date as the invoice’s planned issue date)
- 30 (the invoice will have the contract’s start date + 30 days as its planned issue date)
- 60 (the invoice will have the contract’s start date + 60 days as its planned issue date)
- 90 (the invoice will have the contract’s start date + 90 days as its planned issue date)

When the value '**fecha**' ('date') is indicated on this field, another one called `fechaEmisionPuntual` must appear, with the format `dd/MM/aaaa`, to specify on which date you want the invoice to be issued.

When the invoicing method is set as '**Periodica**' (multiple invoices for the contract), the field `variasFechasFactura` (*invoicing frequency*) must be informed, and it accepts the following values:

- `mensual` ('monthly')
- `bimestral` ('bimonthly')
- `trimestral` ('quarterly')
- `cuatrimestral` ('tri-annually')
- `anual` ('yearly')
- `variasFechas` ('multiple dates')

When the value '**variasFechas**' ('multiple dates') is indicated on this field, the ones below must appear:

`fechaEmisionPuntual1` ('date for the first invoice')
`fechaEmisionPuntual2` ('date for the second invoice')
`fechaEmisionPuntual3` ('date for the third invoice')
`fechaEmisionPuntual4` and so on
`fechaEmisionPuntual5`
`fechaEmisionPuntual6`
`fechaEmisionPuntual7`
`fechaEmisionPuntual8`
`fechaEmisionPuntual9`
`fechaEmisionPuntual10`
`fechaEmisionPuntual11`
`fechaEmisionPuntual12`

These fields are used to indicate up to twelve dates when we want the twelve invoices to be issued. If there are only five, only the first five fields must be informed.

Payment methods map (metodoPago)

Payment methods may not have the same meaning in different countries. Furthermore, some countries have non-standard payment methods whose codes are not listed in this documentation; however, they can be consulted in the iGEO configuration, where you can choose whether or not to use those additional payment methods.

Code in iGEO	Payment method name
ME	Cash

TR	Bank transfer
CH	Check
PG	Promissory note
CF	Confirming
TJ	Credit/debit card
DB	Direct debit
PP	PayPal
PD	To be defined

Code in iGEO	Payment method name (Only for Italy )
ME	Contanti
TR	Bonifico
CH	Assegno
PG	Rimessa diretta
CF	Confirming
TJ	Carta di credito
DB	Ri.Ba
PP	PayPal
PD	Da definire

Collection methods map (formaCobro)

It refers to when the invoice receipts / instalments are expected to be paid.

Code in iGEO	Collection method name
--------------	------------------------

inmediata	Immediate; when issuing the invoice, the receipt must be paid
d15	The single receipt is paid within 15 days after invoice's date
d30	The single receipt is paid within 30 days after invoice's date
d60	The single receipt is paid within 60 days after invoice's date
d90	The single receipt is paid within 90 days after invoice's date
d30y60	Two receipts, one within 30 days, and the other one within 60 days after invoice's date
d3060y90	Three receipts, one within 30 days, another one within 60, and the last one within 90 days after invoice's date
d30y90	Two receipts, one within 30 days, and the other one within 90 days after invoice's date
nDias	Up to twelve receipts, each paid within <n> days after invoice's date (<n> is defined on another field)
variasFechas	Multiple receipts, each one on the date indicated (there are up to twelve date fields to specify twelve receipts' due dates)

If '**nDias**' ('n days') is specified as collection method, a value must be entered on, at least, one of these twelve fields (always respecting the order; that is, if there are two values, they must be entered on the first and second fields):

```

nDiasEmisionRecibo1
nDiasEmisionRecibo2
nDiasEmisionRecibo3
nDiasEmisionRecibo4
nDiasEmisionRecibo5
nDiasEmisionRecibo6
nDiasEmisionRecibo7
nDiasEmisionRecibo8
nDiasEmisionRecibo9
nDiasEmisionRecibo10
nDiasEmisionRecibo11
nDiasEmisionRecibo12

```

If '**variasFechas**' ('multiple dates') is specified as collection method, a value must be entered on, at least, one of these twelve fields (always respecting the order; that is, if there are two values, they must be entered on the first and second fields):

```

fechaEmisionPuntualRecibo1
fechaEmisionPuntualRecibo2
fechaEmisionPuntualRecibo3
fechaEmisionPuntualRecibo4
fechaEmisionPuntualRecibo5

```

fechaEmisionPuntualRecibo6
 fechaEmisionPuntualRecibo7
 fechaEmisionPuntualRecibo8
 fechaEmisionPuntualRecibo9
 fechaEmisionPuntualRecibo10
 fechaEmisionPuntualRecibo11
 fechaEmisionPuntualRecibo12

Except for '**variasFechas**' ('multiple dates'), the value of 'días de pago' ('payment days') defined by the customer will be considered. That is, if the customer always pays on the 15th, all receipts will be accommodated, by adding days to them, so that its payment date is on the 15th of the corresponding month.

Application Methods Map(from Orden De Trabajo)

Code in iGeo	Description
'PULVERIZACION'	Pulverisation
'NEBULIZACION'	Nebulisation
'TERMONEBULIZACION'	Thermonebulisation
'PUNTEO_GEL'	Gel stippling
'ESPOLVOREO'	Sprinkling
'BLOQUE_SUSPENDIDO'	Suspended block
'INYECCION'	Injection site
'AEROSOL'	Spray
'BROCHEADO'	Lacquering
'PINTURA'	Paint
'TRAMPA_FEROMONAS'	Pheromone trap
'TRAMPA_ADHESIVA'	Glue trap
'CEBADEROS_ALTA_SEG'	High-security bait box
'CEBADEROS'	Bait boxes
'INYECCION_BARRERA'	Barrier injection
'INYECCION_MADERA'	Wood injection
'BARRERA_ZANJA'	Ditch
'BIOESTACION_SUELO'	Floor biostation
'PULV_AMB_LOCALIZADA'	Localised environmental pulverisation

'BIOESTACION_PARED'	Wall biostation
'ULV'	ulv
'NEBULIZACION_BV'	LV nebulisation
'TRAMPA_CAPTURA'	Capture trap
'RED_EXCLUSION'	Exclusion net
'PUAS_EXCLUSION'	Exclusion spikes
'CANON_LANZARREDES'	Net cannon
'TRAMPA_ELECTRICA'	Electric trap
'TRAMPA_ATRAYENTE'	Lure trap
'BEBEDEROS'	Water dispenser
'MONITORIZACION'	Monitoring
'ADHESIVO'	Glue
'DISOLUCION_EN_AGUA_DEL_CIRCUITO'	Dissolution in circuit's water
'SUELTA_EJEMPLARES'	Specimen release
'PRODUCTO_FUMIGENO'	Fumigation product
'NEBULIZACION_CON_MICRODIFUSOR'	Nebulisation with microdiffuser
'OTROS'	others
'DISOLUCION_EN_AGUA'	Dissolution in water
'MATERIAL_DE_SOPORTE'	Support materials
'GRANULADO'	Granules
'BLOQUE'	Block
'SIN_METODO_APLICACION'	no application method
'RODILLO'	Roller
'FUMIGACION'	Fumigation

Customer / Site activities

When the customer is a public administration, the first column should be used. If there is no value for the first column, then use the second one.

If your company does not work with the Public Administration, you can ignore the first column and always use the second one.

Code in iGEO for public companies	Code in iGEO for private companies	Name of customer's/site's activity
GUARD	GUAR	Childcare services
MUS	MUSE	Museum

OFIA	OFI	Offices
TELEA	TELE	Telecommunications industry
GIMA	GIM	Sports facilities
RESAA	RESA	Nursing home
CULPUBLI	CULPRI	Culture club
CDSA	CDSAP	Health centre/clinic
COLEG	COLEG2	Charter school
RESI3	RESC	Clinical centre
FUND1	FUND0	Foundation/NGO
MENOR	MENORE	Youth detention centre
ALMAA	ALMACEN	Warehouse
PARK-PUBLIC	PARK	Car park
CAFE_PUBLI	CAFE	Cafeteria
MANT1	MANT	Maintenance/conservation
DIAMAYORES1	DIAMAYORES	Elderly daycare centre
ARCHPUB	ARCHPRI	Archive
INTERPUB	INTERPRI	Visitor centre
SOLARPUB	SOLARPRI	Land lot
GESAGUP	GESAGUA	Comprehensive water resources management
BASURAPUBLI	BASURAPRIV	Waste management/landfill
RESIUNIPUBL	RESIUNIPRIV	Student residence
RESIDISPUB	RESIDIS	Assisted living residence
IESPUB	IESPRI	High school
ASOCIPUBLI	ASOCI	Association
OTROA	OTROSPRI	Other
AERO_PUBLICO	AERO_PRIVADO	Airport/sports airport
MAR_PUBLICO	MAR_PRIVADO	Port/marina
BIBLIOTECA	BIBLIO_PRIV	Library

RESTAURADOR_P UBLI	RESTAURADOR_PRI	Restorer
CENTRO_REHABI LITA	CENTRO_REHAB	Rehabilitation centre
	ADMFIN	Property manager
	AERO	Aeronautical industry
	AGRI	Agricultural holding
	ALBERG	Lodging
	ALMAGRI	Crop warehouse
	ALMAZARA	Olive press
	ALMCERE	Cereal warehouse
	ALMCOSM	Cosmetics warehouse
	APARTURIS	Vacation apartment
	APICUL	Apiculture
	ARTE	Graphic arts
	AUTO	Driving school
	AUTONOMO	Freelancer
	BALNE	Spa
	BAR	Bar/restaurant
	BODEG	Winery
	BOLLE	Industrial bakery
	CAMPING	Campsite
	CARC	Prison
	CARNI	Butcher shop
	CASH	Supplier/wholesale
	CASRURAL	Rural guesthouse
	CATERING	Catering business
	CCOM	Shopping centre
	CLG	Private school
	CLIOD	Dental clinic

	COMR	Shop
	COMV	Residents' association
	CONCESI	Car dealer
	CONSERVA	Canning industry
	CONSTRU	Construction
	COOPER	Cooperative business
	DEPO	Water storage tanks
	DEPU	Water treatment plant
	DEPUA	Water purification service
	DISCOTECA	Nightclub
	DISTRALI	Food distributor
	DISTRDEP	Distributor with no warehouse
	DISTRENV	Packaging distributor
	DISTRI	Commercial distributor
	ENBANC	Banking institution
	ENVA	Packaging
	ENVEMB	Packaging manufacturer
	ESPECIA	Seasoning, sauce and condiment industry
	ESQUI	Ski resort
	EXPORT	Exports
	FARM	Pharmacy
	FGAS	Gas producer
	FORMA	Training/education centre
	FUNE	Funeral services
	GANAD	Cattle industry
	GASOLINA	Petrol station
	GASOLINERA	Petrol station/service area
	GOLOSINA	Confectionery

	GRAJ	Farm
	GYM	Gym
	HARINA	Flour manufacturer
	HELADO	Ice cream shop
	HIELO	Ice manufacturer
	HIPIC	Equestrian centre
	HOGA	Home
	HORTO	Fresh produce industry
	HOST	Hospitality/catering
	HOTE	Hotel
	HSP	Hospital
	IENE	Energy industry
	IGLESIA	Church
	IMAD	Wood industry
	IMET	Metallurgy
	INDA	Food industry
	INDALZ	Olive press
	INDM	Maintenance industry
	INDUSCAR	Meat industry
	INDUSTRIA	General industry
	INFAR	Pharmaceutical industry
	INMO	Real estate management
	IPAP	Paper industry
	IPET	Oil and gas industry
	IQUI	Chemical industry
	ITEX	Textile, footwear and accessories industry
	JUEGOS	Gaming/gambling house
	LAB	Lab

	LAVADERO	Car wash
	LAVAN	Laundry service
	LOCUT	Call shop
	LOGISTICA	Logistics
	LONJA	Fish market
	MENS	Courier and postal services
	MER	Market
	MICOLO	Mycology
	MULTI	Multi-service business
	NAVE	Industrial unit
	OBRADOR	Bakehouse
	OCIO	Leisure
	OFTAL	Eye clinic
	OTRIND	Other industries
	PANAD	Bakery
	PASTEL	Patisserie
	PELU	Hair/beauty salon
	PESCA	Fish shop
	PIENSOS	Fodder manufacturer
	PISC	Community swimming pool
	PISCPUB	Public swimming pool
	PLAGA	Pest control company
	PLAT	Sets/media studios
	QUESERÍA	Cheese shop
	SCI	Fire protection systems
	SCYB	Food and beverage services
	SEG	Insurance company
	SEMI	Seed warehouse
	SERSOC	Social services

	SERVI	Service company
	SIDRERIA	Brewery
	SINUSO	Unused premises
	SUPER	Supermarket
	TABACO	Tobacco industry
	TALL	Repair shop
	TATU	Tattoo shop
	TAVE	Garage
	TECI	Theater/cinema
	TIENDAS	Shop/sales centre
	TIENDAS1	Small service shop
	TRA	Transportation
	VEQUIP	Equipment sales
	VETE	Vet clinic
	VIVIENDA	Private home
	VIVIPISO	Flat
	VIVIUNI	Single-family house
AYTO		City/county council
PDB		Fire station
COMIA		Garda (police) station
ALCA		Sewerage network
HOSA		Public hospital
CPA		State school
GUPA		Public childcare centre
PARQ		Parks and recreation
JUZG		Courts
EDIFIPUBLICO		Public building
POLINACI		An Garda Siochana (National police)
FORMA1		Training centre
ADMON		Public administration
GCIVIK		Military Police Corps
EJERCITO		Army

POLILOCAL		Airport & Harbour Police
GBRN		Government building
IES		High school
MONUMENTO		Landmark
ZOO		Zoo

States / Counties

See in the document: [PDI Country Regions](#)

Fiscal zone codes

Most countries have only one tax region. However, those with colonies often apply different value-added taxes in those territories, which is why different tax regions are defined.

Fiscal zone name	Fiscal zone code
Andorra	AD
Angola	AO
Argentina	AR
Australia	AUD
Bolivia	BO
Brazil	BR
Switzerland	CH
Chile	CL
China	CN
Colombia	CO
Costa Rica	CR

Curaçao	CW
Czech Republic	CZ
Dinamarca	DK
Germany	DE
Denmark	DK
Dominican Republic	DO
Ecuador	EC
Spain	ES
Canary Islands Zone	ES-CANARIAS
Ceuta and Melilla Zone	ES-CEUTAMELILLA
France	FR
Guatemala	GT
Honduras	HN
Hungary	HU
Ireland	IE
Italy	IT
San Marino	IT-SANMARINO
Vatican	IT-VATICANO
Luxembourg	LU
Morocco	MA
Mexico	MX
Mozambique	MZ
Netherlands	NL
Panama	PA
Peru	PE
Poland	PL
Portugal	PT
Azores	PT-ACORES
Madeira	PT-MADEIRA

Paraguay	PY
Qatar	QA
Romania	RO
Saudi Arabia	SA
Senegal	SN
Sao Tome and Principe	ST
El Salvador	SV
United Kingdom	UK
United States	US
Uruguay	UY
Venezuela	VE

7.Data import

Data import is mainly used for migration of data from legacy systems or external platforms to iGEO. But it can be also used to send real time data from another system to iGEO, for example, when you create the Customers in SAP or any other ERP, and you want that the Customer just created gets created in iGEO automatically and in real time.

When a customer wants to send data to iGEO, we will enable a **VirtualHost** on RabbitMQ for that company (iGEO will provide the name of the vHost). On that VHOST, an exchange will be created (its type will be **DIRECT**), called **importaciones_exchange**, with these two queues:

- importaciones (imports)
- resultadoImportaciones (import results)

Each time a customer places something on the 'importaciones' (imports) queue, iGEO will process it. The structure must be the following:

- **TipoEntidadIgeo**: varchar(255) // E.g., 'SEDE' (SITE)
- **CodigoEntidadIgeo** is the code of the entity being sent to iGEO. // E.g., '4562256'
- **Comando**: 'CREATE' | 'UPDATE' | 'DELETE'
- **RemoteOperationId**: It is used to send an identifier from your own system. This identifier is then used to identify the result of the operation in the 'resultadoImportaciones' (import results) queue. // E.g., 'SITE_4562256'
- **datos**: unlimited text. // JSON with payload

CodigoEntidadIgeo is the code of the entity being sent to iGEO.

TipoEntidadIgeo will be the name (capitalised) of the entity being sent to iGEO:

'CONTRATO' (CONTRACT), 'CLIENTE' (CUSTOMER), 'SEDE' (SITE), 'PRODUCTO' (PRODUCT), 'PROVEEDOR' (VENDOR), etc.

Comando is a text string indicating the action to be executed, and admits one of the following three values:

- CREATE
- UPDATE
- DELETE

Datos attribute is the payload, corresponding to what is being sent to iGEO in JSON format. It is what will actually be imported.

If, when sending a new entity, some attribute of the JSON is not included in the message or carries a null value, iGEO will leave that attribute as null (or to its default value). If it is a modification, then, if the attribute is not present in the JSON or comes as null, iGEO will not update that attribute.

In case of non-mandatory strings, if it is a modification you can delete the value with "field" : "".

The “DELETE” of a “contract” has been included in the PDI. Deletion has the following referential integrity restrictions: only the contract that is associated with the followings entities can be deleted:

Sales.

Sales Lines.

Tax Lines.

Cost Lines.

Diagnostic Situation.

Data collection.

For all other cases (other entities created that are relate to the contract that aim to be deleted) there will be a error response message indicating exactly why the contract could not be deleted.

Import results

Each time iGEO processes a message placed on the ‘importaciones’ (imports) queue, another one will be sent to the ‘resultadoImportaciones’ (import results’) queue. It is not mandatory to read the result, but it is recommended in case an error occurs. In the event of that, iGEO will provide the maximum details about its cause.

The message queued will be in JSON format, as usual, and will contain this information:

- ‘codigo’ (error code, or ‘1’ if all went well)
- ‘mensaje’ (summary of what happened)
- ‘mensajeEnviado’ (message collected by iGEO from the ‘importaciones’ (imports) queue, turned into a text string)
- ‘fecha’ (date when message processing was complete)
- ‘errores’: this will be a collection of JSON objects, each of them containing these details:
 - ‘campo’ (the field where the error was detected)
 - ‘valorProporcionado’ (what was entered on that field)
 - ‘clase’ (object where the error occurred)
 - ‘error’ (text in English containing the error)

If not in real time, it is recommended to consume messages from the queue at least once per week, in case any needs to be corrected and resent to ‘importaciones’ (imports).

iGEO imports some entities deemed primary, such as the following:

‘Cliente’ (customer)

‘Sede’ (site)

‘Contrato’ (contract)

‘Orden de trabajo’ (work order)

‘Documento’ (Document)

‘Analítica’ (analysis)

It is possible to import some more upon request.

All PDI’s input and output information must be codified in UTF-8 format.

Payload structure (for Imports)

HEADER	BODY
<pre>{ "claseEntidadIgeo": "SEDE", "codigoEntidadIgeo": "171644", "comando": "UPDATE", "remoteOperationId": "SITE_4562256",</pre>	<pre>"datos": { /* All the data related to be imported in iGEO*/ }</pre>

PAYLOAD HEADER (attribute “Comando”)

When the sent **Comando** is “UPDATE”, we have the possibility to delete the value of a field if it is a string and only double quotes "" are used.

When the sent **Comando** is “UPDATE”, if the field is not provided or set to null, the previous value will be retained.

PAYLOAD BODY (attribute “datos”)

After processing data, all the entity’s information will be located on the body of the payload received; that is, all of it may be found on the ‘datos’ (data) section: {} of the payload received in JSON format.

Below you may find extra information that may be obtained sorted by entity.

In the description of the entities that can be imported, next to the attribute name, there may be a red exclamation mark, a blue question mark, the text **CRT** in green, or the text **TODO** in brown. These are always preceded by an asterisk (*). The meaning of these characters is as follows:

(*!) Mandatory Fields

(*?) Recommended, but not mandatory

(***CRT**) Only for Entity Creation (not mandatory)

(***TODO**) Pending new features (Don’t use it yet)

SIMPLIFIED VISUALIZATION

As the structures are quite big, below each payload we introduce a simplified version of the specific Payload Structure so it is easier to visualize.

Some attributes will also be shown with cells highlighted in red or blue. The color red means that the attribute is a complete JSON object, and its structure is detailed further down, at the end of the list of all entity attributes. The color blue means that the attribute is a collection of other JSON objects whose structure is detailed further down, at the end of the list of all entity attributes.

Embedded Objects	(May only contain One object of this)
Collection of Entities	(May contain Multiple Objects)

[] → Collections of objects or values

{ } → Embedded Objects

8. Data export

When a customer wants to collect data from iGEO, we will enable a **VirtualHost** on RabbitMQ for that company. On that VHOST, an exchange will be created (its type will be **DIRECT**), called **ExportacionesExchange**, with this single line:

- 'Exportaciones' (exports)

Each time iGEO places something on the 'exportaciones' (exports) queue, the customer will collect it and process it at their own pace. The structure will be the following:

- String **claseEntidadigeo**; // E.g., 'SEDE' (SITE)
- Long **idEntidad Igeo**; // E.g., '4562256'
- String **codigo Entidad geo**; // E.g., 'S 3342'
- Long **parentId**; // E.g., '467433' -> ID of this entity's owning customer (e.g., a customer)
- String **parentCode**; // E.g., 'CLI422' -> code of this entity's owner (e.g., a customer)
- String **Comando**: 'CREATE' | 'UPDATE' | 'DELETE'
- String **datos**; // JSON with payload
- String **codigoDelegacion**; // Just for "Customer", "Site", "Work Order" and "Invoice" entities. Branch code. If is a vendor contact will be null. For customer origin contact there may be multiple branches, they will provided separated by commas. Ex:
"codigoDelegacion":
"DG,ACQ,06378,DEL_Catalunya,10001,DN,DS,DSN,DE,MEJOR,DP,28803,SMV,SD,LR-T,AND,BRA,PT,MADE,123,TF"
Site, potential customer and customer will provide just one code. Ex:
""codigoDelegacion": "DG"

If **Comando** is set to 'null', it will be considered a 'CREATE'; that is, new input.

Datos (or 'payload') is what is being extracted from iGEO in JSON format. It is what will actually be exported.

The customer will use a RabbitMQ client (there are types for every programming language, and it also has an API REST, although using libraries is recommended), which will raise a `Listener` on that queue, so, each time an element enters it, an event containing exported data will be launched. The customer will be in charge of collecting it, extracting its data, transforming and storing them in their system.

iGEO exports some entities deemed primary, such as the following:

- 'Cliente' (customer)**
- 'Sede' (site)**
- 'Contrato' (contract)**
- 'Cuenta Bancaria Cliente' (customer's bank account)**
- 'Factura' (invoice)**
- 'Proveedor' (vendor)**
- 'Compra (factura de compra)' [purchase (purchase invoice)]**
- 'Orden de trabajo' (work order)**
- 'Documento' (Document)**
- 'Analítica' (analysis)**

It is possible to export some more upon request.

All PDI's input and output information must be codified in UTF-8 format.

Payload structure (for Exports)

HEADER	BODY
<pre>"tipoEntidadIgeo": "SEDE", "idEntidad Igeo": 2141480, "codigoEntidadIgeo": "171644", "parentId": 1401155, "parentCode": "C-225", "comando": "UPDATE", "fecha": "08/09/2021 10:30:08",</pre>	<pre>"datos": { /* All the data related to the entity available in iGEO*/ }</pre>

PAYLOAD BODY (attribute "datos")

After processing data, all the entity's information will be located on the body of the payload received; that is, all of it may be found on the 'datos' (data) section: {} of the payload received in JSON format.

Below you may find extra information that may be obtained sorted by entity

SIMPLIFIED VISUALIZATION

As the structures are quite big, below each payload we introduce a simplified version of the specific Payload Structure so it is easier to visualize.

Embedded Objects	(May only contain One object of this)
Collection of Entities	(May contain Multiple Objects)

[] → Collections of objects or values

{ } → Embedded Objects

9. Export payloads

‘Cliente’ (customer)

Type	Name	Description
String	codigo	Customer code. Must match the ‘codigoEntidadlgeo’ value.
String	nombre	Customer's trade name.
String	tipoCliente	Customer type. Accepted values: ‘PARTICULAR’ (individual), ‘EMPRESA’ (company), ‘ADMINISTRACION PUBLICA’ (public administration)
String	codigoDelegacion	Branch’s code.
String	codigoActividad	Business activity code.
Date	fechaAlta	Date when customer is registered.

Date	fechaAltaPotencial	Date of registration as a prospect (dd/mm/yyyy).
String	apellidos	Surname/s, in case it's a person.
String	observaciones	Customer's private notes.
String	numeroDeCliente	Customer number or code; it is the same as 'codigo'. Just for iGeo's internal functions. Don't use it.
String	codigoSecundario	Secondary code for the customer. e.g.: internal codification of the company.
String	comoNosHaConocido	Code of the text stating how you heard about us. Accepted values by default: 'BUSCADOR' (browser), 'WEB' (website), 'PRENSA' (press), 'RADIO' (radio), 'TELEVISION' (television), 'AMIGO' (friend), 'FACHADA' (billboard), 'LABOR_COMERCIAL' (sales outreach), 'PUBLICIDAD_IMPRESA' (print advertising), 'BOCA_OREJA' (word of mouth) 'EMAILING' (email marketing), 'ADWORDS' (Adwords), 'OTROS' (other), 'NETWORKING' (networking)
String	detallesComoNosHaConocido	Description of how you heard about us.
String	subCuenta	Accounting subaccount, type '43000023'.
String	url	URL of the customer's website.

String	estado	Client Status. Accepted values: 'ACTIVO' (active), 'INACTIVO' (inactive)
String	motivoInactivo	Inactivity reason.
String	importadoDesde	Origin of the importation.
String	nombreEnvio	Name of the person, company or public administration that receives or sends the invoices.
String	direccionEnvio	First line of the address containing the street, number and first data of the address.
String	distritoEnvio	District area where invoices are sent.
String	codigoPostalEnvio	Postcode where invoices are sent.
String	localidadEnvio	Town where invoices are sent.
String	nombrePaisEnvio	Country where invoices are sent.
String	telefonoEnvio	Phone number where invoices are sent.
String	codigoProvinciaEnvio	Code of region where invoices are sent. e.g.: Madrid = 28, Barcelona = 8.
String	nombreProvinciaEnvio	Name of region where invoices are sent.
String	atencionAEnvio	Person who must receive the invoice. 'To the attention of' field.
String	observacionesFacturacion	Private notes on this invoice.
String	datosImportacion	Importation data.
String	emailsDondeEnviarFacturas	Emails where invoices are

		sent.
String	riesgoEconomico	Text with the economic risk of the client: Accepted values: 'SEGURO' (safe), 'BAJO' (low), 'MEDIO' (medium), 'ALTO' (high'), 'MUY_ALTO' (very high)
Boolean	sepaFirmado	If the SEPA is signed.
BigDecimal	coste	Cost.
BigDecimal	rentabilidad	Profitability.
BigDecimal	beneficio	Profit.
BigDecimal	totalVentas	Total sales.
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days), 'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days), 'variasFechas' (different customized dates) 'd30y90' (within 30 and 90 days)
String	diasDePago	Days of the month when the customer pays. e.g.: '10', '20' of each month. 'ultimo' to choose the last day of the month and 'cuandoToque' doesn't adjust the payment to a fixed day.
String	diasDeFacturacion	Days of the month when the

		customer issues invoices. e.g.: '10,20' of each month. 'ultimo' to choose the last day of the month and 'cuandoToque' doesn't adjust the invoices to a fixed day.
String	fechaPuntualFactura	One-time invoicing date.
Date	fechaEmisionPuntual	One-time invoicing emission date.
String	variasFechasFactura	Several invoicing dates.
Long	nDiasEmisionRecibo1	In case the customer pays within n days, the first period. e.g.: within 20 days.
Long	nDiasEmisiónRecibo2	In case the customer pays within n days, the second period. e.g.: within 40 days.
Long	nDiasEmisionRecibo3	In case the customer pays within n days, the third period. e.g.: within 80 days.
Long	nDiasEmisionRecibo4	In case the customer pays within n days, the fourth period. e.g., within 100 days.
Long	nDiasEmisión Recibo5	In case the customer pays within n days, the fifth period. e.g.: within 120 days.
Long	nDiasEmisionRecibo6	In case the customer pays within n days, the sixth period. e.g.: within 140 days.
Long	nDiasEmisiónRecibo7	In case the customer pays within n days, the seventh period. e.g.: within 180 days.
Long	nDiasEmisionRecibo8	In case the customer pays within n days, the eighth period. e.g.: within 210 days.
Long	nDiasEmisionRecibo9	In case the customer pays

		within n days, the ninth period. e.g.: within 240 days
Long	nDiasEmisionRecibo10	In case the customer pays within n days, the tenth period. e.g.: within 260 days.
Long	nDiasEmisionRecibo11	In case the customer pays within n days, the eleventh period e.g.: within 280 days.
Long	nDiasEmisionRecibo12	In case the customer pays within n days, the twelfth period e.g.: within 300 days.
Boolean	permiteValidarCertificados	If allows certificates validation.
String	codigoComoProveedor	Supplier code, in case it is also a supplier.
Long	contadorNumeroDeCliente	Customer's numeric code, but without letters, only numbers.
String	emailsDondeEnviarPresupuestos	Emails for sending quotes.
String	formaFacturacion	Invoicing methods. Accepted values: 'Puntual' (one-time. A single invoice for the whole contract), 'Periodica' (periodic, Multiple invoices with a specific frequency), 'sobreServicio' (on service. An invoice for each planned service), 'Recapitulativa' (summary. No invoices are generated, they will be created whenever you want, and the services performed until that moment will be included.)

Boolean	generarFacturasAPlazoVencido	If invoices for this customer must be issued in arrears.
Integer	numeroFacturasAEmitir	Number of invoices for emission.
String	codigoZonaComercial	Commercial area code.
Date	fechaBaja	Deactivation or blocking date.
String	perdidoCompetidor	Which competitor took this customer.
Boolean	tcNecesarios	If the customer is up to date with Social Security taxes. Informative nature. Only applies to Spain.
String	grupoRegistroIVACodigo	Codification for VAT grouping.
String	grupoRegistroIVADescripcion	Description for VAT grouping.
String	partidalva	Eleven digits code for companies identification. Only applies on Italy.
String	codigoOrigenCliente	Customer origin code
Boolean	usaNPS	Customer satisfaction survey (NPS)
Boolean	usANPSTiempoReal	For NPS surveys, true to be completed at the end of the work order, false to be completed by e-mail with a link
'datosFacturacion' { }	datosFacturacion	billing data address. See table below
'actividad' { }	actividad	activity. See table below
'datosBaseDelegacion' { }	datosBaseDelegacion	branch. See table below
'gestionadoPor' { }	gestionadoPor	managed by. See table below
'idioma' { }	idioma	language. See table below
'datosContacto' { }	datosContacto	client contact details. See table below

'personaContacto' { }	personaContacto	contact person. See table below
'datosClienteFacturae' { }	datosClienteFacturae	client electronic invoicing data. See table below
Collection of 'cuentas' [{}]	cuentas	Collection of bank accounts. See table below
Collection of 'lineasRetencionGlobal' [{}]	lineasRetencionGlobal	Collection of withholdings, only for Italy, Brazil or Portugal. See table below

'actividad' { } (Activity)

Type	Name	Description
Long	id	ID codification.
String	nombre	Name.
String	codigo	Code.
String	tipoEmpresa	Company classification.

'cuentas' [{}] (Bank accounts)

Type	Name	Description
String	iban	International Bank Account Number.
String	nombre	Name.
Boolean	activa	If this account is active or not.
String	codigo	Code.

'datosBaseDelegacion' { } (Branch)

Type	Name	Description
String	nombre	Name.

String	codigo	Code.
String	cif	Branch VAT number.

‘datosClienteFacturae’ { } (Client electronic invoicing data)

Type	Name	Description
Boolean	facturae_activada	Active/inactive electronic invoicing.
String	facturae_canalEnvio	Shipping channel.
Long	facturae_customerId	ID codification for the customer.
String	facturae_dir3	Electronic invoicing address line 0.
String	facturae_dir31	Electronic invoicing address line 1.
String	facturae_dir32	Electronic invoicing address line 2.
String	facturae_dir33	Electronic invoicing address line 3.
String	facturae_dir34	Electronic invoicing address line 4.
String	facturae_direccionOficinaContable	Electronic invoicing address accounting office address.
String	facturae_direccionOrganoGestor	Electronic invoicing management office address.
String	facturae_denominacionUnidadTramitadora	Electronic invoicing name for the processing section.

‘datosContacto’ { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.

String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

‘datosFacturacion’ { } (Billing data address)

Type	Name	Description
String	nombreFacturacion	Billing data name
String	codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	City/town.
String	provincia	Province (county, district).
String	codigoProvincia	Province (county, district) code. See Appendix
String	alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166.

		https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes
String	pais	Country name.
String	codigoRegion	Region code

'gestionadoPor' { } (Managed by)

Type	Name	Description
Long	id	Id
String	nombre	Name of the person who manages the entity
String	apellidos	Surname/s.
String	codigoidentificacion	VAT number of the employee who manages the entity
String	codigoEmpleado	Code of the employee who manages the entity

'idioma' { } (Language)

Type	Name	Description
String	codigo	Language codification.
String	nombre	Name.

'personaContacto' { } (Contact person)

Type	Name	Description
String	nombre	Name.
String	movil	Mobile phone number.
String	telefono	Phone number.
String	email	Email address.

String	cargo	Position in the company, building or public administration.
Boolean	esLaPrincipal	If is the principal.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	Town/City.
String	numeroFax	Fax number.
provincia' {}	provincia	Province (county, district). See table below

'provincia' {} (Province (county, district))

Type	Name	Description
String	codigo	Province (county, district) code.
Long	id	Province Id
String	nombre	Province (county, district) name.
String	paisId	Country id of province (county, district).

Payload: 'Cliente' (customer)

```
{
  "claseEntidadIgeo": "CLIENTE",
  "idEntidadIgeo": 2386646,
  "codigoEntidadIgeo": "1321",
  "comando": "CREATE",
  "fecha": "12/03/2025 10:33:06",
  "datos": {
    "codigo": "1321",
    "codigoFormaPago": "DB",
    "cuentas": [],
    "fechaAlta": "12/03/2025 11:33:05",
    "tipoCliente": "EMPRESA",
```

```

"nombre": "EXAMPLE CUSTOMER",
"apellidos": "",
"observaciones": "",
"numeroDeCliente": "1321",
"codigoSecundario": "",
"detallesComoNosHaConocido": "",
"subCuenta": "000001321",
"url": "",
"estado": "ACTIVO",
"nombreEnvio": "",
"direccionEnvio": "",
"distritoEnvio": "",
"codigoPostalEnvio": "",
"localidadEnvio": "",
"telefonoEnvio": "",
"atencionAEnvio": "",
"observacionesFacturacion": "",
"emailsDondeEnviarFacturas": "",
"sepaFirmado": false,
"diasDePago": "",
"diasDeFacturacion": "",
"permiteValidarCertificados": true,
"codigoComoProveedor": "",
"emailsDondeEnviarPresupuestos": "",
"formaFacturacion": "Puntual",
"prorratioFacturasFechasContrato": "fechasContrato",
"generarFacturasAPlazoVencido": false,
"numeroFacturasAEmitir": 0,
"requiereLlevarFacturasImpresos": false,
"esIntracomunitario": false,
"tcNecesarios": false,
"codigoDelegacion": "AND",
"gestionadoPor": {
  "id": 28286,
  "nombre": "Vicente",
  "apellidos": "Aleixandre",
  "codigoIdentificacion": "132478o0",
  "codigoEmpleado": ""
},
"codigoGestionadoPor": "132478o0",
"idioma": {

```

```

    "nombre": "Español (España)",
    "codigo": "es_ES"
  },
  "codigoIdioma": "es_ES",
  "datosContacto": {
    "telefono": "",
    "movil": "",
    "email": "",
    "fax": ""
  },
  "personaContacto": {
    "provincia": {}
  },
  "datosFacturacion": {
    "nombreFacturacion": "EXAMPLE TEST",
    "codigoIdentificacion": "447437473",
    "direccion": "34623727",
    "codigoPostal": "19200",
    "localidad": "Azuqueca De Henares",
    "provincia": "Guadalajara",
    "codigoProvincia": "ES-GU",
    "alfa2codepais": "ES",
    "pais": "España"
  },
  "datosClienteFacturae": {
    "facturae_activada": false
  },
  "autoFactura": false,
  "datosBaseDelegacion": {
    "nombre": "ANDALUCIA",
    "codigo": "AND",
    "cif": "B123456789"
  },
  "usaNPS": false,
  "usaNPSTiempoReal": false,
  "id": 2386646,
  "empresaId": 130
},
"empresaId": 130
}

```

‘Contacto’ (Contact person)

Type	Name	Description
String	nombre	Contact name
String	codigo	Contact code
String	tipoEntidadPadre	Type parent entity Accepted values: ‘CLIENTE’ (customer), ‘SEDE’ (site), ‘CLIENTE_POTENCIAL’ (potential customer), ‘PROVEEDOR,’ (vendor), ‘ORIGENCLIENTE’ (customer origin)
String	codigoEntidadPadre	Code parent entity
String	codigoidentificacion	ID/VAT number
String	movil	Mobile number
String	fax	Fax number
String	telefono	Phone number
String	email	Email
String	cargo	Position
Boolean	esLaPrincipal	Main contact
String	direccion	Address
String	codigoPostal	Postcode
String	localidad	City/town
String	codigoProvincia	County code
String	lineasDeNegocio	Comma-separated codes of the Business Lines linked to this contact person

Payload: ‘Contacto’ (Contact person)

```
{
```

```

"claseEntidadIgeo": "CONTACTO",
"idEntidadIgeo": 2385014,
"codigoEntidadIgeo": "Prueba para Sergio",
"parentId": null,
"parentCode": null,
"codigoDelegacion": null,
"comando": "CREATE",
"fecha": "14/01/2026 10:37:54",
"datos": {
  "nombre": "Prueba para Sergio",
  "codigo": "2385014",
  "movil": "",
  "telefono": "+34 910 000 000",
  "email": "prueba@prueba.es",
  "cargo": "cargo",
  "esLaPrincipal": false,
  "direccion": "Calle Test",
  "codigoPostal": "28025",
  "localidad": "Madrid",
  "fax": "+34 910 000 000",
  "numeroFax": null,
  "codigoProvincia": "ES-M",
  "codigoIdentificacion": "B12345678",
  "tipoEntidadPadre": "SEDE",
  "codigoEntidadPadre": "2024 - 288 - SEDE",
  "lineasDeNegocio": "PIGE0, CP",
  "nombrePais": "España"
},
"empresaId": null
}

```

‘Contrato’ (contract)

Type	Name	Description
String	numero	Contract number
String	codigoCliente	Customer code
String	creadoPorCodigo	Code of the employee creating the contract. Mandatory on create

String	lineaNegocioCodigo	Line of business's code
Date	fechaInicio	Start date
Date	fechaFin	End date
String	notaParaOdt	Notes for the work orders
String	notaParaFacturas	Notes for the invoices
String	observaciones	Comments
String	asunto	Subject of this contract
String	observacionesRenovacion	Comments on renewal of the contract
String	formaFacturacion	Invoicing methods. CREATE: Mandatory if noGenerarFacturas is false or null. UPDATE: Mandatory if noGenerarFacturas is false Accepted values: 'Puntual' (one-time. A single invoice for the whole contract), 'Periodica' (periodic, Multiple invoices with a specific frequency), 'sobreServicio' (on service. An invoice for each planned service), 'Recapitulativa' (summary. No invoices are generated, they will be created whenever you want, and the services performed until that moment will be included.)
String	formaCobro	Collection Method Map ('See Method Collection Map'). Mandatory if formaFacturacion is not 'Recapitulativa'. If formaCobro is "variasFechas", then

		any of the fechaEmissionPuntualRecibo1 ...12 must be indicated If formaCobro is “variasFechas”, then any of the fechaEmissionPuntualRecibo1 ...12 must be indicated
Long	nDiasEmissionRecibo1	First period for 'n days' payment
Long	nDiasEmissionRecibo2	Second period for 'n days' payment
Long	nDiasEmissionRecibo3	Third period for 'n days' payment
Long	nDiasEmissionRecibo4	Fourth period for 'n days' payment
Long	nDiasEmissionRecibo5	Fifth period for 'n days' payment
Long	nDiasEmissionRecibo6	Sixth period for 'n days' payment
Long	nDiasEmissionRecibo7	Seventh period for 'n days' payment
Long	nDiasEmissionRecibo8	Eighth period for 'n days' payment
Long	nDiasEmissionRecibo9	Ninth period for 'n days' payment
Long	nDiasEmissionRecibo10	Tenth period for 'n days' payment
Long	nDiasEmissionRecibo11	Eleventh period for 'n days' payment
Long	nDiasEmissionRecibo12	Twelfth period for 'n days' payment
Boolean	renovable	Renewable
Boolean	renovacionRequiereAceptacionCliente	Renewal requires express acceptance by the customer

String	descripcionExplicacion	Description/explanation
String	tipologiaContrato	Contract typology Accepted values: 'PUNTUAL' (Single/one-time), 'MANTENIMIENTO' (Maintenance),
String	metodoPago	Payment Method Map ('See Payment Methods Map'). Mandatory if formaFacturacion is not 'Recapitulativa' If the method of payment is "ME", "CH" or "TJ" (cash, check and card), indicate MetodoCobroEfectivo. If the method of payment is "DB" (direct debit), indicate cuentaBancariaCliente. If the method of payment is "TR" (bank transfer), indicate cuentasBancariasTransferen cia.
String	metodoCobroEfectivo	Cash collection method
Date	fechaEmisionPuntual	Specific date for issuing single invoice (if chosen). Mandatory if fechaPuntualFactura is 'fecha'
String	variasFechasFactura	Invoice frequency for multiple invoices. Mandatory if formaFacturacion is 'Periodica'. if variasFechasFactura is "variasFechas", then any of the fechaEmisionPuntual1...12 must be indicated

Date	fechaEmisionPuntual1	Specific date for issuing invoice 1.
Date	fechaEmisionPuntual2	Specific date for issuing invoice 2
Date	fechaEmisionPuntual3	Specific date for issuing invoice 3
Date	fechaEmisionPuntual4	Specific date for issuing invoice 4
Date	fechaEmisionPuntual5	Specific date for issuing invoice 5
Date	fechaEmisionPuntual6	Specific date for issuing invoice 6
Date	fechaEmisionPuntual7	Specific date for issuing invoice 7
Date	fechaEmisionPuntual8	Specific date for issuing invoice 8
Date	fechaEmisionPuntual9	Specific date for issuing invoice 9
Date	fechaEmisionPuntual10	Specific date for issuing invoice 10
Date	fechaEmisionPuntual11	Specific date for issuing invoice 11
Date	fechaEmisionPuntual12	Specific date for issuing invoice 12
Date	fechaEmisionPuntualRecibo1	Specific date for customer to pay installment 1
Date	fechaEmisionPuntualRecibo2	Specific date for customer to pay installment 2
Date	fechaEmisionPuntualRecibo3	Specific date for customer to pay installment 3
Date	fechaEmisionPuntualRecibo4	Specific date for customer to pay installment 4
Date	fechaEmisionPuntualRecibo5	Specific date for customer to pay installment 5

Date	fechaEmisionPuntualRecibo6	Specific date for customer to pay installment 6
Date	fechaEmisionPuntualRecibo7	Specific date for customer to pay installment 7
Date	fechaEmisionPuntualRecibo8	Specific date for customer to pay installment 8
Date	fechaEmisionPuntualRecibo9	Specific date for customer to pay installment 9
Date	fechaEmisionPuntualRecibo10	Specific date for customer to pay installment 10
Date	fechaEmisionPuntualRecibo11	Specific date for customer to pay installment 11
Date	fechaEmisionPuntualRecibo12	Specific date for customer to pay installment 12
Integer	diasDePago	Day of the month in which the customer pays
String	diasDeFacturacion	Day of the month on which invoices should be issued
Date	fechaVencimientoPagare	Due date for payment with promissory notes
String	diaSemana	Day of the week in which services can be done.
Boolean	mostrarImporteLineas	Show the amount on every line of the contract
String	condiciones	Terms and conditions
String	prorratioFacturasFechasContrato	Within which period should the invoices be created for the contracts of this customer. Accepted values: fechasContrato (default if null) elegirRangoManualmente hoyHastaFinContrato hoyMasUnAnio
Date	fechaInicioPeriodoFacturacion	Start date for the invoicing

	n	period. Mandatory if generarFacturasAPlazoVencido is true
Date	fechaFinPeriodoFacturacion	End date for the invoicing period
Boolean	generarFacturasAPlazoVencido	Generate invoices in arrears
Boolean	requiereLlevarDocsImpresos	It is mandatory to carry the invoices printed on paper
String	motivoDeLaCancelacion	Cause of the cancellation
Date	fechaDeCancelacion	Cancellation date
String	importadoDesde	Imported from
Boolean	separaFacturasPorSede	If a separate invoice for every site is needed
Boolean	enviarFacturaACadaSede	Send invoices to every site
Boolean	facturacionElectronicaPorSede	If there is e-invoicing for every site
Boolean	noGenerarFacturas	Do not generate invoices
Boolean	esUnaRenovacion	It is a renewal
Boolean	unicaLineaFactura	If invoices should have a single line
String	notaInterna	Internal note for invoices
String	tipoContrato	Contract Type. Accepted values: NORMAL, MARCO, HIJO
String	codigoComoPresupuesto	Code as a quote
Boolean	admiteFacturaRecapitulativa	Allow summary invoices
String	lineaFacturaOrden	Way of sorting lines within the invoice
Boolean	permiteAvisosAsistencia	Allow additional free visits

Long	cuantosAvisosAsistencia	Number of additional free visits
Boolean	firmableDesdePortalCliente	If it may be signed on the Customer Portal
String	nombrePersonaFirmante	Name of the customer's person who is signing the contract
String	dniPersonaFirmante	ID/VAT number of the customer's person signing the contract
String	ipFirma	IP address from which the contract is signed
Date	horaFirma	Complete date and time when the contract is signed
Double	latitud	GPS latitude on which the contract is signed
Double	longitud	GPS longitude on which the contract is signed
String	usuarioClienteFirma	Customer Portal's username who signed the contract
String	motivoRechazoFirmaDesdePortalTecnicos	Cause of signature rejection on Technician Portal
String	codigoDivisa	Currency code
Boolean	generacionAutomaticaRecapitulativas	Summary invoices must be generated automatically.
Integer	diaGeneracionAutomaticaRecapitulativas	Day of the month to generate summary invoices. Mandatory if generacionAutomaticaRecapitulativas is true.
String	codigoIdentificacionContratacionPublica	ID code for tenders. For Italy it cannot be longer than 10 characters
String	codigoProyecto	Code for the customer Project. It cannot be longer than 15 characters

String	plantillaCertificadoCodigo	Certificate template code. This is the code of the certificate template that will be assigned by default to the work orders.
String	exigibilidadIva	For e-invoicing from Italy, VAT chargeability. Accepted values: 'INMEDIATA' (immediate), 'DIFERIDA' (Deferred), 'SPLITPAYMENT' (Split payment);
Boolean	esNecesarioNumeroPedido	If No. of purchase order is mandatory
String	numeroDePedido	No. of purchase order
Boolean	noSubirPreciosMasivamente	Exclude from massive price increases
Collection of 'lineasRetencionGlobal' [{}]	lineasRetencionGlobal	Collection of withholdings, only for Italy, Brazil or Portugal. See table below
'serieFacturacion' [{}]	serieFacturacion	Collection of invoicing Series. See table below
'gestionadoPor' { }	gestionadoPor	managed by. See table below
'lineasContrato' [{}]	lineasContrato	Collection of Contract Lines. See table below

'gestionadoPor' { } (Managed by)

Type	Name	Description
Long	id	Id
String	nombre	Name of the person who manages the entity
String	apellidos	Surname/s.
String	codigoidentificacion	VAT number of the employee who manages the entity

String	codigoEmpleado	Code of the employee who manages the entity
--------	----------------	---

‘lineasContrato’ [{ }] (Contract Lines)

Type	Name	Description
String	codigo	Code for this single line
Integer	orden	Number meaning the order of this line
Double	unidades	Amount of services/products
Double	precioUnitario	Unit price per service/product
String	unidadDeMedida	Unit of measure (default: 'units')
Double	importeBruto	Amount before applying discounts and VAT
String	motivoDescuento	Reason for the discount
Double	importeDescuento	Amount of the discount
Double	porcentajeDescuento	Percentage of the discount
String	tipoDescuento	Discount Type. Accepted values: 'PORCENTAJE'(percentage), 'IMPORTE' (amount)
Double	baseImponible	Amount after applying discounts, but before VAT (total amount not unitary amount) (Tax base, which is the gross price minus discounts, but before VAT is applied)
Double	porcentajeImpuesto	VAT percentage
String	sedeCodigo	Site code
String	productoCodigo	Product/Service code
String	descripcion	Description of the

		product/service
Boolean	esRenovable	If this line can be renewed
String	indicacionesEjecucion	Execution instructions for the technicians
Collection of [{'ZonasContratadas'}]	zonasContratadas	Collection of Contracted Areas. See table below

‘serieFacturacion’ [{ }] (Invoicing Series)

Type	Name	Description
Long	id	Id
String	nombre	Name of the person who manages this client.

Payload: ‘Contrato’ (contract)

```
{
  "tipoEntidadIgeo": "CONTRATO",
  "codigoEntidadIgeo": "5505",
  "comando": "Create",
  "remoteOperationId": "PT-84",
  "datos": {
    "asunto": "Esto es una prueba...",
    "numero": "5505",
    "formaCobro": "inmediata",
    "metodoPago": "TJ",
    "fechaInicio": "08/05/2024",
    "fechaFin": "08/08/2024",
    "generarOdt": "FALSE",
    "notaParaOdt": "Debe haber una ODT por mes",
    "codigoCliente": "1346",
    "observaciones": "No hay ninguna observación relevante",
    "lineasContrato": [
      {
        "orden": "2",
        "codigo": "2",
        "unidades": "1",
        "sedeCodigo": "172347",

```

```

    "descripcion": "Prueba linea de contrato",
    "importeBruto": "500",
    "baseImponible": "450",
    "tipoDescuento": "PORCENTAJE",
    "precioUnitario": "500",
    "productoCodigo": "DES",
    "unidadDeMedida": "units",
    "motivoDescuento": "NO",
    "importeDescuento": "50",
    "porcentajeImpuesto": "0",
    "porcentajeDescuento": "10",
    "indicacionesEjecucion": "Consiste en la eliminación de ratas
y ratones, con el objetivo de que los roedores no entren en una
instalación y eliminar a los que ya están dentro.",
    "esRenovable": "TRUE"
  }
],
"creadoPorCodigo": "JOAQ",
"noGenerarFacturas": "FALSE",
"formaFacturacion": "Puntual",
"notaParaFacturas": "Se debe entregar impresa en las oficinas",
"lineaNegocioCodigo": "CP",
"metodoCobroEfectivo": "LO_RECOGE_EL_COMERCIAL",
"nDiasEmisionRecibo1": "1",
"nDiasEmisionRecibo2": "1",
"nDiasEmisionRecibo3": "1",
"nDiasEmisionRecibo4": "1",
"nDiasEmisionRecibo5": "1",
"nDiasEmisionRecibo6": "1",
"nDiasEmisionRecibo7": "1",
"nDiasEmisionRecibo8": "1",
"nDiasEmisionRecibo9": "1",
"nDiasEmisionRecibo10": "1",
"nDiasEmisionRecibo11": "1",
"nDiasEmisionRecibo12": "1",
"numeroFacturasAEmitir": "0",
"fechaInicioPeriodoFacturacion": "08/06/2023",
"fechaFinPeriodoFacturacion": "08/08/2023",
"observacionesRenovacion": "Ninguna",
"asignadoA": {
  "codigo": "DB"
}

```

```

    }
  }
}

```

'Deficiencia' (Deficiency)

Type	Name	Description
String	codigo	Deficiency's Code (Mandatory for imports)
String	categoria	Deficiency's Category
String	fecha	Date
String	codigoCreadaPor	Employee Code created by
Boolean	resuelta	Resolution status
String	resueltaPor	Solved by
String	medidaCorrectora	Corrective measure
String	tipoEntidadSecundaria	Secondary entity type (Only for Legionella line of business)
Long	idEntidadSecundaria	Secondary entity ID (Only for Legionella line of business)
Date	fechaResolucion	Resolution date of deficiency when technician changes status to finished
String	visibilidad	Visibility Accepted values: INTERNA(Internal), PUBLICA(Public)
String	numeroOdtDondeSeCrea	WO number where it's created
String	numeroOdtDondeSeResuelve	WO number where it's solved
String	subzonas	Subarea
String	areaAfectada	Affected area
String	tipoCreacionIncidencia	Incident creation type

		Accepted values: MANUAL(Manual) AUTOMATICA(Created by system automatically under certain circumstances)
String	responsableIncidencia	who is responsible for closing the deficiency: CLIENTE(Cliente) EMPRESA(The PCO)
String	codigoTratamientoAsociado	service code that the deficiency is linked to
String	grupoTipoOperacionAsociado	Group of linked operation's type (this is specific for Legionella)
String	codigoSede	Site code
String	nivelPrioridad	Priority level; Accepted values: BAJA(Low), MEDIA(Medium), ALTA(High),
Date	fechaCierrePropuesta	Proposed closure date
String	subgrupoElementoInstalacionRiesgo	Subgroup of risky premises' element (this is specific for Legionella line of business)
Long	elementoInstalacionRiesgoID	Risky premises' element ID (only for Legionella line of business)
String	elementoInstalacionRiesgoCodigo	Risky premises' element code (this is introduced by the company in a form, only for Legionella line of business)
Number	id	internal database ID
String	numeroPresupuesto	Quote Number (!When importing always use one of these two!)
String	numeroContrato	Contract Number(!When

		importing, always use one of these two!)
'nombresZonas' []	nombresZonas	Area Names. See table below

'nombresZonas' [{ }] (Area Names)

Type	Name	Description
String	zona	Area's name

'Delegacion' (Branch)

Type	Name	Description
String	codigo	Branch code
String	nombre	Branch name
String	cif	CRN
String	distrito	Borough/area
String	emailAutomaticoAvisoFacturacion	Invoicing alerts' email
Double	latitud	GPS latitude
Double	longitud	GPS longitude
String	mensajeEncuesta	Message to be included in the email containing the visit report. It is mandatory if NPS is enabled.
String	mensajeNPSPortalCliente	Message for the Customer Portal's rating page. It is mandatory if NPS is enabled.
String	numRegistroBiocidas	R4BP no.
Boolean	usaFacturacion	The branch uses Invoicing
Boolean	usaNPS	Net Promoter Score, Customer satisfaction survey

		(NPS)
String	zonaHoraria	Time zone. e.g.: 'Europe/Madrid' or 'America/Argentina/Cordoba' https://en.wikipedia.org/wiki/List_of_tz_database_time_zones
'datosContacto' { }	datosContacto	Branch contact details. See table below
'datosPostales' { }	datosPostales	Branch postal data. See table below

'datosContacto' { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

'datosPostales' { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	codigoProvincia	Province (county, district) code
String	alfa2codepais	Country Code eg: 'ES'

'Documento' (Document)

Type	Name	Description
Binary	pdfDocumento	PDF document (64 base)
String	codigoDocumento	Document code (invoice number, service report number, certificate number, etc.)
String	codigoTipoDocumento	Document type code (CLYD - cleaning and disinfection certificate; is the only code available)
String	fechaExportacion	Export date
String	codigoCliente	Customer code
String	codigoSede	Site code
String	codigoOdt	Work order code
String	codigoProveedor	Vendor code
String	codigoContrato	Contract code

Payload: 'Documento' (Document)

```
{
  "comando": "CREATE",
  "codigoEntidadIgeo": "CO-101",
  "idEntidadIgeo": 10001,
  "claseEntidadIgeo": "DOCUMENTO",
  "parentId": 1,
  "parentCode": "PRO-101",
  "datos": {
    "pdfDocumento": "(BINARY DATA)",
    "codigoDocumento": "235679",
    "codigoTipoDocumento": "CLYD",
    "fechaExportacion": "24/11/2020",
    "codigoCliente": 234,
    "codigoSede": "SE-34",
    "codigoOdt": 637489,
    "codigoProveedor": 121,
  }
}
```

```

    "codigoContrato": 327493,
  }
}

```

‘Factura’ (invoice)

Type	Name	Description
String	numeroFactura	Invoice number (E.g., ‘N-4523-20’)
Date	fechaEmision	Issue date (if already issued) DD/MM/YYYY
String	facturaANumeroCliente	Customer code
String	tipoFactura	Invoice type. Accepted values: ‘NORMAL’ (normal), ‘RECTIFICATIVA’ (amending)
Integer	numero	Invoice number without letters, just the serial. (E.g., ‘4523’)
Date	fechaRegistro	Registration date DD/MM/YYYY
Boolean	anulada	annulled (true/false)
Date	fechaVencimiento	Due date DD/MM/YYYY
Double	importeSinImpuestos	‘BaseImponible’ (VAT base’)
Double	importe	Amount with VAT and discounts included
String	formaCobro	Collection Method Map (‘See Collection Method Map’)
String	metodoPago	Payment Method Map (‘See Payment Methods Map’)
String	nombreLineaNegocio	Line of business’s name
String	codigoLineaNegocio	Line of business code (e.g., ‘CP’ for pest control)

Double	cuota	Sum of all VAT
String	renovablePuntual	Contract's/Sale's typology: Accepted values: 'PUNTUAL' (one-time) 'RENOVABLE' (renewable) (sales can't be renewable)
String	frecuenciaFacturacion	billing Frequency. Accepted values: 'SEMANAL' (weekly), 'QUINCENAL' (fortnightly), etc.
String	formaFacturacion	Invoicing methods. Accepted values: 'Puntual' (one-time. A single invoice for the whole contract), 'Periodica' (periodic, Multiple invoices with a specific frequency), 'sobreServicio' (on service. An invoice for each planned service), 'Recapitulativa' (summary. No invoices are generated, they will be created whenever you want, and the services performed until that moment will be included.)
String	metodoCobroEfectivo	Cash collection method: Accepted values: 'LO_COBRA_EL_TECNICO', 'LO_RECOGE_EL_COMERCIAL', etc.
String	notaInterna	Internal note for invoices
String	facturaANombreDe	Invoice payable to
String	codigoDivisa	currency code (EUR, USD ,CHF...)
String	pieFactura	Footnote to the invoices,

Boolean	simulaUnicaLineaFactura	Internal field to display the invoice lines in one line.
String	descripcionLineaUnica	Description of the single invoice line
String	numeroPedido	Order number that of the contract/sale or on each invoice.
Boolean	estaCobrada	Invoice payment status
String	codigoDelegacion	Branch code
String	regimenFiscal	current code of the tax regime of the issuing taxpayer under which the voucher is being issued.
Long	nDiasEmisionRecibo1	Number of days after which receipt no. 1 becomes due for payment once the invoice has been issued.
Long	nDiasEmisiónRecibo2	Number of days after which receipt no. 2 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo3	Number of days after which receipt no. 3 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo4	Number of days after which receipt no. 4 becomes due for payment once the invoice has been issued.
Long	nDiasEmisión Recibo5	Number of days after which receipt no. 5 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo6	Number of days after which receipt no. 6 becomes due for payment once the invoice has been issued.

Long	nDiasEmisiónRecibo7	Number of days after which receipt no. 7 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo8	Number of days after which receipt no. 8 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo9	Number of days after which receipt no. 9 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo10	Number of days after which receipt no. 10 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo11	Number of days after which receipt no. 11 becomes due for payment once the invoice has been issued.
Long	nDiasEmisionRecibo12	Number of days after which receipt no. 12 becomes due for payment once the invoice has been issued.
String	numeroFacturaCorregida	Number of the invoice to be cancelled
String	parentCode	invoice customer number
Integer	ejercicio	Accounting exercise of the invoice
String	metodoPagoMexico	Only for Mexico. Form of payment for the goods, the provision of services. PPD (Pago en Parcialidades o Diferido) PUE (Pago en Una Exhibición)
String	folioUUID	Only for Mexico. "Universally Unique Identifier" o Identificador

		Único Universa
String	codigoUsoCFDI	Only for Mexico. Reason for which an electronic invoice was issued.
Long	puntoDeVenta	Argentina only. Code of the place where commercial transactions take place, either in a physical shop or in an e-commerce.
Boolean	seLeAplicanRetenciones	For Argentina and Peru. if it has a legal figure to control the withholdings of the invoices.
String	CbuArgentina	Only for Argentina. Uniform Bank Code
String	codigoMotivoAnulacion	Only for Peru. Cancellation reason code
String	codigoAgrupacion	Grouping code
String	numTVAINtra	Only for France. TVA intracommunautaire
String Collection []	urlDocumentos	A collection with links to additional documents related to the invoice
String Collection []	odtsAsociadas	Collection of work orders, separated by commas, for which this invoice has been created.
'datosFacturacionEmisor' { }	datosFacturacionEmisor	Issuer billing Info. See table below
'datosFacturacionReceptor' { }	datosFacturacionReceptor	Customer billing Info. See table below
'contrato' { }	contrato	Contract. See table below
'venta' { }	venta	Sale Data. See table below
'cliente' { }	cliente	Customer Data. See table

		below
'cuentaCliente' { }	cuentaCliente	Client Account. See table below
'serieFacturacion' { }	serieFacturacion	Invoicing series related data. See table below
'lineas' { }	lineas	Invoices Line. See table below
'lineasImpuestos' { }	lineasImpuestos	VAT Invoices lines. See table below
'lineasRetenciones' []	lineasRetenciones	Global withholding for the invoice. See table below
'recibos' []	recibos	Collection of Receipts/Installments. See table below

'cliente' { } (Customer info)

Type	Name	Description
String	codigo	Customer code. Must match the 'codigoEntidadlgeo' value.
String	nombre	Customer's trade name.
String	tipoCliente	Customer type. Accepted values: 'PARTICULAR' (individual), 'EMPRESA' (company), 'ADMINISTRACION PUBLICA' (public administration)
String	codigoDelegacion	Branch's code.
String	codigoActividad	Business activity code.
Date	fechaAlta	Date when customer is registered.
Date	fechaAltaPotencial	Date of registration as a

		prospect (dd/mm/yyyy).
String	apellidos	Surname/s, in case it's a person.
String	observaciones	Customer's private notes.
String	numeroDeCliente	Customer number or code; it is the same as 'codigo'. Just for iGeo's internal functions. Don't use it.
String	codigoSecundario	Secondary code for the customer. e.g.: internal codification of the company.
String	comoNosHaConocido	Code of the text stating how you heard about us. Accepted values by default: 'BUSCADOR' (browser), 'WEB' (website), 'PRENSA' (press), 'RADIO' (radio), 'TELEVISION' (television), 'AMIGO' (friend), 'FACHADA' (billboard), 'LABOR_COMERCIAL' (sales outreach), 'PUBLICIDAD_IMPRESA' (print advertising), 'BOCA_OREJA' (word of mouth) 'EMAILING' (email marketing), 'ADWORDS' (Adwords), 'OTROS' (other), 'NETWORKING' (networking)
String	detallesComoNosHaConocido	Description of how you heard about us.
String	subCuenta	Accounting subaccount, type '43000023'.
String	url	URL of the customer's website.
String	estado	Client Status.

		Accepted values: 'ACTIVO' (active), 'INACTIVO' (inactive)
String	motivoInactivo	Inactivity reason.
String	importadoDesde	Origin of the importation.
String	nombreEnvio	Name of the person, company or public administration that receives or sends the invoices.
String	direccionEnvio	First line of the address containing the street, number and first data of the address.
String	distritoEnvio	District area where invoices are sent.
String	codigoPostalEnvio	Postcode where invoices are sent.
String	localidadEnvio	Town where invoices are sent.
String	nombrePaisEnvio	Country where invoices are sent.
String	telefonoEnvio	Phone number where invoices are sent.
String	codigoProvinciaEnvio	Code of region where invoices are sent. e.g.: Madrid = 28, Barcelona = 8.
String	nombreProvinciaEnvio	Name of region where invoices are sent.
String	atencionAEnvio	Person who must receive the invoice. 'To the attention of' field.
String	observacionesFacturacion	Private notes on this invoice.
String	datosImportacion	Importation data.
String	emailsDondeEnviarFacturas	Emails where invoices are sent.

String	riesgoEconomico	Text with the economic risk of the client: Accepted values: 'SEGURO' (safe), 'BAJO' (low), 'MEDIO' (medium), 'ALTO' (high'), 'MUY_ALTO' (very high)
Boolean	sepaFirmado	If the SEPA is signed.
BigDecimal	coste	Cost.
BigDecimal	rentabilidad	Profitability.
BigDecimal	beneficio	Profit.
BigDecimal	totalVentas	Total sales.
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days), 'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days), 'variasFechas' (different customized dates) 'd30y90' (within 30 and 90 days)
String	diasDePago	Days of the month when the customer pays. e.g.: '10', '20' of each month. 'ultimo' to choose the last day of the month and 'cuandoToque' doesn't adjust the payment to a fixed day.
String	diasDeFacturacion	Days of the month when the customer issues invoices.

		e.g.: '10,20' of each month. 'ultimo' to choose the last day of the month and 'cuandoToque' doesn't adjust the invoices to a fixed day.
String	fechaPuntualFactura	One-time invoicing date.
Date	fechaEmisionPuntual	One-time invoicing emission date.
String	variasFechasFactura	Several invoicing dates.
Long	nDiasEmisionRecibo1	In case the customer pays within n days, the first period. e.g.: within 20 days.
Long	nDiasEmisiónRecibo2	In case the customer pays within n days, the second period. e.g.: within 40 days.
Long	nDiasEmisionRecibo3	In case the customer pays within n days, the third period. e.g.: within 80 days.
Long	nDiasEmisionRecibo4	In case the customer pays within n days, the fourth period. e.g., within 100 days.
Long	nDiasEmisión Recibo5	In case the customer pays within n days, the fifth period. e.g.: within 120 days.
Long	nDiasEmisionRecibo6	In case the customer pays within n days, the sixth period. e.g.: within 140 days.
Long	nDiasEmisiónRecibo7	In case the customer pays within n days, the seventh period. e.g.: within 180 days.
Long	nDiasEmisionRecibo8	In case the customer pays within n days, the eighth period. e.g.: within 210 days.
Long	nDiasEmisionRecibo9	In case the customer pays within n days, the ninth

		period. e.g.: within 240 days
Long	nDiasEmisionRecibo10	In case the customer pays within n days, the tenth period. e.g.: within 260 days.
Long	nDiasEmisionRecibo11	In case the customer pays within n days, the eleventh period e.g.: within 280 days.
Long	nDiasEmisionRecibo12	In case the customer pays within n days, the twelfth period e.g.: within 300 days.
Boolean	permiteValidarCertificados	If allows certificates validation.
String	codigoComoProveedor	Supplier code, in case it is also a supplier.
Long	contadorNumeroDeCliente	Customer's numeric code, but without letters, only numbers.
String	emailsDondeEnviarPresupuestos	Emails for sending quotes.
String	formaFacturacion	Invoicing methods. Accepted values: 'Puntual' (one-time. A single invoice for the whole contract), 'Periodica' (periodic, Multiple invoices with a specific frequency), 'sobreServicio' (on service. An invoice for each planned service), 'Recapitulativa' (summary. No invoices are generated, they will be created whenever you want, and the services performed until that moment will be included.)
Boolean	generarFacturasAPlazoVenci	If invoices for this customer

	do	must be issued in arrears.
Integer	numeroFacturasAEmitir	Number of invoices for emission.
String	codigoZonaComercial	Commercial area code.
Date	fechaBaja	Deactivation or blocking date.
String	perdidoCompetidor	Which competitor took this customer.
Boolean	tcNecesarios	If the customer is up to date with Social Security taxes. Informative nature. Only applies to Spain.
String	grupoRegistroIVACodigo	Codification for VAT grouping.
String	grupoRegistroIVADescpcion	Description for VAT grouping.
String	partidalva	Eleven digits code for companies identification. Only applies on Italy.
String	codigoOrigenCliente	Customer origin code
Boolean	usaNPS	Customer satisfaction survey (NPS)
Boolean	usaNPSTiempoReal	For NPS surveys, true to be completed at the end of the work order, false to be completed by e-mail with a link
'datosFacturacion' { }	datosFacturacion	billing data address. See table below
'actividad' { }	actividad	activity. See table below
'datosBaseDelegacion' { }	datosBaseDelegacion	branch. See table below
'gestionadoPor' { }	gestionadoPor	managed by. See table below
'idioma' { }	idioma	language. See table below
'datosContacto' { }	datosContacto	client contact details. See table below

'personaContacto' { }	personaContacto	contact person. See table below
'datosClienteFacturae' { }	datosClienteFacturae	client electronic invoicing data. See table below
Collection of 'cuentas' [{}]	cuentas	Collection of bank accounts. See table below
Collection of 'lineasRetencionGlobal' [{}]	lineasRetencionGlobal	Collection of withholdings, only for Italy, Brazil or Portugal. See table below

'actividad' { } (Activity)

Type	Name	Description
Long	id	ID codification.
String	nombre	Name.
String	codigo	Code.
String	tipoEmpresa	Company classification.

'cuentas' [{}] (Bank accounts)

Type	Name	Description
String	iban	International Bank Account Number.
String	nombre	Name.
Boolean	activa	If this account is active or not.
String	codigo	Code.

'datosBaseDelegacion' { } (Branch)

Type	Name	Description
String	nombre	Name.
String	codigo	Code.

String	cif	Branch VAT number.
--------	-----	--------------------

‘datosClienteFacturae’ { } (Client electronic invoicing data)

Type	Name	Description
Boolean	facturae_activada	Active/inactive electronic invoicing.
String	facturae_canalEnvio	Shipping channel.
Long	facturae_customerId	ID codification for the customer.
String	facturae_dir3	Electronic invoicing address line 0.
String	facturae_dir31	Electronic invoicing address line 1.
String	facturae_dir32	Electronic invoicing address line 2.
String	facturae_dir33	Electronic invoicing address line 3.
String	facturae_dir34	Electronic invoicing address line 4.
String	facturae_direccionOficinaContable	Electronic invoicing address accounting office address.
String	facturae_direccionOrganoGestor	Electronic invoicing management office address.
String	facturae_denominacionUnidadTramitadora	Electronic invoicing name for the processing section.

‘datosContacto’ { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.

String	fax	Fax number.
--------	-----	-------------

'datosFacturacion' { } (Billing data address)

Type	Name	Description
String	nombreFacturacion	Billing data name
String	codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	City/town.
String	provincia	Province (county, district).
String	codigoProvincia	Province (county, district) code. See Appendix
String	alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes
String	pais	Country name.

String	codigoRegion	Region code
--------	--------------	-------------

‘gestionadoPor’ { } (Managed by)

Type	Name	Description
Long	id	Id
String	nombre	Name of the person who manages the entity
String	apellidos	Surname/s.
String	codigoidentificacion	VAT number of the employee who manages the entity
String	codigoEmpleado	Code of the employee who manages the entity

‘idioma’ { } (Language)

Type	Name	Description
String	codigo	Language codification.
String	nombre	Name.

‘personaContacto’ { } (Contact person)

Type	Name	Description
String	nombre	Name.
String	movil	Mobile phone number.
String	telefono	Phone number.
String	email	Email address.
String	cargo	Position in the company, building or public administration.
Boolean	esLaPrincipal	If is the principal.

String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	Town/City.
String	numeroFax	Fax number.
provincia' {}	provincia	Province (county, district). See table below

'provincia' {} (Province (county, district))

Type	Name	Description
String	codigo	Province (county, district) code.
Long	id	Province Id
String	nombre	Province (county, district) name.
String	paisId	Country id of province (county, district).

'contrato' {} (Contract)

Type	Name	Description
Long	id	Contract id
String	numero	Contract number
Date	fechaInicio	Contract's start date
Date	fechaFin	Contract's end date
String	codigoIdentificacionContratacionPublica	Tenders' code (for contracts with Public Administration)
String	codigoProyecto	Project code
String	asunto	Subject of this contract

‘cuentaCliente’ { }

Type	Name	Description
Long	id	Client Account id
String	iban	IBAN code
String	codigoBanco	Bank code
String	nombre	Your internal name for this bank account
Boolean	activa	If it is active

‘datosFacturacionEmisor’ { } (Issuer billing Info)

Type	Name	Description
String	nombreFacturacion	Billing data name
String	codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	City/town.
String	provincia	Province (county, district).
String	codigoProvincia	Province (county, district) code. See Appendix
String	alfa2codepais	Two letters country codes. Accepted values: ES, IT,

		FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes
String	pais	Country name.

‘datosFacturacionReceptor’ { } (Customer billing Info)

Type	Name	Description
String	nombreFacturacion	Billing data name
String	codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	City/town.
String	provincia	Province (county, district).
String	codigoProvincia	Province (county, district) code. See Appendix
String	alfa2codepais	Two letters country codes. Accepted values: ES, IT,

		FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes
String	pais	Country name.

'lineas' { }

Type	Name	Description
String	tipo	Type of line
Integer	numero	Invoice line's unique identifier
String	descripcion	Line description. Minimum length: 5 characters.
Double	cantidad	Quantity
Double	precioVenta	Sales price
Double	precioUnitario	Unit price
Double	importeSinIva	Price (VAT excluded)
Double	importe	Total amount (VAT included)
Double	porcentajeImpuesto	VAT percentage
Double	cuota	Amount in VAT currency
String	codigoLineaNegocio	Line of business's code
String	codigoProducto	Product/service code
String	tipoProductoServicio	Type of product/service ('ARTÍCULO' or 'SERVICIO'). Mandatory if codigoProducto is not set.
String	subCuenta	Accounting account

String	nombreSede	Site name
String	codigoSede	Site code
String	numeroPedido	Order number of this line
String	unidadDeMedida	Unit of measurement Accepted values: 'uds', 'l', 'g', 'kg', 'm2', etc.
Boolean	esTangible	Indicates if the line is tangible
Double	importeBruto	Gross amount before VAT and discounts. Mandatory if tipoPrecio is set to "TOTAL"
String	nombreProducto	Invoice line product name
String	claveProductoServicio	Mexico only. Code generated by the SAT within its reference catalog that you must use for your invoice issuance. http://200.57.3.89/PyS/catPyS.aspx
String	TipoGravamen	Italy only. Detail code related to the "Nature" of the operation (Defines the taxes to which it is subject).
String	codigoAgrupacion	Grouping code
Date	fechaAlta	Site registration date
String	direccion2	Site second line of address (building name, flat number, etc.)
String	cifDni	Site VAT number
'datosPostales' { }	datosPostales	Site postal data. See table below

'impuestoConcreto' { }	impuestoConcreto	extra VAT data
'descuento' { }	descuento	Discount
'lineaFacturaRetencionesDto' { }	lineaFacturaRetencionesDto	Withholding applied to this line

'descuento' { } (Discount)

Type	Name	Description
String	motivoDescuento	Reason for the discount
Double	importeDescuento	Amount of the discount
Double	porcentajeDescuento	Percentage of the discount

'impuestoConcreto' { } (extra VAT data)

Type	Name	Description
Double	contador	Meter
String	sufijo	Suffix
'impuesto' { }	impuesto	VAT

'Impuesto'

Type	Name	Description
String	nombre	Global VAT name (E.g., 'VAT')

'lineaFacturaRetencionesDto' { } (Withholding applied to this line)

Type	Name	Description
Integer	orden	Order in which the withholding tax is applied
String	nombre	Withholding tax's name
String	impuesto	Name of the tax to which the withholding is applied

Double	porcentajeRetencion	Percentage applied by the withholding tax
Double	importeRetencion	Amount applied by the withholding tax
String	aplicarSobre	Attribute to indicate the concept to which the withholding tax is applied
Double	importe	Final amount of the withholding tax
Double	base	Base amount for calculating the withholding tax
String	tipoFactor	Mexico only. Indicates if the withholding is calculated as a percentage of the taxable base, if it is exempt or if it is a fixed amount. Possible values: 'PORCENTAJE' (Percentage), 'IMPORTE' (Amount), 'EXENTO' (Exempt);

'datosPostales' { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	alfa2codepais	Country Code eg: 'ES'

'lineasImpuestos' { }

Type	Name	Description
String	nombreImpuesto	VAT name
Double	porcentajeImpuesto	Percentage of the specific tax applied

Double	totalLineaImpuesto	Total amount of this tax line
Double	cuota	Amount that is a tax
Double	baseImponible	Total amount to which this tax needs to be applied
String	FacturaALaQuePertenece	Invoice number to which the Tax line belongs

'lineasRetenciones' []

Type	Name	Description
String	numeroFactura	Invoice number
Double	porcentaje	Percentage to apply
Double	totalLineaRetencion	Total amount of the withholding
String	descripcion	Withholding description
String	causa	Italy only. The reason for payment corresponds to that specified by the Italian Treasury.

'recibos' []

Type	Name	Description
Long	id	Internal ID.
String	numeroFactura	Invoice number
Long	orden	Order of the receipt on your invoice based on its due date, starts at 1
boolean	cobrado	Indicates if the invoice has been paid
boolean	devuelto	Indicates if the invoice has been returned
String	metodoPago	Payment Method Map ('See

		Payment Methods Map')
Date	fechaEmision	Issue date
Date	fechaDevolucion	Return date
Date	fechaVencimiento	Due date. Mandatory if nDias is not set.
Double	importe	Final amount (including withholding)
Double	importeSinRetenciones	Amount without withholdings
String	notas	Comments
Double	importeFactura	Total amount of the invoice
Date	fechaPago	Payment date
String	subcuentaCliente	Customer's accounting account
String	codigoCliente	Customer code
String	nombreCliente	Customer's name
String	codigoDelegacion	Branch code
String	numeroIdentificacionCliente	Customer's VAT number
String	tipoTarjeta	Type of card (Credit/Debit, etc.)
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days), 'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days), 'variasFechas' (different customized dates)

		'd30y90' (within 30 and 90 days)
Long	nDias	Number of days after which the receipt will become outstanding after the invoice has been issued. Mandatory if fechaVencimiento is not set.
cuentaBancaria' { }	cuentaBancaria	Bank Account
cuentaBancariaCliente' { }	cuentaBancariaCliente	Client Bank Account

'cuentaBancaria' { } (Bank Account)

Type	Name	Description
String	codigoBanco	Bank code
String	iban	IBAN code
String	swiftCode	Swift code
String	nombre	Internal name for this bank account
Boolean	activa	Indicates if the bank account is active
String	cuentaContable	Accounting account

'cuentaBancariaCliente' { } (Client Bank Account)

Type	Name	Description
String	codigoBanco	Bank code
String	iban	IBAN code
String	swiftCode	Swift code
String	nombre	Internal name for this bank account
Boolean	activa	Indicates if the bank account is active

String	cuentaContable	Accounting account
--------	----------------	--------------------

‘serieFacturacion’ { }

Type	Name	Description
Integer	contador	Meter
String	prefijo	Prefix
String	sufijo	Suffix
String	letra	Letter
Boolean	esParaRectificativas	For amending invoices
String	nombre	Name
Boolean	esPrehistorica	Prehistoric
Boolean	esLaPrincipal	Main
Long	serieFacturacionRectificativaId	ID of the corresponding amending SerieFacturacion (invoicing series)
Boolean	reseteoAnual	Annual reset
Boolean	timbradoConIgeo	Postmarking with iGEO
String	tipoFacturas	Invoice type
Boolean	esParaFacturasCreditoAR	Argentinian invoicing information
String	identificadorEnSistemaTimbrado	Postmarking system's ID
‘impuestoConcretoForzado’ { }	impuestoConcretoForzado	Mandatory tax for this billing series
‘datosBaseDelegacion’ { }	datosBaseDelegacion	Branch

‘datosBaseDelegacion’ { } (Branch)

Type	Name	Description
String	nombre	Name.

String	codigo	Code.
String	cif	Branch VAT number.

'impuestoConcretoForzado' { }

Type	Name	Description
Double	valor	Value
String	nombre	Name
'impuesto' { }	impuesto	VAT

'Impuesto'

Type	Name	Description
String	nombre	Global VAT name (E.g., 'VAT')

'venta' { } (Sale)

Type	Name	Description
Long	id	Sale id
String	numeroVenta	Sale number
Date	asunto	Subject of this sale

Payload: 'Factura' (invoice)

```
{
  "claseEntidadIgeo": "FACTURA",
  "idEntidadIgeo": 2020473,
  "codigoEntidadIgeo": "P-20-948",
  "parentId": 582248,
  "parentCode": "914",
  "comando": "CREATE",
  "fecha": "09/09/2021 09:32:24",
  "datos": {
    "cif": null,
```

```

"numeroFactura": "P-20-948",
"numero": 948,
"fechaRegistro": "31/07/2020 00:00:00",
"fechaEmision": "31/07/2020 00:00:00",
"fechaVencimiento": "31/07/2020 00:00:00",
"facturaANombreDe": "ALAMOS 3, S.L.",
"facturaANumeroCliente": "914",
"importeSinImpuestos": 1066.700663,
"importe": 1290.710000,
"formaCobro": "d60",
"metodoPago": "DB",
"numeroFacturaCorregida": null,
"nombreLineaNegocio": "Control de plagas",
"codigoLineaNegocio": "CP",
"cuota": 224.010000,
"datosEnvioFacturacionEmisor": {
  "nombreFacturacion": "EMPRESA EMISORA, S.L.",
  "codigoIdentificacion": "B55677100",
  "direccion": "C/ Los santos, 12 1º",
  "codigoPostal": "03002",
  "localidad": "Alicante",
  "provincia": "Alicante/Alacant",
  "codigoProvincia": "ES-A",
  "alfa2codepais": "ES",
  "pais": "España",
  "comuna": null,
  "regimenFiscal": null
},
"datosEnvioFacturacionReceptor": {
  "nombreFacturacion": "ALAMOS 3, S.L.",
  "codigoIdentificacion": "B45637573",
  "direccion": "C/ GERONIMA, 7",
  "codigoPostal": "03503",
  "localidad": "BENIDORM",
  "provincia": "Alicante/Alacant",
  "codigoProvincia": "ES-A",
  "alfa2codepais": "ES",
  "pais": "España",
  "comuna": null,
  "regimenFiscal": null
},

```

```

"comuna": null,
"acteco": null,
"simulaUnicaLineaFactura": false,
"descripcionLineaUnica": "",
"tipoFactura": "NORMAL",
"folioUUID": null,
"datosPreSellado": null,
"datosPostSellado": null,
"datosSelladoOriginal": null,
"contrato": {
  "numero": "LEG-317",
  "delegacion": null,
  "fechaInicioPeriodoFacturacion": null,
  "fechaFinPeriodoFacturacion": null,
  "fechaInicio": "01/03/2020 00:00:00",
  "fechaFin": "28/02/2021 00:00:00",
  "codigoIdentificacionContratacionPublica": null,
  "codigoProyecto": null,
  "numeroDePedido": null,
  "id": 744495,
  "empresaId": null,
  "parentId": null,
  "parentCode": null
},
"venta": {
  "numeroVenta": null,
  "fechaVenta": null,
  "delegacion": null,
  "fechaInicioPeriodoFacturacion": null,
  "fechaFinPeriodoFacturacion": null,
  "numeroDePedido": null,
  "id": null,
  "empresaId": null,
  "parentId": null,
  "parentCode": null
},
"cuentaCliente": {
  "codigoBanco": "0049",
  "iban": "ES2000496689092212621512",
  "swiftCode": null,
  "nombre": "PRINCIPAL",

```

```

"activa": null,
"cuentaContable": null,
"bancoGenericoDto": {
  "nombre": null,
  "prefijoIban": null,
  "codigoSwift": null,
  "cif": null,
  "id": null,
  "empresaId": null,
  "parentId": null,
  "parentCode": null
},
"id": 112587,
"empresaId": null,
"parentId": null,
"parentCode": null
},
"cliente": {
  "codigo": "914",
  "emailFacturacion": null,
  "codigoTerminoPago": "d60",
  "codigoFormaPago": "TR",
  "diasPago": null,
  "diasEmisionRecibo": null,
  "fechaAlta": "27/03/2020 00:00:00",
  "tipoCliente": "EMPRESA",
  "nombre": "HOTEL LA ALAMEDA",
  "apellidos": "",
  "observaciones": "Obs del cliente.",
  "fechaAltaPotencial": null,
  "numeroDeCliente": "914",
  "codigoSecundario": "",
  "comoNosHaConocido": "OTROS",
  "detallesComoNosHaConocido": "",
  "subCuenta": "",
  "url": "",
  "estado": "ACTIVO",
  "motivoInactivo": null,
  "importadoDesde": "",
  "nombreEnvio": "ALAMOs 6, S.L.",
  "direccionEnvio": "C/ GERONIMA, 7",

```

```
"distritoEnvio": "",
"codigoPostalEnvio": "03503",
"localidadEnvio": "BENIDORM",
"nombrePaisEnvio": "España",
"telefonoEnvio": "",
"codigoProvinciaEnvio": "ES-A",
"nombreProvinciaEnvio": "Alicante/Alacant",
"idProvinciaEnvio": 3,
"atencionAEnvio": "",
"observacionesFacturacion": "",
"datosImportacion": null,
"emailsDondeEnviarFacturas": "st@hotellaalameda.es",
"riesgoEconomico": null,
"sepaFirmado": false,
"coste": 153.08,
"rentabilidad": 93.30,
"beneficio": 2130.85,
"totalVentas": 2283.93,
"formaCobro": "d60",
"diasDePago": "",
"diasDeFacturacion": "",
"fechaPuntualFactura": null,
"fechaEmisionPuntual": null,
"variasFechasFactura": null,
"nDiasEmisionRecibo1": null,
"nDiasEmisionRecibo2": null,
"nDiasEmisionRecibo3": null,
"nDiasEmisionRecibo4": null,
"nDiasEmisionRecibo5": null,
"nDiasEmisionRecibo6": null,
"nDiasEmisionRecibo7": null,
"nDiasEmisionRecibo8": null,
"nDiasEmisionRecibo9": null,
"nDiasEmisionRecibo10": null,
"nDiasEmisionRecibo11": null,
"nDiasEmisionRecibo12": null,
"permiteValidarCertificados": null,
"codigoComoProveedor": "",
"contadorNumeroDeCliente": null,
"emailsDondeEnviarPresupuestos": "",
"formaFacturacion": null,
```

```

"generarFacturasAPlazoVencido": false,
"numeroFacturasAEmitir": 0,
"requiereLlevarFacturasImpresos": false,
"esIntracomunitario": false,
"zonaComercial": "BELROY",
"codigoZonaComercial": null,
"fechaBaja": null,
"perdidoCompetidor": null,
"codigosClasificacion": null,
"nombresClasificacion": null,
"grupoRegistroIVACodigo": null,
"grupoRegistroIVADescripcion": null,
"actividad": {
  "id": null,
  "nombre": "Hotel",
  "codigo": "HOTE",
  "tipoEmpresa": "PRIVADA"
},
"codigoActividad": null,
"codigoDelegacion": null,
"gestionadoPor": {
  "id": 11692,
  "nombre": "Ramon ",
  "apellidos": "Riveros",
  "alias": null,
  "codigoIdentificacion": "43534544H",
  "codigoEmpleado": "11"
},
"codigoGestionadoPor": null,
"idioma": {
  "nombre": null,
  "codigo": null
},
"codigoIdioma": null,
"datosContacto": {
  "telefono": "965850212",
  "movil": "",
  "email": "st@hotellaalameda.es",
  "fax": ""
},
"personaContacto": {

```

```

"nombre": "JUAN PEREZ",
"movil": "634234443",
"fax": null,
"telefono": "",
"email": "st@hotellaalameda.es",
"cargo": "Servicios Técnicos",
"esLaPrincipal": null,
"direccion": "",
"codigoPostal": "",
"localidad": "",
"numeroFax": "",
"provincia": {
  "id": null,
  "nombre": null,
  "codigo": null,
  "paisId": null
},
"id": null,
"empresaId": null,
"parentId": 582248,
"parentCode": "914"
},
"datosEnvioFacturacion": {
  "nombreFacturacion": "ALAMOS 6, S.L.",
  "codigoIdentificacion": "B3434333",
  "direccion": "C/ GERONIMA, 7",
  "codigoPostal": "03503",
  "localidad": "BENIDORM",
  "provincia": "Alicante/Alacant",
  "codigoProvincia": "ES-A",
  "alfa2codepais": "ES",
  "pais": "España",
  "comuna": null,
  "regimenFiscal": null
},
"datosClienteFacturae": {
  "facturae_activada": false,
  "facturae_canalEnvio": null,
  "facturae_customerId": null,
  "facturae_dir3": null,
  "facturae_dir31": null,

```

```

    "facturae_dir32": null,
    "facturae_dir33": null,
    "facturae_dir34": null,
    "facturae_direccionOficinaContable": null,
    "facturae_direccionOrganoGestor": null,
    "facturae_denominacionUnidadTramitadora": null
  },
  "fechaBloqueo": null,
  "cuentaBancariaPreferida": null,
  "comuna": null,
  "acteco": null,
  "figuraJuridica": null,
  "codigoFiguraJuridica": null,
  "codigoIdentificativoDestinatarioFacturaE": null,
  "partidaIva": null,
  "emailNotificacionesCertificadas": null,
  "datosBaseDelegacion": {
    "id": null,
    "nombre": "Delegación principal",
    "codigo": "",
    "cif": ""
  },
  "id": 582248,
  "empresaId": 1030,
  "parentId": null,
  "parentCode": null
},
"serieFacturacion": {
  "id": 10772,
  "empresaId": 1030,
  "contador": 123,
  "prefijo": "P-21-",
  "sufijo": "",
  "letra": "P",
  "esParaRectificativas": false,
  "nombre": "Plagas",
  "impuestoConcretoForzado": null,
  "esPrehistorica": false,
  "esLaPrincipal": true,
  "serieFacturacionRectificativaId": 10773,
  "reseteoAnual": false,

```

```

    "timbradoConIgeo": false,
    "tipoFacturas": null,
    "esParaFacturasCreditoAR": null,
    "identificadorEnSistemaTimbrado": null,
    "datosBaseDelegacion": {
      "id": null,
      "nombre": "Delegación principal",
      "codigo": "",
      "cif": ""
    }
  },
  "lineas": [
    {
      "tipo": "TRATAMIENTO",
      "numero": 1,
      "descripcion": "Seguimiento del Programa de Control Integrado  
de Plagas Factura de Marzo 2020 a Febrero de 2021",
      "dimension1": "",
      "dimension2": "",
      "cantidad": 12.00,
      "precioVenta": 1066.70,
      "precioUnitario": 88.891700,
      "importeSinIva": 1066.700663,
      "importe": 1290.710663,
      "porcentajeImpuesto": 21.00,
      "codigoLineaNegocio": null,
      "codigoProducto": "PCIP",
      "tipoProductoServicio": "TRATAMIENTO",
      "claveProductoServicio": null,
      "subCuenta": "",
      "numeroPedido": null,
      "unidadDeMedida": null,
      "descuento": null,
      "cuota": 224.010000,
      "impuestoConcreto": {
        "impuesto": {
          "nombre": "IVA"
        },
        "nombre": "IVA Regular",
        "valor": 21.00
      },
    },
  ],

```

```

    "esTangible": false,
    "importeBruto": 1066.700663,
    "lineaFacturaRetencionesDto": [],
    "codigoSede": "914",
    "nombreSede": "HOTEL LOS ALAMOS"
  }
],
"lineasImpuestos": [
  {
    "nombreImpuesto": "IVA Regular",
    "porcentajeImpuesto": 21.000000,
    "totalLineaImpuesto": 1290.710000,
    "cuota": 224.010000,
    "baseImponible": 1066.700663,
    "facturaALaQuePertenece": "P-20-948"
  }
],
"lineasRetenciones": [],
"recibos": [
  {
    "id": 2074146,
    "numeroFactura": "P-20-948",
    "cobrado": true,
    "devuelto": false,
    "metodoPago": "TR",
    "fechaEmision": "07/09/2021 15:33:53",
    "fechaDevolucion": null,
    "fechaVencimiento": "30/09/2020 00:00:00",
    "importe": 1290.710000,
    "importeSinRetenciones": null,
    "notas": "",
    "importeFactura": 1290.710000,
    "fechaPago": "07/09/2021 15:33:00",
    "cuentaBancaria": {
      "codigoBanco": "0081",
      "iban": "ES92-00811452270001001405",
      "swiftCode": "BSABESBBXXX",
      "nombre": null,
      "activa": true,
      "cuentaContable": null,
      "bancoGenericoDto": {

```

```

    "nombre": "Banco De Sabadell, S.A.",
    "prefijoIban": "0081",
    "codigoSwift": "BSABESBBXXX",
    "cif": null,
    "id": null,
    "empresaId": null,
    "parentId": null,
    "parentCode": null
  },
  "id": 66706,
  "empresaId": 1030,
  "parentId": null,
  "parentCode": null
},
"cuentaBancariaCliente": {
  "codigoBanco": "0049",
  "iban": "ES2000490444092212621544",
  "swiftCode": "BSCHESMMXXX",
  "nombre": null,
  "activa": true,
  "cuentaContable": null,
  "bancoGenericoDto": {
    "nombre": "Banco Santander, S.A.",
    "prefijoIban": "0049",
    "codigoSwift": "BSCHESMMXXX",
    "cif": null,
    "id": null,
    "empresaId": null,
    "parentId": null,
    "parentCode": null
  },
  "id": 112587,
  "empresaId": 1030,
  "parentId": 582248,
  "parentCode": "914"
},
"subcuentaCliente": "",
"codigoCliente": "914",
"nombreCliente": "ALAMOS 6, S.L.",
"codigoDelegacion": "",
"numeroIdentificacionCliente": "B66687544",

```

```

        "tipoTarjeta": null,
        "formaCobro": "Transferencia",
        "nDias": 60,
        "orden": 1
    }
],
"datosBaseEmpresa": {
    "id": 1030,
    "cif": null,
    "nombre": "EMPRESA EMISORA, S.L.",
    "dominio": "empresaemisora"
},
"fechaInicioPeriodoFacturacion": null,
"fechaFinPeriodoFacturacion": null,
"urlDocumentos": [],
"metodoPagoMexico": "PPD",
"codigoUsoCFDI": null,
"datosTimbradoChile": {
    "folio": null,
    "tipoDte": null,
    "pdf": null,
    "xml": null,
    "datosPresellado": null
},
"puntoDeVenta": null,
"renovablePuntual": "RENOVABLE",
"frecuenciaFacturacion": null,
"formaFacturacion": "Puntual",
"numeroOrdenesPrevistas": null,
"seLeAplicanRetenciones": false,
"codigoMotivoAnulacion": null,
"cbuArgentina": null,
"referenciaTransferencia": null,
"identificadorEnSistemaTimbrado": null,
"hashSoft": null,
"permalink": null,
"codigoDivisa": "EUR",
"pieFactura": "",
"numeroDePedido": null,
"configuracionTimbradoPorFicheroGenericoDto": null,
"configuracionTimbradoPorTokenGenericoDto": null,

```

```

"datosBaseDelegacion": {
  "id": null,
  "nombre": "Delegación principal",
  "codigo": "",
  "cif": ""
},
"numeroPedido": "",
"nDiasEmisionRecibo1": null,
"nDiasEmisionRecibo2": null,
"nDiasEmisionRecibo3": null,
"nDiasEmisionRecibo4": null,
"nDiasEmisionRecibo5": null,
"nDiasEmisionRecibo6": null,
"nDiasEmisionRecibo7": null,
"nDiasEmisionRecibo8": null,
"nDiasEmisionRecibo9": null,
"nDiasEmisionRecibo10": null,
"nDiasEmisionRecibo11": null,
"nDiasEmisionRecibo12": null,
"estaCobrada": true,
"metodoCobroEfectivo": null,
"anulada": false,
"facturaPDF": null,
"id": 2020473,
"empresaId": 1030,
"parentId": 582248,
"parentCode": "914"
"odtsAsociadas": ["N12", "N13"]
}
}

'PROVEEDOR' ('VENDOR')
{
  "comando": "CREATE",
  "codigoEntidadIgeo": "PRO-101",
  "idEntidadIgeo": 10001,
  "claseEntidadIgeo": "PROVEEDOR",
  "parentId": "",
  "parentCode": "",
  "datos": {
    "nombreFacturacion": "Proveedor de biocidas SL",

```

```
"codigoIdentificacion": "B-3423534",
"direccion": "C/ Ramiro I, 4",
"codigoPostal": "34231",
"localidad": "Jaca",
"provincia": "Huesca",
"codigoProvincia": null,
"alfa2codepais": "es",
"pais": "España",
"telefono": null,
"movil": null,
"email": null,
"fax": null,
"codigo": "PRO-101",
"nombre": "Proveedor Biocidas",
"emailFacturacion": null,
"codigoTerminoPago": null,
"codigoFormaPago": null,
"cuentas": [
  {
    "codigoBanco": "AA",
    "iban": "ES12328232332032323233",
    "swiftCode": "43423",
    "nombre": "santandar",
    "activa": true,
    "cuentaContable": "2334234"
  }
],
"fechaAlta": "22/12/2019",
"tipoProveedor": null,
"subtipoProveedor": null,
"observaciones": null,
"numeroDeProveedor": null,
"subCuenta": null,
"url": null,
"estado": null,
"motivoInactivo": null,
"importadoDesde": null,
"formaCobro": null,
"diasDePago": null,
"diasDeFacturacion": null,
"formaFacturacion": null,
```

```

    "fechaBaja": null,

    "codigoIdioma": null
  }
}

'COMPRA' ('PURCHASE')
{
  "comando": "CREATE",
  "codigoEntidadIgeo": "CO-101",
  "idEntidadIgeo": 10001,
  "claseEntidadIgeo": "COMPRA",
  "parentId": 1,
  "parentCode": "PRO-101",
  "datos": {
    "numeroFactura": "F1-2020",
    "fechaRegistro": "24/11/2020",
    "fechaEmision": "24/11/2020",
    "fechaVencimiento": null,
    "facturaANombreDe": null,
    "facturaANumeroCliente": null,
    "importeSinImpuestos": null,
    "importe": 121,
    "formaCobro": null,
    "metodoPago": null,
    "numeroFacturaCorregida": null,
    "codigoLineaNegocio": null,
    "cuota": 21,
    "datosEnvioFacturacionEmisor": {
      "nombreFacturacion": "Proveedor de biocidas SL",
      "codigoIdentificacion": "B-3423534",
      "direccion": "C/ Ramiro I, 4",
      "codigoPostal": "34231",
      "localidad": "Jaca",
      "provincia": "Huesca",
      "codigoProvincia": null,
      "alfa2codepais": "es",
      "pais": null
    },
    "datosEnvioFacturacionReceptor": {
      "nombreFacturacion": "Empresa de Control de Plagas SL",

```

```

"codigoIdentificacion": "B4534344",
"direccion": "",
"codigoPostal": "",
"localidad": "",
"provincia": "",
"codigoProvincia": null,
"alfa2codepais": "es",
"pais": null
},
"tipoGasto": "COMPRA",
"lineas": [
  {
    "tipo": null,
    "numero": 1,
    "descripcion": "descripcion de la linea",
    "dimension1": null,
    "dimension2": null,
    "cantidad": 10,
    "precioUnitario": 11,
    "importeBruto": 100,
    "motivoDescuento": null,
    "importeDescuento": 10,
    "porcentajeDescuento": null,
    "precioVenta": 100,
    "importeSinIva": 100,
    "importe": 121,
    "cuota": 21,
    "porcentajeImpuesto": 21,
    "codigoLineaNegocio": null,
    "codigoProducto": "PD3434",
    "tipoProductoServicio": null,
    "subCuenta": null,
    "numeroPedido": null,
    "unidadDeMedida": "uds",
    "esTangible": null
  }
],
"lineasRetenciones": [
  {
    "porcentaje": 0,
    "totalLineaRetencion": 0,

```

```

        "baseImponible": 0,
        "descripcion": "descripcion de la retencion",
        "subcuenta": "subcuenta",
        "fecha": "24/11/2020"
    }
],
"recibos": [
    {
        "id": 1,
        "numeroFactura": "F1-2020",
        "cobrado": true,
        "metodoPago": null,
        "fechaEmision": "24/11/2020",
        "fechaVencimiento": "24/11/2020",
        "importe": 0,
        "importeSinRetenciones": 0,
        "notas": "notas",
        "importeFactura": 0,
        "cuentaBancaria": {
            "codigoBanco": "AA",
            "iban": "ES2032323233",
            "swiftCode": "43423",
            "nombre": "nombre",
            "activa": true,
            "cuentaContable": "2334234"
        },
        "orden": 1
    }
],
"fechaInicioPeriodoFacturacion": null,
"fechaFinPeriodoFacturacion": null,
"renovablePuntual": null,
"frecuenciaFacturacion": null,
"formaFacturacion": null
}
}

```

‘Jornada Laboral’ (work day record)

Type	Name	Description
------	------	-------------

'empleado' {}	empleado	Employee to whom this workday belongs
Date	hora	Hour of record the work day
Date	horaOriginal	Hour of record the work day
String	ipAddress	Ip address of person who records the work day
String	longitud	Longitude on the map
String	latitud	Latitude on the map
String	tipo	Type of work day record (START, PAUSE, RESTART, FINISH)
Integer	total	Total record of time of work day recorded in seconds, only showed in record with type FINISHED

'Orden de trabajo' (work order)

Type	Name	Description
Long	id	Identifier.
String	numero	WO number or code
String	nombreFamilia	Name of the family to whom the product belongs.
String	nombreComercial	Product's trade name.
String	tiempoActuacion	Time the product takes to work since applied
Date	horaInicioEstimada	WO's estimated start date and time
Date	horaFinEstimada	WO's estimated end date and time
Date	horaInicioReal	WO's real start date and time
Date	horaFinReal	WO's real end date and time

String	notaInterna	Internal note for communication
String	notaPublica	Public note for the customer containing recommendations or any other kind of information
String	estado	WO's status
String	estadoAsignacion	WO's status of communication to the customer
Date	fechaConfirmacion	Date in which the Technical Manager has validated the work order
String	codigoEmpleadoCompletado	Code of the employee closing the work order
String	codigoEmpleadoConfirmado	Code of the employee validating the work order
String	tipoOdT	Type of WO
String	horaInicioBloqueo	Date and time when the first time window during which this WO may be executed starts
String	horaFinBloqueo	Date and time when the first time window during which this WO may be executed ends
String	horaInicioBloqueo2	Date and time when the second time window during which this WO may be executed starts
String	horaFinBloqueo2	Date and time when the second time window during which this WO may be executed ends
Date	fechaBloqueo	Date (with no time) when this WO must be executed
String	diaSemanaBloqueo	List of weekdays when this

		WO may be executed
String	otrosBloqueos	Free text to describe other WO's execution restrictions
Long	duracion	WO's planned/final duration
Double	coste	This WO's total cost for the pest control company
Boolean	esLaPrimera	To indicate whether it is the contract's first WO (Only for exports)
String	ipCierre	IP address where the WO is finished
Date	horaCierre	Date and time when the technician finishes the WO
Double	latitudCierre	GPS coordinate (latitude) where the WO is closed
Double	longitudCierre	GPS coordinate (longitude) where the WO is closed
Boolean	certificadoEnviado	Boolean to indicate whether the certificate has already been emailed
Double	productividad	WO's price (calculated based on the prices °indicated in the contract/sale)
Double	beneficio	Real profit of this WO (productivity - cost)
Double	rentabilidad	Profitability obtained from this WO once validated (%)
Date	horaInicioEstimadaOriginal	WO's estimated start date and time when the WOs were generated based on the contract/sale
Date	horaFinEstimadaOriginal	WO's estimated end date and time when the WOs were generated based on the contract/sale

String	tipoOrdenAdicional	If it is a WO of type 'ADICIONAL' ('additional'), which accepts the following values: 'CON_COSTE' ('chargeable'), 'AVISO' ('alert'), 'PROACTIVA' ('proactive')
String	modalidad	type of contract to which this WO belongs Accepted values: 'PUNTUAL' ('one-time'), 'MANTENIMIENTO' ('maintenance')
Boolean	periodoIntensivo	Boolean indicating whether this WO will be executed in an intensive period
Boolean	revisadoPlanificacion	Not used
Date	fechaValidezTratamiento	In some countries, it is necessary to indicate the maximum validity date of the services executed in this WO
Date	fechaPrimeraEjecucion	Date in which the WO was executed for the first time. A work order may be unexecuted and re-executed later, but the date in which it was converted to 'EJECUTADA' ('executed') the first time is kept
String	resumenOperaciones	Code indicating the number of 3 possible operation types. Format Type: A(3) P(1) M(4) indicates that there are three analysis operations, one execution protocol, and four maintenance operations. Only for exports
String	plantillaCertificadoCodigo	Certificate template code.
'cliente' {}	cliente	Customer Minimum info. See

		table below
'sede' { }	sede	Minimum info on Customer Site. See table below
'contrato' { }	contrato	Contracts Minimum Info. See table below
'venta' { }	venta	Sale's minimum Info. See table below
'lineaNegocio' { }	lineaNegocio	line of Business's Minimum info. See table below
'delegacion' { }	delegacion	Branch office's Minimum info. See table below
'zonaComercial' { }	zonaComercial	Commercial area's minimum info. See table below
'proveedor' { }	proveedor	Vendor's minimum info. See table below
'lineasProducto' [{ }]	lineasProducto	Product Line Minimum info. See table below
'horarios' [{ }]	horarios	List of planned or executed timetables. See table below
'lineasTratamiento' [{ }]	lineasTratamiento	minimum information on a Treatment line. See table below
'operaciones' [{ }]	operaciones	Collection of Minimum Operation Data. See table below
'preguntasRespuestas' [{ }]	preguntasRespuestas	Collection of Questions & Answers. See table below

'cliente' { } (Customer Minimum info)

Type	Name	Description
Long	id	id
String	nombre	name
String	codigo	code

String	codigoSecundario	Secondary Code
String	codigoidentificacion	Identification Code

‘contrato’ { } (Contracts Minimum Info)

Type	Name	Description
Long	id	Id
String	numero	Number
Date	fechaInicio	Beginning date
Date	fechaFin	Ending Date

‘delegacion’ { } (Branch office’s Minimum info)

Type	Name	Description
Long	id	Id
String	nombre	Name
String	codigo	Code
String	cif	Vat Number

‘horarios’ [{ }] (List of planned or executed timetables)

Type	Name	Description
Long	id	Id of the timetables
String	codigoTecnico	Code of the employee/technician executing this slot.
Date	horaInicioReal	Date and time when the technician actually started this execution slot. It is mandatory when the work order status is EJECUTADA or VERIFICADA. It is also mandatory when the status is

		CANCELADA, but only if there is no estimated start time (horaInicioEstimada).
Date	horaFinReal	Date and time when the technician actually finished this execution slot. It is mandatory when the work order status is EJECUTADA or VERIFICADA. It is also mandatory when the status is CANCELADA, but only if there is no estimated end time (horaFinEstimada).
Date	horaInicioEstimada	Date and time when the technician is expected to start this execution slot. It is mandatory when the work order status is PENDIENTE_EJECUTAR. It is also mandatory when the status is CANCELADA, but only if there is no actual start time (horaInicioReal).
Date	horaFinEstimada	Date and time when the technician is expected to finish this execution slot. It is mandatory when the work order status is PENDIENTE_EJECUTAR. It is also mandatory when the status is CANCELADA, but only if there is no actual end time (horaFinReal).
Integer	minutosDesplazamiento	Minutes it took the technician to arrive to the WO's site address

'lineaNegocio' { } (line of Business's Minimum info)

Type	Name	Description
Long	id	Id

String	nombre	Name
String	codigo	Code

‘lineasProducto’ [{ }] (Product Line Minimum info)

Type	Name	Description
Long	id	Product id
String	codigoProducto	Product code
BigDecimal	consumo	Amount to be consumed/already consumed
String	uomConsumo	Unit of consumption (l, ml, cc, kg, g, etc.)
String	codigoTratamientoAsociado	Code of the service to which this product is linked
String	materiaActiva	Name of the active matter and concentration %
String	numeroRegistro	Registration number
String	plazoSeguridad	Safety period
String	dosificacion	Dosage
String	metodoAplicacion	Application method (multiple values, explained below)
String	lote	Product's lot number
Date	fechaCaducidad	Expiry date
zonas' [{ }]	zonas	Collection of ‘zonas’ minimum information of premises' area
String	instalacion	Instalation of product where it workas like a circuit or different kind ok instalation

‘zonas’[{}] (Areas)

Type	Name	Description
String	nombre	Name/code of the Area
String	descripcion	Short description of the Area

‘lineasTratamiento’ [{ }] (minimum information on a Treatment line)

Type	Name	Description
Long	id	Service/treatment's id
String	nombre	Service/treatment's name.
String	codigo	Internal code for this line
zonas' [{ }]	zonas	Collection of ‘zonas’ minimum information of premises' area

‘zonas’ [{ }] (minimum information on the Install Area)

Type	Name	Description
String	nombre	Name/code of the Area
String	descripcion	Short description of the Area

‘operaciones’ [{ }] (Collection of Minimum Operation Data)

Type	Name	Description
Long	id	id
String	tipoOperacion	Operation type's code
String	estado	Operation status Accepted values: 'PENDIENTE'(pending), 'FINALIZADA'(finished)
String	codigoEntidad	Code of the entity on which this operation is executed

Long	idEntidad	DB ID of the entity on which this operation is executed
String	codigoGrupo	Code of the group to which this type of operation belongs
String	codigoSubgrupo	Code of the subgroup to which this type of operation belongs
String	instrucciones	This operation's specific instructions
String	nombre	Operation's name
Long	duracion	This operation's estimated duration
String	observaciones	Operation's notes

`preguntasRespuestas` [{ }] (Collection of Questions & Answers)

Type	Name	Description
Long	id	Identifier
String	pregunta	Question
String	codigoPregunta	Question code
String	respuesta	Response
Integer	orden	Order
TipoRespuestaOdt	tipoRespuesta	Type of WO response; Accepted values: YES_NO, TEXTO_LARGO, ENTERO, DECIMAL

`proveedor` { } (Vendor's minimum info)

Type	Name	Description
Long	id	Id

String	nombre	Name
String	codigo	Code
String	cif	Vat Number

‘sede’ { } (Minimum info on Customer Site)

Type	Name	Description
Long	id	id
String	nombre	name
String	codigo	code
String	direccion	Address (street and number)
String	direccion2	Second line of address (building name, flat number, etc.)
String	codigoPostal	Postal code
String	localidad	City/town
String	codigoProvincia	Province (county, district) code
String	codigoRegion	Region code
String	pais	Country name
String	alfa2codepais	Country Code eg: ‘ES’
String	latitud	GPS Latitude
String	longitud	GPS Longitude

‘venta’ { } (Sale’s minimum Info)

Type	Name	Description
String	numero	Number
Date	fecha	Date
String	numeroDePedido	Purchase Order

‘zonaComercial’ {} (Commercial area’s minimum info)

Type	Name	Description
Long	id	Id
String	nombre	Name
String	codigo	Code

Payload: ‘Orden de trabajo’ (work order)

```
{
  "claseEntidadIgeo": "ORDEN_DE_TRABAJO",
  "idEntidadIgeo": 17318910,
  "codigoEntidadIgeo": "294971",
  "comando": "CREATE",
  "fecha": "20/05/2024 14:39:41",
  "datos": {
    "id": 17318910,
    "numero": "294971",
    "cliente": {
      "id": 518534,
      "codigo": "00000",
      "nombre": "FAB CARAMELOS 1",
      "codigoSecundario": "",
      "codigoIdentificacion": "65435343A"
    },
    "sede": {
      "id": 2103150,
      "nombre": " S.E.D.E.X. - NRBQ",
      "codigo": "171613",
      "direccion": "C/Madrid 5",
      "direccion2": "Izquierda, 4C",
      "codigoPostal": "28001",
      "localidad": "Madrid",
      "codigoProvincia": "ES-M",
      "codigoRegion": "13",
      "pais": "España",
      "alfa2codepais": "ES",
      "latitud": "40.4149638",
```

```

    "longitud": "-3.7109379"
  },
  "contrato": {
    "id": 1881459,
    "numero": "5381-2023",
    "fechaInicio": "04/07/2023 00:00:00",
    "fechaFin": "03/07/2024 00:00:00"
  },
  "lineaNegocio": {
    "id": 10225,
    "nombre": "Control de plagas",
    "codigo": "CP"
  },
  "delegacion": {
    "id": 10039,
    "nombre": "Delegación principal - BIOP",
    "codigo": "DP"
  },
  "zonaComercial": {
    "id": 10638,
    "nombre": "Avila 1",
    "codigo": ""
  },
  "lineasProducto": [],
  "horarios": [
    {
      "id": 26688553,
      "codigoTecnico": "JOAQ",
      "horaInicioReal": "20/05/2024 16:37:02",
      "horaFinReal": "20/05/2024 16:39:19",
      "horaInicioEstimada": "20/05/2024 08:00:00",
      "horaFinEstimada": "20/05/2024 09:00:00"
    }
  ],
  "lineasTratamiento": [
    {
      "id": 21710976,
      "nombre": "Tratamiento de Avispas",
      "zonas": [],
      "codigoTratamiento": "dfdre"
    }
  ]

```

```

],
"operaciones": [],
"avisos": [],
"horaInicioEstimada": "20/05/2024 08:00:00",
"horaFinEstimada": "20/05/2024 09:00:00",
"horaInicioReal": "20/05/2024 16:37:02",
"horaFinReal": "20/05/2024 16:39:19",
"notaInterna": "",
"estado": "VERIFICADA",
"estadoAsignacion": "CERRADA",
"codigoEmpleadoCompletado": "JOAQ",
"codigoEmpleadoConfirmado": "011212",
"tipoOdT": "PREVISTA",
"diaSemanaBloqueo": "2,3",
"duracion": 137000,
"coste": 0.84,
"esLaPrimera": false,
"ipCierre": "2.139.216.26",
"horaCierre": "20/05/2024 16:39:19",
"latitudCierre": 40.4488192,
"longitudCierre": 40.4488192,
"certificadoEnviado": false,
"productividad": 416.67,
"beneficio": 415.83,
"rentabilidad": 99.8,
"horaInicioEstimadaOriginal": "20/05/2024 08:00:00",
"horaFinEstimadaOriginal": "20/05/2024 09:00:00",
"periodoIntensivo": false,
"revisadoPlanificacion": false,
"fechaValidezTratamiento": "06/05/2024 05:40:00",
"fechaPrimeraEjecucion": "20/05/2024 16:37:02",
"preguntasRespuestas": []
}
}

```

'Linea tratamiento ODT' (treatment line)

Type	Name	Description
String	codigo	Service line code
	codigoTratamiento	Treatment / Service code

String	nombre	Name
String	codigoLineaVenta	Contract line code
String	descripcion	Treatment description
String	indicacionesEjecucion	Execution instructions
Collection of 'zonas' [{}]	zonas	Areas to be treated. See table below.

'zonas' [{}] (Areas to be treated)

Type	Name	Description
String	nombre	Name
String	descripcion	Description

Payload: 'Linea tratamiento ODT' (treatment line)

```

"claseEntidadIgeo": "LINEA_TRATAMIENTO_ODT",
"idEntidadIgeo": 37281491,
"codigoEntidadIgeo": "PRU",
"comando": "UPDATE",
"fecha": "18/11/2025 16:47:35",
"parentCode": "247691"
"codigoDelegacion": "B"
"datos": {
  "id": 37281491,
  "nombre": "Tratamiento especial contra acaros",
  "codigo": "PRU",
  "zonas": [
    {
      "id": 60503957,
      "nombre": "jardín",
      "descripcion": ""
    },
    {
      "id": 60503956,
      "nombre": "Parqueadero",
      "descripcion": ""
    }
  ]
}

```

```

    }
  ],
  "descripcion": "esto es un tratamiento especial contra acaros",
  "indicacionesEjecucion": "este tratamiento siempre hay que hacerlo
con mascarillas",
  "codigoTratamiento": "ACARS"
},
"empresaId": 130
}

```

‘OrdenDeTrabajoRevisiones’ (WO’s Inspections)

Type	Name	Description
String	codigoRevision	REV_<WO number or code>
String	numeroOdt	WO number or code
‘tipoPuntoControl’ [{}]	tiposPuntoControl	Types of control point

‘tiposPuntoControl’ [{}] (Types of control point)

Type	Name	Description
String	codigoTipoPto	Control point type code
String	nombreTipoPto	Name of the type of control point
String	finalidadTipoPto	Purpose of the Type of control point Accepted values: 'CEBO' (bait), 'CAPTURA' (capture)
puntosControlRevisados [{}]	puntosControlRevisados	control points checked

‘puntosControlRevisados’ [{}] (control points checked)

Type	Name	Description
String	codigoPto	Control point code
revisiones	revisiones	Inspections

'revisiones' [{}] (Inspections)

Type	Name	Description
Boolean	actividad	For bait, if there has been consumption
String	codigoEmpleado	Technician code
String	estadoDeConservacion	State of conservation Accepted values: 'BIEN' (Good), 'MAL' (Bad), 'REGULAR' (Fair)
Date	fechaRevision	inspection date
Boolean	hayIncidencia	Incidents
Boolean	inaccesible	Inaccessible/missing
String	metodoLectura	if read by QR or NFC Accepted values: 'QR', 'NFC'
String	observaciones	Notes
Boolean	seCambiaElCebo	Replacement of device
Boolean	seSustituyeDispositivo	Replacement of device
Especies	especies	Species
Respuestas	respuestas	Responses

'respuestas' [{}] (Answers)

Type	Name	Description
String	codigoPregunta	question code
String	pregunta	question
String	respuesta	response

'Especies' [{}] (Species)

Type	Name	Description
------	------	-------------

Long	id	id
Long	revisionId	Inspection id
String	texto	Specie text (name)
String	genero	gender Accepted values: 'M' (male), 'H' (female)
String	edad	age Accepted values: 'J' (Young), 'A' (Adult)
Double	valor	value (quantity)

Payload: 'OrdenDeTrabajoRevisiones' (WO's Inspections)

```
{
  "datos": {
    "numeroOdt": "1221081",
    "codigoRevision": "REV_1221081",
    "tiposPuntoControl": [
      {
        "codigoTipoPto": "ER",
        "nombreTipoPto": "Estacion Roedor",
        "finalidadTipoPto": "CEBO",
        "puntosControlRevisados": [
          {
            "codigoPto": "ER-86",
            "revisiones": [
              {
                "especies": [],
                "actividad": false,
                "respuestas": [
                  {
                    "pregunta": "Nivel Actividad",
                    "respuesta": "0",
                    "codigoPregunta": "NA"
                  },
                  {
                    "pregunta": "Cebo Repuesto ",

```

```

        "respuesta": "SI",
        "codigoPregunta": "CR"
    },
    ],
    "inaccesible": false,
    "fechaRevision": "28/03/2025
11:29:01",

    "hayIncidencia": false,
    "metodoLectura": null,
    "observaciones": null,
    "codigoEmpleado": "1234",
    "seCambiaElCebo": false,
    "estadoDeConservacion": "BIEN",
    "seSustituyeDispositivo": false
    }
    ]
    }
    ]
    },
    "fecha": "28/03/2025 11:41:11",
    "comando": "CREATE",
    "parentId": null,
    "empresaId": 130,
    "parentCode": null,
    "idEntidadIgeo": 26071241,
    "claseEntidadIgeo": "REVISION_ODT",
    "codigoEntidadIgeo": "1221081"
}

```

'OrigenCliente' (Customer origin)

Type	Name	Description
String	nombre	Name
String	tipo	Customer origin type
String	codigo	Code
String	notas	Notes

String	email	Email
String	telefono	Phone number
String	movil	Customer's mobile number
String	codigoZonaComercial	Commercial area code
String	alias	Alias
String Collection []	codigosDelegaciones	Branch codes
'datosFacturacion' { }	datosFacturacion	Invoicing data. See table below

'datosFacturacion' { } (Billing data address)

Type	Name	Description
String	nombreFacturacion	Billing data name
String	codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	City/town.
String	provincia	Province (county, district).
String	codigoProvincia	Province (county, district) code. See Appendix
String	alfa2codepais	Two letters country codes. Accepted values: ES,

		IT, FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes
String	pais	Country name.

Payload: 'OrigenCliente' (Customer origin)

```
{
  "claseEntidadIgeo": "ORIGEN_CLIENTE",
  "idEntidadIgeo": 51983,
  "codigoEntidadIgeo": "TestOrigen",
  "parentId": null,
  "parentCode": null,
  "codigoDelegacion": null,
  "comando": "CREATE",
  "fecha": "26/01/2026 15:08:48",
  "datos": {
    "id": 51983,
    "nombre": "Paula",
    "tipo": "Comercial",
    "codigo": "TestOrigen",
    "notas": "testtttt",
    "email": "biop@biopplagas.com",
    "telefono": "12346565",
    "movil": "98955814",
    "codigoZonaComercial": "madnor",
    "alias": null,
    "codigosDelegaciones": [
      "DG",
      "ACQ",
      "06378",
      "10001",
      "DN",
    ]
  }
}
```

```

"DS",
"DSN",
"DE",
"MEJOR",
"DP",
"28803",
"LR-T",
"AND",
"BRA",
"MADE",
"123"
],
"datosFacturacion": {
  "nombreFacturacion": "Paula2",
  "codigoIdentificacion": "09592548",
  "direccion": "Calle Vigo",
  "codigoPostal": "28805",
  "localidad": "Alcalá De Henares",
  "provincia": "Madrid",
  "codigoProvincia": "ES-M",
  "alfa2codepais": "ES",
  "pais": "España",
  "comuna": null,
  "regimenFiscal": null,
  "acteco": null,
  "giro": null,
  "codigoLocalidad": null,
  "inscripcionLocalidad": null,
  "codigoFacturacionElectronica": null,
  "barrio": null,
  "telefono": null,
  "registroEstatal": null,
  "codigoIdentificativoDestinatarioFacturaE": null,
  "direccion2": null,
  "personaContacto": null
}
}
}

```

'Proveedor' (vendor)

Type	Name	Description
String	estado	vendors: Accepted values: Status: 'ACTIVO' ('active'), 'INACTIVO' ('inactive')
String	nombre	Name
String	proveedorOAcreeedor	vendor or creditor Accepted values: 'PROVEEDOR' ('vendor'), 'ACREEDOR' ('creditor')
String	tipoProveedor	Provider type: Accepted values (comma-separated for multiple values): 'MATERIAL' ('Materials'), 'SERVICIOS' ('Services'), 'SUBCONTRATA' (('Subcontractor'))
String	codigo	Provider Code
String	codigoFormaPago	Payment Form code
String	codigoGrupoRegistroIVA	VAT registration group code
String	emailEnvioRecogidaMuestras	Email to submit sample collections
String	estadoEvaluacion	Assessment status. Accepted values: 'EN_PRUEBAS' ('Test in progress'), 'APROBADO' ('Passed'), 'ISO9001' ('ISO 9001 certification'), 'NO_APTO' ('Unfit')
String	etiquetas	Tags
Date	fechaAlta	Creation date

Date	fechaEvaluacion	Vendor's assessment date for ISO 9001 standard
Date	fechaReevaluacion	Vendor's Reassessment date for ISO 9001 standard
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days), 'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days), 'variasFechas' (different customized dates) 'd30y90' (within 30 and 90 days)
BigDecimal	importeMinimoCompra	Minimum purchase amount
BigDecimal	importeMinimoPortesGratis	Minimum amount Free Shipping
String	numeroDeProveedor	Provider Number
String	numRegistroBiocidas	Biocide record no.
String	observaciones	observations
Integer	pagoANDias	N days payment
String	subCuenta	Accounting subaccount
String	subtipoProveedor	If any of the tiposProveedor is SERVICIOS this field is mandatory. In any other case it shall not be used. Provider subtypes Accepted values (comma-separated for

		multiple values): 'SUMINISTROS' (Supplies), 'MANTENIMIENTOS' (Maintenance operations), 'LABORATORIO' (Lab), 'GESTION_DE_RESIDUOS' (Waste management), 'TRANSPORTE_DE_RESIDUOS' (Waste transportation)
'cuentas' { }	cuentas	Vendor's banking accounts. See table below
'datosContacto' { }	datosContacto	Client contact details. See table below
'datosFacturacion' { }	datosFacturacion	Invoicing data. See table below
'personaContacto' { }	personaContacto	Contact person. See table below

'cuentas' [{}] (Bank accounts)

Type	Name	Description
String	iban	International Bank Account Number.
String	nombre	Name.
Boolean	activa	If this account is active or not.
String	codigo	Code.

'datosContacto' { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.

String	email	Email address.
String	fax	Fax number.

‘datosFacturacion’ { } (Billing data address)

Type	Name	Description
String	nombreFacturacion	Billing data name
String	codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	City/town.
String	provincia	Province (county, district).
String	codigoProvincia	Province (county, district) code. See Appendix
String	alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes

		des
String	pais	Country name.

'personaContacto' { } (Contact person)

Type	Name	Description
String	nombre	Name.
String	movil	Mobile phone number.
String	telefono	Phone number.
String	email	Email address.
String	cargo	Position in the company, building or public administration.
Boolean	esLaPrincipal	If is the principal.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	Town/City.
String	numeroFax	Fax number.
provincia' { }	provincia	Province (county, district). See table below

'provincia' { } (Province (county, district))

Type	Name	Description
String	codigo	Province (county, district) code.
Long	id	Province Id
String	nombre	Province (county, district) name.
String	paisId	Country id of province (county, district).

Payload: 'Proveedor' (vendor)

```
{
  "claseEntidadIgeo": "PROVEEDOR",
  "idEntidadIgeo": 96716,
  "codigoEntidadIgeo": "PEX",
  "comando": "CREATE",
  "fecha": "25/04/2024 15:12:59",
  "datos": {
    "codigo": "PEX",
    "codigoFormaPago": "ME",
    "cuentas": [],
    "fechaAlta": "25/04/2024 00:00:00",
    "tipoProveedor": "SERVICIOS",
    "subtipoProveedor": "MANTENIMIENTOS",
    "nombre": "PROVIDER EXAMPLE",
    "observaciones": "",
    "numeroDeProveedor": "0",
    "subCuenta": "409",
    "estado": "ACTIVO",
    "formaCobro": "inmediata",
    "idioma": {},
    "datosFacturacion": {
      "nombreFacturacion": "PROVIDER EXAMPLE",
      "codigoIdentificacion": "123456789",
      "direccion": "C/ Alcala 525",
      "codigoPostal": "28027",
      "localidad": "Madrid",
      "provincia": "Madrid",
      "codigoProvincia": "ES-M",
      "alfa2codepais": "ES",
      "pais": "España"
    },
  },
  "datosContacto": {
    "telefono": "",
    "movil": "",
    "email": "",
    "fax": ""
  },
  "personaContacto": {
    "nombre": "YO",
    "telefono": "",
  }
}
```

```

    "email": "",
    "cargo": "",
    "provincia": {},
    "parentId": 96716,
    "parentCode": "0"
  },
  "proveedorOAcreeedor": "PROVEEDOR",
  "id": 96716,
  "empresaId": 130
}

```

‘Sede’ (site)

Type	Name	Description
String	nombre	Site name
String	codigo	Site Code
String	codigoCliente	Code of customer to whom site belongs
String	codigoDelegacion	Branch office code
String	estado	Status: Accepted values: 'ACTIVO' ('active'), 'INACTIVO' ('inactive')
String	direccion2	Second line of address (building name, flat number, etc.)
String	distrito	District / block where the site is.
Date	fechaAlta	Site registration date
Date	fechaBloqueo	Site's block date
String	codigoSecundario	Secondary code
String	zonaComercial	Name of commercial area
String	codigoZonaComercial	Code of commercial area
Double	latitud	GPS Latitude

Double	longitud	GPS Longitude
Double	distanciaDelegacionSede	Distance from the branch office to this site (in km)
String	motivoInactivo	Cause of inactivity
Date	fechaBaja	Date of conversion to 'inactive'
String	personaContacto	Name of main contact's person
String	telefonoPersonaContacto	Phone number of main contact's person
String	horarios	Schedules authorised by this site
String	m2	Total square meters of the site surface
String	m3	Site total cubic meters
Boolean	notificarCliente	If the customer needs to be notified before an appointment
String	cifDni	Site VAT number
String	auditUsuario	Username who creates this Site
Date	auditDate	Date in which this Site is created
String	auditIpAddress	IP Address from which it is created
String	correoElectronicoMarketing	Email address used for marketing communications
String	tipo	Real Customer Site or Prospect Site. Accepted values: CLIENTE (real) CLIENTE_POTENCIAL (prospect)
String	emailIncidencias	Email address for reporting

		incidents.
Long	numeroSede	Numerical identifier for a specific location or office number.
String	emailsNotificacionesParteDeTrabajo	Email addresses for work report notifications.
String	emailsNotificacionesCertificadoDeServicio	Email addresses for service certificate notifications.
String	observaciones	General field for observations or comments.
String	notaInternaParaTrabajosFuturos	Internal note for future jobs
Boolean	incluirPlanoEnCertificadoServicio	Flag to include a plan in the service certificate. Default is FALSE.
String	formaNotificarSedeCliente	Method of notifying the client's office location. Accepted values: TELEFONO (phone) EMAIL CARTA (postal mail) FAX
Integer	diasAntelacionNotificacion	Number of days in advance for sending notifications.
String	horaInicioBloqueo	Start time for a blocking or reservation period (slots in which it is allowed to execute jobs)
String	horaFinBloqueo	End time for a blocking or reservation period (slots in which it is allowed to execute jobs)
String	horaInicioBloqueo2	Alternative start time for a secondary blocking period.
String	horaFinBloqueo2	Alternative end time for a secondary blocking period.
String	diasBloqueo	Specific days allocated for

		blocking or reservation (days when it is mandatory to execute jobs)
'actividad' { } OBSOLETE	actividad	OBSOLETE Maintained for backward compatibility only. activity. See table below
'datosBaseDelegacion' { }	datosBaseDelegacion	branch. See table below
'datosPostalesEnvio' { }	datosPostalesEnvio	Postal data for sending invoices. See table below
'datosPostales' { }	datosPostales	Site postal data. See table below
'datosContacto' { }	datosContacto	Contact Info. See table below
'zonas' [{ }]	zonas	Collection of Areas. See table below
'actividad' { }	actividad	OBSOLETE Type of activity. See table below
'datosBaseDelegacion' { }	datosBaseDelegacion	branch. See table below
'idioma' { } OBSOLETE	idioma	OBSOLETE Maintained for backward compatibility only. language. See table below

'actividad' { } (Activity)

Type	Name	Description
Long	id	ID codification.
String	nombre	Name.
String	codigo	Code.
String	tipoEmpresa	Company classification.

'datosBaseDelegacion' { } (Branch)

Type	Name	Description
------	------	-------------

String	nombre	Name.
String	codigo	Code.
String	cif	Branch VAT number.

‘datosContacto’ { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

‘datosPostales’ { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	pais	Country name
String	codigoProvincia	Province (county, district) code
String	alfa2codepais	Country Code eg: ‘ES’
String	codigoRegion	Region code

‘datosPostalesEnvio’ { } (Postal data Invoicing Info)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code

String	localidad	City/town
String	pais	Country name
String	codigoProvincia	Province (county, district) code
String	alfa2codepais	Country Code eg: 'ES'

'gestionadoPor' { } (Managed by)

Type	Name	Description
Long	id	Id
String	nombre	Name of the person who manages the entity
String	apellidos	Surname/s.
String	codigoidentificacion	VAT number of the employee who manages the entity
String	codigoEmpleado	Code of the employee who manages the entity

'idioma' { } (Language)

Type	Name	Description
String	codigo	Language codification.
String	nombre	Name.

'zonas' [{}] (Areas)

Type	Name	Description
String	nombre	Name/code of the Area
String	descripcion	Short description of the Area

Payload: 'Sede' (site)

```
{
  "claseEntidadIgeo": "SEDE",
  "idEntidadIgeo": 3659931,
  "codigoEntidadIgeo": "172277",
  "parentId": 554157,
  "parentCode": "170863",
  "comando": "CREATE",
  "fecha": "20/05/2024 11:33:42",
  "datos": {
    "numeroSede": 172277,
    "emailsNotificacionesParteDeTrabajo": "",
    "emailsNotificacionesCertificadoDeServicio": "",
    "observaciones": "",
    "notaInternaParaTrabajosFuturos": "",
    "incluirPlanoEnCertificadoServicio": false,
    "emailEnvioFacturas": "",
    "datosPostalesEnvio": {
      "direccion": "",
      "codigoPostal": "",
      "localidad": ""
    },
    "zonas": [],
    "correoElectronicoMarketing": "",
    "nombre": "Pepe",
    "codigo": "172277",
    "codigoCliente": "170863",
    "latitud": 46.227638,
    "longitud": 2.213749,
    "estado": "ACTIVO",
    "direccion2": "",
    "personaContacto": "",
    "telefonoPersonaContacto": "",
    "horarios": "",
    "m2": "",
    "m3": "",
    "notificarCliente": false,
    "cifDni": "",
    "distrito": "",
    "tipo": "CLIENTE",
    "datosContacto": {
```

```

    "telefono": "",
    "movil": "",
    "email": "",
    "fax": ""
  },
  "datosPostales": {
    "direccion": "",
    "codigoPostal": "",
    "localidad": "",
    "provincia": "1",
    "alfa2codepais": "FR",
    "pais": "Francia",
    "provinciaId": 4379
  },
  "datosBaseDelegacion": {
    "nombre": "DELEGACIÓN POLO SUR",
    "codigo": "",
    "cif": ""
  },
  "auditUsuario": "nerea@biop",
  "auditDate": "20/05/2024 11:33:42",
  "auditIpAddress": "2.139.216.26",
  "empresaId": 130,
  "parentId": 554157,
  "parentCode": "170863"
}
}

```

10. Import payloads

‘Almacen’ (Warehouse)

Type	Name	Description
String	*! nombre	Warehouse name
String	*! codigo	Code
String	delegaciones	Branch codes separated by commas
Boolean	activo	This warehouse is active. If

		the delegations are empty we will set the active field to false.
String	observaciones	Notes
String	numeroRegistro	Certified warehouse's record number
String	telefono	Phone number
Boolean	permiteRecepcionarPedidos	Authorise receptions of materials in this warehouse
Boolean	registrarTraspasosBiocidasLomb	Transfers of highly-toxic biocide from or to this warehouse should be noted on the biocide use record
'datosPostales' { }	datosPostales	Postal data

'datosPostales' { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	codigoProvincia	Province (county, district) code
String	alfa2codepais	Country Code eg: 'ES'

Payload: 'Almacen' (Warehouse)

```
{
  "tipoEntidadIgeo": "ALMACEN",
  "codigoEntidadIgeo": "principal",
  "comando": "UPDATE",
  "fecha": "20/08/2024 13:03:32",
  "datos": {
    "nombre": "principal",
    "activo": true,

```

```

"observaciones": "Es el almacén principal, el de la nave",
"codigo": "COD31",
"numeroRegistro": "",
"permiteRecepcionarPedidos": false,
"telefono": "",
"datosPostales": {
  "direccion": "calle Ebro",
  "localidad": "Torrejon de ardoz",
  "codigoProvincia": "ES-M",
  "codigoPostal": "28850",
  "alfa2codepais": "ES"
}
}
}

```

‘Cliente’ (customer)

Type	Name	Description
String	*! codigo	Customer code. Must match the ‘codigoEntidadlgeo’ value.
String	*! nombre	Customer's trade name.
String	*! tipoCliente	Customer type. Accepted values: ‘PARTICULAR’ (individual), ‘EMPRESA’ (company), ‘ADMINISTRACION PUBLICA’ (public administration)
String	*! codigoDelegacion	Branch's code.
String	*? codigoActividad	Business activity code.
Date	fechaAlta	Date when customer is registered.
String	apellidos	Surname/s, in case it's a person.
String	observaciones	Customer's private notes.
String	codigoSecundario	Secondary code for the

		customer. e.g.: internal codification of the company.
String	comoNosHaConocido	Code of the text stating how you heard about us. Accepted values by default: 'BUSCADOR' (browser), 'WEB' (website), 'PRENSA' (press), 'RADIO' (radio), 'TELEVISION' (television), 'AMIGO' (friend), 'FACHADA' (billboard), 'LABOR_COMERCIAL' (sales outreach), 'PUBLICIDAD_IMPRESA' (print advertising), 'BOCA_OREJA' (word of mouth) 'EMAILING' (email marketing), 'ADWORDS' (Adwords), 'OTROS' (other), 'NETWORKING' (networking)
String	detallesComoNosHaConocido	Description of how you heard about us.
String	subCuenta	Accounting subaccount, type '43000023'.
String	url	URL of the customer's website.
String	estado	Client Status. Accepted values: 'ACTIVO' (active), 'INACTIVO' (inactive)
String	motivoInactivo	Inactivity reason.
String	importadoDesde	Origin of the importation.
String	nombreEnvio	Name of the person, company or public administration that receives or sends the invoices.

String	direccionEnvio	First line of the address containing the street, number and first data of the address.
String	distritoEnvio	District area where invoices are sent.
String	codigoPostalEnvio	Postcode where invoices are sent.
String	localidadEnvio	Town where invoices are sent.
String	nombrePaisEnvio	Country where invoices are sent.
String	telefonoEnvio	Phone number where invoices are sent.
String	codigoProvinciaEnvio	Code of region where invoices are sent. e.g.: Madrid = 28, Barcelona = 8.
String	atencionAEnvio	Person who must receive the invoice. 'To the attention of' field.
String	observacionesFacturacion	Private notes on this invoice.
String	datosImportacion	Importation data.
String	emailsDondeEnviarFacturas	Emails where invoices are sent.
String	riesgoEconomico	Text with the economic risk of the client: Accepted values: 'SEGURO' (safe), 'BAJO' (low), 'MEDIO' (medium), 'ALTO' (high'), 'MUY_ALTO' (very high)
Boolean	sepaFirmado	If the SEPA is signed.
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days),

		'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days), 'variasFechas' (different customized dates) 'd30y90' (within 30 and 90 days)
String	diasDePago	Days of the month when the customer pays. e.g.: '10', '20' of each month. 'ultimo' to choose the last day of the month and 'cuandoToque' doesn't adjust the payment to a fixed day.
String	diasDeFacturacion	Days of the month when the customer issues invoices. e.g.: '10,20' of each month. 'ultimo' to choose the last day of the month and 'cuandoToque' doesn't adjust the invoices to a fixed day.
String	fechaPuntualFactura	One-time invoicing date.
Date	fechaEmisionPuntual	One-time invoicing emission date.
String	variasFechasFactura	Several invoicing dates.
Long	nDiasEmisionRecibo1	In case the customer pays within n days, the first period. e.g.: within 20 days.
Long	nDiasEmisiónRecibo2	In case the customer pays within n days, the second period. e.g.: within 40 days.
Long	nDiasEmisionRecibo3	In case the customer pays within n days, the third

		period. e.g.: within 80 days.
Long	nDiasEmisionRecibo4	In case the customer pays within n days, the fourth period. e.g., within 100 days.
Long	nDiasEmisión Recibo5	In case the customer pays within n days, the fifth period. e.g.: within 120 days.
Long	nDiasEmisionRecibo6	In case the customer pays within n days, the sixth period. e.g.: within 140 days.
Long	nDiasEmisiónRecibo7	In case the customer pays within n days, the seventh period. e.g.: within 180 days.
Long	nDiasEmisionRecibo8	In case the customer pays within n days, the eighth period. e.g.: within 210 days.
Long	nDiasEmisionRecibo9	In case the customer pays within n days, the ninth period. e.g.: within 240 days
Long	nDiasEmisionRecibo10	In case the customer pays within n days, the tenth period. e.g.: within 260 days.
Long	nDiasEmisionRecibo11	In case the customer pays within n days, the eleventh period e.g.: within 280 days.
Long	nDiasEmisionRecibo12	In case the customer pays within n days, the twelfth period e.g.: within 300 days.
Boolean	permiteValidarCertificados	If allows certificates validation.
String	codigoComoProveedor	Supplier code, in case it is also a supplier.

Long	contadorNumeroDeCliente	Customer's numeric code, but without letters, only numbers.
String	emailsDondeEnviarPresupuestos	Emails for sending quotes.
String	formaFacturacion	Invoicing methods. Accepted values: 'Puntual' (one-time. A single invoice for the whole contract), 'Periodica' (periodic, Multiple invoices with a specific frequency), 'sobreServicio' (on service. An invoice for each planned service), 'Recapitulativa' (summary. No invoices are generated, they will be created whenever you want, and the services performed until that moment will be included.)
Boolean	generarFacturasAPlazoVencido	If invoices for this customer must be issued in arrears.
Integer	numeroFacturasAEmitir	Number of invoices for emission.
Boolean	requiereLlevarFacturasImpresas	If this customer needs to get printed invoices.
String	codigoZonaComercial	Commercial area code.
Date	fechaBaja	Deactivation or blocking date.
String	perdidoCompetidor	Which competitor took this customer.
Boolean	tcNecesarios	If the customer is up to date with Social Security taxes. Informative nature. Only applies to Spain.
String	grupoRegistroIVACodigo	Codification for VAT grouping.

String	codigoGestionadoPor	Code of the employee who manages this client.
String	codigoldioma	Language code ('es_ES', 'en_GB', 'fr_FR', etc.). Defaults to the company Language. The valid values correspond to the languages defined in the company's configuration, specifically in the Primary Language, PDF Language, and Alternate PDF Languages fields. Use Locale Format. These codes are formatted as follows: Language Code (ISO 639-1): A two-letter lowercase identifier for a language. Example: "en" (English), "es" (Spanish), "fr" (French). Country Code (ISO 3166-1 alpha-2): A two-letter uppercase identifier for a country. Example: "US" (United States), "FR" (France), "DE" (Germany). Locale Format (Combination of both): Example: "en_US" (English, United States), "es_ES" (Spanish, Spain), "fr_CA" (French, Canada).
String	partidalva	Eleven digits code for companies identification. Only applies on Italy.
String	emailNotificacionesCertificadas	'Email PEC per l'invio certificato dei documenti'. Just for Italy's electronic invoicing.

String	metodoPago	Payment method code
String	zonaHoraria	Time zone. e.g.: 'Europe/Madrid' or 'America/Argentina/Cordoba' https://en.wikipedia.org/wiki/List_of_tz_database_time_zones
String	codigoZonaFiscal	Fiscal zone code (see in the table of fiscal zone codes)
String	codigoOrigenCliente	Customer origin code
Boolean	usaNPS	Customer satisfaction survey (NPS)
Boolean	usaNPSTiempoReal	For NPS surveys, true to be completed at the end of the work order, false to be completed by e-mail with a link
'datosFacturacion' { }	*! datosFacturacion	billing data address. See table below
'datosContacto' { }	datosContacto	client contact details. See table below
'personaContacto' { }	*CRT personaContacto	contact person. See table below
Collection of 'cuentas' [{}]	*CRT cuentas	Collection of bank accounts. See table below
Collection of 'lineasRetencionGlobal' [{}]	lineasRetencionGlobal	Collection of withholdings, only for Italy, Brazil or Portugal. See table below
'actividad' { } OBSOLETE	actividad	OBSOLETE Maintained for backward compatibility only. activity. See table below
'delegacion' { } OBSOLETE	delegacion	OBSOLETE Maintained for backward compatibility only. branch. See table below

'gestionadoPor' { } OBSOLETE	gestionadoPor	OBSOLETE Maintained for backward compatibility only. managed by. See table below
'idioma' { } OBSOLETE	idioma	OBSOLETE Maintained for backward compatibility only. language. See table below

'actividad' { } (Activity)

Type	Name	Description
String	codigo	Code.

'cuentas' [{}] (Bank accounts)

Type	Name	Description
String	*! iban	International Bank Account Number.
String	*! nombre	Name.
Boolean	*! activa	If this account is active or not.
String	*! codigo	Code.

'delegacion' { } (Branch)

Type	Name	Description
String	codigo	Code.

'datosContacto' { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.

String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

‘datosFacturacion’ { } (Billing data address)

Type	Name	Description
String	*! nombreFacturacion	Billing data name
String	*! codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	*! direccion	Address.
String	*! codigoPostal	Postal code.
String	*! localidad	City/town.
String	*! codigoProvincia	Province (county, district) code. See Appendix
String	*! alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes

		des
--	--	-----

‘gestionadoPor’ { } (Managed by)

Type	Name	Description
String	codigo	Code of the employee who manages the entity,

‘idioma’{ } (Language)

Type	Name	Description
String	codigo	Language codification.

‘personaContacto’ { } (Contact person)

Type	Name	Description
String	*! nombre	Name.
String	*! codigo	Code.
String	movil	Mobile phone number.
String	telefono	Phone number.
String	email	Email address.
String	cargo	Position in the company, building or public administration.
Boolean	esLaPrincipal	If is the principal.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	Town/City.
String	numeroFax	Fax number.
String	codigoProvincia	Province (county, district)

		code.
String	codigoidentificacion	ID codification of the contact person

'lineasRetencionGlobal' [{}] (withholdings)

Type	Name	Description
BigDecimal	*! porcentaje	Percentage to apply
String	*! descripcion	Withholding description. Accepted values Brazil: `PIS`, `COFINS`, `INSS`, `IRRF`, `CSLL`, `ISS`, `ICMS`; Accepted values Italy: `RT01` (Ritenuta persone fisiche), `RT02` (Ritenuta persone giuridiche), `RT03` (Contributo INPS), `RT04` (Contributo ENASARCO), `RT05` (Contributo ENPAM), `RT06` (Altro contributo previdenziale); Accepted values Portugal: Configured per company
String	causa	Withholding cause. only for Italy. Mandatory for Italy. Accepted values: `A` (Prestazioni di lavoro autonomo rientranti nell'esercizio di arte o professione abituale), `B` (Utilizzazione economica,

		da parte dell'autore o dell'inventore, di opere dell'ingegno, di brevetti industriali e di processi, relativi a esperienze acquisite in campo industriale, commerciale o scientifico), 'C' (Utili derivanti da contratti di associazione in partecipazione e da contratti di cointeressenza, quando l'apporto è costituito esclusivamente dalla prestazione di lavoro), 'D' (Utili spettanti ai soci promotori e ai soci fondatori delle società di capitali), 'E' (Levata di protesti cambiari da parte dei segretari comunali), 'G' (Indennità corrisposte per la cessazione di attività sportiva professionale), 'H' (Indennità corrisposte per la cessazione dei rapporti di agenzia delle persone fisiche e delle società di persone, con esclusione delle somme maturate entro il 31.12.2003, già imputate per competenza), 'I' (Indennità corrisposte per la cessazione da funzioni notarili), 'L' (Utilizzazione economica, da parte di soggetto diverso dall'autore o dall'inventore, di opere dell'ingegno, di brevetti industriali e di processi, formule e informazioni relative a esperienze acquisite), 'L_1' (Redditi derivanti dall'utilizzazione economica di opere dell'ingegno, di brevetti industriali e di processi, che sono percepiti
--	--	---

		da soggetti che abbiano acquistato a titolo oneroso i diritti alla loro utilizzazione), 'M' (Prestazioni di lavoro autonomo non esercitate abitualmente, obblighi di fare, di non fare o permettere), 'M_1' (Redditi derivanti dall'assunzione di obblighi di fare, di non fare o permettere), 'M_2' (Prestazioni di lavoro autonomo non esercitate abitualmente per le quali sussiste l'obbligo di iscrizione alla Gestione Separata ENPAPI.), 'N' (Indennità di trasferta, rimborso forfettario di spese, premi e compensi erogati: .. nell'esercizio diretto di attività sportive dilettantistiche), 'O' (Prestazioni di lavoro autonomo non esercitate abitualmente, obblighi di fare, di non fare o permettere, per le quali non sussiste l'obbligo di iscrizione alla gestione separata (Circ. Inps 104/2001)), 'O_1' (Redditi derivanti dall'assunzione di obblighi di fare, di non fare o permettere, per le quali non sussiste l'obbligo di iscrizione alla gestione separata (Circ. INPS n. 104/2001)), 'P' (Compensi corrisposti a soggetti non residenti privi di stabile organizzazione per l'uso o la concessione in uso di attrezzature industriali, commerciali o scientifiche che si trovano nel territorio dello Stato), 'Q' (Provvigioni corrisposte ad agente o rappresentante
--	--	---

		di commercio monomandatario), 'R' (Provvigioni corrisposte ad agente o rappresentante di commercio plurimandatario), 'S' (Provvigioni corrisposte a commissionario), 'T' (Provvigioni corrisposte a mediatore), 'U' (Provvigioni corrisposte a procacciatore di affari), 'V' (Provvigioni corrisposte a incaricato per le vendite a domicilio e provvigioni corrisposte a incaricato per la vendita porta a porta e per la vendita ambulante di giornali quotidiani e periodici (L. 25.02.1987, n. 67)), 'V_1' (Redditi derivanti da attività commerciali non esercitate abitualmente (ad esempio, provvigioni corrisposte per prestazioni occasionali ad agente o rappresentante di commercio, mediatore, procacciatore d'affari)), 'W' (Corrispettivi erogati nel 2015 per prestazioni relative a contratti d'appalto cui si sono rese applicabili le disposizioni contenute nell'art. 25-ter D.P.R. 600/1973), 'X' (Canoni corrisposti nel 2004 da società o enti residenti, ovvero da stabili organizzazioni di società estere di cui all'art. 26-quater, c. 1, lett. a) e b) D.P.R. 600/1973), 'Y' (Canoni corrisposti dal 1.01.2005 al 26.07.2005 da soggetti di cui al punto precedente),
--	--	--

		'Z' (Titulo diverso dai precedenti.* V.≤2020), 'ZO' (Titulo diverso dai precedenti);
--	--	---

Payload: 'Cliente' (customer)

```
{
  "tipoEntidadIgeo": "CLIENTE",
  "codigoEntidadIgeo": "1354",
  "remoteOperationId": "124578 - Testing",
  "comando": "Create",
  "datos": {
    "codigo": "1354",
    "fechaAlta": "30/04/2024 00:00:00",
    "tipoCliente": "EMPRESA",
    "nombre": "Juan",
    "apellidos": "Vasquez",
    "codigoGestionadoPor": "AMAL",
    "observaciones": "ESTO ES UNA PRUEBA",
    "codigoIdioma": "es_ES",
    "comoNosHaConocido": "WEB",
    "detallesComoNosHaConocido": "El punto de usar Lorem Ipsum es
que tiene una distribución más o menos normal de las letras",
    "subCuenta": "7222529",
    "url": "www.pruebas.com",
    "zonaHoraria": "Europe/Madrid",
    "estado": "ACTIVO",
    "motivoInactivo": "Remodelacion",
    "nombreEnvio": "DAVID",
    "direccionEnvio": "calle cabrera",
    "distritoEnvio": "BARRIO NUEVO",
    "codigoPostalEnvio": "28830",
    "localidadEnvio": "BARRIOBUSTO",
    "codigoPaisEnvio": "ES",
    "telefonoEnvio": "+69 45678915",
    "codigoProvinciaEnvio": "ES-NA",
    "atencionAEnvio": "Hola guapi",
    "observacionesFacturacion": "LOREM",
    "emailsDondeEnviarFacturas": "emailfactura@hotmail.com",
    "riesgoEconomico": "MEDIO",
  }
}
```

```

"sepaFirmado": true,
"diasDePago": "2",
"diasDeFacturacion": "5",
"nDiasEmisionRecibo1": "1",
"nDiasEmisionRecibo2": "2",
"codigoSecundario": "00050930",
"codigoComoProveedor": "PRB",
"emailsDondeEnviarPresupuestos": "presupuesto@hotmail.com",
"formaFacturacion": "Puntual",
"prorratioFacturasFechasContrato": "fechasContrato",
"generarFacturasAPlazoVencido": false,
"requiereLlevarFacturasImpresos": true,
"codigoZonaComercial": "NAV",
"fechaBaja": "26/04/2030 00:00:00",
"perdidoCompetidor": "cliente muy moroso",
"grupoRegistroIVACodigo": "NA",
"codigoDelegacion": "DN",
"codigoActividad": "SUPER",
"distrito": "EL POBLADO",
"direccion2": "PISO 5 PUERTA 12",
"gestionadoPor": {
  "codigo": "27846"
},
"datosContacto": {
  "telefono": "912208377",
  "movil": "685412367",
  "email": "cliente_completo2@gmail.com",
  "fax": "912208377"
},
"datosFacturacion": {
  "nombreFacturacion": "GabrielaCA9",
  "codigoIdentificacion": "Z12342678P",
  "direccion": "Calle Ebro",
  "codigoPostal": "28830",
  "localidad": "Torrejon de Ardoz",
  "codigoProvincia": "ES-NA",
  "alfa2codepais": "ES"
}
}
}

```

```

{
  "datos": {
    "codigo": "C12345",
    "estado": "ACTIVO",
    "nombre": "Empresa Ficticia S.A.",
    "fechaAlta": "19/10/2024 00:00:00",
    "delegacion": {
      "codigo": "D001"
    },
    "tipoCliente": "EMPRESA",
    "codigoIdioma": "en_IE",
    "numeroDeCliente": "C12345",
    "codigoSecundario": "SEC98765",
    "datosFacturacion": {
      "pais": "España",
      "direccion": "Calle Falsa 123",
      "localidad": "MEDIO CUDEYO",
      "codigoPostal": "39710",
      "alfa2codepais": "ES",
      "codigoProvincia": "ES-S",
      "nombreFacturacion": "Empresa Ficticia S.A.",
      "codigoIdentificacion": "B12345678"
    }
  },
  "comando": "UPDATE",
  "tipoEntidadIgeo": "CLIENTE",
  "codigoEntidadIgeo": "C12345"
}

```

‘Cliente potencial’ (prospective customer)

Type	Name	Description
String	*! codigoDelegacion	Branch’s code.
String	*! nombre	Customer's trade name.
String	apellidos	Surname/s, in case it’s a person. Mandatory if is person
String	numeroDeCliente	Customer number or code; it is the same as ‘codigo’.

String	tipoCliente	Customer type. Accepted values: 'PARTICULAR' (individual), 'EMPRESA' (company), 'ADMINISTRACION PUBLICA' (public administration) If the command is CREATE and the value is blank ("") or null, the value default value for tipoCliente will be 'EMPRESA' (company)
String	*! codigoGestionadoPor	Code of the employee who manages this client.
String	codigoZonaFiscal	Fiscal zone code (see in the table of fiscal zone codes)
String	*? codigoActividad	Business activity code.
String	codigoldioma	Language code ('es_ES', 'en_GB', 'fr_FR', etc.). Defaults to the company Language. The valid values correspond to the languages defined in the company's configuration, specifically in the Primary Language, PDF Language, and Alternate PDF Languages fields. Use Locale Format. These codes are formatted as follows: Language Code (ISO 639-1): A two-letter lowercase identifier for a language. Example: "en" (English), "es" (Spanish), "fr" (French). Country Code (ISO 3166-1 alpha-2): A two-letter uppercase identifier for a

		country. Example: "US" (United States), "FR" (France), "DE" (Germany). Locale Format (Combination of both): Example: "en_US" (English, United States), "es_ES" (Spanish, Spain), "fr_CA" (French, Canada). If the command is CREATE and the value is blank ("") or null, it will check if there is a value in the language code of the company.
String	codigoOrigenCliente	Customer origin code
String	codigoZonaComercial	Commercial area code.
String []	codigosClasificacionesCliente	A list of string with customer classification codes of this prospective customer
String	comoNosHaConocido	Code of the text stating how you heard about us. Accepted values by default: 'BUSCADOR' (browser), 'WEB' (website), 'PRENSA' (press), 'RADIO' (radio), 'TELEVISION' (television), 'AMIGO' (friend), 'FACHADA' (billboard), 'LABOR_COMERCIAL' (sales outreach), 'PUBLICIDAD_IMPRESA' (print advertising), 'BOCA_OREJA' (word of mouth) 'EMAILING' (email marketing), 'ADWORDS' (Adwords), 'OTROS' (other), 'NETWORKING' (networking)

String	detallesComoNosHaConocido	Description of how you heard about us.
String	estado	Client Status. Accepted values: 'ACTIVO' (active), 'INACTIVO' (inactive) If the command is CREATE and the value is blank ("") or null, the value default value for tipoCliente will be 'ACTIVO' (active)
Date	fechaAlta	Date when customer is registered.
String	url	URL of the customer's website.
Boolean	presupuestosMuestralImpuestosPdf	If is TRUE, muestra los impuestos en el presupuesto en una columna separada
String	tipoOportunidad	Opportunity type: Accepted values by default: 'PROSPECT', 'OPORTUNIDAD'(opportunity)
Long	valorEstimado	Estimated value
String	emailsDondeEnviarPresupuestos	Emails for sending quotes.
String	observaciones	Customer's private notes.
String	razonSocial	Business name
String	codigoidentificacion	Identification code
String	emailsDondeEnviarFacturas	Emails where invoices are sent.
String	motivoInactivo	Inactivity reason.
String	partidalva	Eleven digits code for companies identification. Only applies on Italy.

String	grupoRegistroIVACodigo	Codification for VAT grouping.
String	urlFacebook	customer's Facebook url
String	urlTwitter	customer's X url
String	urlLinkedin	customer's Linkedin url
String	urlInstagram	customer's Instagram url
String	urlWeb	customer's Website url
String	whatsapp	customer's whatsapp
String	urlOtros	Other url
String	distrito	district area
String	direccion2	alternative address
String	telefonoEnvio	billing phone number
String	distritoEnvio	billing data district.
'datosFacturacion' { }	datosEnvio	billing data address. See table below
'datosContacto' { }	datosContacto	client contact details. See table below
'datosPostales' { } (Postal data)	'datosPostales' { } (Postal data)	contact person. See table below

'datosContacto' { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

‘datosEnvio’ { } (Billing data address)

Type	Name	Description
String	*! nombreFacturacion	Billing data name
String	*! codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	*! direccion	Address.
String	*! codigoPostal	Postal code.
String	*! localidad	City/town.
String	*! codigoProvincia	Province (county, district) code. See Appendix
String	*! alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR, BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes

‘datosPostales’ { } (Postal data)

Type	Name	Description
------	------	-------------

String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	*? codigoProvincia	Province (county, district) code. If the Province value is null, it will attempt to retrieve it from the Province of the producing company. If the company which sent the message to the queue province is also null (or the company is not registered), the import will fail.

Payload: 'Cliente potencial' (prospective customer)

```
{
  "tipoEntidadIgeo": "CLIENTE_POTENCIAL",
  "comando": "CREATE",
  "datos": {
    "tipoCliente": "EMPRESA",
    "nombre": "Test iGE0",
    "apellidos": "",
    "codigoGestionadoPor": "33983217G",
    "codigoDelegacion": "02A",
    "codigoZonaFiscal": "ES",
    "codigoActividad": "OFI",
    "codigoIdioma": "es_ES",
    "codigoOrigenCliente": "",
    "codigoZonaComercial": "01AHA014",
    "codigosClasificacionesCliente": [],
    "comoNosHaConocido": "01",
    "detallesComoNosHaConocido": "Como nos conocio detalle empresa"
  },
  "estado": "ACTIVO",
  "fechaAlta": "04/11/2025",
  "url": "https://www.pruebasbiop.com/es-ES/",
  "presupuestosMuestraImpuestosPdf": "true",
  "tipoOportunidad": "",
  "valorEstimado": "2500",
}
```

```

    "emailsDondeEnviarPresupuestos":
"correo1presupuesto@empresa.com, correo2presupuesto@empresa.com",
    "observaciones": "Pruebas importación desde PDI",
    "razonSocial": "razonPruebas Igeo",
    "codigoIdentificacion": "C87845614",
    "emailsDondeEnviarFacturas": "correo1facturas@empresa.com,
correo2facturas@empresa.com",
    "motivoInactivo": "",
    "partidaIva": "",
    "grupoRegistroIVA": "",
    "direccion2": "34",
    "datosPostales": {
        "provincia": "Madrid",
        "codigoProvincia": "ES-M",
        "direccion": "Avenida Guadarrama 15",
        "codigoPostal": "28810",
        "localidad": "Guadalajara",
        "distrito": "Villa Nueva"
    },
    "datosContacto": {
        "telefono": "987654132",
        "movil": "66235458",
        "email": "pruebas123@gmail.com",
        "fax": "35346654"
    },
    "urlFacebook": "https://facebook.com/empresaXYZ",
    "urlLinkedin": "https://linkedin.com/in/maria-rodriguez-UX",
    "urlInstagram": "https://instagram.com/panaderia_del_valle",
    "urlTwitter": "https://twitter.com/market_trends2025",
    "urlWeb": "https://consultoriaprueba.com",
    "urlOtros": "https://pinterest.com/ideascocina",
    "whatsapp": "https://wa.me/34666777888",
    "datosEnvio": {
        "nombreFacturacion": "CONSTRUCCIONES LEGASKO, S.L.",
        "direccion": "Calle de Gran Vía, 45, 1º A",
        "codigoPostal": "28013",
        "localidad": "Madrid",
        "codigoProvincia": "ES-M"
    },
    "distritoEnvio": "Villa Bonita",
    "telefonoEnvio": "6421945630"

```

```

    }
}

```

‘Contacto’ (Contact person)

Type	Name	Description
String	*! nombre	Contact name
String	*! codigo	Contact code
String	*! tipoEntidadPadre	Type parent entity Accepted values: ‘CLIENTE’ (customer), ‘SEDE’ (site), ‘CLIENTE_POTENCIAL’ (potential customer), ‘PROVEEDOR,’ (vendor), ‘ORIGENCLIENTE’ (customer origin)
String	*! codigoEntidadPadre	Code parent entity
String	codigoidentificacion	ID/VAT number
String	movil	Mobile number
String	fax	Fax number
String	telefono	Phone number
String	email	Email
String	cargo	Position
Boolean	esLaPrincipal	Main contact
String	direccion	Address
String	codigoPostal	Postcode
String	localidad	City/town
String	codigoProvincia	County code
String	lineasDeNegocio	Comma-separated codes of the Business Lines linked to

		this contact person
--	--	---------------------

Payload: 'Contacto' (Contact person)

```
{
  "tipoEntidadIgeo": "CONTACTO",
  "codigoEntidadIgeo": "SEDE-987-2",
  "comando": "CREATE",
  "fecha": "10/09/2024 09:07:05",
  "datos": {
    "nombre": "Eleanor Abernathy",
    "movil": "647811000",
    "fax": "769832000",
    "telefono": "967103000",
    "codigo": "SEDE-987-2",
    "email": "bowlarama@gmail.com",
    "cargo": "Vendedora",
    "esLaPrincipal": false,
    "direccion": "Callejón Bowlarama 32",
    "codigoPostal": "28805",
    "localidad": "San Sebastian de los Reyes",
    "codigoProvincia": "ES-S",
    "codigoIdentificacion": "PV74185",
    "tipoEntidadPadre": "SEDE",
    "codigoEntidadPadre": "SP7040",
    "lineasDeNegocio": "CONST, AV"
  }
}
```

'Contrato' (contract)

Type	Name	Description
String	*! numero	Contract number
String	*! codigoCliente	Customer code
String	creadoPorCodigo	Code of the employee creating the contract. Mandatory on create
String	*! lineaNegocioCodigo	Line of business's code

Date	*! fechaInicio	Start date
Date	*! fechaFin	End date
String	notaParaOdt	Notes for the work orders
String	notaParaFacturas	Notes for the invoices
String	observaciones	Comments
String	asunto	Subject of this contract
String	observacionesRenovacion	Comments on renewal of the contract
String	*CRT estado	Status: Accepted values: 'ACTIVO' (Active), 'CADUCADO' (Expired), 'CANCELADO' (Cancelled), 'BORRADOR' (Draft), 'PENDIENTE_ACEPTAR' (Pending acceptance), 'ACEPTADO_PENDIENTE_DE_ACTIVAR' (Accepted pending activation)
String	formaFacturacion	Invoicing methods. CREATE: Mandatory if noGenerarFacturas is false or null. UPDATE: Mandatory if noGenerarFacturas is false Accepted values: 'Puntual' (one-time. A single invoice for the whole contract), 'Periodica' (periodic, Multiple invoices with a specific frequency), 'sobreServicio' (on service. An invoice for each planned service), 'Recapitulativa' (summary. No invoices are generated, they will be created whenever you want, and the services performed until that

		moment will be included.)
String	formaCobro	Collection Method Map ('See Method Collection Map'). Mandatory if formaFacturacion is not 'Recapitulativa'. If formaCobro is "variasFechas", then any of the fechaEmisionPuntualRecibo1 ...12 must be indicated If formaCobro is "variasFechas", then any of the fechaEmisionPuntualRecibo1 ...12 must be indicated
Long	nDiasEmisionRecibo1	First period for 'n days' payment
Long	nDiasEmisionRecibo2	Second period for 'n days' payment
Long	nDiasEmisionRecibo3	Third period for 'n days' payment
Long	nDiasEmisionRecibo4	Fourth period for 'n days' payment
Long	nDiasEmisionRecibo5	Fifth period for 'n days' payment
Long	nDiasEmisionRecibo6	Sixth period for 'n days' payment
Long	nDiasEmisionRecibo7	Seventh period for 'n days' payment
Long	nDiasEmisionRecibo8	Eighth period for 'n days' payment
Long	nDiasEmisionRecibo9	Ninth period for 'n days' payment
Long	nDiasEmisionRecibo10	Tenth period for 'n days' payment

		payment
Long	nDiasEmisionRecibo11	Eleventh period for 'n days' payment
Long	nDiasEmisionRecibo12	Twelfth period for 'n days' payment
Boolean	renovable	Renewable
Boolean	renovacionRequiereAceptacionCliente	Renewal requires express acceptance by the customer
String	descripcionExplicacion	Description/explanation
String	tipologiaContrato	Contract typology Accepted values: 'PUNTUAL' (Single/one-time), 'MANTENIMIENTO' (Maintenance),
String	*CRT metodoPago	Payment Method Map ('See Payment Methods Map'). Mandatory if formaFacturacion is not 'Recapitulativa' If the method of payment is "ME", "CH" or "TJ" (cash, check and card), indicate MetodoCobroEfectivo. If the method of payment is "DB" (direct debit), indicate cuentaBancariaCliente. If the method of payment is "TR" (bank transfer), indicate cuentasBancariasTransferencia.
String	metodoCobroEfectivo	Cash collection method
Boolean	generarOdts	Generate work orders when receiving contract via PDI

String	fechaPuntualFactura	Specific date for issuing single invoice. Mandatory if formaFacturacion is 'Puntual'. Accepted values: 'QUINCE' (15), 'TREINTA' (30), 'CUARENTA_Y_CINCO' (45), 'SESENTA' (60), 'NOVENTA' (90), 'FECHA' (Specific date)
Date	fechaEmisionPuntual	Specific date for issuing single invoice (if chosen). Mandatory if fechaPuntualFactura is 'fecha'
String	variasFechasFactura	Invoice frequency for multiple invoices. Mandatory if formaFacturacion is 'Periodica'. if variasFechasFactura is "variasFechas", then any of the fechaEmisionPuntual1...12 must be indicated
Date	fechaEmisionPuntual1	Specific date for issuing invoice 1.
Date	fechaEmisionPuntual2	Specific date for issuing invoice 2
Date	fechaEmisionPuntual3	Specific date for issuing invoice 3
Date	fechaEmisionPuntual4	Specific date for issuing invoice 4
Date	fechaEmisionPuntual5	Specific date for issuing invoice 5
Date	fechaEmisionPuntual6	Specific date for issuing invoice 6
Date	fechaEmisionPuntual7	Specific date for issuing invoice 7

Date	fechaEmisionPuntual8	Specific date for issuing invoice 8
Date	fechaEmisionPuntual9	Specific date for issuing invoice 9
Date	fechaEmisionPuntual10	Specific date for issuing invoice 10
Date	fechaEmisionPuntual11	Specific date for issuing invoice 11
Date	fechaEmisionPuntual12	Specific date for issuing invoice 12
Date	fechaEmisionPuntualRecibo1	Specific date for customer to pay installment 1
Date	fechaEmisionPuntualRecibo2	Specific date for customer to pay installment 2
Date	fechaEmisionPuntualRecibo3	Specific date for customer to pay installment 3
Date	fechaEmisionPuntualRecibo4	Specific date for customer to pay installment 4
Date	fechaEmisionPuntualRecibo5	Specific date for customer to pay installment 5
Date	fechaEmisionPuntualRecibo6	Specific date for customer to pay installment 6
Date	fechaEmisionPuntualRecibo7	Specific date for customer to pay installment 7
Date	fechaEmisionPuntualRecibo8	Specific date for customer to pay installment 8
Date	fechaEmisionPuntualRecibo9	Specific date for customer to pay installment 9
Date	fechaEmisionPuntualRecibo10	Specific date for customer to pay installment 10
Date	fechaEmisionPuntualRecibo11	Specific date for customer to pay installment 11
Date	fechaEmisionPuntualRecibo12	Specific date for customer to pay installment 12

Integer	diasDePago	Day of the month in which the customer pays
String	diasDeFacturacion	Day of the month on which invoices should be issued
Date	fechaVencimientoPagare	Due date for payment with promissory notes
Date	fechaVencimientoConfirming	Due date for payment with "Confirming"
String	diaSemana	Day of the week in which services can be done.
Boolean	mostrarImporteLineas	Show the amount on every line of the contract
String	condiciones	Terms and conditions
String	prorratioFacturasFechasContrato	Within which period should the invoices be created for the contracts of this customer. Accepted values: fechasContrato (default if null) elegirRangoManualmente hoyHastaFinContrato hoyMasUnAnio
Date	fechaInicioPeriodoFacturacion	Start date for the invoicing period. Mandatory if generarFacturasAPlazoVencido is true
Date	fechaFinPeriodoFacturacion	End date for the invoicing period
Boolean	generarFacturasAPlazoVencido	Generate invoices in arrears
Boolean	requiereLlevarDocsImpresos	It is mandatory to carry the invoices printed on paper
String	importadoDesde	Imported from
Boolean	separaFacturasPorSede	If a separate invoice for every site is needed

Boolean	enviarFacturaACadaSede	Send invoices to every site
Boolean	noGenerarFacturas	Do not generate invoices
Boolean	esUnaRenovacion	It is a renewal
Boolean	unicaLineaFactura	If invoices should have a single line
String	notaInterna	Internal note for invoices
String	codigoComoPresupuesto	Code as a quote
String	lineaFacturaOrden	Way of sorting lines within the invoice
Boolean	permiteAvisosAsistencia	Allow additional free visits
Long	cuantosAvisosAsistencia	Number of additional free visits
Boolean	firmableDesdePortalCliente	If it may be signed on the Customer Portal
String	codigoDivisa	Currency code
String	modoFacturasRecapitulativas	invoice generation method. Mandatory if generacionAutomaticaRecapitulativas is true. Accepted values: 'FACTURA_UNICA' (single invoice), 'SEDE' (site);
String	modoLineasFacturasRecapitulativas	invoice line mode. Mandatory if generacionAutomaticaRecapitulativas is true. Accepted values: 'ORDENES' (Performed work orders), 'SERVICIOS' (Services performed), 'SEDE_SERVICIOS' (Site and services performed), 'SEDE' (site),

		'LINEA_UNICA' (single line), 'CODIGO_AGRUPACION' (grouping code);
String	codigoIdentificacionContratacionPublica	ID code for tenders. For Italy it cannot be longer than 10 characters
String	codigoProyecto	Code for the customer Project. It cannot be longer than 15 characters
String	codigoGestionadoPor	Employee Code managed by
String	nombreSerieFacturacion	Name of invoicing series. Optional.
Date	primeraFechaContrato	Date when this contract started for the first time
String	plantillaCertificadoCodigo	Certificate template code. This is the code of the certificate template that will be assigned by default to the work orders.
String	codigoDelegacion	Branch Code, by default, the client branch will be used.
String []	cuentasBancariasTransferencia	company bank account codes
String	cuentaBancariaCliente	client bank account code
String	exigibilidadIva	For e-invoicing from Italy, VAT chargeability. Accepted values: 'INMEDIATA' (immediate), 'DIFERIDA' (Deferred), 'SPLITPAYMENT' (Split payment);
Boolean	esNecesarioNumeroPedido	If No. of purchase order is mandatory
String	numeroDePedido	No. of purchase order
Boolean	noSubirPreciosMasivamente	Exclude from massive price increases

Collection of 'lineasRetencionGlobal' [{ }]	lineasRetencionGlobal	Collection of withholdings, only for Italy, Brazil or Portugal. See table below
'gestionadoPor' { }	gestionadoPor	managed by. See table below
'lineasContrato' [{ }]	*CRT lineasContrato	Collection of Contract Lines. See table below

'gestionadoPor' { } (Managed by)

Type	Name	Description
String	codigo	Code of the employee who manages the entity,

'lineasContrato' [{ }] (Contract Lines)

Type	Name	Description
String	codigo	Code for this single line
Integer	orden	Number meaning the order of this line
Double	*! unidades	Amount of services/products
Double	precioUnitario	Unit price per service/product
String	unidadDeMedida	Unit of measure (default: 'units')
Double	*! importeBruto	Amount before applying discounts and VAT
String	motivoDescuento	Reason for the discount
Double	importeDescuento	Amount of the discount
Double	porcentajeDescuento	Percentage of the discount
String	tipoDescuento	Discount Type. Accepted values: 'PORCENTAJE'(percentage), 'IMPORTE' (amount)

Double	*! baseImponible	Amount after applying discounts, but before VAT (total amount not unitary amount) (Tax base, which is the gross price minus discounts, but before VAT is applied)
Double	porcentajeImpuesto	VAT percentage
String	*! sedeCodigo	Site code
String	*! productoCodigo	Product/Service code
String	descripcion	Description of the product/service
Boolean	esRenovable	If this line can be renewed
String	indicacionesEjecucion	Execution instructions for the technicians
'asignadoA' [{ }]	asignadoA	Collection of Assigned To. See table below
Collection of ['ZonasContratadas']	zonasContratadas	Collection of Contracted Areas. See table below

'asignadoA' [{ }] (Assigned To)

Type	Name	Description
String	codigo	Technician's code

'lineasRetencionGlobal' [{ }] (withholdings)

Type	Name	Description
BigDecimal	*! porcentaje	Percentage to apply
String	*! descripcion	Withholding description. Accepted values Brazil: 'PIS', 'COFINS', 'INSS', 'IRRF',

		`CSLL`, `ISS`, `ICMS`; Accepted values Italy: `RT01` (Ritenuta persone fisiche), `RT02` (Ritenuta persone giuridiche), `RT03` (Contributo INPS), `RT04` (Contributo ENASARCO), `RT05` (Contributo ENPAM), `RT06` (Altro contributo previdenziale); Accepted values Portugal: Configured per company
String	causa	Withholding cause. only for Italy. Mandatory for Italy. Accepted values: `A` (Prestazioni di lavoro autonomo rientranti nell'esercizio di arte o professione abituale), `B` (Utilizzazione economica, da parte dell'autore o dell'inventore, di opere dell'ingegno, di brevetti industriali e di processi, relativi a esperienze acquisite in campo industriale, commerciale o scientifico), `C` (Utili derivanti da contratti di associazione in partecipazione e da contratti di cointeressenza, quando l'apporto è costituito esclusivamente dalla prestazione di lavoro), `D` (Utili spettanti ai soci promotori e ai soci fondatori delle società di capitali), `E` (Levata di protesti cambiari da parte dei

		segretari comunali), 'G' (Indennità corrisposte per la cessazione di attività sportiva professionale), 'H' (Indennità corrisposte per la cessazione dei rapporti di agenzia delle persone fisiche e delle società di persone, con esclusione delle somme maturate entro il 31.12.2003, già imputate per competenza), 'I' (Indennità corrisposte per la cessazione da funzioni notarili), 'L' (Utilizzazione economica, da parte di soggetto diverso dall'autore o dall'inventore, di opere dell'ingegno, di brevetti industriali e di processi, formule e informazioni relative a esperienze acquisite), 'L_1' (Redditi derivanti dall'utilizzazione economica di opere dell'ingegno, di brevetti industriali e di processi, che sono percepiti da soggetti che abbiano acquistato a titolo oneroso i diritti alla loro utilizzazione), 'M' (Prestazioni di lavoro autonomo non esercitate abitualmente, obblighi di fare, di non fare o permettere), 'M_1' (Redditi derivanti dall'assunzione di obblighi di fare, di non fare o permettere), 'M_2' (Prestazioni di lavoro autonomo non esercitate abitualmente per le quali sussiste l'obbligo di iscrizione alla Gestione Separata ENPAPI.), 'N' (Indennità di trasferta, rimborso forfettario di spese,
--	--	---

		premi e compensi erogati: .. nell'esercizio diretto di attività sportive dilettantistiche), 'O' (Prestazioni di lavoro autonomo non esercitate abitualmente, obblighi di fare, di non fare o permettere, per le quali non sussiste l'obbligo di iscrizione alla gestione separata (Circ. Inps 104/2001)), 'O_1' (Redditi derivanti dall'assunzione di obblighi di fare, di non fare o permettere, per le quali non sussiste l'obbligo di iscrizione alla gestione separata (Circ. INPS n. 104/2001)), 'P' (Compensi corrisposti a soggetti non residenti privi di stabile organizzazione per l'uso o la concessione in uso di attrezzature industriali, commerciali o scientifiche che si trovano nel territorio dello Stato), 'Q' (Provvigioni corrisposte ad agente o rappresentante di commercio monomandatario), 'R' (Provvigioni corrisposte ad agente o rappresentante di commercio plurimandatario), 'S' (Provvigioni corrisposte a commissionario), 'T' (Provvigioni corrisposte a mediatore), 'U' (Provvigioni corrisposte a procacciatore di affari), 'V' (Provvigioni corrisposte a incaricato per le vendite a domicilio e provvigioni corrisposte a incaricato per la vendita porta a porta e per la vendita ambulante di giornali quotidiani e periodici (L.
--	--	--

		25.02.1987, n. 67)), 'V_1' (Redditi derivanti da attività commerciali non esercitate abitualmente (ad esempio, provvigioni corrisposte per prestazioni occasionali ad agente o rappresentante di commercio, mediatore, procacciatore d'affari)), 'W' (Corrispettivi erogati nel 2015 per prestazioni relative a contratti d'appalto cui si sono rese applicabili le disposizioni contenute nell'art. 25-ter D.P.R. 600/1973), 'X' (Canoni corrisposti nel 2004 da società o enti residenti, ovvero da stabili organizzazioni di società estere di cui all'art. 26-quater, c. 1, lett. a) e b) D.P.R. 600/1973), 'Y' (Canoni corrisposti dal 1.01.2005 al 26.07.2005 da soggetti di cui al punto precedente), 'Z' (Titolo diverso dai precedenti.* V.≤2020), 'ZO' (Titolo diverso dai precedenti);
--	--	--

Payload: 'Contrato' (contract)

```
{
  "tipoEntidadIgeo": "CONTRATO",
  "codigoEntidadIgeo": "5505",
  "comando": "Create",
  "remoteOperationId": "PT-84",
  "datos": {
    "numero": "5505",
    "codigoCliente": "1346",
    "creadoPorCodigo": "JOAQ",
    "lineaNegocioCodigo": "CP",
```

"fechaInicio": "08/05/2027",
"fechaFin": "08/08/2027",
"notaParaOdt": "Debe haber una ODT por mes",
"notaParaFacturas": "Se debe entregar impresa en las oficinas",
"observaciones": "No hay ninguna observación relevante",
"asunto": "Esto es una prueba...",
"observacionesRenovacion": "Ninguna",
"estado": "ACTIVO",
"formaFacturacion": "Puntual",
"formaCobro": "inmediata",
"nDiasEmisionRecibo1": "1",
"nDiasEmisionRecibo2": "1",
"nDiasEmisionRecibo3": "1",
"nDiasEmisionRecibo4": "1",
"nDiasEmisionRecibo5": "1",
"nDiasEmisionRecibo6": "1",
"nDiasEmisionRecibo7": "1",
"nDiasEmisionRecibo8": "1",
"nDiasEmisionRecibo9": "1",
"nDiasEmisionRecibo10": "1",
"nDiasEmisionRecibo11": "1",
"nDiasEmisionRecibo12": "1",
"renovable": "FALSE",
"renovacionRequiereAceptacionCliente": "TRUE",
"descripcionExplicacion": "Description/explanation",
"tipologiaContrato": "PUNTUAL",
"metodoPago": "TJ",
"metodoCobroEfectivo": "LO_RECOGE_EL_COMERCIAL",
"generarOdts": "FALSE",
"fechaPuntualFactura": "QUINCE",
"fechaEmisionPuntual": null,
"variasFechasFactura": null,
"fechaEmisionPuntual1": null,
"fechaEmisionPuntual2": null,
"fechaEmisionPuntual3": null,
"fechaEmisionPuntual4": null,
"fechaEmisionPuntual5": null,
"fechaEmisionPuntual6": null,
"fechaEmisionPuntual7": null,
"fechaEmisionPuntual8": null,
"fechaEmisionPuntual9": null,

"fechaEmisionPuntual10": null,
"fechaEmisionPuntual11": null,
"fechaEmisionPuntual12": null,
"fechaEmisionPuntualRecibo1": null,
"fechaEmisionPuntualRecibo2": null,
"fechaEmisionPuntualRecibo3": null,
"fechaEmisionPuntualRecibo4": null,
"fechaEmisionPuntualRecibo5": null,
"fechaEmisionPuntualRecibo6": null,
"fechaEmisionPuntualRecibo7": null,
"fechaEmisionPuntualRecibo8": null,
"fechaEmisionPuntualRecibo9": null,
"fechaEmisionPuntualRecibo10": null,
"fechaEmisionPuntualRecibo11": null,
"fechaEmisionPuntualRecibo12": null,
"diasDePago": null,
"diasDeFacturacion": null,
"fechaVencimientoPagare": null,
"fechaVencimientoConfirming": null,
"diaSemana": null,
"mostrarImporteLineas": null,
"condiciones": null,
"prorratioFacturasFechasContrato": null,
"fechaInicioPeriodoFacturacion": "08/06/2027",
"fechaFinPeriodoFacturacion": "08/08/2027",
"generarFacturasAPlazoVencido": null,
"requiereLlevarDocsImpresos": null,
"importadoDesde": null,
"separaFacturasPorSede": null,
"enviarFacturaACadaSede": null,
"noGenerarFacturas": "FALSE",
"esUnaRenovacion": null,
"unicaLineaFactura": null,
"notaInterna": null,
"codigoComoPresupuesto": null,
"lineaFacturaOrden": null,
"permiteAvisosAsistencia": null,
"cuantosAvisosAsistencia": null,
"firmableDesdePortalCliente": null,
"codigoDivisa": null,
"modoFacturasRecapitulativas": null,

```

"modoLineasFacturasRecapitulativas":null,
"codigoIdentificacionContratacionPublica":null,
"codigoProyecto":null,
"codigoGestionadoPor":null,
"nombreSerieFacturacion":null,
"primeraFechaContrato":null,
"plantillaCertificadoCodigo":null,
"codigoDelegacion":null,
"cuentasBancariasTransferencia":null,
"cuentaBancariaCliente":null,
"exigibilidadIva":null,
"esNecesarioNumeroPedido":null
"numeroDePedido":null,
"noSubirPreciosMasivamente":null,
"lineasRetencionGlobal":null,
"lineasContrato": [
  {
    "codigo": "2",
    "orden": "2",
    "unidades": "1",
    "precioUnitario": "500",
    "unidadDeMedida": "units",
    "importeBruto": "500",
    "motivoDescuento": "NO",
    "importeDescuento": null,
    "porcentajeDescuento": "10",
    "tipoDescuento": "PORCENTAJE",
    "baseImponible": "450",
    "porcentajeImpuesto": "0",
    "sedeCodigo": "172347",
    "productoCodigo": "DES",
    "descripcion": "Prueba linea de contrato",
    "esRenovable": "TRUE",
    "indicacionesEjecucion": "Consiste en la eliminación de ratas
y ratones, con el objetivo de que los roedores no entren en una
instalación y eliminar a los que ya están dentro.",
    "asignadoA": {
      "codigo": "TC1"
    },
    "zonasContratadas": [
      {

```

```

        "nombre": "cocina",
        "codigo": "CZ",
        "descripcion": "cocina con falso techo",
        "convertirEnZonasDeInstalacion": "TRUE"
    }
]
},
"gestionadoPor": {
    "codigo": "DB"
}
}
}

```

‘Deficiencia’ (Deficiency)

Type	Name	Description
String	*! codigo	Deficiency's Code (Mandatory for imports)
String	categoria	Deficiency's Category
String	fecha	Date
String	codigoCreadaPor	Employee Code created by
Boolean	resuelta	Resolution status
String	resueltaPor	Solved by
String	medidaCorrectora	Corrective measure
String	tipoEntidadSecundaria	Secondary entity type (Only for Legionella line of business)
Long	idEntidadSecundaria	Secondary entity ID (Only for Legionella line of business)
Date	fechaResolucion	Resolution date of deficiency when technician changes status to finished
String	visibilidad	Visibility Accepted values:

		INTERNA(Internal), PUBLICA(Public)
String	numeroOdtDondeSeCrea	WO number where it's created
String	numeroOdtDondeSeResuelve	WO number where it's solved
String	subzonas	Subarea
String	areaAfectada	Affected area
String	tipoCreacionIncidencia	Incident creation type Accepted values: MANUAL(Manual) AUTOMATICA(Created by system automatically under certain circumstances)
String	responsableIncidencia	who is responsible for closing the deficiency: CLIENTE(Cliente) EMPRESA(The PCO)
String	codigoTratamientoAsociado	service code that the deficiency is linked to
String	grupoTipoOperacionAsociado	Group of linked operation's type (this is specific for Legionella)
String	*! codigoSede	Site code
String	nivelPrioridad	Priority level; Accepted values: BAJA(Low), MEDIA(Medium), ALTA(High),
Date	fechaCierrePropuesta	Proposed closure date
String	subgrupoElementoInstalacionRiesgo	Subgroup of risky premises' element (this is specific for Legionella line of business)
Long	elementoInstalacionRiesgoID	Risky premises' element ID (only for Legionella line of business)

String	elementoInstalacionRiesgoCodigo	Risky premises' element code (this is introduced by the company in a form, only for Legionella line of business)
String	*? numeroPresupuesto	Quote Number (!When importing always use one of these two!)
String	*? numeroContrato	Contract Number(!When importing, always use one of these two!)
'nombresZonas' []	nombresZonas	Area Names. See table below

'nombresZonas' [{ }] (Area Names)

Type	Name	Description
String	zona	Area's name

'Delegacion' (Branch)

Type	Name	Description
String	*! codigo	Branch code
String	*! nombre	Branch name
String	cif	CRN
String	distrito	Borough/area
String	emailAutomaticoAvisoFacturacion	Invoicing alerts' email
Double	latitud	GPS latitude
Double	longitud	GPS longitude
String	mensajeEncuesta	Message to be included in the email containing the visit report. It is mandatory if NPS is enabled.

String	mensajeNPSPortalCliente	Message for the Customer Portal's rating page. It is mandatory if NPS is enabled.
String	numRegistroBiocidas	R4BP no.
Boolean	usaFacturacion	The branch uses Invoicing
Boolean	usaNPS	Net Promoter Score, Customer satisfaction survey (NPS)
String	zonaHoraria	Time zone. e.g.: 'Europe/Madrid' or 'America/Argentina/Cordoba' https://en.wikipedia.org/wiki/List_of_tz_database_time_zones
'datosContacto' { }	datosContacto	Branch contact details. See table below
'datosPostales' { }	datosPostales	Branch postal data. See table below

'datosContacto' { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

'datosPostales' { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code

String	localidad	City/town
String	codigoProvincia	Province (county, district) code

Payload: 'Delegacion' (Branch)

```
{
  "tipoEntidadIgeo": "DELEGACION",
  "codigoEntidadIgeo": "97A",
  "comando": "CREATE",
  "fecha": "29/08/2024 11:15:26",
  "datos": {
    "cif": null,
    "nombre": "Delegación 97A",
    "datosPostales": {
      "direccion": "Avda. del Ejercito, 34. Nave 34",
      "codigoPostal": "18011",
      "localidad": "Guadalajara",
      "codigoProvincia": "ES-M"
    },
    "datosContacto": {
      "telefono": "941355666",
      "movil": "605786121",
      "email": "delegacion97@bioplagas.com",
      "fax": null
    },
    "longitud": "-2.3364136",
    "latitud": "41.1481660",
    "numRegistroBiocidas": null,
    "distrito": null,
    "codigo": "97A",
    "usaFacturacion": null,
    "usaNPS": false,
    "mensajeEncuesta": null,
    "mensajeNPSPortalCliente": null
  }
}
```

‘Dimension’ (Dimension, only for orders from Navision)

Type	Name	Description
String	*! tipo	Dimension type
String	*! codigo	Dimension code
String	*? descripcion	Description
Boolean	bloqueado	blocked (Status)

‘Documentacion’ (Documentation)

Type	Name	Description
String	*! tipoDocumento	The possible document types are “CONTRACT”, “INVOICE” and “CR_MEMO”.
String	*! codigo	Contract Number (CONTRACT) Customer Number (INVOICE or CR_MEMO)
String	*! nombreFichero	Url from which the file should be downloaded
String	numDocumento	Mandatory in “INVOICE” and “CR_MEMO”. Document reference

Payload: ‘Documentacion’ (Documentation)

```
{
  "tipoEntidadIgeo": "DOCUMENTACION",
  "comando": "CREATE",
  "codigoEntidadIgeo": "122348",
  "datos": {
    "tipoDocumento": "CONTRACT",
    "codigo": "122348",
    "nombreFichero":
    "https://fesc.xes.cat/wp-content/uploads/2023/06/lorem-ipsu.pdf",

```

```

"numDocumento": null
}
}

```

'Empleado' (Employee)

Type	Name	Description
String	*! nombre	Name
String	*! apellidos	Surname
String	*! nif	Tax Identification number
String	*! codigoEmpleado	Code
String []	*! delegacionesEnLasQueTrabaja	Codes of the branches in which they work
String	alias	Nickname
Date	fechaNacimiento	Date of birth
Date	fechaIncorporacion	Onboarding date
Date	fechaSalida	Dismissal date
String	sexo	Gender. Accepted values: 'HOMBRE' (Male), 'MUJER' (Female)
String	cuentaBancaria	Bank account
BigDecimal	salarioAnualBruto	Gross annual salary
Boolean	esTecnico	is Technician
Boolean	esTecnicoAutonomo	Self-managing technician
String	color	Planning's colour
String	inicioJornada	Workday's start
String	finJornada	Workday's end
String	almacen	(Technician) code of warehouse will the materials used by this employee be

		deducted
String	matricula	Vehicle's number plate
BigDecimal	precioHora	Cost of employee per hour
Boolean	diaAutorizadoLunes	iGEO can be used on Monday (Authorized days)
Boolean	diaAutorizadoMartes	iGEO can be used on Tuesday (Authorized days)
Boolean	diaAutorizadoMiercoles	iGEO can be used on Wednesday (Authorized days)
Boolean	diaAutorizadoJueves	iGEO can be used on Thursday (Authorized days)
Boolean	diaAutorizadoViernes	iGEO can be used on Friday (Authorized days)
Boolean	diaAutorizadoSabado	iGEO can be used on Saturday (Authorized days)
Boolean	diaAutorizadoDomingo	iGEO can be used on Sunday (Authorized days)
String	horalInicioAutorizado	Start time of the authorized hours for using iGEO
String	horaFinAutorizado	End time of authorized hours for using iGEO
Boolean	activo	Active
Boolean	visibleDesdePortalCliente	Visible on the Customer Portal
Boolean	puedeModificarClausulasContrato	Modify terms when creating a contract
Boolean	puedeModificarClausulasPresupuesto	Modify terms when creating a quote
Boolean	puedeVerOrdenesDeOtrosEmpleados	View other employees' work orders on the Technician Portal
Boolean	puedeVerNombreCliente	View the customer's name on the Technician Portal

Boolean	puedeFirmarAntesDeFinalizar	Collect a signature before closing a task on the Technician Portal
Boolean	puedeCrearAvisosParaCualquierCliente	Create alerts for any customer on the Technician Portal
Boolean	puedeEnviarCertificadoDeServicio	Send a visit report when closing a work order
String	cargo	Position
String	emailDepartamento	Department's email
String	emailOAuth	Login by OAuth email (Google or Microsoft)
String	nombreDepartamento	Department name
Boolean	puedeMoverPuntosDeControl	Move control points on the Technician Portal
Boolean	puedeModificarPuntosDeControl	Create, delete and edit control points on the Technician Portal.
Boolean	puedeModificarZonasDeInstalacion	Perform automatic inspections on the Technician Portal.
Boolean	estadoCheckEnvioParteTrabajo	Send work report/certificate once a work order is completed and validated
String	idioma	Language code ('es_ES', 'en_GB', 'fr_FR', etc.). Defaults to the company Language. Use Locale Format. These codes are formatted as follows: Language Code (ISO 639-1): A two-letter lowercase identifier for a language. Example: "en" (English), "es" (Spanish), "fr" (French).

		Country Code (ISO 3166-1 alpha-2): A two-letter uppercase identifier for a country. Example: "US" (United States), "FR" (France), "DE" (Germany). Locale Format (Combination of both): Example: "en_US" (English, United States), "es_ES" (Spanish, Spain), "fr_CA" (French, Canada).
String	numeroCarnetConducir	Driving licence's number
String	tipoCarnetConducir	Driving licence type
Date	fechaCaducidadCarnetConducir	Driving licence's expiry date
Boolean	puedeAnadirServiciosALaOdt	Add services to a work order
Boolean	puedeEditarDuracionEventos	Modify events' real duration
Boolean	puedeGestionarZonasDeTratamiento	Manage areas where services are performed
String	codigoIdentificacionSecundario	Secondary ID number
String	numeroSeguridadSocial	Tax Identification number
Boolean	puedeAccederBI	Access the Business Intelligence module
Boolean	puedeModificarHorasLegionellaDesdePT	Puede modificar la hora inicio y hora fin de las operaciones de Legionella desde el PT
Boolean	puedeHacerRevisionesAutomaticasDesdePT	Puede hacer revisiones automáticas en el Portal Técnico
String []	zonasComercialesEnLasQueTrabaja	Codes of the employee's commercial areas
String []	lineasDeNegocioQueTrabaja	Codes of the employee's lines of business

String	emailOAuth	Microsoft or Google account to access lgeo
'datosContactoEmpresariales' { }	datosContactoEmpresariales	employee's business contact details. See table below
'datosContactoPersonales' { }	datosContactoPersonales	employee's personal contact details. See table below
'datosPostales' { }	*! datosPostales	employee's postal data. See table below
String	zonaHoraria	time zone
Collection of 'lineaTituloFormativos' [{}]	lineaTituloFormativo	Training title line. See table below
Collection of 'tramoHorario' [{}]	tramosHorarios	Workday time slots. See table below

'datosContactoEmpresariales' { } (Business contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

'datosContactoPersonales' { } (Personal contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

‘datosPostales’ { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	*! codigoProvincia	Province (county, district) code

‘lineaTituloFormativos’ [{}] (Training title line)

Type	Name	Description
String	*! codigoTituloFormativo	certificate code
Date	fechaTitulacion	Achievement date
Date	validoHasta	Valid until
String	impartidoEn	Taught in/issued by
String	numeroCarne	Licence number
String	observaciones	Notes
Boolean	noIncluirEnLatablaDeRenovaciones	Do not add to renewal table
String []	lineasNegocio	Codes of the lines of business of which it is the main certificate holder

‘tramosHorarios’ [{}] (Workday time slots)

Type	Name	Description
String	*! dia	Workday. Accepted values: 'LUNES' (Monday), 'MARTES' (Tuesday), 'MIERCOLES' (Wednesday), 'JUEVES' (Thursday),

		'VIERENES' (Friday), 'SABADO' (Saturday), 'DOMINGO' (Sunday)
String	*! horalInicio	Start time
String	*! horaFin	End time

Payload: 'Empleado' (Employee)

```
{
  "tipoEntidadIgeo": "EMPLEADO",
  "codigoEntidadIgeo": "EMP1",
  "comando": "CREATE",
  "datos": {
    "nombre": "Geronimo",
    "apellidos": "Stilton",
    "nif": "00000016Q",
    "codigoEmpleado": "EMP1",
    "delegacionesEnLasQueTrabaja": [
      "01A",
      "01B"
    ],
    "alias": "GSG",
    "fechaNacimiento": "07/07/1990",
    "fechaIncorporacion": "07/09/2015",
    "fechaSalida": "",
    "sexo": "HOMBRE",
    "cuentaBancaria": "0014579N",
    "salarioAnualBruto": 24000,
    "esTecnico": false,
    "esTecnicoAutonomo": false,
    "color": "#8a4400",
    "inicioJornada": "08:15",
    "finJornada": "19:15",
    "almacen": "COD1",
    "matricula": "084FN",
    "precioHora": 45,
    "diaAutorizadoLunes": true,
    "diaAutorizadoMartes": true,
    "diaAutorizadoMiercoles": true,
    "diaAutorizadoJueves": true,
  }
}
```

```

"diaAutorizadoViernes": true,
"diaAutorizadoSabado": false,
"diaAutorizadoDomingo": false,
"horaInicioAutorizado": "08:00",
"horaFinAutorizado": "20:00",
"activo": true,
"visibleDesdePortalCliente": false,
"puedeModificarClausulasContrato": false,
"puedeModificarClausulasPresupuesto": false,
"puedeVerOrdenesDeOtrosEmpleados": false,
"puedeVerNombreCliente": false,
"puedeFirmarAntesDeFinalizar": false,
"puedeCrearAvisosParaCualquierCliente": false,
"puedeEnviarCertificadoDeServicio": false,
"puedeMoverPuntosDeControl": false,
"puedeModificarPuntosDeControl": false,
"puedeModificarZonasDeInstalacion": false,
"estadoCheckEnvioParteTrabajo": false,
"puedeAnadirServiciosALaOdt": false,
"puedeEditarDuracionEventos": false,
"puedeGestionarZonasDeTratamiento": false,
"puedeAccederBI": false,
"puedeModificarHorasLegionellaDesdePT": false,
"puedeHacerRevisionesAutomaticasDesdePT": false,
"cargo": "Investigador",
"emailDepartamento": "",
"nombreDepartamento": "",
"idioma": "es_ES",
"numeroCarnetConducir": "0895895L",
"tipoCarnetConducir": "B2",
"fechaCaducidadCarnetConducir": "07/10/2028",
"codigoIdentificacionSecundario": "EMP21",
"numeroSeguridadSocial": "000014587",
"zonasComercialesEnLasQueTrabaja": ["01BSG001", "COD_05"],
"lineasDeNegocioQueTrabaja": [
  "CP"
],
"datosContactoEmpresariales": {
  "telefono": "456311983",
  "movil": "",
  "email": "",

```

```

    "fax": "",
  },
  "datosContactoPersonales": {
    "telefono": "456311984",
    "movil": "",
    "email": "",
    "fax": ""
  },
  "datosPostales": {
    "direccion": "C/Madrid",
    "codigoPostal": "28001",
    "localidad": "Madrid",
    "codigoProvincia": "ES-M"
  },
  "zonaHoraria": "Europe/Madrid",
  "lineasTituloFormativos": [
    {
      "codigoTituloFormativo": "FORM",
      "fechaTitulacion": "19/08/2010",
      "validoHasta": "",
      "impartidoEn": "ITDF",
      "numeroCarne": "00145",
      "observaciones": "FPS",
      "noIncluirEnLatablaDeRenovaciones": false,
      "lineasNegocio": [
        "CP"
      ]
    }
  ],
  "tramosHorarios": [
    {
      "dia": "LUNES",
      "horaInicio": "07:00",
      "horaFin": "20:00"
    }
  ]
}

```

‘Estado Contrato’ (Contract status)

Type	Name	Description
String	*! numeroContrato	Contract number
String	*! estado	The new status to be applied. Accepted values: 'ACTIVO' (Active), 'CANCELADO' (Cancelled), 'CADUCADO' (Expired), 'PENDIENTE_ACEPTAR' (Pending acceptance), 'ACEPTADO_PENDIENTE_DE_ACTIVAR' (Accepted pending activation)
Boolean	cancelarOrdenesDeTrabajoPendientes	Only to CANCEL contracts. If true, all the pending work orders will be cancel. Default value: TRUE
Boolean	borrarFacturasPendientes	Only to CANCEL contracts. If true, all the pending invoices will be deleted. Default value: TRUE
String	motivoDeLaCancelacion	Only to CANCEL contracts. Description of the cancellation reason
Date	fechaDeCancelacion	Only to CANCEL contracts. MANDATORY if the value of estado is "CANCELADO". Cancellation Date.
Boolean	avisarClienteCancelacionODTs	Only to CANCEL contracts. If true, the customer will be notified about the cancellation of the work orders. Default value: FALSE

‘Factura’ (invoice)

Type	Name	Description
------	------	-------------

String	*! facturaANumeroCliente	Customer code
String	*! nombreSerieFacturacion	Name of the invoicing serie
Date	*! fechaVencimiento	Due date DD/MM/YYYY
String	notas	Notes for invoices
String	pieFactura	Footnote to the invoices,
String	numeroPedido	Order number that of the contract/sale or on each invoice.
Boolean	estaCobrada	Invoice payment status
String	*? nombrePlantillaFactura	invoice template name. If this field is not set, it inherits its value from the selected invoice series. However, if no template is defined in serieFacturacion (invoice series), this field becomes MANDATORY.
Boolean	mostrarImporteLineas	Set to FALSE to hide individual line amounts and only display the total amount to the customer.
'lineas' { }	lineas	Invoices Line. See table below
'recibos' []	*! recibos	Collection of Receipts/Installments. See table below

'lineas' { }

Type	Name	Description
String	*! descripcion	Line description. Minimum length: 5 characters.
Double	precioUnitario	Unit price
String	codigoProducto	Product/service code

String	tipoProductoServicio	Type of product/service ('ARTÍCULO' or 'SERVICIO'). Mandatory if codigoProducto is not set.
Double	importeBruto	Gross amount before VAT and discounts. Mandatory if tipoPrecio is set to "TOTAL"
Double	*! unidades	Amount of services/products
String	motivoDescuento	Reason for the discount
Double	importeDescuento	Amount of the discount. Mandatory if tipoDescuento is set to "IMPORTE"
Double	porcentajeDescuento	Percentage of the discount. Mandatory if tipoDescuento is set to "PORCENTAJE"
String	tipoDescuento	Type of discount. Allowed values: "IMPORTE" (Amount) "PORCENTAJE" (Percentage). Validation: Mandatory if either importeDescuento or porcentajeDescuento is provided.
String	tipoPrecio	Price type. Allowed values "TOTAL" (total) "UNITARIO" (price per unit). Default value is "TOTAL"
'ImpuestosVenta' { }	impuestosVenta	Sales Taxes. See table below

'impuestosVenta' { } (sales taxes)

Type	Name	Description
String	*! zonaFiscal	Tax area code. Duplicates are not accepted
BigDecimal	*! impuesto	exact tax percentage

'recibos' []

Type	Name	Description
Long	orden	Order of the receipt on your invoice based on its due date, starts at 1
String	metodoPago	Payment Method Map ('See Payment Methods Map')
Date	fechaEmision	Issue date
Date	fechaDevolucion	Return date
Date	fechaVencimiento	Due date. Mandatory if nDias is not set.
Double	importe	Final amount (including withholding)
Double	importeSinRetenciones	Amount without withholdings
String	notas	Comments
String	notaInterna	Internal comments
Double	importeFactura	Total amount of the invoice
Date	fechaPago	Payment date
String	tipoTarjeta	Type of card (Credit/Debit, etc.)
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days), 'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days),

		'variasFechas' (different customized dates) 'd30y90' (within 30 and 90 days)
Long	nDias	Number of days after which the receipt will become outstanding after the invoice has been issued. Mandatory if fechaVencimiento is not set.
String	estadoCobro	
String	metodoPagoCobro	
String	fechaEfectivaIngreso	
cuentaBancaria' {}	cuentaBancaria	Bank Account
cuentaBancariaCliente' {}	cuentaBancariaCliente	Client Bank Account

Payload: 'Factura' (invoice)

```
{
  "tipoEntidadIgeo": "FACTURA",
  "comando": "CREATE",
  "codigoEntidadIgeo": 171294,
  "datos": {
    "facturaANumeroCliente": 171294,
    "nombreSerieFacturacion": "Principal",
    "fechaVencimiento": "2026-08-25",
    "numeroDePedido": "PED-998877",
    "notas": "Factura correspondiente al servicio de mantenimiento trimestral.",
    "pieFactura": "Gracias por su confianza.",
    "nombrePlantillaFactura": "normal",
    "mostrarImporteLineas": true,
    "lineas": [
      {
        "descripcion": "Servicio de Control de Plagas",
        "unidades": 1,
        "tipoPrecio": "TOTAL",
        "importeBruto": 150,

```

```

        "tipoProductoServicio": "TRATAMIENTO",
        "tipoDescuento": "PORCENTAJE",
        "porcentajeDescuento": 10,
        "motivoDescuento": "Descuento por fidelidad",
        "impuestosVenta": {
            "zonaFiscal": "ES",
            "impuesto": 21
        }
    },
    {
        "descripcion": "Cepo para roedores",
        "unidades": 5,
        "tipoPrecio": "UNITARIO",
        "precioUnitario": 12.5,
        "tipoProductoServicio": "ARTICULO",
        "impuestosVenta": {
            "zonaFiscal": "ES",
            "impuesto": 21
        }
    }
],
"recibos": [
    {
        "importe": 100,
        "fechaVencimiento": "2026-08-05",
        "metodoPago": "TR",
        "notaInterna": "Primer pago",
        "notas": "A pagar antes de fin de año"
    },
    {
        "importe": 112.5,
        "nDias": 30,
        "metodoPago": "DB",
        "notaInterna": "Segundo pago automatizado"
    }
]
}

```

'Linea de contrato' (contract lines)

Type	Name	Description
String	*! codigo	Code for this single line
String	*! numeroDeContrato	Contract number
Double	*! unidades	Amount of services/products
String	*! sedeCodigo	Site code, cannot be inactive
String	*! productoCodigo	Product/Service code
String	descripcion	Description of the product/service
String	*? delegacionCodigo	Branch code
Double	*? importeBruto	Amount before applying discounts and VAT
Double	precioUnitario	Unit price per service/product
Integer	orden	Number meaning the order of this line
String	unidadDeMedida	Unit of measure (default units: 'uds')
String	tipoDescuento	Discount Type. Accepted values: 'PORCENTAJE'(percentage), 'IMPORTE' (amount)
String	motivoDescuento	Reason for the discount
Double	importeDescuento	Amount of the discount
Double	porcentajeDescuento	Percentage of the discount
Boolean	esRenovable	If this line can be renewed
String	indicacionesEjecucion	Execution instructions for the technicians
String	zonasInstalacion	OBSOLETE Maintained for backward compatibility only. premises' areas

String	subCuenta	Accounting subaccount
String	almacenCodigo	Warehouse code
String	lote	Lot number
Date	fechaCaducidad	Expiry date
String	codigoZonaComercial	Commercial zone code, if no one is provided, it would be taken from the site's commercial zone
Collection of [{'ZonasContratadas'}]	zonasContratadas	Collection of Contracted Areas. See table below

Collection of [{'ZonasContratadas'}]

Type	Name	Description
String	*! nombre	Name
String	*? codigo	Code
String	descripcion	Description
Boolean	convertirEnZonasDeInstalacion	Convert these to premises' areas

Payload: 'Linea de contrato' (contract lines)

```
{
  "tipoEntidadIgeo": "LINEA_CONTRATO",
  "comando": "CREATE",
  "codigoEntidadIgeo": "122348",
  "datos": {
    "codigo": "LC01",
    "numeroDeContrato": "2/2026",
    "unidades": 10,
    "orden": 1,
    "precioUnitario": 10,
    "unidadDeMedida": "uds",
    "sedeCodigo": "47",
    "productoCodigo": "DESRATI",
    "descripcion": "DESRATIZACION",
  }
}
```

```

    "delegacionCodigo": "MAD",
    "importeBruto": 0,
    "baseImponible": 0,
    "importeDescuento": 0,
    "motivoDescuento": "Promocion navidad",
    "tipoDescuento": "PORCENTAJE",
    "porcentajeDescuento": 30,
    "esRenovable": "TRUE",
    "indicacionesEjecucion": "Desratizacion de todas las plantas del
edificio",
    "zonasInstalacion": null,
    "subCuenta": "430.2",
    "almacenCodigo": "AL150",
    "lote": null,
    "fechaCaducidad": null,
    "codigoZonaComercial": null,
    "zonasContratadas": [
      {
        "nombre": "COCINAS P1",
        "codigo": "C01",
        "descripcion": "AREA DE FOGONES PLANTA 1",
        "convertirEnZonasDeInstalacion": "TRUE"
      },
      {
        "nombre": "COCINAS P2",
        "codigo": "C02",
        "descripcion": "AREA DE FOGONES Y FRIGORIFICOS PLANTA 2",
        "convertirEnZonasDeInstalacion": "TRUE"
      }
    ]
  }
}

```

‘Linea de negocio’ (Lines of business)

Type	Name	Description
String	*! nombre	Lines of business name
String	*! codigo	Lines of business code
String	descripcion	Lines of business description

Boolean	requiereDirectorTecnico	Technical manager required to validate work orders
Boolean	tieneCertificadoPropio	There are specific templates for the documents of this line of business
Boolean	tieneDiagnosis	Environmental risk assessment
Boolean	tieneDiagnosisObligatoria	Mandatory environmental risk assessment
Boolean	tieneOperacionesAnaliticas	the line of business has laboratory test operations
String	cuentaContableVenta	Accounting account for the sale
String	cuentaContableCompra	Accounting account for the purchase
Boolean	generaParteDeTrabajo	Generate work reports after finishing tasks, before visit reports
Boolean	enviaParteDeTrabajoAutomaticamente	Automatically send visit reports after finishing tasks
Boolean	verificarCertificadosSinProtocolos	Technical manager required to validate work orders with no executed cleaning and disinfection protocols
Boolean	sePuedenModificarOrdenesDeTrabajoNoIniciadas	The technician is allowed to modify the work order before starting it
Boolean	permiteEntregaMaterial	Allows delivery of material to the customer
Boolean	rellenarEspecieObligatorio	Filling in the detected species is mandatory
Boolean	solicitarFechaValidez	the expiration date of treatment is mandatory
Integer	numDiasValidezPorDefecto	number of days of treatment validity by default

Boolean	permiteRegenerarPdfCertificado	Devalidate a validated service, edit it and validate it again.
---------	--------------------------------	--

‘Orden de trabajo’ (work order)

Type	Name	Description
String	*! numero	WO number or code
Date	horaInicioEstimada	WO's estimated start date and time
Date	horaFinEstimada	WO's estimated end date and time
Date	horaInicioReal	WO's real start date and time
Date	horaFinReal	WO's real end date and time
String	notaInterna	Internal note for communication
String	notaPublica	Public note for the customer containing recommendations or any other kind of information
String	estado	WO's status
String	estadoAsignacion	WO's status of communication to the customer
Date	fechaConfirmacion	Date in which the Technical Manager has validated the work order
String	codigoEmpleadoCompletado	Code of the employee closing the work order
String	codigoEmpleadoConfirmado	Code of the employee validating the work order
String	tipoOdT	Type of WO
String	horaInicioBloqueo	Date and time when the first time window during which

		this WO may be executed starts
String	horaFinBloqueo	Date and time when the first time window during which this WO may be executed ends
String	horaInicioBloqueo2	Date and time when the second time window during which this WO may be executed starts
String	horaFinBloqueo2	Date and time when the second time window during which this WO may be executed ends
Date	fechaBloqueo	Date (with no time) when this WO must be executed
String	diaSemanaBloqueo	List of weekdays when this WO may be executed
String	otrosBloqueos	Free text to describe other WO's execution restrictions
Long	duracion	WO's planned/final duration
Double	coste	This WO's total cost for the pest control company
Boolean	esLaPrimera	To indicate whether it is the contract's first WO (Only for exports)
String	ipCierre	IP address where the WO is finished
Date	horaCierre	Date and time when the technician finishes the WO
Double	latitudCierre	GPS coordinate (latitude) where the WO is closed
Double	longitudCierre	GPS coordinate (longitude) where the WO is closed
Boolean	certificadoEnviado	Boolean to indicate whether the certificate has already

		been emailed
Double	productividad	WO's price (calculated based on the prices °indicated in the contract/sale)
Double	beneficio	Real profit of this WO (productivity - cost)
Double	rentabilidad	Profitability obtained from this WO once validated (%)
Date	horaInicioEstimadaOriginal	WO's estimated start date and time when the WOs were generated based on the contract/sale
Date	horaFinEstimadaOriginal	WO's estimated end date and time when the WOs were generated based on the contract/sale
String	tipoOrdenAdicional	If it is a WO of type 'ADICIONAL' ('additional'), which accepts the following values: 'CON_COSTE' ('chargeable'), 'AVISO' ('alert'), 'PROACTIVA' ('proactive')
String	modalidad	type of contract to which this WO belongs Accepted values: 'PUNTUAL' ('one-time'), 'MANTENIMIENTO' ('maintenance')
Boolean	periodoIntensivo	Boolean indicating whether this WO will be executed in an intensive period
Boolean	revisadoPlanificacion	Not used
Date	fechaValidezTratamiento	In some countries, it is necessary to indicate the maximum validity date of the services executed in this WO

Date	fechaPrimeraEjecucion	Date in which the WO was executed for the first time. A work order may be unexecuted and re-executed later, but the date in which it was converted to 'EJECUTADA' ('executed') the first time is kept
String	resumenOperaciones	Code indicating the number of 3 possible operation types. Format Type: A(3) P(1) M(4) indicates that there are three analysis operations, one execution protocol, and four maintenance operations. Only for exports
String	plantillaCertificadoCodigo	Certificate template code.
'cliente' { }	*CRT cliente	Customer Minimum info. See table below
'sede' { }	*CRT sede	Minimum info on Customer Site. See table below
'contrato' { }	*CRT contrato	Contracts Minimum Info. See table below
'lineaNegocio' { }	lineaNegocio	line of Business's Minimum info. See table below
'delegacion' { }	*CRT delegacion	Branch office's Minimum info. See table below
'zonaComercial' { }	zonaComercial	Commercial area's minimum info. See table below
'lineasProducto' [{ }]	*CRT lineasProducto	Product Line Minimum info. See table below
'horarios' [{ }]	*! horarios	List of planned or executed timetables. See table below
'lineasTratamiento' [{ }]	*CRT lineasTratamiento	minimum information on a Treatment line. See table below
'operaciones' [{ }]	*CRT operaciones	Collection of Minimum

		Operation Data. See table below
`preguntasRespuestas` [{ }]	*CRT preguntasRespuestas	Collection of Questions & Answers. See table below

‘cliente’ { } (Customer Minimum info)

Type	Name	Description
String	*! codigo	code

‘contrato’ { } (Contracts Minimum Info)

Type	Name	Description
String	*! numero	Number

‘delegacion’ { } (Branch office’s Minimum info)

Type	Name	Description
String	*! codigo	Code

‘horarios’ [{ }] (List of planned or executed timetables)

Type	Name	Description
String	*! codigoTecnico	Code of the employee/technician executing this slot.
Date	*? horaInicioReal	Date and time when the technician actually started this execution slot. It is mandatory when the work order status is EJECUTADA or VERIFICADA. It is also mandatory when the status is CANCELADA, but only if there is no estimated start time (horaInicioEstimada).

Date	*? horaFinReal	Date and time when the technician actually finished this execution slot. It is mandatory when the work order status is EJECUTADA or VERIFICADA. It is also mandatory when the status is CANCELADA, but only if there is no estimated end time (horaFinEstimada).
Date	*? horaInicioEstimada	Date and time when the technician is expected to start this execution slot. It is mandatory when the work order status is PENDIENTE_EJECUTAR. It is also mandatory when the status is CANCELADA, but only if there is no actual start time (horaInicioReal).
Date	*? horaFinEstimada	Date and time when the technician is expected to finish this execution slot. It is mandatory when the work order status is PENDIENTE_EJECUTAR. It is also mandatory when the status is CANCELADA, but only if there is no actual end time (horaFinReal).
Integer	minutosDesplazamiento	Minutes it took the technician to arrive to the WO's site address

'lineaNegocio' { } (line of Business's Minimum info)

Type	Name	Description
String	*! codigo	Code

‘lineasProducto’ [{ }] (Product Line Minimum info)

Type	Name	Description
String	*! codigoProducto	Product code
BigDecimal	consumo	Amount to be consumed/already consumed
String	uomConsumo	Unit of consumption (l, ml, cc, kg, g, etc.)
String	codigoTratamientoAsociado	Code of the service to which this product is linked

‘lineasTratamiento’ [{ }] (minimum information on a Treatment line)

Type	Name	Description
String	codigo	Internal code for this line
String	*! codigoTratamiento	Code of the service
zonas' [{ }]	zonas	Collection of ‘zonas’ minimum information of premises' area

‘zonas’ [{ }] (minimum information on the Install Area)

Type	Name	Description
String	nombre	Name/code of the Area
String	descripcion	Short description of the Area

‘operaciones’ [{ }] (Collection of Minimum Operation Data)

Type	Name	Description
String	*! tipoOperacion	type of operation, see in the section ‘Setup of Legionella operations’.
String	*? codigo	Operation code
String	estado	Operation state.

		Accepted values: 'PENDIENTE'(PENDING), 'FINALIZADA'(FINISHED), 'CANCELADA' (CANCELLED)
String	codigoEntidad	Code of the entity on which this operation is performed. Ex: CIR_ACS_1
String	instrucciones	Operation procedure
String	nombre	Operation name
Integer	duracion	Duration (minutes)
Boolean	crearTomaDatos	Create data collection (if not exist)
String	sufijoNombre	Name suffix

`preguntasRespuestas` [{ }] (Collection of Questions & Answers)

Type	Name	Description
String	pregunta	Question
String	codigoPregunta	Question code
String	respuesta	Response
Integer	orden	Order
TipoRespuestaOdt	*! tipoRespuesta	Type of WO response; Accepted values: YES_NO, TEXTO_LARGO, ENTERO, DECIMAL

`sede` { } (Minimum info on Customer Site)

Type	Name	Description
String	*! codigo	code

‘zonaComercial’ {} (Commercial area’s minimum info)

Type	Name	Description
String	codigo	Code

Payload: ‘Orden de trabajo’ (work order)

```
{
  "tipoEntidadIgeo": "Orden_De_Trabajo",
  "codigoEntidadIgeo": "1009",
  "comando": "create",
  "remoteOperationId": "JL 1245-789",
  "datos": {
    "numero": "1009",
    "cliente": {
      "codigo": "1346"
    },
    "sede": {
      "codigo": "172347"
    },
    "delegacion": {
      "codigo": "AND"
    },
    "lineaNegocio": {
      "codigo": "CP"
    },
    "contrato": {
      "numero": "5503-2024"
    },
    "zonaComercial": {
      "codigo": "N"
    },
    "notaInterna": "Lorem Ipsum es simplemente el texto de relleno de las imprentas y archivos de texto. Lorem Ipsum ha sido el texto de relleno estándar de las industrias desde el año 1500",
    "notaPublica": "Al contrario del pensamiento popular, el texto de Lorem Ipsum no es simplemente texto aleatorio. Tiene sus raíces en una pieza clásica de la literatura del Latín, que data del año 45 antes de Cristo, haciendo que este adquiera más de 2000 años de antigüedad",
    "estado": "ejecutada",
```

```

"estadoAsignacion": "bloqueada",
"tipoOdT": "prevista",
"horarios": [
  {
    "codigoTecnico": "JOAQ",
    "horaInicioEstimada": "25/04/2024 09:30:00",
    "horaFinEstimada": "25/04/2024 10:30:00"
  }
],
"lineasTratamiento": [
  {
    "Codigo": "1",
    "nombre": "Control de plagas",
    "codigoTratamiento": "DES"
  }
],
"lineasProducto": [
  {
    "codigoProducto": "Co_207",
    "codigoTratamientoAsociado": "DES",
    "consumo": "3",
    "uomConsumo": "uds"
  }
],
"horaInicioEstimada": "25/04/2024 11:30:00",
"horaFinEstimada": "30/04/2024 12:30:00"
}
}

```

'Linea tratamiento ODT' (treatment line)

Type	Name	Description
String	*! codigoOrdenDeTrabajo	Work order code
String	*! codigo	Service line code
String	*! codigoServicio	Treatment / Service code
String	*! nombre	Name
String	*? codigoLineaVenta	Contract line code
Integer	orden	Order

String	descripcion	Treatment description
String	indicacionesEjecucion	Execution instructions
String	creadoPor	Code of the employee creating it
String	codigoContrato	Contract code
Date	fechaProximoServicio	Next service date
Collection of 'zonasATratar' [{}]	*CRT zonasATratar	Areas to be treated. See table below.

'zonasATratar' [{}] (Areas to be treated)

Type	Name	Description
String	*! nombre	Name
String	*? codigo	Code
String	descripcion	Description
Boolean	convertirEnZonasDeInstalacion	Convert these to premises' areas

Payload: 'Linea tratamiento ODT' (treatment line)

```
{
  "tipoEntidadIgeo": "LINEA_TRATAMIENTO_ODT",
  "idEntidadIgeo": 37281491,
  "codigoEntidadIgeo": "PRU",
  "comando": "UPDATE",
  "fecha": "18/11/2025 16:47:35",
  "datos": {
    "id": 37281491,
    "nombre": "Tratamiento especial contra acaros",
    "codigoOrdenDeTrabajo": "W01",
    "codigoServicio": "ACARS",
    "codigo": "PRU",
    "codigoLineaVenta": "CP-L1",
    "orden": 0,
    "creadoPor": "JASE",

```

```

"codigoContrato": "C-505-2025",
"fechaProximoServicio": null,
"zonasATratar": [
  {
    "codigo": "J34",
    "nombre": "jardín",
    "descripcion": ""
  },
  {
    "codigo": "zn232",
    "nombre": "Parqueadero",
    "descripcion": ""
  }
],
"descripcion": "esto es un tratamiento especial contra acaros",
"indicacionesEjecucion": "este tratamiento siempre hay que hacerlo
con mascarillas",

},
"empresaId": 130
}

```

‘Operacion legionella’ (Legionella operations)

Type	Name	Description
String	*! numeroOdt	Work order number
String	*! tipoOperacion	type of operation, see in the section ‘Setup of Legionella operations’.
String	*? codigo	Operation code
String	estado	Operation state. Accepted values: 'PENDIENTE'(PENDING), 'FINALIZADA'(FINISHED), 'CANCELADA' (CANCELLED)
String	codigoEntidad	Code of the entity on which this operation is performed. Ex: CIR_ACS_1

String	instrucciones	Operation procedure
String	nombre	Operation name
Integer	duracion	Duration (minutes)
Boolean	crearTomaDatos	Create data collection (if not exist)
String	sufijoNombre	Name suffix

Payload: 'Operacion legionella' (Legionella operations)

```
{
  "tipoEntidadIgeo": "OPERACIONES_LEGIONELLA_ODT",
  "codigoEntidadIgeo": "7131526",
  "comando": "UPDATE",
  "fecha": "25/10/2024 09:32:11",
  "datos": {
    "numeroOdt": "299361",
    "codigo": "RELL_TORR_TEST",
    "tipoOperacion": "RELL_TORR",
    "estado": "PENDIENTE",
    "codigoEntidad": "TOR1",
    "instrucciones": "Revisión completa del relleno",
    "nombre": "Relleno. Revisión completa",
    "duracion": 15,
    "crearTomaDatos": false,
    "sufijoNombre": null
  },
}
```

'OrigenCliente' (Customer origin)

Type	Name	Description
String	*! nombre	Name
String	*! tipo	Customer origin type
String	*! codigo	Code
String	notas	Notes

String	email	Email
String	telefono	Phone number
String	movil	Customer's mobile number
String	codigoZonaComercial	Commercial area code
String	alias	Alias
String Collection []	codigosDelegaciones	Branch codes
'datosFacturacion' { }	datosFacturacion	Invoicing data. See table below

'datosFacturacion' { } (Billing data address)

Type	Name	Description
String	*! nombreFacturacion	Billing data name
String	*! codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	*! direccion	Address.
String	*! codigoPostal	Postal code.
String	*! localidad	City/town.
String	*! codigoProvincia	Province (county, district) code. See Appendix
String	*! alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR,

		BR, MX, etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/L ist_of_ISO_3166_country_co des
--	--	---

Payload: 'OrigenCliente' (Customer origin)

```
{
  "tipoEntidadIgeo": "ORIGEN_CLIENTE",
  "codigoEntidadIgeo": "OC-1",
  "comando": "CREATE",
  "datos": {
    "nombre": "Jordan Belfort",
    "codigo": "OC-1",
    "tipo": "broker",
    "notas": "notes",
    "email": "JordanBelfort@Broker",
    "telefono": "656999988",
    "movil": "656999989",
    "codigosDelegaciones": [
      "01A",
      "01B",
      "MAD1"
    ],
    "codigoZonaComercial": "COD_01",
    "alias": "The Wolf of Wall Street",
    "datosFacturacion": {
      "nombreFacturacion": "JordanBelfort, S.L.",
      "codigoIdentificacion": "JB10881902",
      "direccion": "PASEO DEL CLUB DEPORTIVO, 1",
      "codigoPostal": "28223",
      "localidad": "POZUELO DE ALARCÓN",
      "codigoProvincia": "ES-M"
    }
  }
}
```

'Producto_Proveedor' (Product-Service_vendor)

Type	Name	Description
String	*! codigoProducto	Item / Service Code
String	*! codigoProveedor	Vendor code
String	codigoSegunProveedor	Code according to vendor
Boolean	esPrincipal	Is the leading vendor of this product
Boolean	multipoCompra	Purchase multiple
String	precioCompra	Purchase price
String	subCuenta	Accounting subaccount
String	tipoDescuento	Discount type Accepted values: 'PORCENTAJE' (Percentage), 'IMPORTE' (Amount)
String	unidadMinimaCompra	Minimum purchase unit
Boolean	valorDescuento	Discount value

Payload: 'Producto_Proveedor' (Product-Service_vendor)

```
{
  "tipoEntidadIgeo": "PRODUCTO_PROVEEDOR",
  "codigoEntidadIgeo": "test2",
  "parentId": null,
  "parentCode": null,
  "comando": "CREATE",
  "fecha": "05/07/2024 13:44:13",
  "datos": {
    "codigoProducto": "TR01",
    "codigoProveedor": "Prov01",
    "codigoSegunProveedor": "test2",
    "precioCompra": null,
    "unidadMinimaCompra": null,
    "multipoCompra": null,
    "esPrincipal": true,
  }
}
```

```

        "valorDescuento": 5.00,
        "tipoDescuento": "PORCENTAJE",
        "subcuenta": null
    }
}

```

‘Producto’ (Product-Service)

Type	Name	Description
String	*! codigo	Code
String	*! familia	Line of family code
String	*! nombre	Item / Service Name
String	*! tipo	Type Accepted values: ‘ARTICULO’ (Item), ‘TRATAMIENTO’ (Service)
String	agenteACombatir	Target
Boolean	altaToxicidad	Highly toxic
String	clasificacion	Classification
String	descripcion	Description
String	descripcionTratamiento	Service's additional description
String	dosificacion	Dosage
String	ean13	EAN-13 barcode
BigDecimal	efectoResidual	Residual effect (days)
Boolean	esBiocida	Biocide
Boolean	esComprable	Buyable
Boolean	esTangible	Tangible
Boolean	esTratamientoPlagas	Service for pest control or environmental health companies
Boolean	esVendible	Sellable

String	fabricante	Manufacturer
String	finalidad	Purpose
String	grupoBiocida	Biocide type code
String	indicacionesEjecucion	Execution instructions
String	materiaActiva	Active matter
MetodoAplicacion	metodoAplicacion	Application method Accepted values: 'PULVERIZACION' (Pulverisation), 'NEBULIZACION' (Nebulisation), 'TERMONEBULIZACION' (Thermonebulisation), 'PUNTEO_GEL' (Gel stippling), 'ESPOLVOREO' (Sprinkling), 'BLOQUE_SUSPENDIDO' (Suspended block), 'INYECCION' (Injection), 'AEROSOL' (Spray), 'BROCHEADO' (Lacquering), 'PINTURA' (Paint), 'TRAMPA_FEROMONAS' (Pheromone trap), 'TRAMPA_ADHESIVA' (Glue trap), 'CEBADEROS_ALTA_SEG' (High-security bait box), 'CEBADEROS' (Bait boxes), 'INYECCION_BARRERA' (Barrier injection), 'INYECCION_MADERA' (Wood injection), 'BARRERA_ZANJA' (Ditch), 'BIOESTACION_SUELO' (Floor biostation), 'PULV_AMB_LOCALIZADA' (Localised environmental pulverisation), 'BIOESTACION_PARED' (Wall biostation), 'ULV' (ULV),

		'NEBULIZACION_BV' (LV nebulisation), 'TRAMPA_CAPTURA' (Capture trap), 'RED_EXCLUSION' (Exclusion net), 'PUAS_EXCLUSION' (Exclusion spikes), 'CANON_LANZARREDES' (Net cannon), 'TRAMPA_ELECTRICA' (Electric trap), 'TRAMPA_ATRAYENTE' (Lure trap), 'BEBEDEROS' (Water dispenser), 'MONITORIZACION' (Monitoring), 'ADHESIVO' (Glue), 'DISOLUCION_EN_AGUA_D EL_CIRCUITO' (Dissolution in circuit's water), 'SUELTA_EJEMPLARES' (Specimen release), 'PRODUCTO_FUMIGENO' (Fumigation product), 'NEBULIZACION_CON_MIC RODIFUSOR' (Nebulisation with microdiffuser), 'OTROS' (Other), 'DISOLUCION_EN_AGUA' (Dissolution in water), 'MATERIAL_DE_SOPORTE' (Support materials), 'GRANULADO' (Granules), 'BLOQUE' (Block), 'SIN_METODO_APLICACIO N' (With no application method), 'RODILLO' (Roller), 'FUMIGACION' (Fumigation)
Integer	minutosEjecucion	Duration (minutes):
BigDecimal	multiploCompra	Purchase multiple
String	nombreComercial	Trade name

Boolean	obsoleto	Obsolete
String	plazoSeguridad	Safety period
BigDecimal	porcentajeMateriaActiva	Active matter's percentage (%)
BigDecimal	precioCompra	Purchase price
String	presentacion	Product's presentation
String	registro	Record
Boolean	requiereChecklist	Checklist required (HACCP)
Boolean	seSubcontrata	Service subcontracted
String	subCuenta	Accounting subaccount for purchases
String	subcuentaParaVentas	Accounting subaccount for sales
String	tipoToxicidad	Toxicity category Accepted values: 'AGUDA' (acute), 'ESPECIFICA_EXPOSICION_UNICA' (Specific target organ toxicity (single exposure)), 'ESPECIFICA_EXPOSICION_REPETIDA' (Specific target organ toxicity (repeated exposure)), 'CANCERIGENAS_MUTAGENICAS_O_TOXICAS_PARA_LA_REPRODUCCION' (Carcinogenicity, germ cell mutagenicity, or reproductive toxicity), 'SENSIBILIZACION_RESPIRATORIA' (Respiratory sensitivity, category 1 and subcategories 1A and 1B)
String	toxicidad	Toxicity/hazard category
BigDecimal	unidadMinimaCompra	Minimum purchase unit.

		Number of indivisible units to make a purchase order
Date	validoHasta	Valid until
String	imagen	Product image in base64
String	tipoServicioTratamiento	Service's type Accepted values: 'FISICO' (Physical), 'QUIMICO' (Chemical), 'FISICOQUIMICO' (Physicochemical), 'BIOLOGICO' (Biological), 'QUIMICOBIOLOGICO' (Chemicobiological), 'MODIFICACION_DEL_HABITAT' (Habitat modification), 'MECANICO' (Mechanical)
'unidadMedidaAlmacenaje' { }	*? unidadMedidaAlmacenaje	Storage's unit of measurement. By default are units of the international system. See table below
'unidadMedidaCompra' { }	*? unidadMedidaCompra	Purchase's unit of measurement. By default are units of the international system. See table below
'unidadMedidaVenta' { }	*? unidadMedidaVenta	Sales/consumption's unit of measurement. By default are units of the international system. See table below
String Collection []	clasificacionesCLP	CLP categories. Accepted values: 'Li1' (Li1 - Flammable liquids - Category 1 - Physical hazards), 'Li2' (Li2 - Flammable liquids - Category 2 - Physical hazards), 'Li3' (Li3 - Flammable liquids - Category 3 - Physical hazards),

		'Ai1' (Ai1 - Flammable aerosols - Category 1 - Physical hazards), 'Ai2' (Ai2 - Flammable aerosols - Category 2 - Physical hazards), 'GPc' (GPc - Gases under pressure - Compressed gas - Physical hazards), 'T1' (T1 - Acute toxicity - Category 1 - Health hazard), 'T2' (T2 - Acute toxicity - Category 2 - Health hazard), 'T3' (T3 - Acute toxicity - Category 3 - Health hazard), 'T4' (T4 - Acute toxicity - Category 4 - Health hazard) 'CA' (CA - Skin corrosion/irritation - Type A - Health hazard), 'CB' (CB - Skin corrosion/irritation - Type B - Health hazard), 'CC' (CC - Skin corrosion/irritation - Type C - Health hazard), 'LO1' (LO1 - Serious eye damage/eye irritation - Category 1 - Health hazard), 'LO2' (LO2 - Serious eye damage/eye irritation - Category 2 - Health hazard), 'S1' (S1 -Sensitisation of the respiratory tract or the skin - Category 1 - Health hazard), 'S2' (S2 -Sensitisation of the respiratory tract or the skin - Category 2 - Health hazard), 'M1' (M1 -Germ cell mutagenicity - Category 1 - Health hazard), 'M2' (M2 -Germ cell mutagenicity - Category 2 - Health hazard), 'Cr1' (Cr1 - Carcinogenicity - Category 1 - Health hazard), 'Cr2' (Cr2 - Carcinogenicity -
--	--	---

		Category 1 - Health hazard), ‘TrA’ (TrA - Reproductive toxicity - Type A - Health hazard), ‘TrB’ (TrB - Reproductive toxicity - Type B - Health hazard), ‘TrL’ (TrL - Reproductive toxicity - Lactation category - Health hazard), ‘Tu1’ (Tu1 - Specific target organ toxicity (single exposure) - Category 1 - Health hazard), ‘Tu2’ (Tu2 - Specific target organ toxicity (single exposure) - Category 2 - Health hazard), ‘Tu3’ (Tu3 - Specific target organ toxicity (single exposure) - Category 3 - Health hazard), ‘Te1’ (Te1 - Specific target organ toxicity (repeated exposure) - Category 1 - Health hazard), ‘Te2’ (Te2 - Specific target organ toxicity (repeated exposure) - Category 2 - Health hazard), ‘P1’ (P1 - Aspiration toxicity - Category 1 - Health hazard), ‘PMa1’ (PMa1 - Hazardous to the aquatic environment - Category 1 - Hazardous to the environment), ‘Pma2’ (PMa2 - Hazardous to the aquatic environment - Category 2 - Hazardous to the environment), ‘PMa3’ (PMa3 - Hazardous to the aquatic environment - Category 3 - Hazardous to the environment), ‘PMa4’ (PMa4 - Hazardous to the aquatic environment - Category 4 - Hazardous to
--	--	---

		the environment), 'PMa5' (PMa5 - Hazardous to the aquatic environment - Category 5 - Hazardous to the environment), 'Po1' (Po1 - Hazardous to the ozone layer - Category 1 - Hazardous to the environment),
Collection of 'impuestosVenta' [{}]	*! impuestosVenta	Collection of Sales tax for each tax area. See table below

'impuestosVenta' { } (sales taxes)

Type	Name	Description
String	*! zonaFiscal	Tax area code. Duplicates are not accepted
BigDecimal	*! impuesto	exact tax percentage

'unidadMedidaAlmacenaje' { } (Storage's unit of measurement)

Type	Name	Description
String	*! simbolo	symbol. (m,ft,L,fl oz...)
String	*! sistema	Unit system Accepted values: 'INTERNACIONAL' (International system), 'IMPERIAL_UK' (Anglo-Saxon system (UK)), 'IMPERIAL_US' (Anglo-Saxon system (USA))

'unidadMedidaCompra' { } (Purchase's unit of measurement)

Type	Name	Description
String	*! simbolo	symbol. (m,ft,L,fl oz...)

String	*! sistema	Unit system Accepted values: 'INTERNACIONAL' (International system), 'IMPERIAL_UK' (Anglo-Saxon system (UK)), 'IMPERIAL_US' (Anglo-Saxon system (USA))
--------	------------	---

‘unidadMedidaVenta’ { } (Sales/consumption's unit of measurement)

Type	Name	Description
String	*! simbolo	symbol. (m,ft,L,fl oz...)
String	*! sistema	Unit system Accepted values: 'INTERNACIONAL' (International system), 'IMPERIAL_UK' (Anglo-Saxon system (UK)), 'IMPERIAL_US' (Anglo-Saxon system (USA))

Payload: ‘Producto’ (Product-Service)

```
{
  "tipoEntidadIgeo": "PRODUCTO",
  "idEntidadIgeo": 29,
  "codigoEntidadIgeo": "GELANT",
  "comando": "UPDATE",
  "fecha": "02/07/2024 11:55:00",
  "datos": {
    "tipo": "ARTICULO",
    "nombre": "Gel Antitermitas",
    "familia": "PXI",
    "descripcion": "Gel Antitermitas TEST",
    "codigo": "GELANT",
    "esVendible": true,
    "esComprable": false,
    "obsoleto": false,
    "impuestosVenta": [],
    "esBiocida": true,
```

```

    "registro": "21/20-10-2001",
    "unidadMedidaCompra": {
        "simbolo": "g",
        "sistema": "INTERNACIONAL"
    },
    "unidadMedidaVenta": {
        "simbolo": "g",
        "sistema": "INTERNACIONAL"
    },
    "unidadMedidaAlmacenaje": {
        "simbolo": "g",
        "sistema": "INTERNACIONAL"
    },
    "clasificacionesCLP": [],
    "esBasico": false,
    "esTratamientoPlagas": false,
    "seSubcontrata": false
}

{
    "tipoEntidadIgeo": "PRODUCTO",
    "codigoEntidadIgeo": "TEST001",
    "comando": "CREATE",
    "datos": {
        "tipo": "TRATAMIENTO",
        "nombre": "TEST TRATAMIENTO",
        "familia": "TLA",
        "descripcion": "BELEN",
        "codigo": "TEST001",
        "esVendible": false,
        "esComprable": true,
        "obsoleto": false,
        "impuestosVenta": [
            {
                "zonaFiscal": "ES",
                "impuesto": 0.0
            }
        ],
        "esBiocida": false,
        "unidadMedidaCompra": {

```

```

        "simbolo": "uds",
        "sistema": "INTERNACIONAL "
    },
    "unidadMedidaVenta": {
        "simbolo": "uds",
        "sistema": "INTERNACIONAL "
    },
    "unidadMedidaAlmacenaje": {
        "simbolo": "uds",
        "sistema": "INTERNACIONAL "
    },
    "metodoAplicacion": "MONITORIZACION",
    "tipoToxicidad": "ESPECIFICA_EXPOSICION_REPETIDA",
    "esBasico": false
}
}

```

‘Proveedor’ (vendor)

Type	Name	Description
String	*! estado	vendors: Accepted values: Status: ‘ACTIVO’ (‘active’), ‘INACTIVO’ (‘inactive’)
String	*! nombre	Name
String	*! proveedorOAcreeedor	vendor or creditor Accepted values: ‘PROVEEDOR’ (‘vendor’), ‘ACREEDOR’ (‘creditor’)
String	*! tipoProveedor	Provider type: Accepted values (comma-separated for multiple values): ‘MATERIAL’ (‘Materials’), ‘SERVICIOS’ (‘Services’), ‘SUBCONTRATA’ (‘Subcontractor’)
String	*! zonaFiscal	Fiscal zone code (see in the

		table of fiscal zone codes)
String	*? codigo	Provider Code
String	costePortes	Cost of postage
String	estadoEvaluacion	Assessment status. Accepted values: 'EN_PRUEBAS' ('Test in progress'), 'APROBADO' ('Passed'), 'ISO9001' ('ISO 9001 certification'), 'NO_APTO' ('Unfit')
Date	fechaEvaluacion	Vendor's assessment date for ISO 9001 standard
Date	fechaReevaluacion	Vendor's Reassessment date for ISO 9001 standard
String	formaCobro	Payment receipt mode. Accepted values: 'inmediata' (immediate), 'd15' (within 15 days), 'd30' (within 30 days), 'd60' (within 60 days), 'd90' (within 90 days), 'd30y60' (within 30 and 60 days), 'd60y90' (within 60 and 90 days), 'd3060y90' (within 30, 60 and 90 days) 'nDias' (within n days), 'variasFechas' (different customized dates) 'd30y90' (within 30 and 90 days)
BigDecimal	importeMinimoCompra	Minimum purchase amount
BigDecimal	importeMinimoPortesGratis	Minimum amount Free Shipping
String	numRegistroBiocidas	Biocide record no.
String	observaciones	observations

String	observacionesFacturacion	remarks for Invoicing
Integer	pagoANDias	N days payment
String	subtipoProveedor	If any of the tiposProveedor is SERVICIOS this field is mandatory. In any other case it shall not be used. Provider subtypes Accepted values (comma-separated for multiple values): 'SUMINISTROS' ('Supplies'), 'MANTENIMIENTOS' ('Maintenance operations'), 'LABORATORIO' ('Lab'), 'GESTION_DE_RESIDUOS' ('Waste management'), 'TRANSPORTE_DE_RESIDUOS' ('Waste transportation')
'datosContacto' { }	datosContacto	Client contact details. See table below
'datosFacturacion' { }	datosFacturacion	Invoicing data. See table below

'cuentas' [{}] (Bank accounts)

Type	Name	Description
String	*! iban	International Bank Account Number.
String	*! nombre	Name.
Boolean	*! activa	If this account is active or not.
String	*! codigo	Code.

‘datosContacto’ { } (Contact details)

Type	Name	Description
String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

‘datosFacturacion’ { } (Billing data address)

Type	Name	Description
String	*! nombreFacturacion	Billing data name
String	*! codigoidentificacion	ID codification of the invoicing data Accepted values: Codice fiscale, CIF, VAT number, NIF, NIE, RFC, RUC, CUIT, etc.
String	*! direccion	Address.
String	*! codigoPostal	Postal code.
String	*! localidad	City/town.
String	*! codigoProvincia	Province (county, district) code. See Apendix
String	*! alfa2codepais	Two letters country codes. Accepted values: ES, IT, FR, BR, MX,

		etc. For another codes please search for the complete list of countries ISO 3166. https://en.wikipedia.org/wiki/List_of_ISO_3166_country_codes
--	--	---

'personaContacto' { } (Contact person)

Type	Name	Description
String	*! nombre	Name.
String	*! codigo	Code.
String	movil	Mobile phone number.
String	telefono	Phone number.
String	email	Email address.
String	cargo	Position in the company, building or public administration.
Boolean	esLaPrincipal	If is the principal.
String	direccion	Address.
String	codigoPostal	Postal code.
String	localidad	Town/City.
String	numeroFax	Fax number.
String	codigoProvincia	Province (county, district) code.
String	codigoidentificacion	ID codification of the contact person

Payload: 'Proveedor' (vendor)

```
{
  "tipoEntidadIgeo": "PROVEEDOR",
  "codigoEntidadIgeo": "QA-175",
```

```

"comando": "CREATE",
"datos": {
  "codigo": "QA-175",
  "tipoProveedor": "SERVICIOS",
  "subtipoProveedor": "LABORATORIO",
  "nombre": "Byostasys",
  "observaciones": "Proveedor subcontratado",
  "estado": "ACTIVO",
  "observacionesFacturacion": "Subcontratado para mantenimientos ",
  "formaCobro": "d15",
  "metodoPago": "TR",
  "zonaFiscal": "ES",
  "datosFacturacion": {
    "nombreFacturacion": "PDITEST S.A",
    "codigoIdentificacion": "CP123654",
    "direccion": "PLAZA RAIMAN GONZALEZ FRUTOS 5",
    "codigoPostal": "30001",
    "localidad": "Región De Murcia",
    "codigoProvincia": "ES-MU",
    "alfa2codepais": "ES"
  },
  "datosContacto": {
    "telefono": 12345697,
    "movil": 12345697,
    "email": "pruebasqa2@igeo.com",
    "fax": 12345697
  },
  "numRegistroBiocidas": "ENUM-001",
  "proveedorOAcreeedor": "PROVEEDOR",
  "importeMinimoCompra": 26,
  "costwortes": 3,
  "importeMinimoPortesGratuitos": 2,
  "pagoANDias": 10,
  "fechaEvaluacion": "15/07/2024",
  "fechaReevaluacion": "26/07/2024",
  "estadoEvaluacion": "NO_APTO"
}
}

```

'Sede' (site)

Type	Name	Description
String	*! nombre	Site name
String	*! codigo	Site Code
String	*! codigoCliente	Code of customer to whom site belongs
String	*! codigoDelegacion	Branch office code
String	estado	Status: Accepted values: 'ACTIVO' ('active'), 'INACTIVO' ('inactive')
String	direccion2	Second line of address (building name, flat number, etc.)
String	distrito	District / block where the site is.
Date	fechaAlta	Site registration date
String	codigoSecundario	Secondary code
String	codigoZonaComercial	Code of commercial area
Double	latitud	GPS Latitude
Double	longitud	GPS Longitude
Double	distanciaDelegacionSede	Distance from the branch office to this site (in km)
String	motivoInactivo	Cause of inactivity
Date	fechaBaja	Date of conversion to 'inactive'
String	personaContacto	Name of main contact's person
String	telefonoPersonaContacto	Phone number of main contact's person
String	horarios	Schedules authorised by this site

String	m2	Total square meters of the site surface
String	m3	Site total cubic meters
Boolean	notificarCliente	If the customer needs to be notified before an appointment
String	cifDni	Site VAT number
String	correoElectronicoMarketing	Email address used for marketing communications
String	emailIncidencias	Email address for reporting incidents.
String	emailsNotificacionesParteDeTrabajo	Email addresses for work report notifications.
String	emailsNotificacionesCertificadoDeServicio	Email addresses for service certificate notifications.
String	observaciones	General field for observations or comments.
String	notaInternaParaTrabajosFuturos	Internal note for future jobs
String	formaNotificarSedeCliente	Method of notifying the client's office location. Accepted values: TELEFONO (phone) EMAIL CARTA (postal mail) FAX
Integer	*TODO diasAntelacionNotificacion	Number of days in advance for sending notifications.
String	horaInicioBloqueo	Start time for a blocking or reservation period (slots in which it is allowed to execute jobs)
String	horaFinBloqueo	End time for a blocking or reservation period (slots in which it is allowed to execute jobs)

String	horaInicioBloqueo2	Alternative start time for a secondary blocking period.
String	horaFinBloqueo2	Alternative end time for a secondary blocking period.
String	diasBloqueo	Specific days allocated for blocking or reservation (days when it is mandatory to execute jobs)
String	zonaHoraria	Time zone. e.g.: 'Europe/Madrid' or 'America/Argentina/Cordoba' https://en.wikipedia.org/wiki/List_of_tz_database_time_zones
String	emailEnvioFacturas	Email addresses for invoicing notifications.
String	telefonoRecodatorioCitas	Phone number used for appointment reminders.
String	distritoEnvio	District area where invoices are sent.
String	codigoActividad	Activity code
String	codigoldioma	Site language code (es_ES, en_GB, fr_FR, etc.) Use Locale Format. These codes are formatted as follows: Language Code (ISO 639-1): A two-letter lowercase identifier for a language. Example: "en" (English), "es" (Spanish), "fr" (French). Country Code (ISO 3166-1 alpha-2): A two-letter uppercase identifier for a country. Example: "US" (United States), "FR"

		(France), "DE" (Germany). Locale Format (Combination of both): Example: "en_US" (English, United States), "es_ES" (Spanish, Spain), "fr_CA" (French, Canada).
'datosPostalesEnvio' { }	datosPostalesEnvio	Postal data for sending invoices. See table below
'datosPostales' { }	datosPostales	Site postal data. See table below
'datosContacto' { }	datosContacto	Contact Info. See table below
'actividad' { }	actividad	OBSOLETE Type of activity. See table below
'delegacion' { } OBSOLETE	delegacion	OBSOLETE Maintained for backward compatibility only. branch. See table below
'idioma' { } OBSOLETE	*CRT idioma	OBSOLETE Maintained for backward compatibility only. language. See table below

'actividad' { } (Activity)

Type	Name	Description
String	codigo	Code.

'delegacion' { } (Branch)

Type	Name	Description
String	codigo	Code.

'datosContacto' { } (Contact details)

Type	Name	Description
------	------	-------------

String	telefono	Phone Number.
String	movil	Mobile phone number.
String	email	Email address.
String	fax	Fax number.

'datosPostales' { } (Postal data)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	pais	Country name
String	codigoProvincia	Province (county, district) code
String	alfa2codepais	Country Code eg: 'ES'

'datosPostalesEnvio' { } (Postal data Invoicing Info)

Type	Name	Description
String	direccion	Address (street and number)
String	codigoPostal	Postal code
String	localidad	City/town
String	pais	Country name
String	codigoProvincia	Province (county, district) code
String	alfa2codepais	Country Code eg: 'ES'

'gestionadoPor' { } (Managed by)

Type	Name	Description
------	------	-------------

String	codigo	Code of the employee who manages the entity,
--------	--------	--

'idioma'{} (Language)

Type	Name	Description
String	codigo	Language codification.

Payload: 'Sede' (site)

```
{
  "tipoEntidadIgeo": "SEDE",
  "codigoEntidadIgeo": "50",
  "comando": "create",
  "remoteOperationId": "TR-50",
  "datos": {
    "numeroSede": "50",
    "zonaHoraria": "Europe/ANDORRA",
    "codigoZonaComercial": "NAV",
    "codigoIdioma": "es_VE",
    "codigoActividad": "COMR",
    "emailsNotificacionesParteDeTrabajo": "daniela@moyano.com",
    "emailsNotificacionesCertificadoDeServicio":
"andrea@britto.com",
    "observaciones": "Pasara la prueba",
    "notaInternaParaTrabajosFuturos": "Avisar con un sms antes de
venir",
    "incluirPlanoEnCertificadoServicio": false,
    "emailEnvioFacturas": "victor12@igeoerp.com",
    "telefonoRecodatorioCitas": "+34 845749652",
    "distritoEnvio": "GETAFE",
    "datosPostalesEnvio": {
      "direccion": "calle Ebro",
      "localidad": "Torrejon de ardoz",
      "codigoProvincia": "ES-M",
      "codigoPostal": "28850",
      "alfa2codepais": "ES"
    },
    "zonas": [],

```

```

"correoElectronicoMarketing": "fullventas1@ventas.com",
"nombre": "Sede Oporto III",
"codigo": "50",
"codigoCliente": "1346",
"latitud": 1.15,
"longitud": 2.30,
"distanciaDelegacionSede": 8.50,
"estado": "ACTIVO",
"motivoInactivo": "Ausente",
"direccion2": "Piso 10 puerta 2",
"personaContacto": "JOTA BOSS",
"telefonoPersonaContacto": "+58 123456789",
"horarios": "9am a 23pm",
"m2": "80.50",
"m3": "92.70",
"notificarCliente": true,
"formanotificarsedeciente": "EMAIL",
"cifDni": "Z123456Y",
"distrito": "Adentro",
"tipo": "CLIENTE",
"datosContacto": {
    "telefono": "+34 852963",
    "movil": "+34 741852",
    "email": "contacto2@contacto.com",
    "fax": "0900 123456"
},
"datosPostales": {
    "direccion": "Cam. de Valladolid, 33",
    "codigoPostal": "28250",
    "localidad": "Torrelodones",
    "codigoProvincia": "ES-M",
    "alfa2codepais": "ES",
    "pais": "España"
},
"delegacion": {
    "codigo": "DN"
}
}
}

```

'Toma datos' (Data collection)

Type	Name	Description
String	*! numeroDeCliente	Customer code
String	*! codigoSede	Commercial area's name
String	*! numeroDeContrato	Contract number
String	*! subgrupoTipoOperacion	Type of element. Accepted values: 'CIRCUITO_ACS' ('DHW circuit'), 'ACUMULADOR' ('Accumulator'), 'CIRCUITO_AFCH' ('CWHC circuit'), 'DEPOSITO_AFCH' ('CWHC Storage tank'), 'CIRCUITO_HIDROMASAJE' ('Hydromassage circuit'), 'HIDROMASAJE' ('Hydromassage tub'), 'ENFRIADOR_EVAPORATIVO' ('Cooler'), 'FUENTE' ('Fountain'), 'CIRCUITO_FO' ('Decorative fountains' circuit), 'DEPOSITO_HUM' ('Humidifiers circuit'), 'DEPOSITO_NEB' ('Nebuliser Storage tank'), 'DEPOSITO_OTRO' ('Other Storage tank'), 'CIRCUITO_OTRO' ('Other circuit'), 'PISCINA' ('Swimming pool'), 'TORRE' ('Tower'), 'CIRCUITO_SISTEMAS_REFRIGERACION' ('Cooling systems' circuit'), 'DEPOSITO_RA' ('Sprinkler irrigation storage tank'), 'CIRCUITO_RA' ('Sprinkler irrigation circuit'), 'CIRCUITO_SCI' ('Fire

		protection system's circuit'), 'DEPOSITO_SCI' ('Fire protection system's storage tank'), 'DEPOSITO_SLV' ('Car wash systems' storage tank'), 'CIRCUITO_SLV' ('Car wash system's circuit'),
String	*! codigoElemento	Code of the element
String	codigoElementoPadre	Code of the parent element Mandatory if element type has parent E.g. DEPOSITO_AFCH must always belong to a CIRCUITO_AFCH
String	instrucciones	Description of the installation
Date	fechaUltimaLimpiezaYDesinfeccion	Date of last cleaning and disinfection
CircuitoAFCH {}	circuitoAFCH	AFCH Circuit (Cold Water for Human Consumption)
DepositoAFCH {}	DepositoAFCH	AFCH Deposit (Cold Water for Human Consumption)
CicuitoACS {}	CircuitoACS	ACS Circuit (Hot sanitary water)
Acumulador {}	Acumulador	Accumulator
CircuitoSCI {}	CircuitoSCI	SCI Circuit (Fire Fighting System)
DepositoSCI {}	DepositoSCI	SCI Deposit (Fire Fighting System)

'CircuitoAFCH' {}

Type	Name	Description
Boolean	depositosEnSerieAFCH	If water storage tanks connected in series within the

		AFCH system.
Boolean	depositosEnParaleloAFCH	If water storage tanks connected in parallel within the AFCH system.
Boolean	suministroAguaAcometidaDirectaAFCH	Direct water supply from the main connection without intermediate storage.
Boolean	grupoPresionAFCH	Pressure boosting system used to maintain adequate water pressure.
Boolean	tieneFiltroAcometidaAFCH	Indicates whether a filter is installed at the water inlet connection.
Boolean	dosificadoresCloroAFCH	Chlorine dosing devices used for water disinfection.
String	tipoBiocidaEquiposAFCH	Type of biocide used in water treatment equipment.
Boolean	funcionamientoCorrectoDosificadoresCloroAFCH	Proper operation status of chlorine dosing equipment.
Boolean	otrosEquiposAFCH	Other equipment associated with the AFCH system.
String	puntoMedicionEquipamientoAFCH	Location where system parameters or equipment performance are measured.
String	estadoMecanicoGrifosAFCH	Mechanical condition of taps and fixtures.
Boolean	posibilidadTomaMuestrasCircuitoAFCH	Availability of sampling points in the water circuit.
Boolean	posibilidadVaciadoCircuitoAFCH	Possibility to drain the water circuit.
Boolean	zonasEstancamientoTuberiasAFCH	Presence of stagnation zones in the piping system.
Boolean	zonasEstancamientoMenorUnMetroTuberiaAFCH	Stagnation zones in pipes shorter than one meter.
Boolean	zonasEstancamientoEntreUn	Stagnation zones in pipes

	oYCincoMetrosTuberiaAFCH	between one and five meters.
Boolean	zonasEstancamientoMayorCincoMetrosTuberiaAFCH	Stagnation zones in pipes longer than five meters.
Boolean	tienePuntoDeInyeccionAFCH	If there is a chemical injection point in the system.
Boolean	puntoEmisionMenorCincoAFCH	Fewer than five water outlet points in the system.
Boolean	puntoEmisionEntreCincoYVeinticincoAFCH	Between five and twenty-five water outlet points.
Boolean	puntoEmisionMayorVeinticincoAFCH	More than twenty-five water outlet points.
String	facilidadLimpiezaGrifosDuchasAFCH	Ease of cleaning taps and showers.
Boolean	frecuenciaAFCHUsoGrifosDuchasDiario	Daily usage frequency of taps and showers.
Boolean	frecuenciaAFCHUsoGrifosDuchasSemanal	Weekly usage frequency of taps and showers.
Boolean	frecuenciaAFCHUsoGrifosDuchasMayorSemana	Usage frequency longer than one week interval.
String	temperaturaMediaPuntosTerminalesAFCH	Average temperature at terminal water outlets.

'DepositoAFCH' {}

Type	Name	Description
String	volumen	Total storage capacity of the tank.
Boolean	materialObra	Indicates if the tank is constructed from concrete or masonry.
Boolean	materialPVC	Indicates if the tank is made of PVC.
Boolean	materialMetalico	Indicates if the tank is made of metal.

Boolean	materialOtro	Indicates if the tank is made of another material.
String	especificarMaterialesConstruccion	Description of alternative construction materials used.
String	ubicacion	Physical location of the tank within the facility.
Boolean	depositoAisladoTermicamenteSi	Indicates whether the tank is thermally insulated.
String	facilidadLimpieza	Ease of cleaning and maintenance of the tank.
Boolean	depositosTapadosEvitaContaminacion	Indicates whether the tank is covered to prevent contamination.
Boolean	accesible	Indicates whether the tank is easily accessible for inspection and maintenance.
Boolean	bypassDirecto	Indicates whether a direct bypass connection is present in the system.

'CircuitoACS' { }

Type	Name	Description
Boolean	acumuladoresSerieACS	If water storage accumulators connected in series within the ACS system.
Boolean	acumuladoresSerieACS	If water storage accumulators connected in parallel within the ACS system.
Boolean	valvulasDrenajeCircuitoACS	Valve for drain of ACS system
Boolean	tienePuntoDeInyeccionACS	Injection point in ACS system
String	tipoAerosolizacionDuchasACS	Indicates what kind of aerosolization is in showers
Boolean	interAcumuladoresACS	Determine if instalation is

		with interaccumulator
Boolean	intercambiadorExternoACS	Determine if instalation is with external exchanger
Boolean	instalacionCalentamientoPre vioACS	If exists a previous heating instalation
Boolean	precalentamientoGeotermico ACS	If exists a previous heating instalation of geothermal kind
Boolean	precalentamientoOtrasACS	If exists a previous heating instalation of other different kind
Boolean	precalentamientoSolarACS	If exists a previous heating instalation of solar kind
String	especificarPrecalentamiento OtrasACS	Specify information about previous heating instalation of other different kind
String	temperaturaMediaPuntosTer minalesACS	Average of temperature in terminal points
String	facilidadDesmontajeLimpieza GrifoACS	Ease of cleaning taps.
Boolean	frecuenciaUsoGrifoDiarioAC S	If frequency using of taps is daily
Boolean	frecuenciaUsoGrifoSemanal ACS	If frequency using of taps is weekly
Boolean	frecuenciaUsoGrifoMasSema naACS	If frequency using of taps is more than daily
Boolean	equipoAnticorrosivoACS	If have anti-corrosive equipment (enable the following field)
String	tipoEquipoACS	Information about other kind of equipments available (if previous selection field "yes")
Boolean	equipoFuncionamientoCorrec toACS	If equipment works correctly
Boolean	equipoProductoAptoACS	If product equipment is suitable

Integer	numLavabosACS	Number of sinks in ACS system
Integer	numDuchasACS	Number of showers in ACS system
Integer	numCuartosHumedosACS	Number of wet rooms in ACS system
String	estadoMecanicoTuberiaACS	Mechanical condition of the pipe
Boolean	puntoEmisionBajoACS	If the emission point is low
Boolean	puntoEmisionAltoACS	If the emission point is high
Boolean	puntoEmisionMuyAltoACS	If the emission point is very high

‘Acumulador’ { }

Type	Name	Description
String	volumen	Total storage capacity of the tank.
Boolean	materialObra	Indicates if the accumulator is constructed from concrete or masonry.
Boolean	materialPVC	Indicates if the accumulator is made of PVC.
Boolean	materialMetalico	Indicates if the accumulator is made of metal.
Boolean	materialOtro	Indicates if the accumulator is made of another material.
String	ubicacionAcumulador	Physical location of the accumulator within the facility.
String	marca	Indicates the brand of accumulator
String	modeloAndAnio	Indicates the model and year of accumulator

Boolean	conCircuitoRetorno	Indicates if the accumulator have returning circuit
String	temperaturaRetorno	Indicates the temperature of returning
String	estadoMecanico	Indicates mecanic state if it's fine, regular or bad
String	materialAislamiento	Indicates material of isolation
String	especificarMaterialesRevestimiento	Indicates information about coating material
Boolean	vaciado	Indicates if accumulator have emptied
String	tiempoEstimadoVaciado	Time needed for get accumulator empty
Boolean	valvulaRetencion	Indicates if have valve for retention
Boolean	posibleMuestra	Indicates if it's possible to get a sample
String	ubicacionTomaMuestrasAcumulador	Indicates physical ubication of taking samples

'CircuitoSCI' { }

Type	Name	Description
Integer	numAerosolesBieSCILE	Number of aerosols Bie in the system
Integer	numAerosolesSprinklersSCILE	Number of aerosols Spinklers in the system
String	tipoInstalacionSCILE	Indicates what kind of instalation have the system
Boolean	suministroSCILERedPublica	If the system uses public network supplies
Boolean	suministroSCILERedPropia	If the system uses its own network supplies
Boolean	suministroSCILERedesSecu	If the system uses secondary

	ndarias	network supplies
String	estadoMecanicoTuberiasSCILE	Mechanical condition of the pipes
String	estadoMecanicoSprinklersSCILE	Mechanical condition of the splinkers
String	estadoMecanicoBieSCILE	Mechanical condition of the Bie
Boolean	materialSCILETuberiasMetales	If the system's pipe material is metal
Boolean	materialSCILETuberiasPlastico	If the system's pipe material is plastic
Boolean	materialSCILETuberiasHormigon	If the system's pipe material is concrete
Boolean	materialSCILETuberiasOtro	If the system's pipe material is different
Boolean	equipoSistemaPurgadoSCILE	if it is a purged system equipment
Boolean	equipoBiocidaSCILE	if it is a biocide equipement
Boolean	equipoAntiincrustanteSCILE	if it is an anti-fouling equipement
Boolean	equipoOtrosEquiposSCILE	if it is other type of equipement
String	detalleEquipoDosificadorOtrosSCILE	Details of the system's dosing equipment
Boolean	depositosEnSerieSCILE	If the tank is in series
Boolean	depositosEnParaleloSCILE	If the tank is in parallel

‘DepositoSCI’ { }

Type	Name	Description
String	volumen	Total storage capacity of the tank.
String	marca	Indicates the brand.

String	modelo	Indicates the model.
String	ubicacion	Physical location of the tank within the facility.

Payload: 'Toma datos' (Data collection)

```
{
  "comando": "CREATE",
  "tipoEntidadIgeo": "TOMA_DATOS",
  "codigoEntidadIgeo": "00212122-6",
  "datos": {
    "numeroDeCliente": "1369",
    "codigoSede": "2024 - 190 - SEDE",
    "numeroDeContrato": "5676-2025",
    "subgrupoTipoOperacion": "CIRCUITO_HIDROMASAJE",
    "codigoElemento": "CIRC-HIDRO-ttt",
    "instrucciones": "CIRC ACS 1 instrc..",
    "codigoElementoPadre": "CodigoElementoPadre",
    "fechaUltimaLimpiezaYDesifeccion": "05/02/2025"
  }
}
```

'Zona comercial' (Commercial areas)

Type	Name	Description
String	*! codigo	Commercial area's code
String	*! nombre	Commercial area's name
String	*! delegacionCodigo	Branch code
String	descripcion	Description
String	color	Commercial area's hexadecimal color
Boolean	activa	Enabled (Status)

Payload: 'Zona comercial' (Commercial areas)

```
{
  "tipoEntidadIgeo": "ZONA_COMERCIAL",
```

```
"codigoEntidadIgeo": "ZC1",
"comando": "CREATE",
"datos": {
  "nombre": "MADRID CENTRO",
  "codigo": "ZC1",
  "delegacionCodigo": "DL1",
  "descripcion": "Madrid centro",
  "color": "0000ff",
  "activa": true
}
}
```