


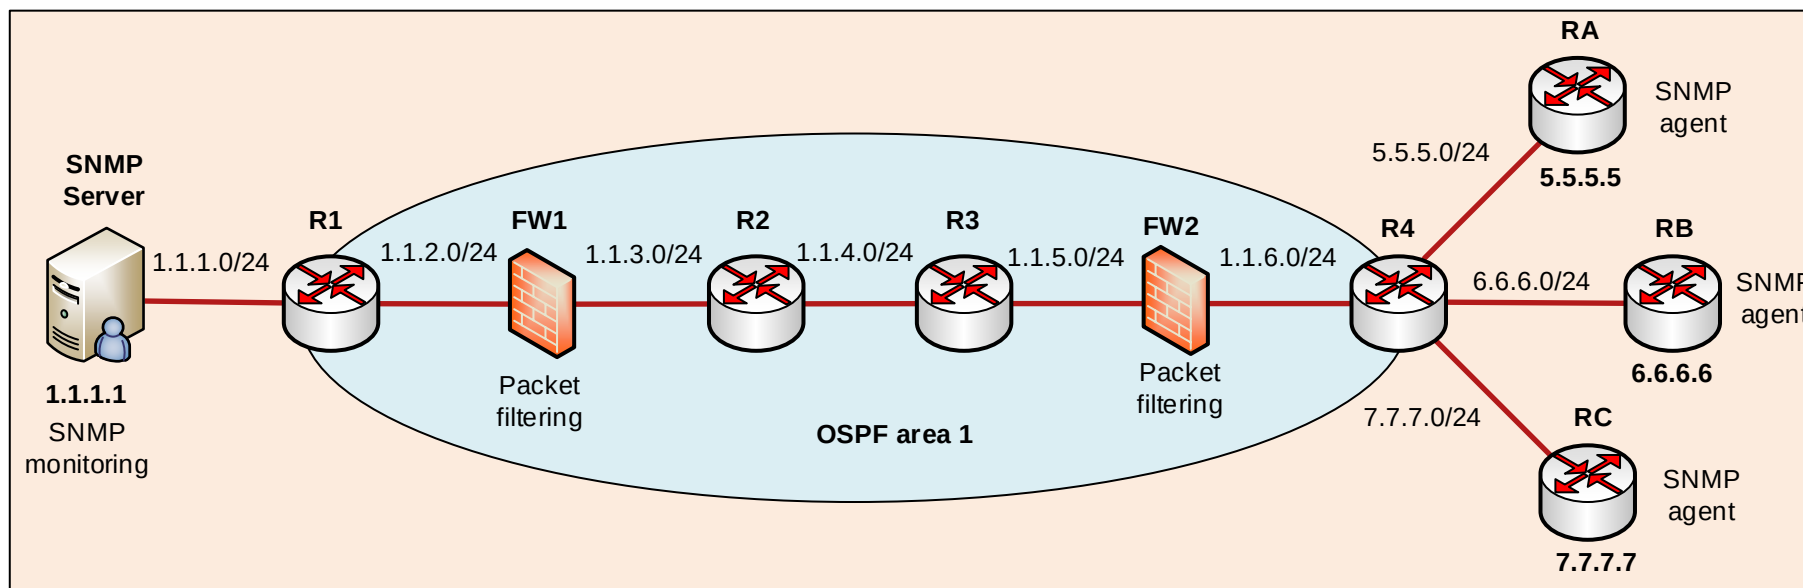

Scenario Configuring SNMP monitoring of customers' devices

Configure SNMP monitoring from the SNMP server to the customers' devices RA, RB, RC with SNMPv2 and community string "att-monitoring".

Task 0 Basic Configuration.

1. Cable the network topology.
2. Perform basic router configuration.
 - Configure the router hostnames and disable DNS lookup on them.
3. Configure the network interfaces and IP addressing.
 - Configure IP addresses on the routers.
4. Enable SSH on routers FW1 and RA. No other access is permitted for administrators.
5. Configure OSPF routing.
 - Configure OSPF routing between routers R1, R2, R3, R4, FW1 and FW2.
 - Do not send routing updates towards the stub networks.
 - Configure default routes on routers RA, RB and RC.
6. Configure filtering on firewalls FW1 and FW2.
 - Only allow traffic from ATT monitoring server to enter FW1. No other traffic except OSPF routing is permitted.
 - Only web, email and ssh services can be sent to RA. No other traffic is permitted to RA.

Task 1 SNMP configuration

1. Configure the SNMP agents on routers RA, RB and RC.
 - Set the community string to "att-monitoring".
 - Restrict access to the SNMP service to the 1.1.1.1 host only.
 - Enable traps to be sent to the monitoring server.
2. Configure firewalls to enable SNMP monitoring.
 - Update the ACLs on routers FW1 and FW2 to allow SNMP communication.
3. Test the SNMP connection.
 - Verify the SNMP connection between the monitoring server and the RA, RB, and RC routers.