

IP Addressing

Objectives


Upon completion of this chapter, you will be able to:

- Describe the structure of an IPv4 address.
- Describe the purpose of the subnet mask.
- Compare the characteristics and uses of the unicast, broadcast, and multicast IPv4 addresses.
- Compare the use of public address space and private address space.
- Explain the need for IPv6 addressing.
- Describe the representation of an IPv6 address.
- Describe types of IPv6 network addresses.
- Configure global unicast addresses.
- Describe multicast addresses.
- Describe the role of ICMP in an IP network. (Include IPv4 and IPv6.)
- Use ping and traceroute utilities to test network connectivity.

IPv4 Network Addresses

IPv4 Address Structure

Binary Number System

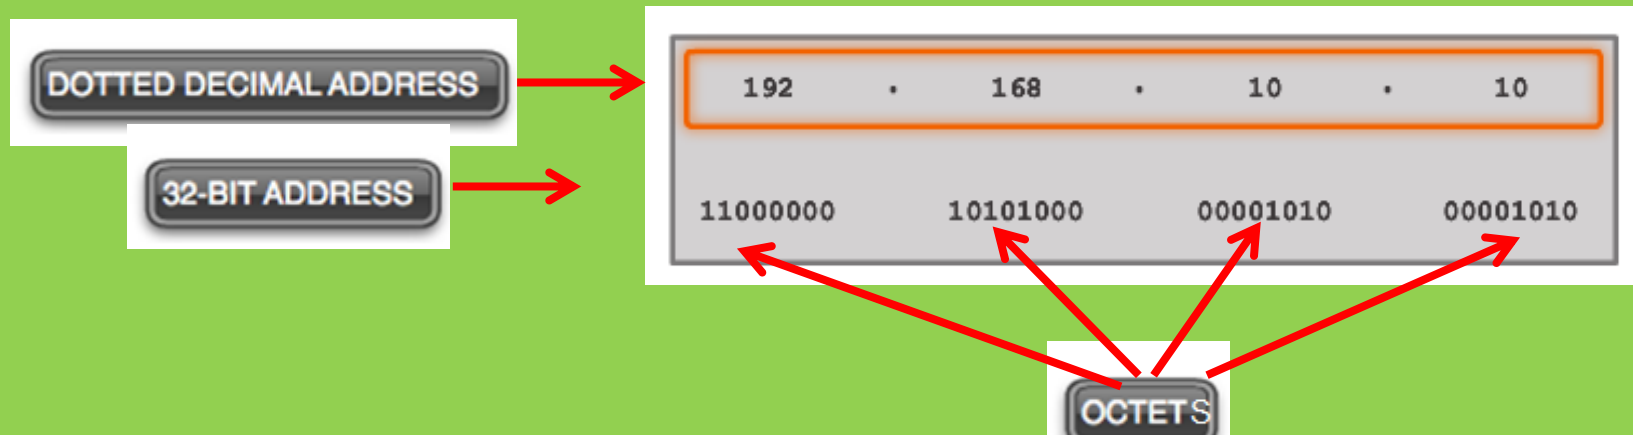


Radix	2	2	2	2	2	2	2	2
Exponent	7	6	5	4	3	2	1	0
Octet Bit Values	128	64	32	16	8	4	2	1
Binary Address	1	1	0	0	0	0	0	0
Binary Bit Values	128	64	0	0	0	0	0	0

Add the binary bit values.

$$128 + 64 = 192$$

IPv4 Address Structure


Converting from Decimal to Binary (Cont.)

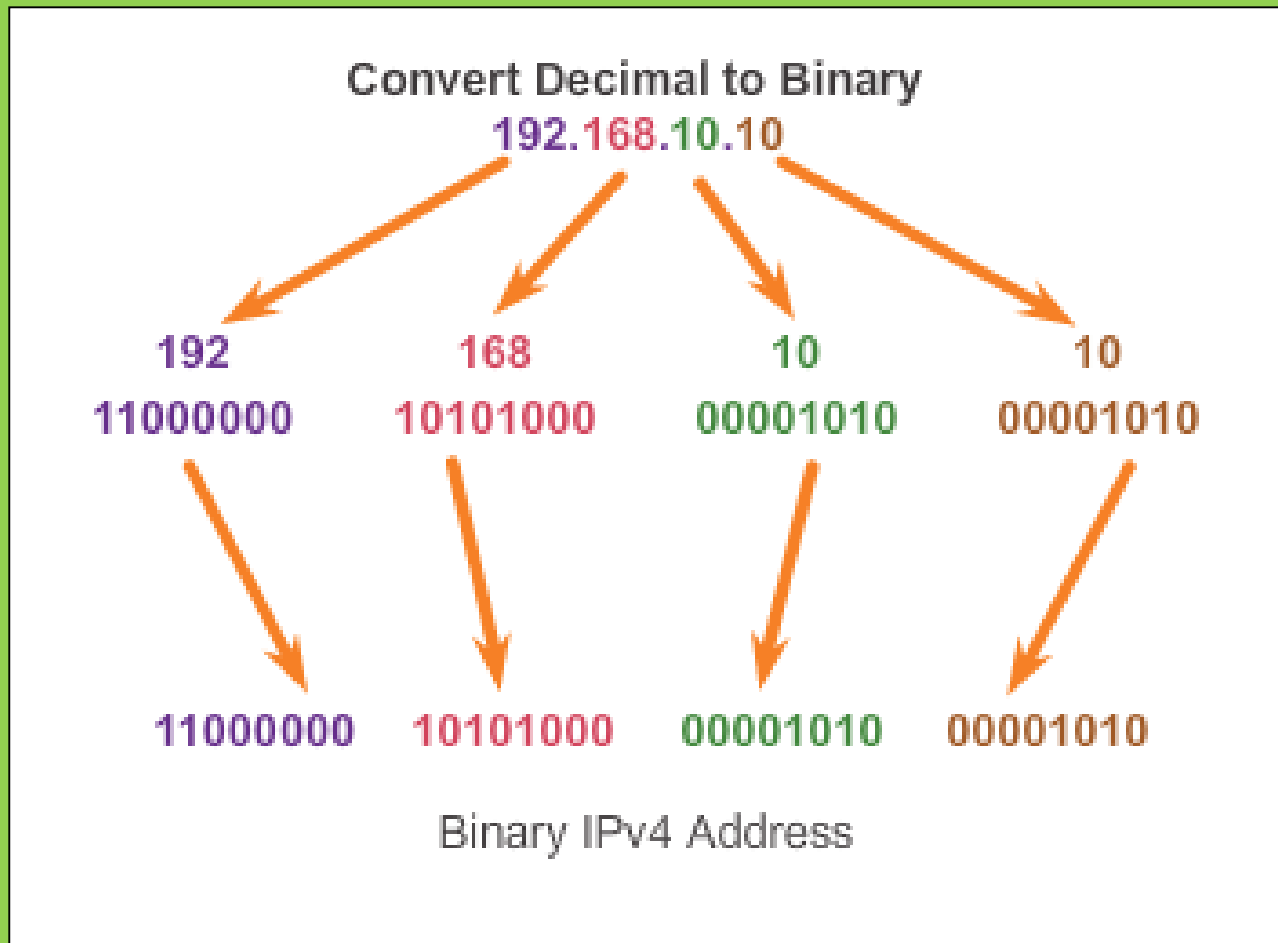

IPv4 Subnet Mask

Network Portion and Host Portion of an IPv4 Address

- To define the **network** and **host** portions of an address, a device uses a separate 32-bit pattern called a **subnet mask**
- The subnet mask **does not** actually contain the network or host portion of an IPv4 address, it just **says where to look for these portions** in a given IPv4 address

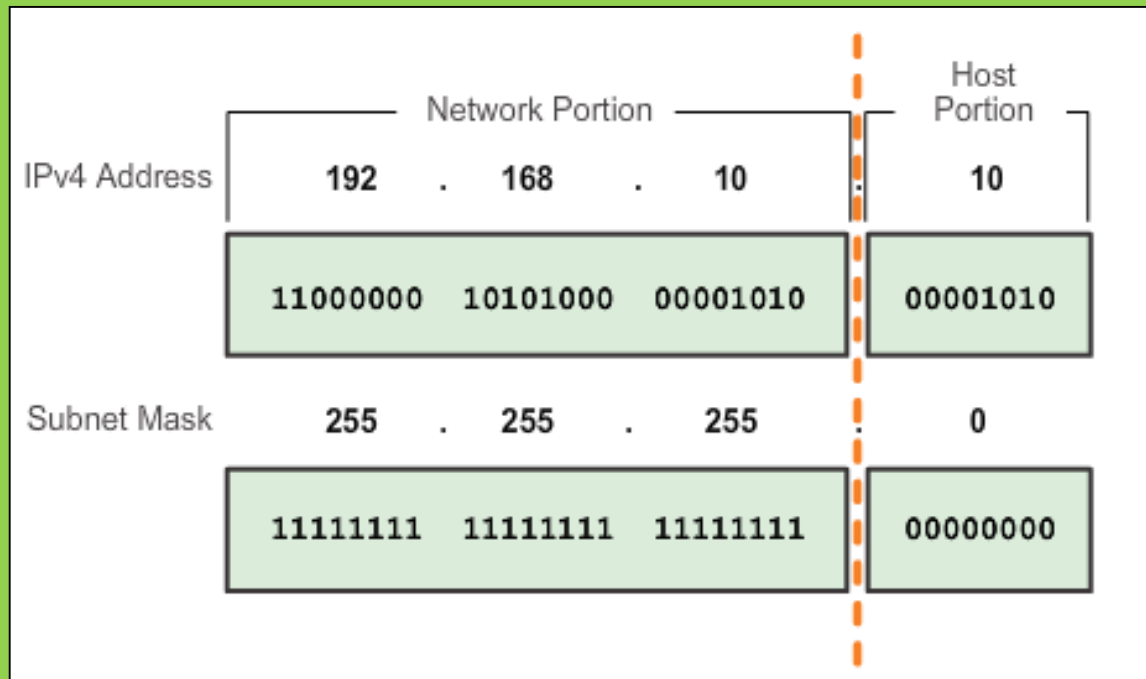

IPv4 Subnet Mask

Examining the Prefix Length

	Dotted Decimal	Significant bits shown in binary
Network Address	10.1.1.0/24	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.254	10.1.1.11111110
Broadcast Address	10.1.1.255	10.1.1.11111111
Number of hosts: $2^8 - 2 = 254$ hosts		

Network Address	10.1.1.0/25	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.126	10.1.1.01111110
Broadcast Address	10.1.1.127	10.1.1.01111111
Number of hosts: $2^7 - 2 = 126$ hosts		

Network Address	10.1.1.0/26	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.62	10.1.1.00111110
Broadcast Address	10.1.1.63	10.1.1.00111111
Number of hosts: $2^6 - 2 = 62$ hosts		


Examining the Prefix Length (cont.)

	Dotted Decimal	Significant bits shown in binary
Network Address	10.1.1.0/27	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.30	10.1.1.00011110
Broadcast Address	10.1.1.31	10.1.1.00011111
Number of hosts: $2^5 - 2 = 30$ hosts		

Network Address	10.1.1.0/28	10.1.1.00000000
First Host Address	10.1.1.1	10.1.1.00000001
Last Host Address	10.1.1.14	10.1.1.00001110
Broadcast Address	10.1.1.15	10.1.1.00001111
Number of hosts: $2^4 - 2 = 14$ hosts		

IPv4 Subnet Mask

IPv4 Network, Host, and Broadcast Address

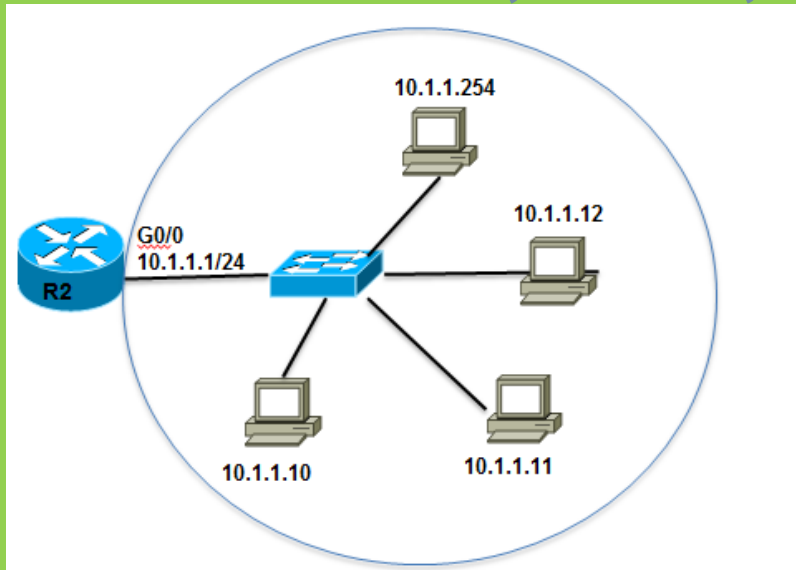


10.1.1.0/24

Network Portion			Host Portion	
10	1	1	0	
00001010	00000001	00000001	00000000	All 0s – NETWORK ADDRESS
10	1	1	10	
00001010	00000001	00000001	00001010	0s and 1s in host portion
10	1	1	255	
00001010	00000001	00000001	11111111	All 1s – BROADCAST ADDRESS

IPv4 Subnet Mask

First Host and Last Host Addresses

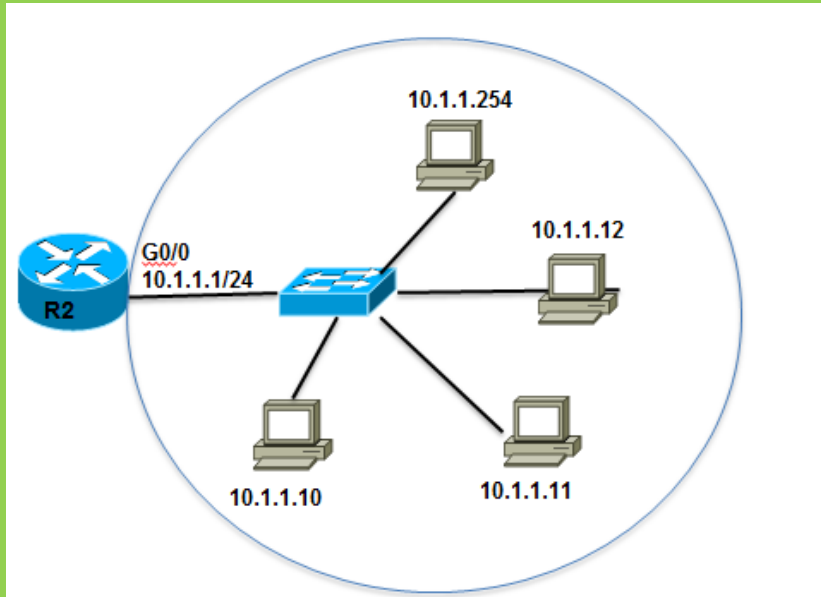

10.1.1.0/24

Network Portion			Host Portion	
10	1	1	1	FIRST HOST
00001010	00000001	00000001	00000001	All 0s and a 1 in the host portion
10	1	1	254	LAST HOST
00001010	00000001	00000001	11111110	All 1s and a 0 in the host portion

IPv4 Subnet Mask

Bitwise AND Operation


1 AND 1 = 1 1 AND 0 = 0 0 AND 1 = 0 0 AND 0 = 0

IPv4 Address	192	.	168	.	10	.	10
	11000000		10101000		00001010		00001010
Subnet Mask	255	.	255	.	255	.	0
	11111111		11111111		11111111		00000000
Network Address	192	.	168	.	10	.	0
	11000000		10101000		00001010		00000000


IPv4 Unicast, Broadcast, and Multicast

Assigning a Static IPv4 Address to a Host

LAN Interface Properties


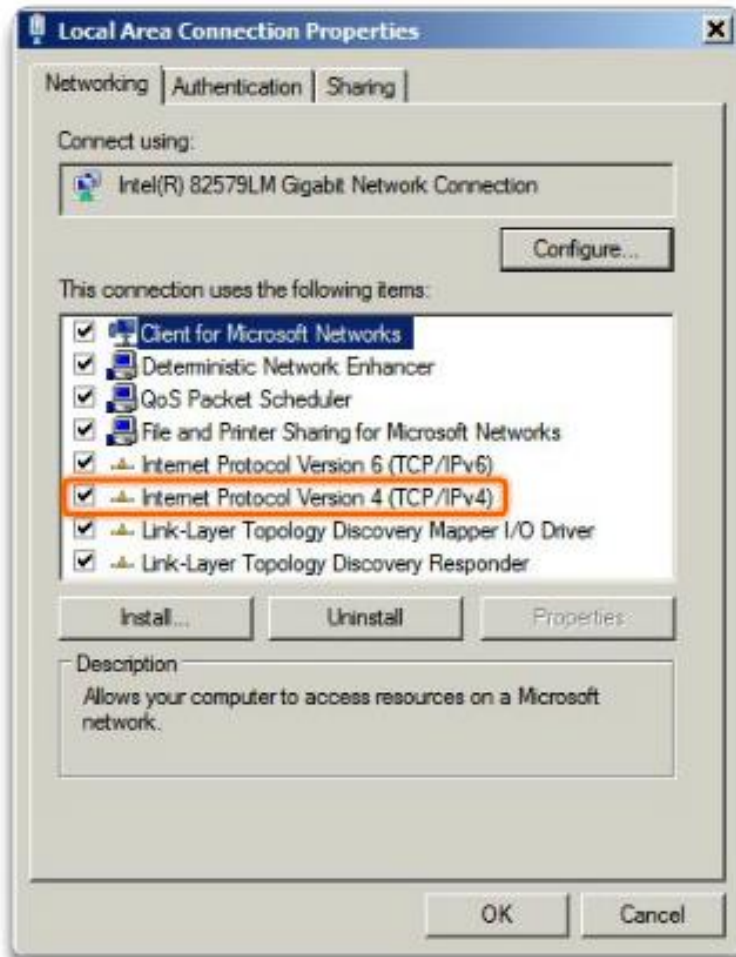


Configuring a Static IPv4 Address

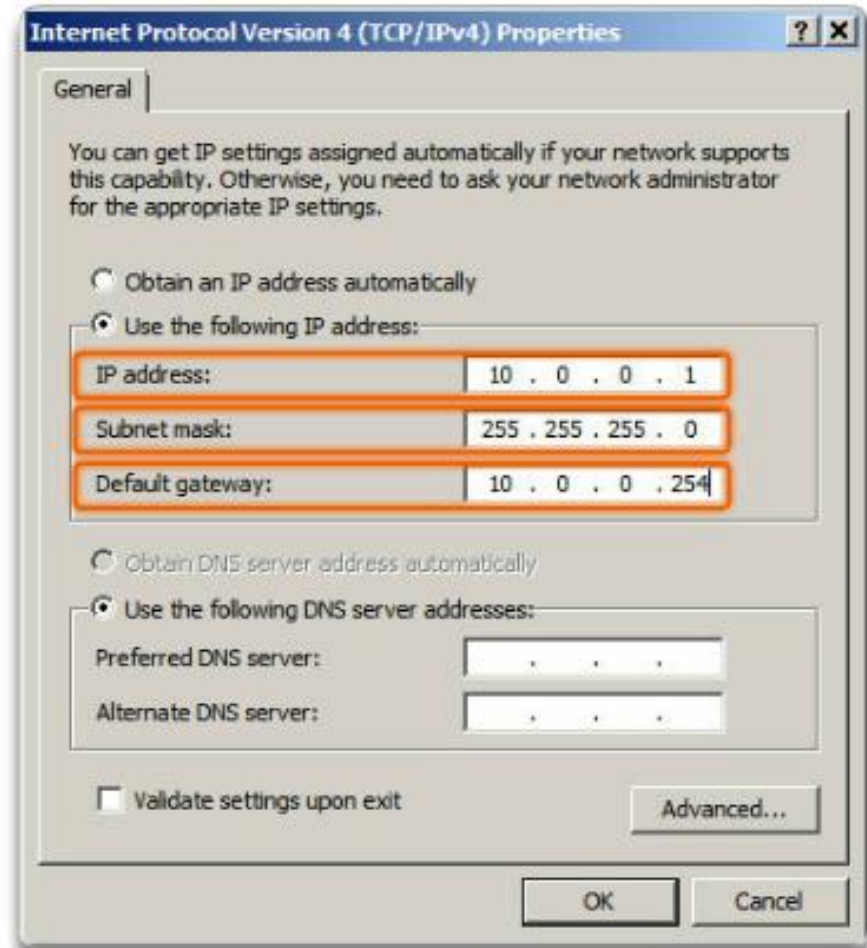

IPv4 Unicast, Broadcast, and Multicast

Assigning a Dynamic IPv4 Address to a Host

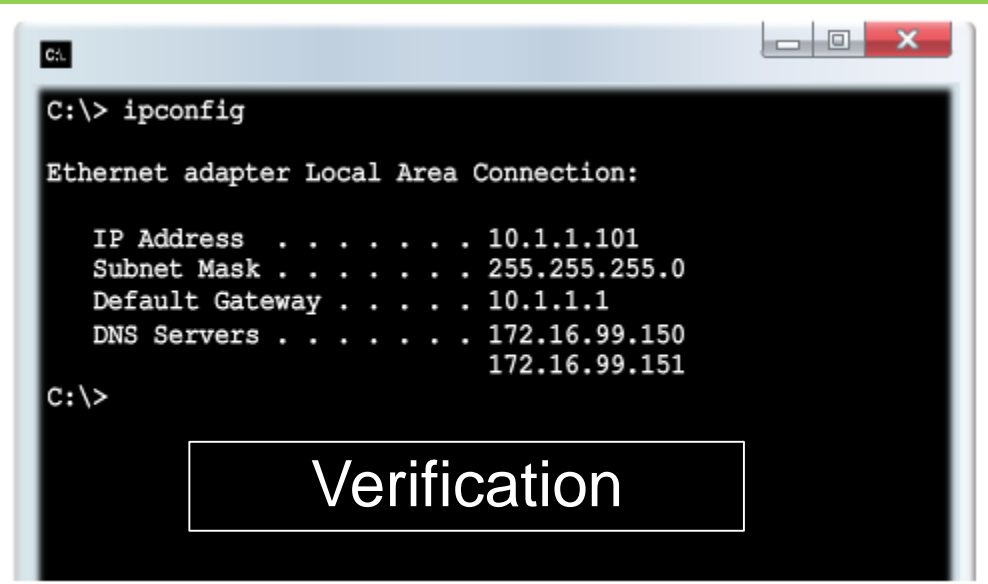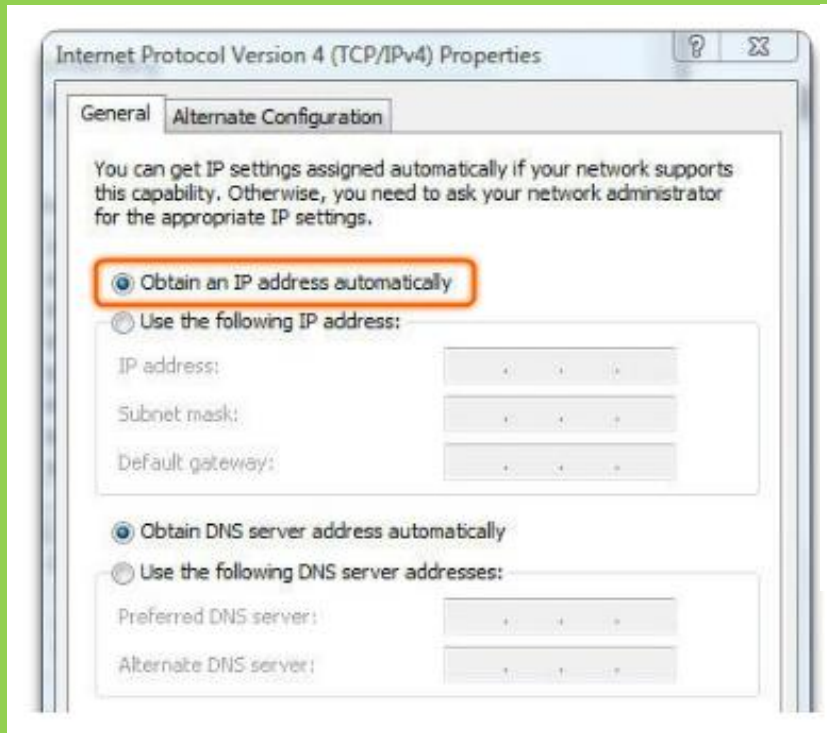


DHCP – The preferred method of assigning IPv4 addresses to hosts on large networks because it reduces the burden on network support staff and virtually eliminates entry errors.

IPv4 Unicast, Broadcast, and Multicast

Unicast Transmission

In an IPv4 network, the hosts can communicate one of three different ways:
Unicast, Broadcast, and Multicast

#1 Unicast – the process of sending a packet from one host to an individual host.

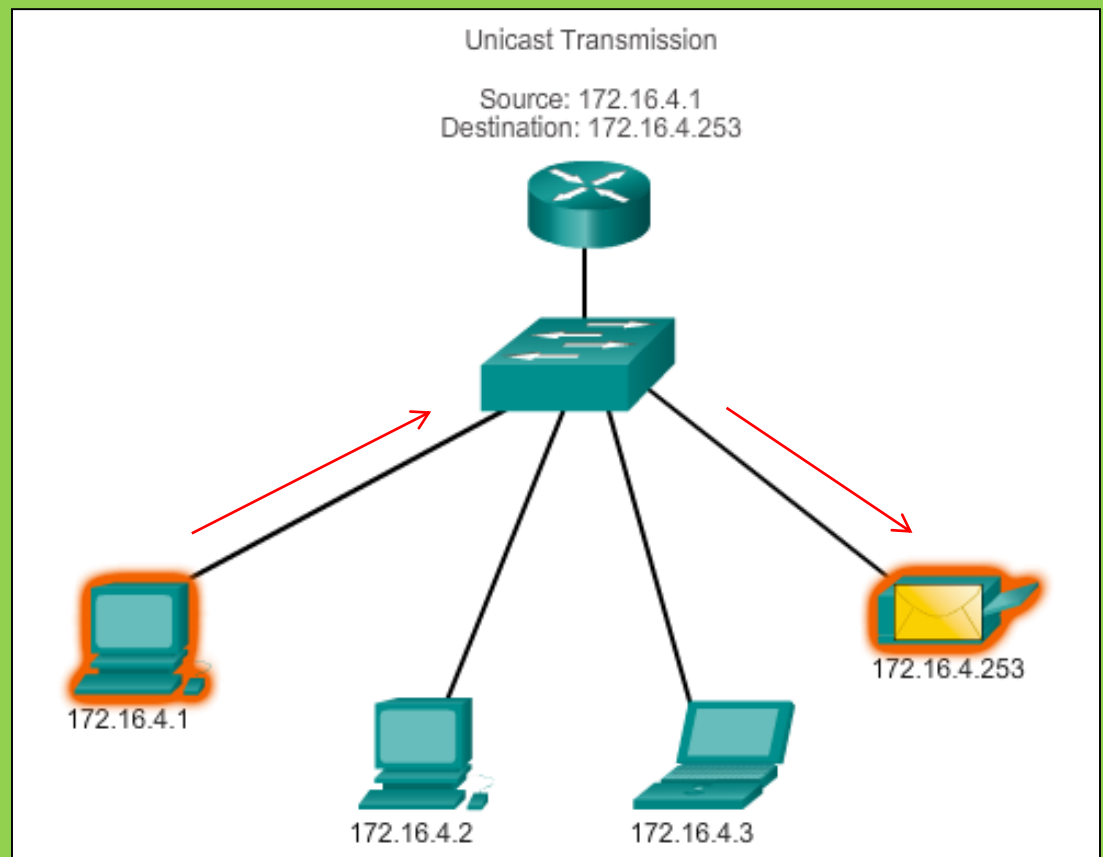

IPv4 Unicast, Broadcast, and Multicast

Broadcast Transmission

In an IPv4 network, the hosts can communicate one of three different ways: Unicast, **Broadcast**, and Multicast.


#2 Broadcast – the process of sending a packet from one host to all hosts in the network.

NOTE: Routers do not forward a limited broadcast!

Directed broadcast

- Destination 172.16.4.255
- Hosts within the 172.16.4.0/24 network

Limited Broadcast

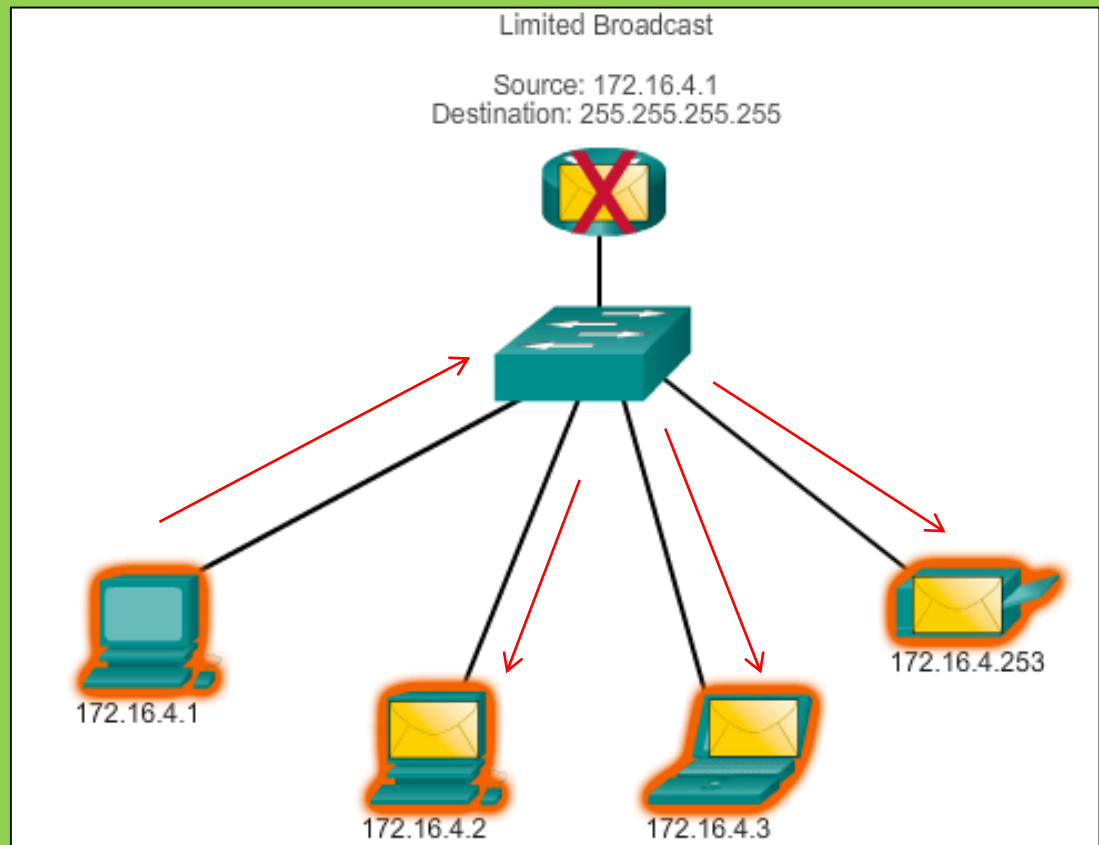

IPv4 Unicast, Broadcast, and Multicast


Multicast Transmission

#3 Multicast – The process of sending a packet from one host to a selected group of hosts, possibly in different networks.

- Reduces traffic
- Reserved for addressing multicast groups – 224.0.0.0 to 239.255.255.255.
- **Link local** – 224.0.0.0 to 224.0.0.255 (Example: routing information exchanged by routing protocols)
- **Globally scoped addresses** – 224.0.1.0 to 238.255.255.255 (Example: 224.0.1.1 has been reserved for Network Time Protocol)
- **Limited scope addresses** or administratively scoped addresses
(**Companies, universities, or other organizations** can use limited scope addresses to have local multicast applications that **will not be forwarded** outside their domain) -Addresses in the 239.0.0.0/8 range

Multicast Clients

Each **multicast group** is represented by a **single** IPv4 multicast destination address

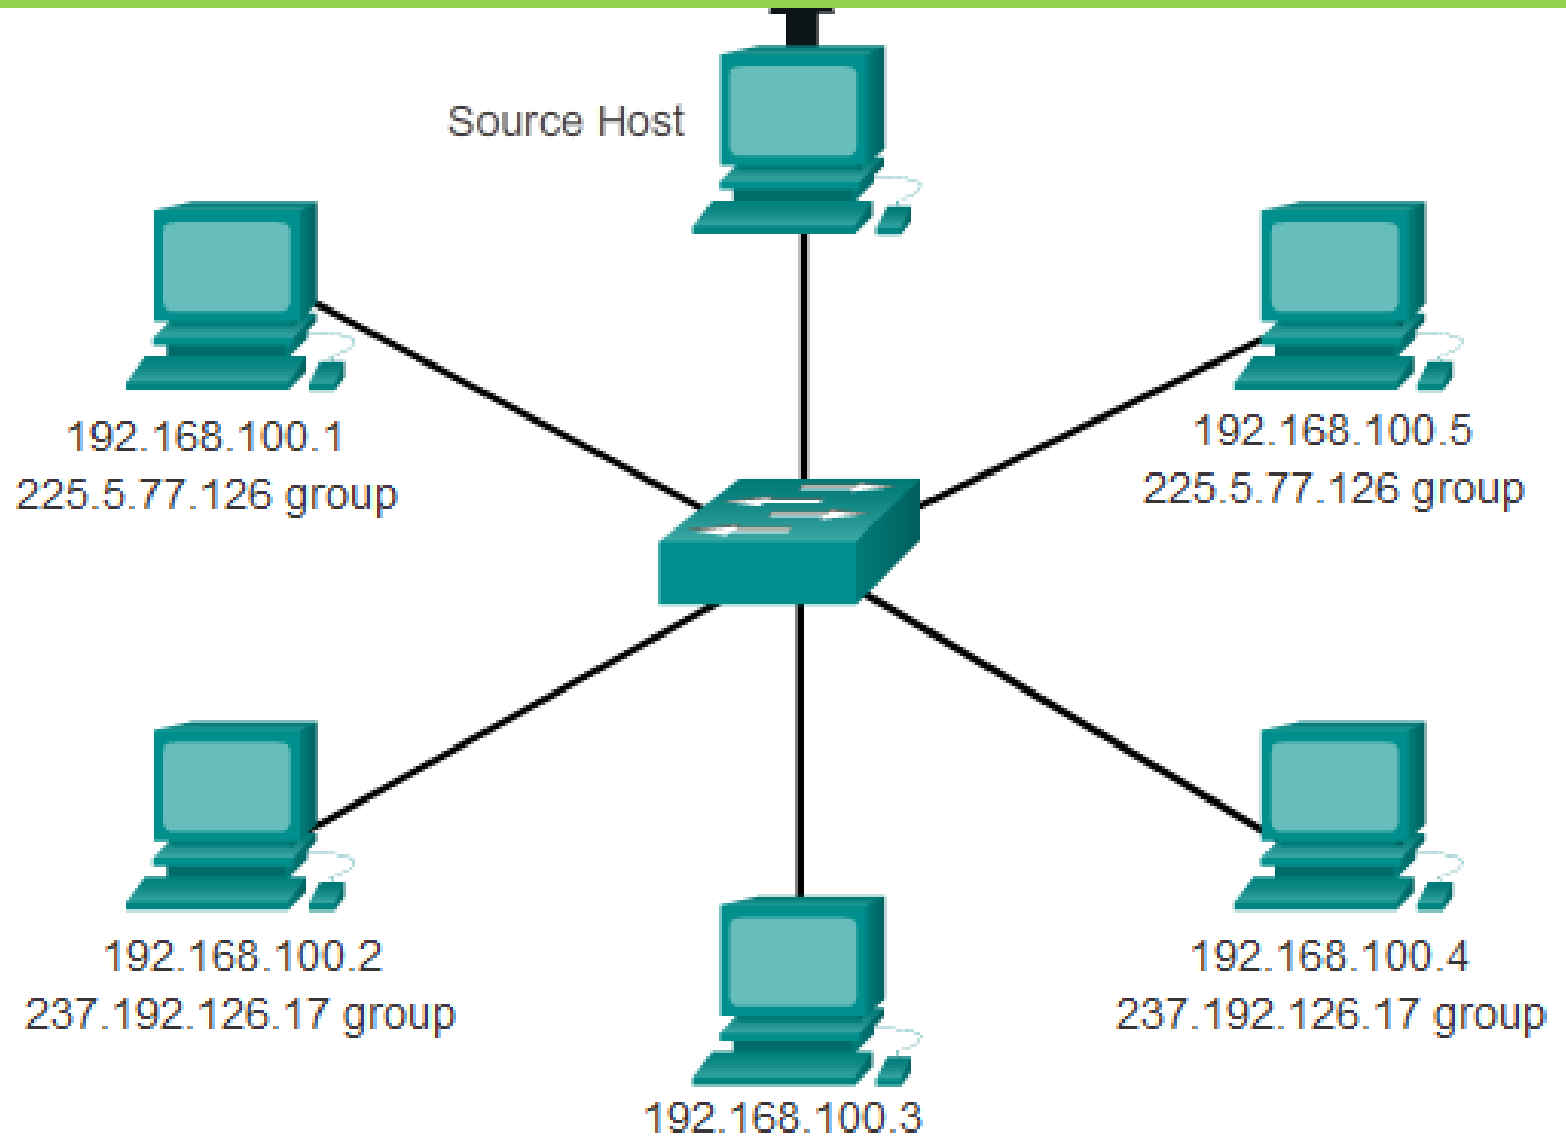

Calculate the Network, Broadcast and Host Addresses

Given address/prefix of **166.214.251.203/25**

Type of Address	Enter Last octet of network prefix in binary	Enter LAST octet in decimal	Enter full address in decimal
Network	10000000	128	166.214.251.128
Broadcast	11111111	255	166.214.251.255
First Usable Host Address	10000001	129	166.214.251.129
Last Usable Host Address	11111110	254	166.214.251.254

Given address/prefix of **177.119.128.17/22**

Type of Address	Enter Last octet of network prefix in binary	Enter LAST octet in decimal	Enter full address in decimal
Network	00000000	0	177.119.128.0
Broadcast	11111111	255	177.119.131.255
First Usable Host Address	00000001	1	177.119.128.1
Last Usable Host Address	11111110	254	177.119.131.254

Public and Private IPv4 Addresses

Private address blocks are:

- Hosts that do not require access to the Internet can use private addresses
 - 10.0.0.0 to 10.255.255.255 (10.0.0.0/8)
 - 172.16.0.0 to 172.31.255.255 (172.16.0.0/12)
 - 192.168.0.0 to 192.168.255.255 (192.168.0.0/16)

Shared address space addresses:

- Not globally routable
- Intended only for use in service provider networks
- Address block is 100.64.0.0/10

Special Use IPv4 Addresses

- **Network and Broadcast addresses** – within each network the first and last addresses cannot be assigned to hosts
- **Loopback address** – 127.0.0.1 a special address that hosts use to direct traffic to themselves (addresses 127.0.0.0 to 127.255.255.255 are reserved)
- **Link-Local address** – 169.254.0.0 to 169.254.255.255 (169.254.0.0/16) addresses can be automatically assigned to the local host
- **TEST-NET addresses** – 192.0.2.0 to 192.0.2.255 (192.0.2.0/24) set aside for **teaching and learning purposes**, used in documentation and network examples
- **Experimental addresses** – 240.0.0.0 to 255.255.255.254 are listed as reserved

Public Addresses

The vast majority of the addresses in the IPv4 unicast host range are public addresses.

Types of IPv4 Address

Legacy Classful Addressing

IP Address Classes

Address Class	1st octet range (decimal)	1st octet bits (green bits do not change)	Network(N) and Host(H) parts of address	Default subnet mask (decimal and binary)	Number of possible networks and hosts per network
A	1-127**	00000000-01111111	N.H.H.H	255.0.0.0	128 nets (2^7) 16,777,214 hosts per net ($2^{24}-2$)
B	128-191	10000000-10111111	N.N.H.H	255.255.0.0	16,384 nets (2^{14}) 65,534 hosts per net ($2^{16}-2$)
C	192-223	11000000-11011111	N.N.N.H	255.255.255.0	2,097,150 nets (2^{21}) 254 hosts per net (2^8-2)
D	224-239	11100000-11101111	NA (multicast)		
E	240-255	11110000-11111111	NA (experimental)		

Legacy Classful Addressing (cont.)

Classless Addressing

- Formal name is **Classless Inter-Domain Routing** (CIDR, pronounced “cider”)
- Created a new set of standards that allowed service providers to allocate IPv4 addresses on any address bit boundary (prefix length) instead of only by a class A, B, or C address

Internet Assigned Numbers Authority (**IANA**)

- manages the allocation of IPv4 and IPv6 addresses
- registration companies are called **Regional** Internet Registries (RIRs)
- RIRs are responsible for allocating IP addresses to the Internet Service Providers (**ISPs**).
- Most companies or organizations obtain their IPv4 address blocks from an ISP

IPv6 Network Addresses


The Need for IPv6

- IPv6 is designed to be the **successor** to IPv4.
- **Depletion** of IPv4 address space has been the motivating factor for moving to IPv6.
- Projections show that all five RIRs will run out of IPv4 addresses between 2015 and 2020.
- With an **increasing** Internet population, a **limited** IPv4 address space, issues with **NAT** and an Internet of **things**, the time has come to begin the transition to IPv6!
- IPv4 has a theoretical maximum of 4.3 billion addresses, plus private addresses in combination with NAT.
- IPv6 larger 128-bit address space provides for 340 undecillion (10^{36}) addresses.
- IPv6 fixes the limitations of IPv4 and includes additional enhancements, such as ICMPv6.

IPv4 and IPv6 Coexistence

The migration techniques can be divided into three categories:
Dual-stack, Tunnelling, and Translation.


Dual-stack

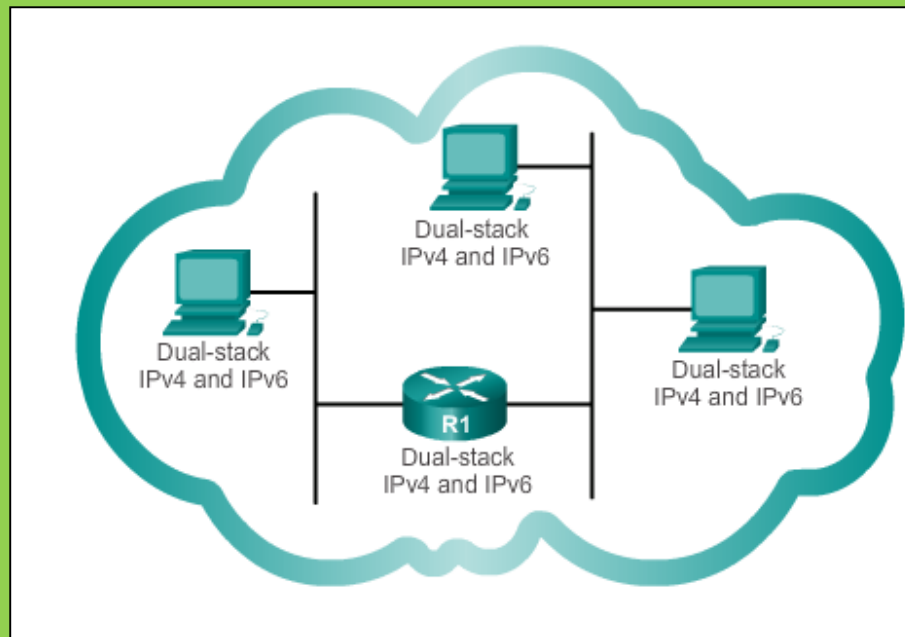

Dual-stack: Allows IPv4 and IPv6 to coexist on the same network. Devices run both IPv4 and IPv6 protocol stacks simultaneously.

IPv4 and IPv6 Coexistence (cont.)


Tunnelling

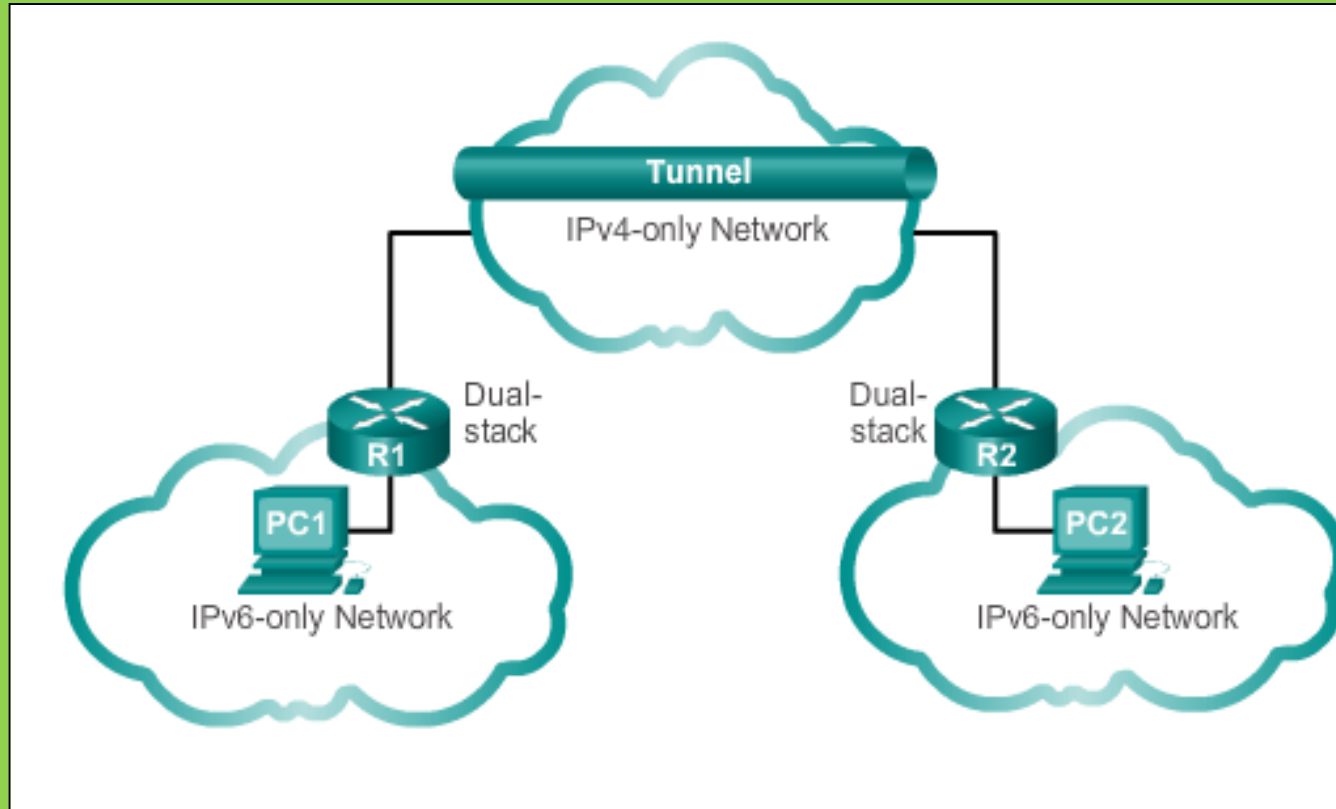

Tunnelling: A method of transporting an IPv6 packet over an IPv4 network. The IPv6 packet is **encapsulated** inside an IPv4 packet.

IPv4 and IPv6 Coexistence (cont.)

Translation

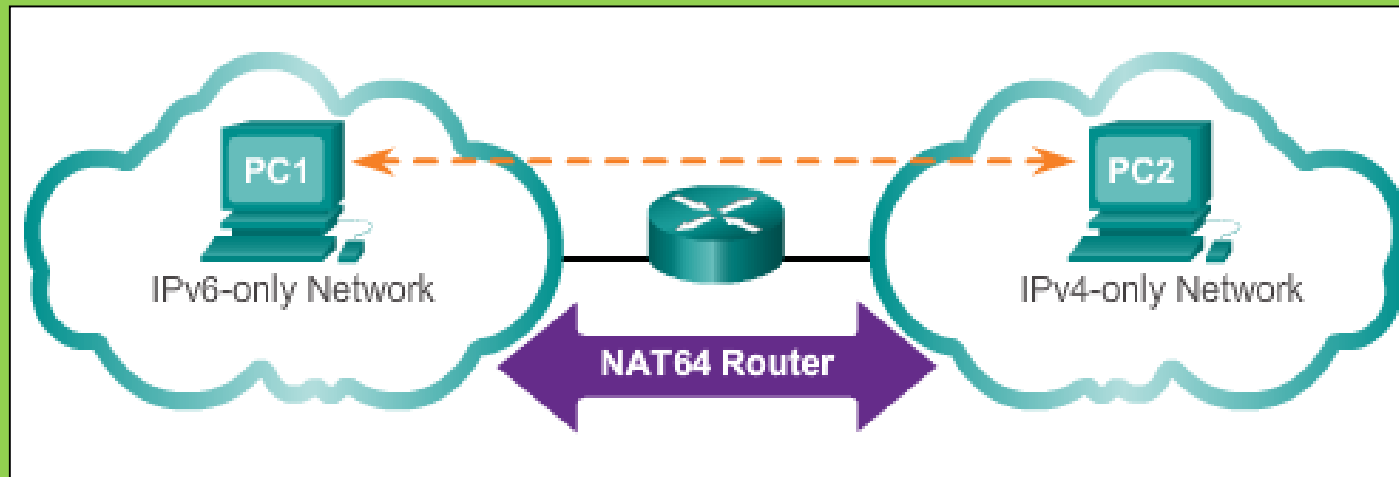

Translation: The Network Address Translation 64 (NAT64) allows IPv6-enabled devices to communicate with IPv4-enabled devices using a translation technique similar to NAT for IPv4. An IPv6 packet is translated to an IPv4 packet, and vice versa.

Hexadecimal Number System

- Hexadecimal is a base sixteen system.
- Base 16 numbering system uses the numbers 0 to 9 and the letters A to F.
- Four bits (half of a byte) can be represented with a single hexadecimal value.

Hexadecimal	Decimal	Binary
0	0	0000
1	1	0001
2	2	0010
3	3	0011
4	4	0100
5	5	0101
6	6	0110
7	7	0111
8	8	1000
9	9	1001
A	10	1010
B	11	1011
C	12	1100
D	13	1101
E	14	1110
F	15	1111

Hexadecimal Number System (cont.)

Look at the binary bit patterns that match the decimal and hexadecimal values

Hexadecimal	Decimal	Binary
00	0	0000 0000
01	1	0000 0001
02	2	0000 0010
03	3	0000 0011
04	4	0000 0100
05	5	0000 0101
06	6	0000 0110
07	7	0000 0111
08	8	0000 1000
0A	10	0000 1010
0F	15	0000 1111
10	16	0001 0000
20	32	0010 0000
40	64	0100 0000
80	128	1000 0000
C0	192	1100 0000
CA	202	1100 1010
F0	240	1111 0000
FF	255	1111 1111

IPv6 Address Representation


- **128 bits in length** and written as a string of hexadecimal values
- In IPv6, 4 bits represents a single hexadecimal digit, 32 hexadecimal value = IPv6 address

2001:0DB8:0000:1111:0000:0000:0000:0200

FE80:0000:0000:0000:0123:4567:89AB:CDEF

- **Hextet** used to refer to a segment of 16 bits or four hexadecimal
- Can be written in either lowercase or uppercase

IPv6 Address Representation (cont.)

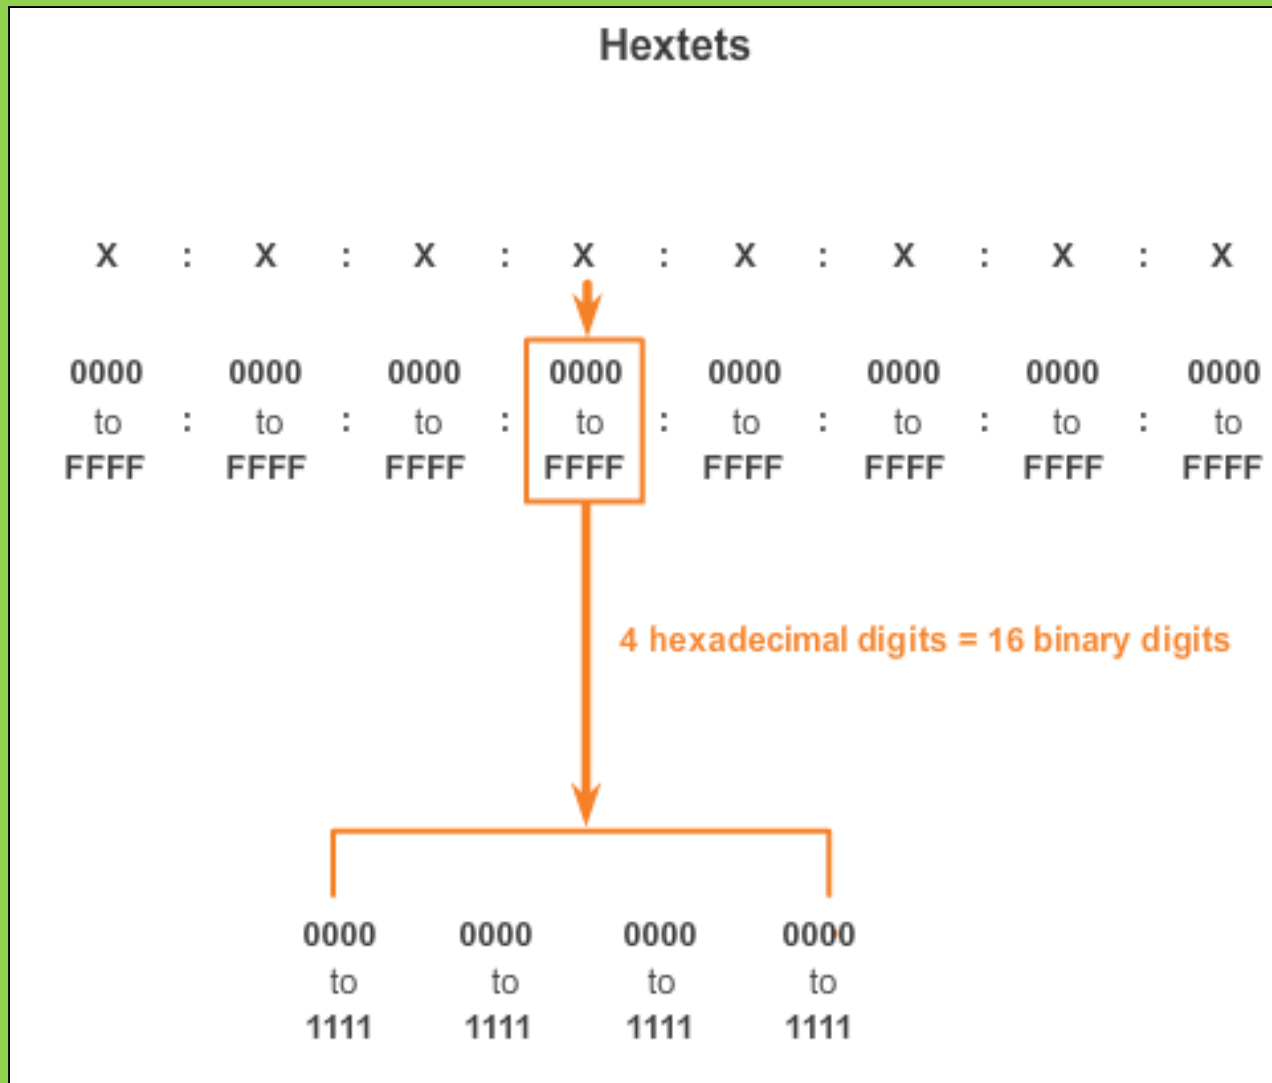

IPv6 Addressing

Rule 1- Omitting Leading 0s

- The first rule to help reduce the notation of IPv6 addresses is any leading 0s (zeros) in any 16-bit section or hextet can be omitted.
- 01AB can be represented as 1AB.
- 09F0 can be represented as 9F0.
- 0A00 can be represented as A00.
- 00AB can be represented as AB.

Preferred	2001:0DB8:000A:1000:0000:0000:0000:0100
No leading <u>0s</u>	2001: DB8: A:1000: 0: 0: 0: 100
Compressed	2001:DB8:A:1000:0:0:0:100

Rule 2 - Omitting All 0 Segments


- A double colon (::) can replace any single, contiguous string of one or more 16-bit segments (hexets) consisting of all 0's.
- Double colon (::) can only be used once within an address otherwise the address will be ambiguous.
- Known as the *compressed format*.
- Incorrect address - 2001:0DB8::ABCD::1234.

IPv6 Addressing

Rule 2 - Omitting All 0 Segments (cont.)

Example #1

Preferred	2001:0DB8:0000:0000:ABCD:0000:0000:0100
Omit leading 0s	2001: DB8: 0: 0:ABCD: 0: 0: 100
Compressed	2001:DB8::ABCD:0:0:100
OR	
Compressed	2001:DB8:0:0:ABCD::100

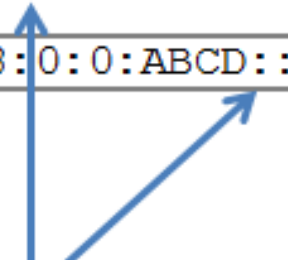

Only one :: may be used.

Example #2


Preferred	FE80:0000:0000:0000:0123:4567:89AB:CDEF
Omit leading 0s	FE80: 0: 0: 0: 123:4567:89AB:CDEF
Compressed	FE80::123:4567:89AB:CDEF

Types of IPv6 Addresses

IPv6 Prefix Length


- IPv6 does **not use the dotted-decimal subnet mask notation**
- Prefix length indicates the **network portion** of an IPv6 address using the following **format**:
 - IPv6 address/prefix length
 - Prefix length can range from 0 to 128
 - **Typical** prefix length is /64

/64 Prefix

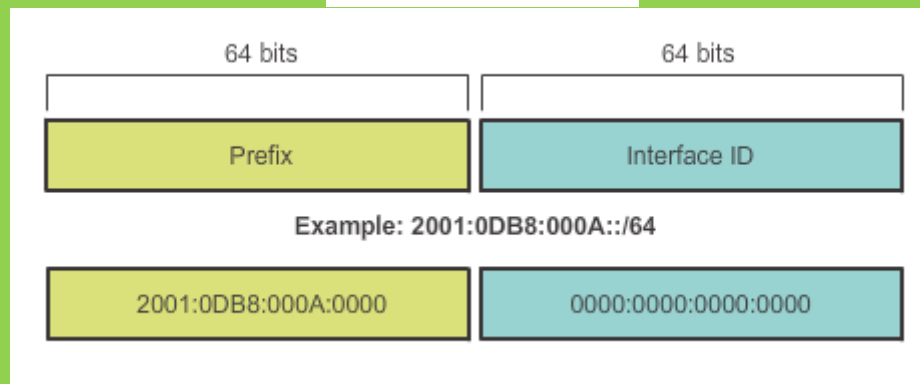

Types of IPv6 Addresses


IPv6 Address Types

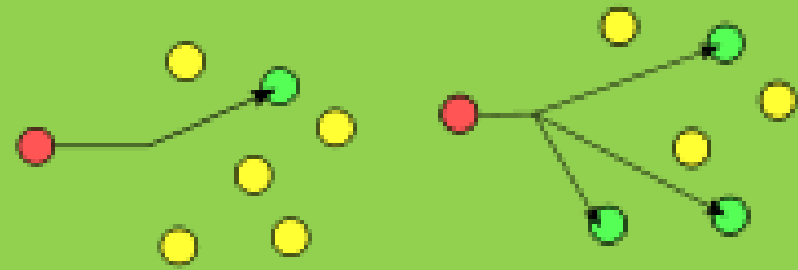

There are three types of IPv6 addresses:

- Unicast - *one-to-one* association
- Multicast - *one-to-unique many* association
- Anycast.- *one-to-nearest* association
 - assigned to a set of interfaces that typically belong to different nodes
 - A packet sent to an anycast address is routed to the nearest device having that address.
 - anycast addresses are allocated from the unicast address space.
 - **Assigning a unicast address** to more than one interface makes a unicast address an anycast address.
 - **Explicitly configured** to **recognize** that the address is an anycast address.
 - Anycast addresses can be used **only by a device**, **not a host**, and anycast addresses must **not be used as the source address** of an IPv6 packet.


Note: IPv6 does **not have broadcast addresses**. However, there is an IPv6 **all-nodes multicast address** that essentially gives the same result.

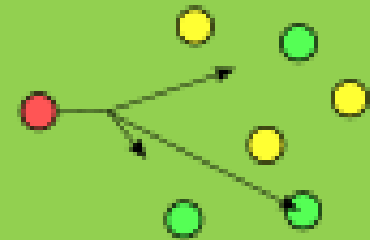


IPv6 Unicast Addresses

Unicast

- Uniquely identifies an interface on an IPv6-enabled device.
- A packet sent to a unicast address is received by the interface that is assigned that address.

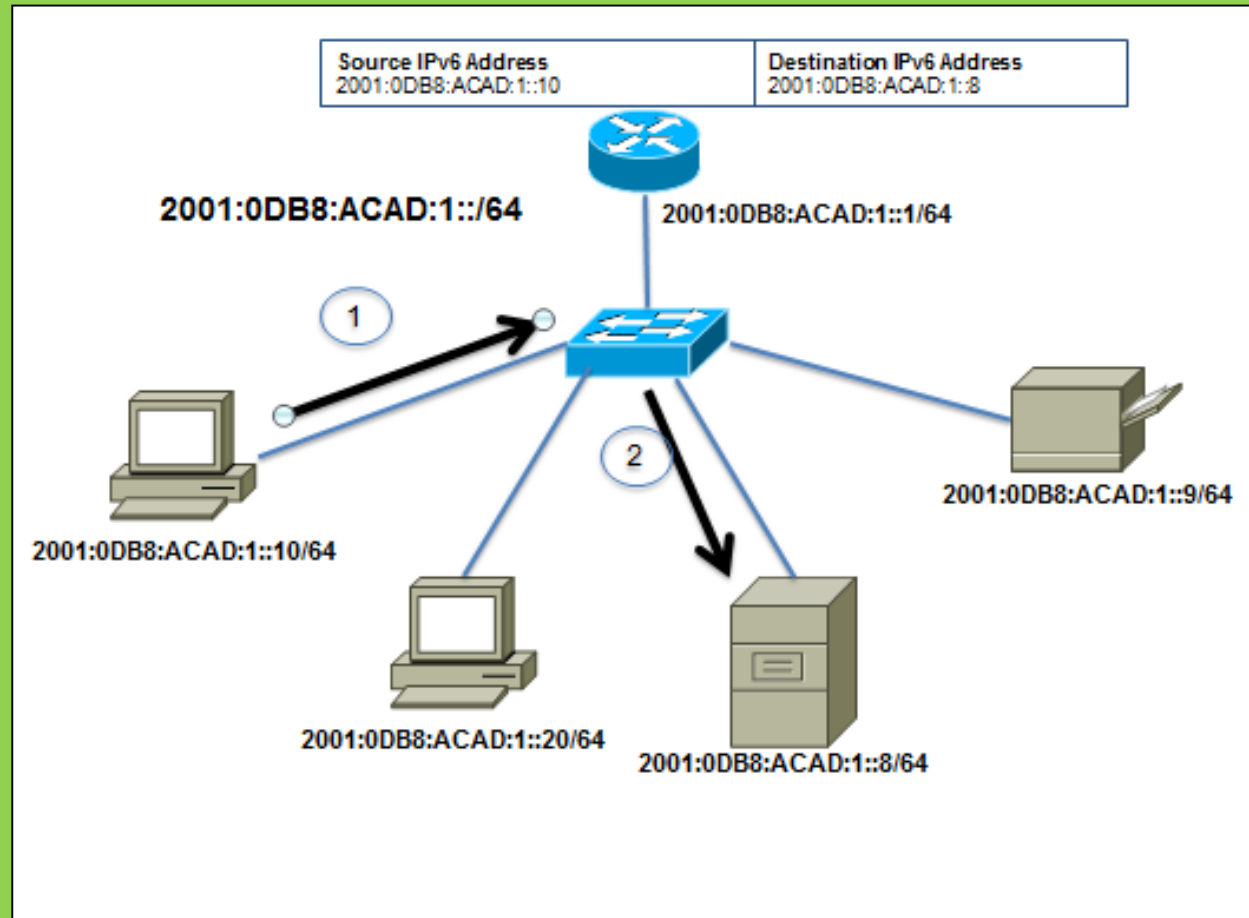

IPv6 Unicast Addresses (cont.)

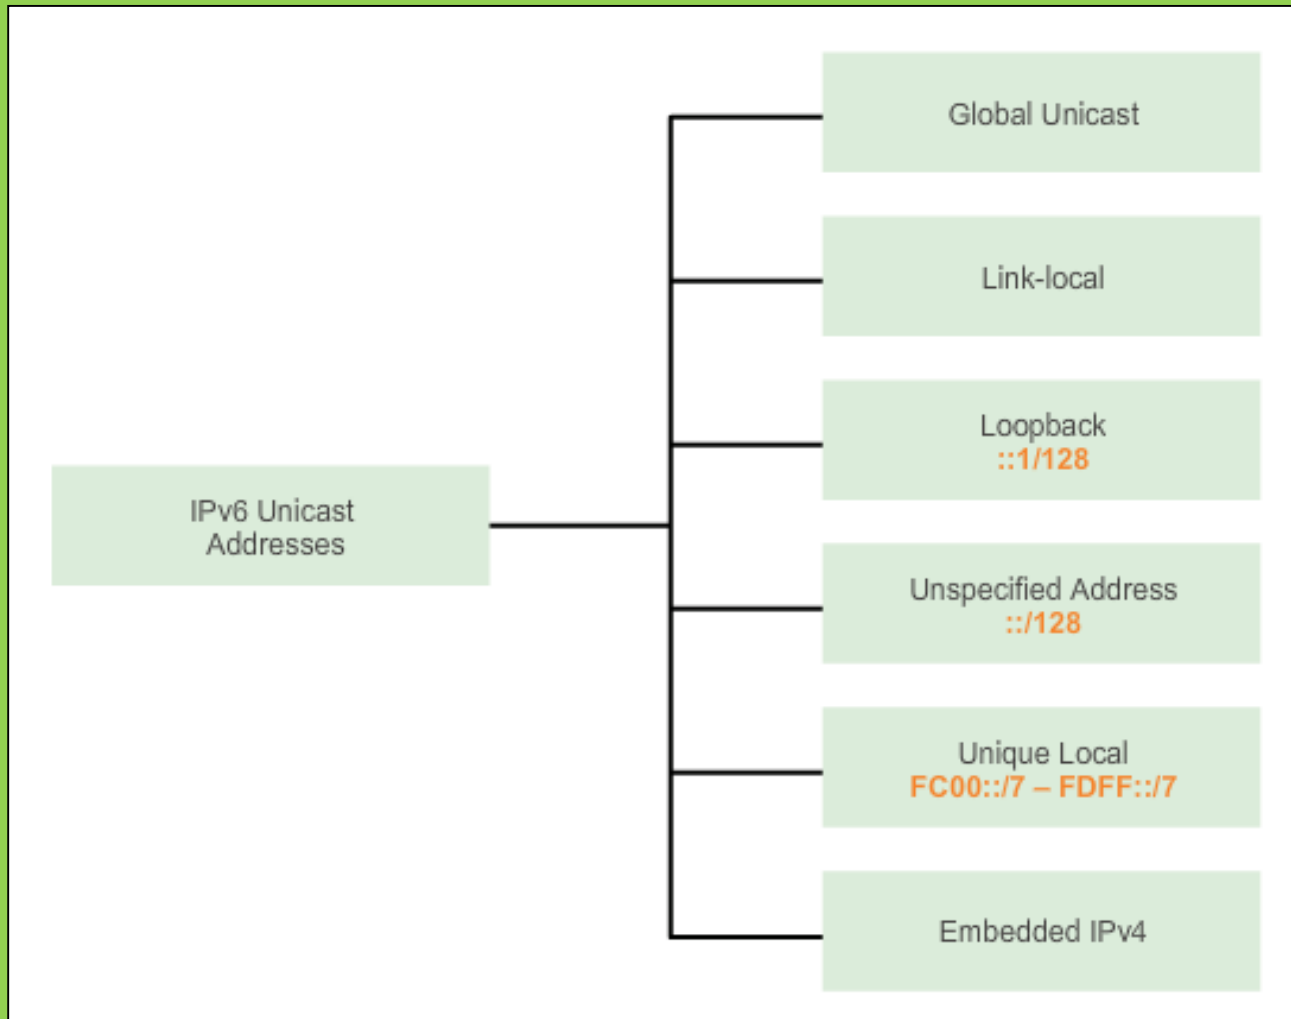

IPv6 Unicast Addresses (cont.)

Global Unicast

- Similar to a public IPv4 address
- Globally unique
- Internet routable addresses
- Can be configured statically or assigned dynamically

Link-local

- Used to communicate with other devices on the same local link
- Confined to a single link; not routable beyond the link
- routers will not forward packets with a link-local source or destination address.

IPv6 Unicast Addresses (cont.)

Loopback

- Used by a host to **send a packet to itself** and cannot be assigned to a physical interface.
- Ping an IPv6 loopback address to **test the configuration of TCP/IP** on the local host.
- All-0s except for the last bit, represented as **::1/128** or just **::1**.

Unspecified Address

- All-0's address represented as **::/128** or just **::**
- **Cannot be assigned** to an interface and is **only used as** a source address.
- An unspecified address is used as a source address **when the device does not yet have a permanent IPv6 address** or
- when the source of the **packet is irrelevant** to the destination.

IPv6 Unicast Addresses (cont.)

Unique Local

- Similar to private addresses for IPv4.
- Used for local addressing within a site or between a limited number of sites.
- should not be routable in the global IPv6
- In the range of FC00::/7 to FDFF::/7.


IPv4 Embedded (not covered in this course)

- Used to help transition from IPv4 to IPv6.

Types of IPv6 Addresses

IPv6 Link-Local Unicast Addresses

- Every IPv6-enabled network interface is **REQUIRED** to have a link-local address
- Enables a device to communicate with other IPv6-enabled devices on the **same link** and only on that link (subnet) includes communication with the **default gateway** (router).
- FE80::/10 range, first 10 bits are 1111 1110 10xx xxxx
- 1111 1110 10**00 0000** (FE80) - 1111 1110 10**11 1111** (FEBF)

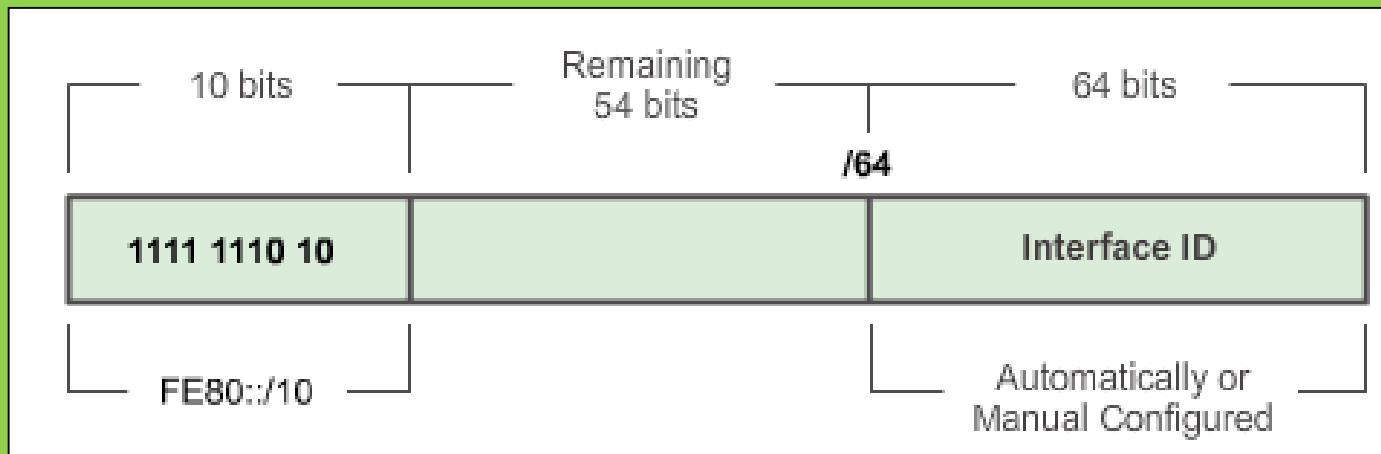

Types of IPv6 Addresses


IPv6 Link-Local Unicast Addresses

- The global unicast address is not a requirement; however, every IPv6-enabled network interface is required to have a link-local address
- If a link-local address is not configured manually on an interface, the device will automatically create its own without communicating with a DHCP server.
- IPv6-enabled hosts create an IPv6 link-local address even if the device has not been assigned a global unicast IPv6 address.
- IPv6 link-local addresses are also used by IPv6 routing protocols to exchange messages and as the next-hop address in the IPv6 routing table.
- it is the link-local address of the router and not the global unicast address that is used as the default gateway for other devices on the link.

Types of IPv6 Addresses

IPv6 Link-Local Unicast Addresses (cont.)

Packets with a source or destination link-local address cannot be routed beyond the link from where the packet originated.

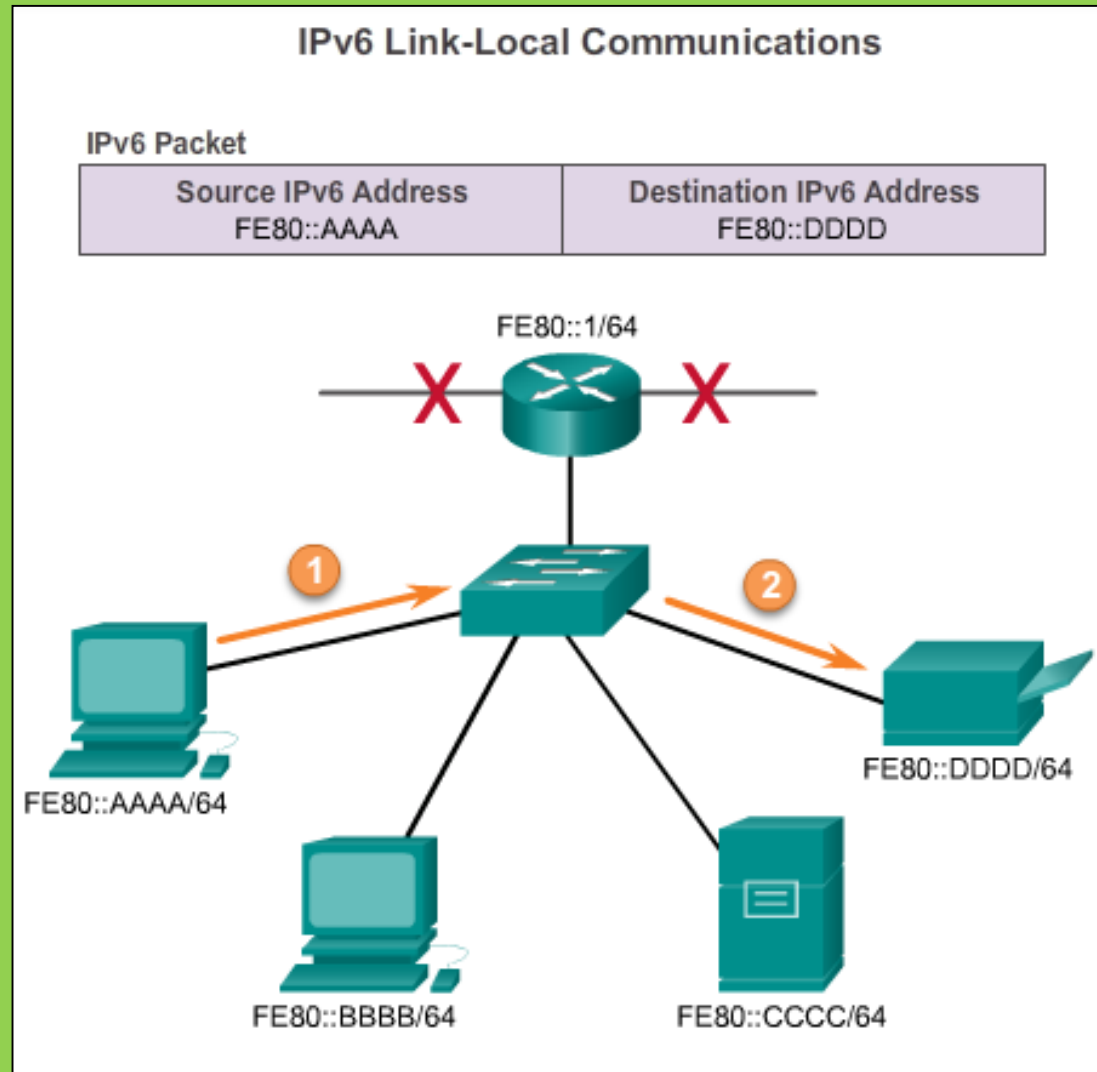

IPv6 Unicast Addresses


Structure of an IPv6 Global Unicast Address

- IPv6 **global unicast** addresses are globally unique and routable on the IPv6 Internet
- Equivalent to public IPv4 addresses
- ICANN allocates IPv6 address blocks to the five RIRs
 - Internet Committee for Assigned Names and Numbers (ICANN) - the operator for Internet Assigned Numbers Authority (IANA)

IPv6 Unicast Addresses

Structure of an IPv6 Global Unicast Address (cont.)

Currently, only global unicast addresses with the first three bits of 001 or 2000::/3 are being assigned

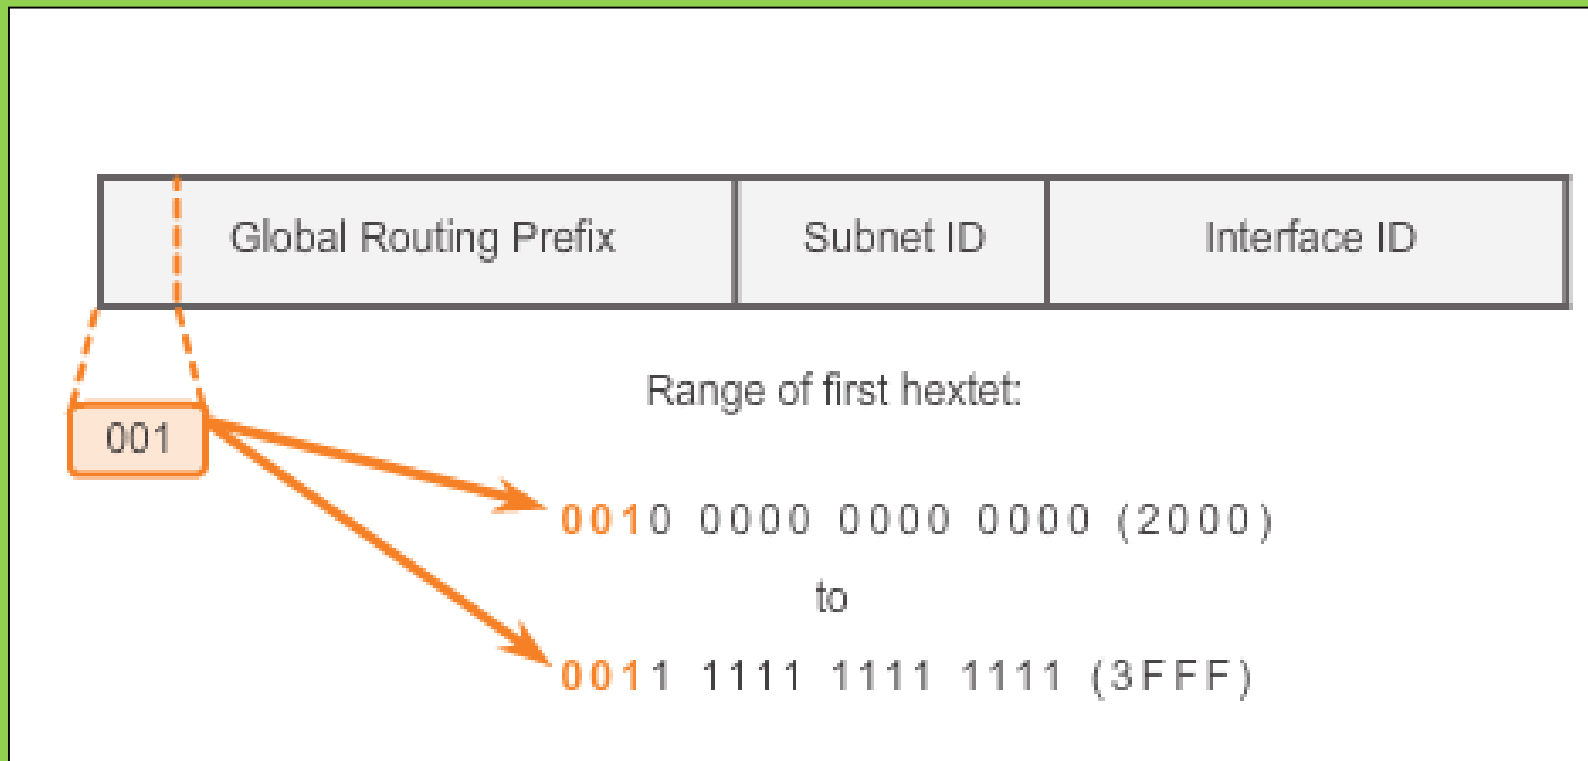


Note: The 2001:0DB8::/32 address has been reserved for documentation purposes, including use in examples.

IPv6 Unicast Addresses

Structure of an IPv6 Global Unicast Address (cont.)

A global unicast address has three parts: **Global Routing Prefix**, **Subnet ID**, and **Interface ID**.

- **Global Routing Prefix** is the prefix or network portion of the address assigned by the provider, such as an ISP, to a customer or site, currently, RIR's assign a /48 global routing prefix to customers.
- 2001:0DB8:ACAD::/48 has a prefix that indicates that the first 48 bits (2001:0DB8:ACAD) is the prefix or network portion.

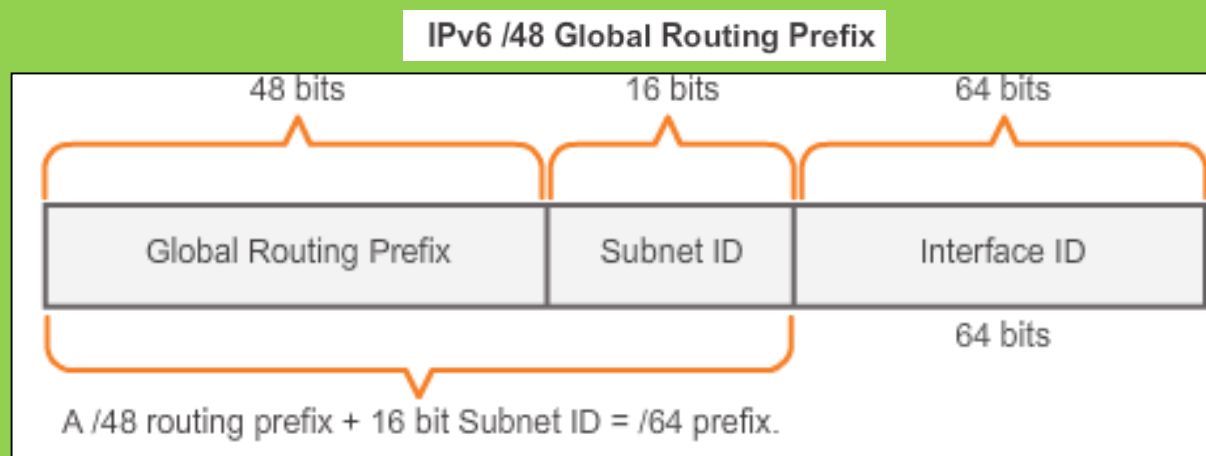


IPv6 Unicast Addresses

Structure of an IPv6 Global Unicast Address (cont.)


- **Subnet ID** is used by an organization to identify subnets within its site
- **Interface ID**
 - Equivalent to the host portion of an IPv4 address.
 - Used because a **single host may have multiple interfaces**, each having one or more IPv6 addresses.

Reading a Global Unicast Address

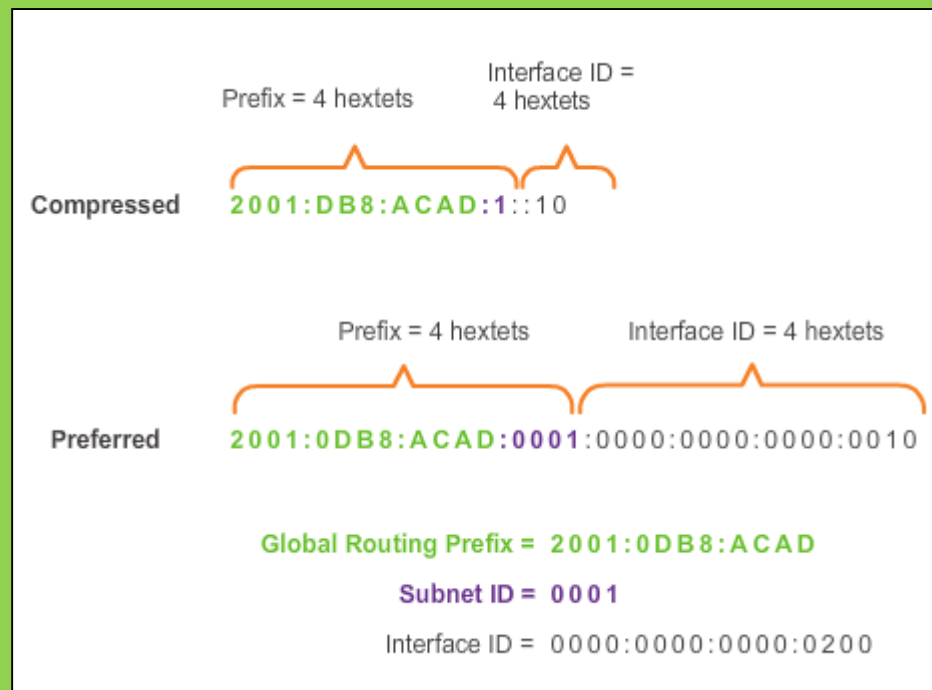

IPv6 Unicast Addresses

Static Configuration of a Global Unicast Address

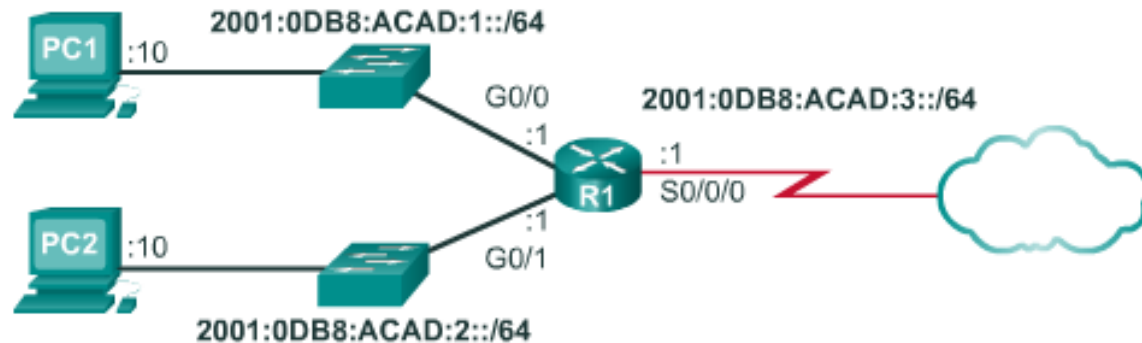

```
R1(config)#interface gigabitethernet 0/0
R1(config-if)#ipv6 address 2001:db8:acad:1::1/64
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface gigabitethernet 0/1
R1(config-if)#ipv6 address 2001:db8:acad:2::1/64
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#interface serial 0/0/0
R1(config-if)#ipv6 address 2001:db8:acad:3::1/64
R1(config-if)#clock rate 56000
R1(config-if)#no shutdown
```

IPv6 Unicast Addresses

Static Configuration of an IPv6 Global Unicast Address (cont.)

Windows IPv6 Setup

The screenshot shows the 'Internet Protocol Version 6 (TCP/IPv6) Properties' dialog box with the 'General' tab selected. The dialog box has a title bar with a question mark and a close button. The main area contains instructions: 'You can get IPv6 settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IPv6 settings.' Below this, there are two radio button options. The first is 'Obtain an IPv6 address automatically' (unselected). The second is 'Use the following IPv6 address:' (selected). This second option is followed by three text input fields: 'IPv6 address:' with the value '2001:db8:acad:1::10', 'Subnet prefix length:' with the value '64', and 'Default gateway:' with the value '2001:db8:acad:1::1'. Below these fields, there are two more radio button options. The first is 'Obtain DNS server address automatically' (unselected). The second is 'Use the following DNS server addresses:' (selected). This second option is followed by two text input fields: 'Preferred DNS server:' and 'Alternate DNS server:', both of which are empty. At the bottom left, there is a checkbox labeled 'Validate settings upon exit' which is unchecked. At the bottom right, there are three buttons: 'OK', 'Cancel', and 'Advanced...'. The 'Advanced...' button is located above the 'OK' and 'Cancel' buttons.

Internet Protocol Version 6 (TCP/IPv6) Properties

General

You can get IPv6 settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IPv6 settings.

☐ Obtain an IPv6 address automatically

☒ Use the following IPv6 address:

IPv6 address: 2001:db8:acad:1::10

Subnet prefix length: 64

Default gateway: 2001:db8:acad:1::1

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server:

Alternate DNS server:

☐ Validate settings upon exit

Advanced...

OK Cancel

IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using SLAAC

Stateless Address Autoconfiguration (SLAAC)

- A method that allows a device to obtain its **prefix, prefix length and default gateway** from an **IPv6 router**
- No DHCPv6 server needed
- Rely on ICMPv6 Router Advertisement (RA) messages

IPv6 routers

- Forwards IPv6 packets between networks
- Can be configured with static routes or a dynamic IPv6 routing protocol
- Sends ICMPv6 RA messages


IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using SLAAC (cont.)

- The **IPv6 unicast-routing** command enables IPv6 routing.
- RA message can contain one of the following three options:
 - SLAAC Only – Uses the information contained in the RA message.
 - SLAAC and DHCPv6 – Uses the information contained in the RA message and get other information from the DHCPv6 server, **stateless DHCPv6** (for example, DNS).
 - DHCPv6 only – The device should not use the information in the RA, **stateful DHCPv6**.
- Routers send ICMPv6 RA messages using the link-local address as the source IPv6 address

IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using SLAAC (cont.)

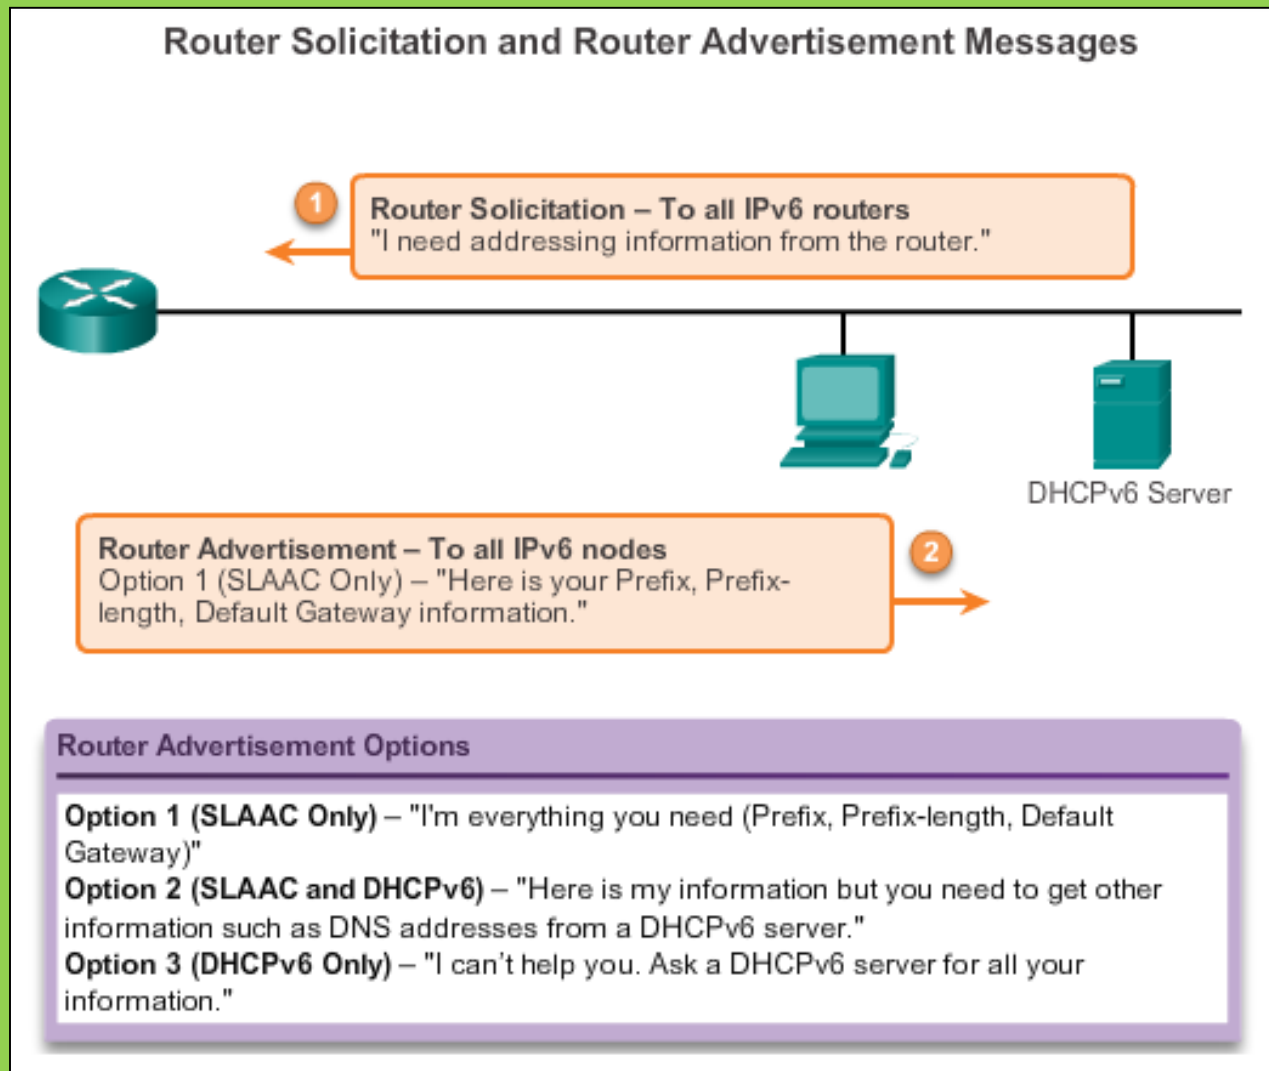

IPv6 Unicast Addresses


Dynamic Configuration of a Global Unicast Address using DHCPv6 (cont.)

Dynamic Host Configuration Protocol for IPv6 (DHCPv6)

- Similar to IPv4
- Automatically receives addressing information, including a global unicast address, prefix length, default gateway address and the addresses of DNS servers using the services of a DHCPv6 server.
- Device may receive all or some of its IPv6 addressing information from a DHCPv6 server depending upon whether option 2 (SLAAC and DHCPv6) or option 3 (DHCPv6 only) is specified in the ICMPv6 RA message.
- Host may choose **to ignore** whatever is in the router's RA message and obtain its IPv6 address and other information **directly** from a **DHCPv6 server**.

IPv6 Unicast Addresses

Dynamic Configuration of a Global Unicast Address using DHCPv6 (cont.)

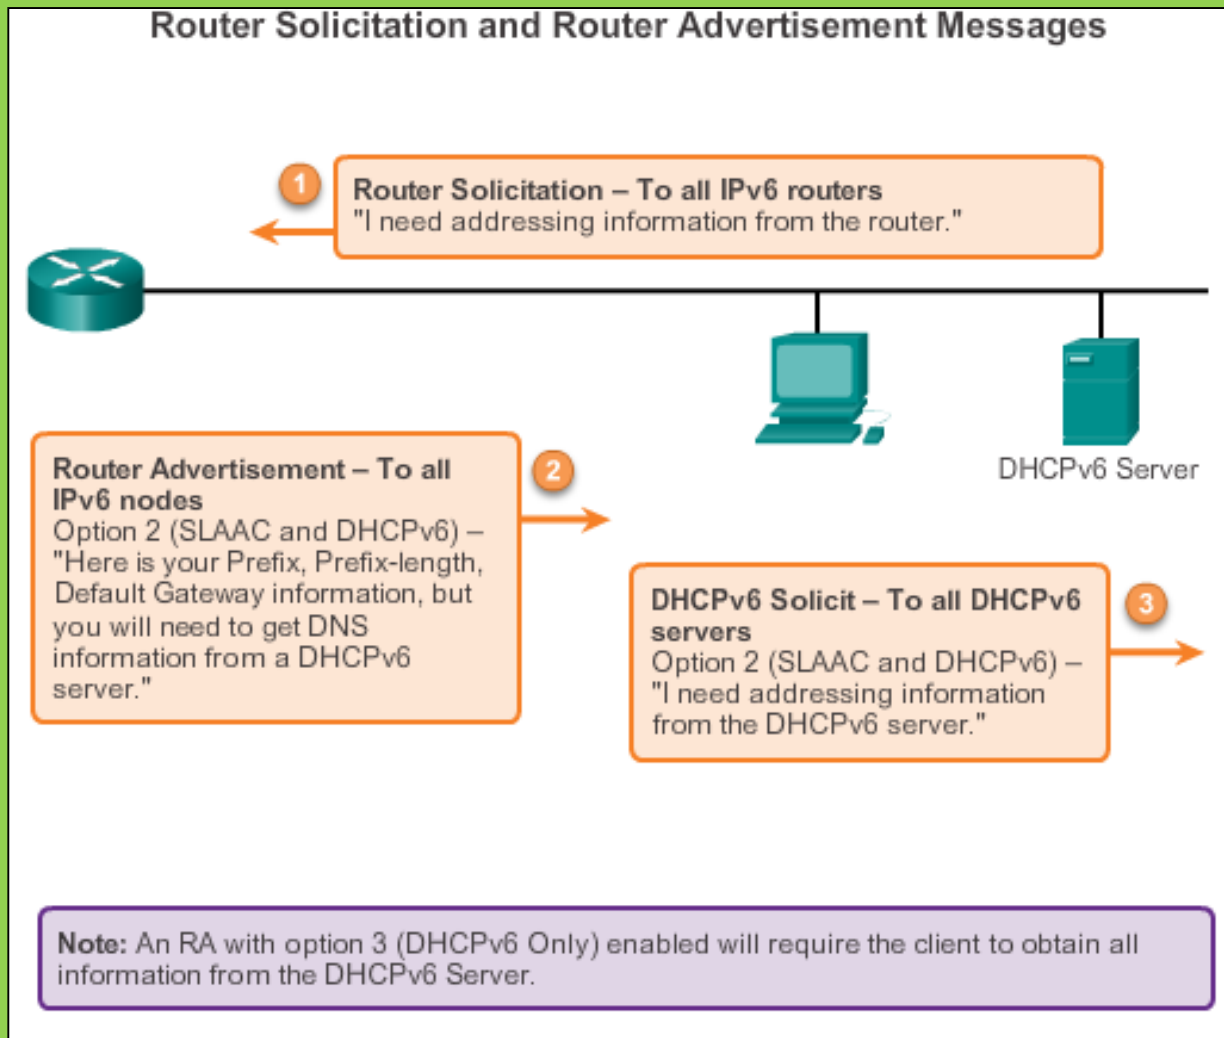

EUI-64 Process or Randomly Generated

EUI-64 Process


- Uses a client's 48-bit Ethernet MAC address and inserts another 16 bits in the middle of the 48-bit MAC address to create a 64-bit Interface ID.
- Advantage is that the Ethernet MAC address can be used to determine the interface; is easily tracked.

EUI-64 Interface ID is represented in binary and comprises three parts:

- 24-bit OUI from the client MAC address, but the 7th bit (the Universally/Locally bit) is reversed (0 becomes a 1).
- Inserted as a 16-bit value FFFE.
- 24-bit device identifier from the client MAC address.

IPv6 Unicast Addresses

EUI-64 Process or Randomly Generated (cont.)

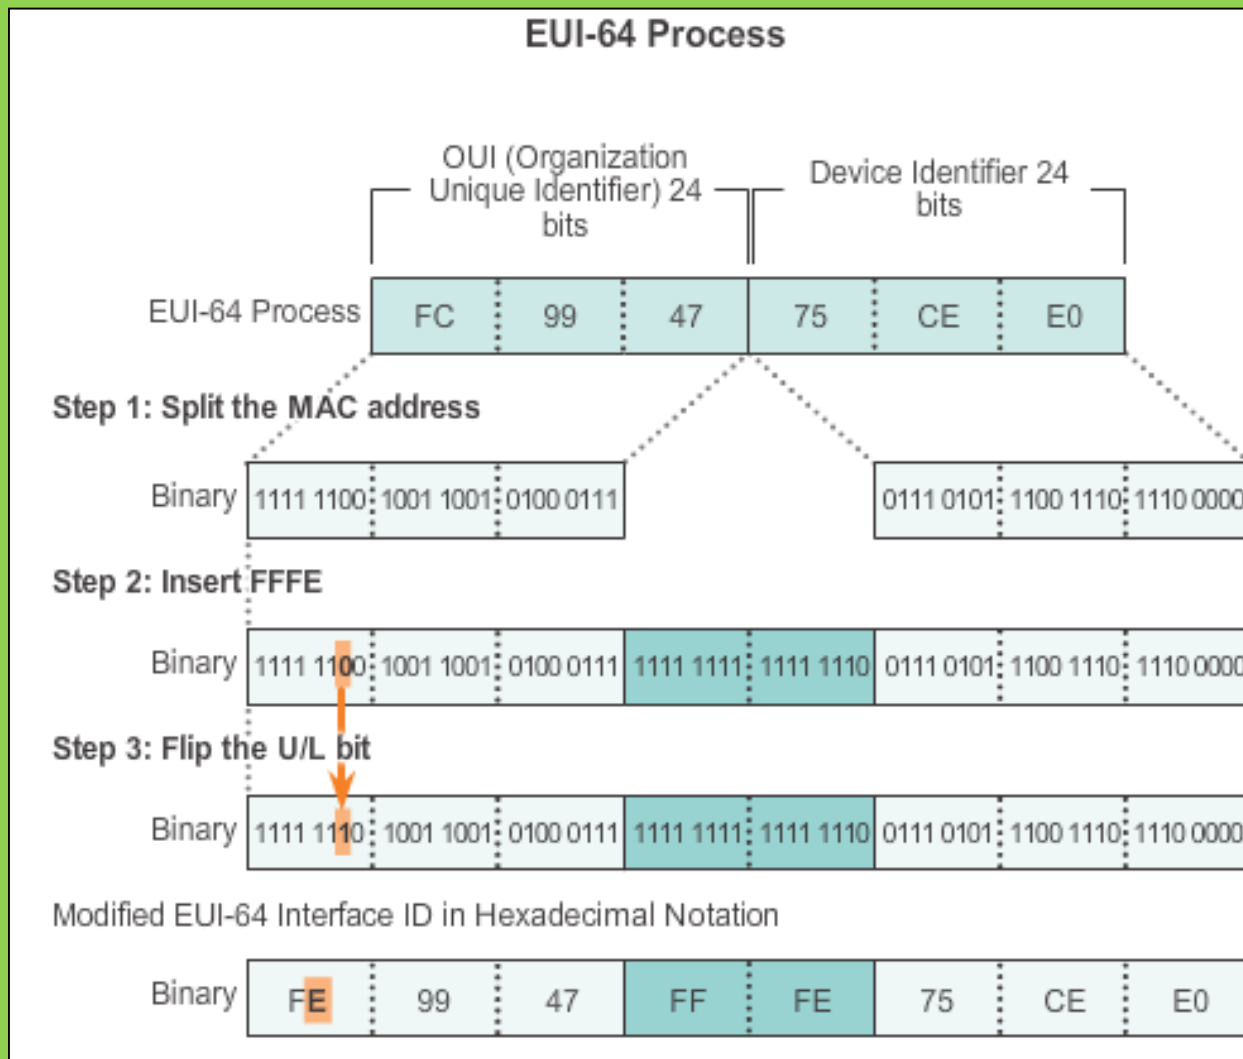

IPv6 Unicast Addresses

EUI-64 Process or Randomly Generated (cont.)

```
R1#show interface gigabitethernet 0/0
GigabitEthernet0/0 is up, line protocol is up
  Hardware is CN Gigabit Ethernet, address is fc99.4775.c3e0
(bia fc99.4775.c3e0)
<Output Omitted>
```

```
R1#show ipv6 interface brief
```

```
GigabitEthernet0/0 [up/up]
```

```
FE80::FE99:47FF:FE75:C3E0
```

```
2001:DB8:ACAD:1::1
```

```
GigabitEthernet0/1 [up/up]
```

```
FE80::FE99:47FF:FE75:C3E1
```

```
2001:DB8:ACAD:2::1
```

```
Serial0/0/0 [up/up]
```

```
FE80::FE99:47FF:FE75:C3E0
```


```
2001:DB8:ACAD:3::1
```

```
Serial0/0/1 [administratively down/down]
```

```
unassigned
```

```
R1#
```

Link-local addresses using
EUI-64



EUI-64 Process or Randomly Generated (cont.)

Randomly Generated Interface IDs

- Depending upon the operating system, a device can use a randomly generated Interface ID instead of using the MAC address and the EUI-64 process.
- Beginning with Windows Vista, Windows uses a randomly generated Interface ID instead of one created with EUI-64.
- Windows XP (and previous Windows operating systems) used EUI-64.

IPv6 Unicast Addresses

Dynamic Link-local Addresses


Link-Local Address

- **After** a global unicast address is assigned to an interface, an IPv6-enabled device **automatically** generates its link-local address.
- Must have a link-local address that enables a device to communicate with other IPv6-enabled devices on the **same subnet**.
- Uses the **link-local address** of the local router for its **default gateway** IPv6 address.
- Routers exchange **dynamic routing protocol messages** using link-local addresses.
- Routers' routing tables use the link-local address to identify the **next-hop router** when forwarding IPv6 packets.

Dynamic Link-local Addresses (cont.)

Dynamically Assigned

The link-local address is **dynamically created** using the FE80::/10 prefix and the Interface ID.

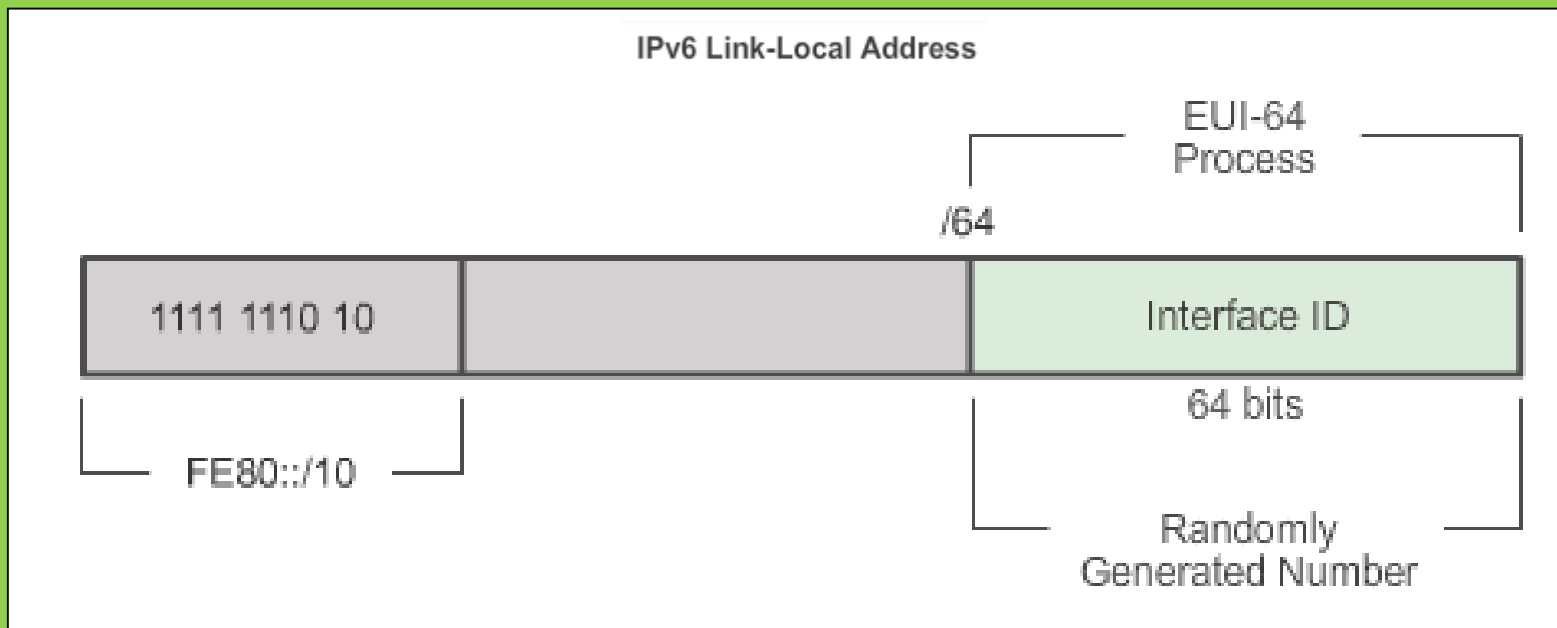

After the Interface ID is established, either through the EUI-64 process or through random generation,

- **Global unicast address** – When using SLAAC, the device **receives** its prefix from the ICMPv6 RA and combines it with the Interface ID.
- **Link-local address** – A link-local prefix begins with FE80::/10. A device **typically uses FE80::/64** as the prefix/prefix-length, followed by the Interface ID.

Dynamically Assigned Link-Local Address

- By default, routers use EUI-64 to generate the Interface ID for all link-local address on IPv6 interfaces.
- For serial interfaces, the router will use the MAC address of an Ethernet interface.
- Recall that a link-local address must be unique only on that link or network. However, a drawback to using the dynamically assigned link-local address is its length, which makes it challenging to identify and remember assigned addresses.

Static Link-local Addresses

Configuring the link-local address manually provides the ability to create an address that is recognizable and **easier to remember**.

Configuring Link-local

```
R1(config)#interface gigabitethernet 0/0
R1(config-if)#ipv6 address fe80::1 ?
    link-local    Use link-local address

R1(config-if)#ipv6 address fe80::1 link-local
R1(config-if)#exit
R1(config)#interface gigabitethernet 0/1
R1(config-if)#ipv6 address fe80::1 link-local
R1(config-if)#exit
R1(config)#interface serial 0/0/0
R1(config-if)#ipv6 address fe80::1 link-local
R1(config-if)#
```

Static Link-local Addresses (cont.)

Configuring Link-local

```
R1#show ipv6 interface brief
```

```
GigabitEthernet0/0      [up/up]
```

```
FE80::1
```

```
2001:DB8:ACAD:1::1
```

```
GigabitEthernet0/1      [up/up]
```

```
FE80::1
```

```
2001:DB8:ACAD:2::1
```

```
Serial10/0/0            [up/up]
```

```
FE80::1
```

```
2001:DB8:ACAD:3::1
```

```
Serial10/0/1            [administratively down/down]
```

```
unassigned
```

```
R1#
```

Statically configured link-local addresses


IPv6 Global Unicast Addresses

Verifying IPv6 Address Configuration

Serial 0/0/0 link-local address is the same as its GigabitEthernet 0/0 interface

Each interface has two IPv6 addresses -

1. global unicast address that was configured
2. one that begins with FE80 is automatically added as a link-local unicast address

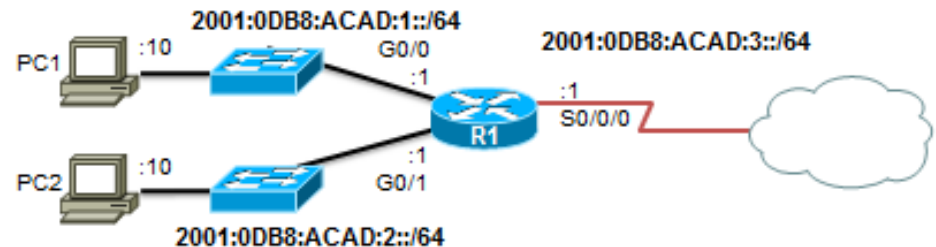

```
R1#show ipv6 interface brief
GigabitEthernet0/0    [up/up]
FE80::FE99:47FF:FE75:C3E0
2001:DB8:ACAD:1::1
GigabitEthernet0/1    [up/up]
FE80::FE99:47FF:FE75:C3E1
2001:DB8:ACAD:2::1
Serial0/0/0           [up/up]
FE80::FE99:47FF:FE75:C3E0
2001:DB8:ACAD:3::1
Serial0/0/1           [administratively down/down]
unassigned
R1#
```

Serial interfaces **do not have an Ethernet MAC** addresses so IOS uses the MAC address of the **first available Ethernet interface**.

Verifying IPv6 Address Configuration (cont.)

```
R1#show ipv6 route
IPv6 Routing Table - default - 7 entries
Codes: C - Connected, L - Local, S - Static, U - Per-user
Static

<output omitted>

C    2001:DB8:ACAD:1::/64 [0/0]
     via GigabitEthernet0/0, directly connected
L    2001:DB8:ACAD:1::1/128 [0/0]
     via GigabitEthernet0/0, receive
C    2001:DB8:ACAD:2::/64 [0/0]
     via GigabitEthernet0/1, directly connected
L    2001:DB8:ACAD:2::1/128 [0/0]
     via GigabitEthernet0/1, receive
C    2001:DB8:ACAD:3::/64 [0/0]
     via Serial0/0/0, directly connected
L    2001:DB8:ACAD:3::1/128 [0/0]
     via Serial0/0/0, receive
L    FF00::/8 [0/0]
     via Null0, receive
R1#
```

Assigned IPv6 Multicast Addresses

- IPv6 multicast addresses have the prefix FF00::/8
- There are two types of IPv6 multicast addresses:
 - Assigned multicast
 - Solicited node multicast


Assigned IPv6 Multicast Addresses (cont.)

Two common IPv6 assigned multicast groups include:

- **FF02::1 All-nodes multicast group** –
 - All IPv6-enabled devices join
 - Same effect as an IPv4 broadcast address
- **FF02::2 All-routers multicast group**
 - All IPv6 routers join
 - A router becomes a member of this group when it is enabled as an IPv6 router with the `ipv6 unicast-routing` global configuration mode command.
 - A packet sent to this group is received and processed by all IPv6 routers on the link or network.

IPv6 Multicast Addresses


Assigned IPv6 Multicast Addresses (cont.)

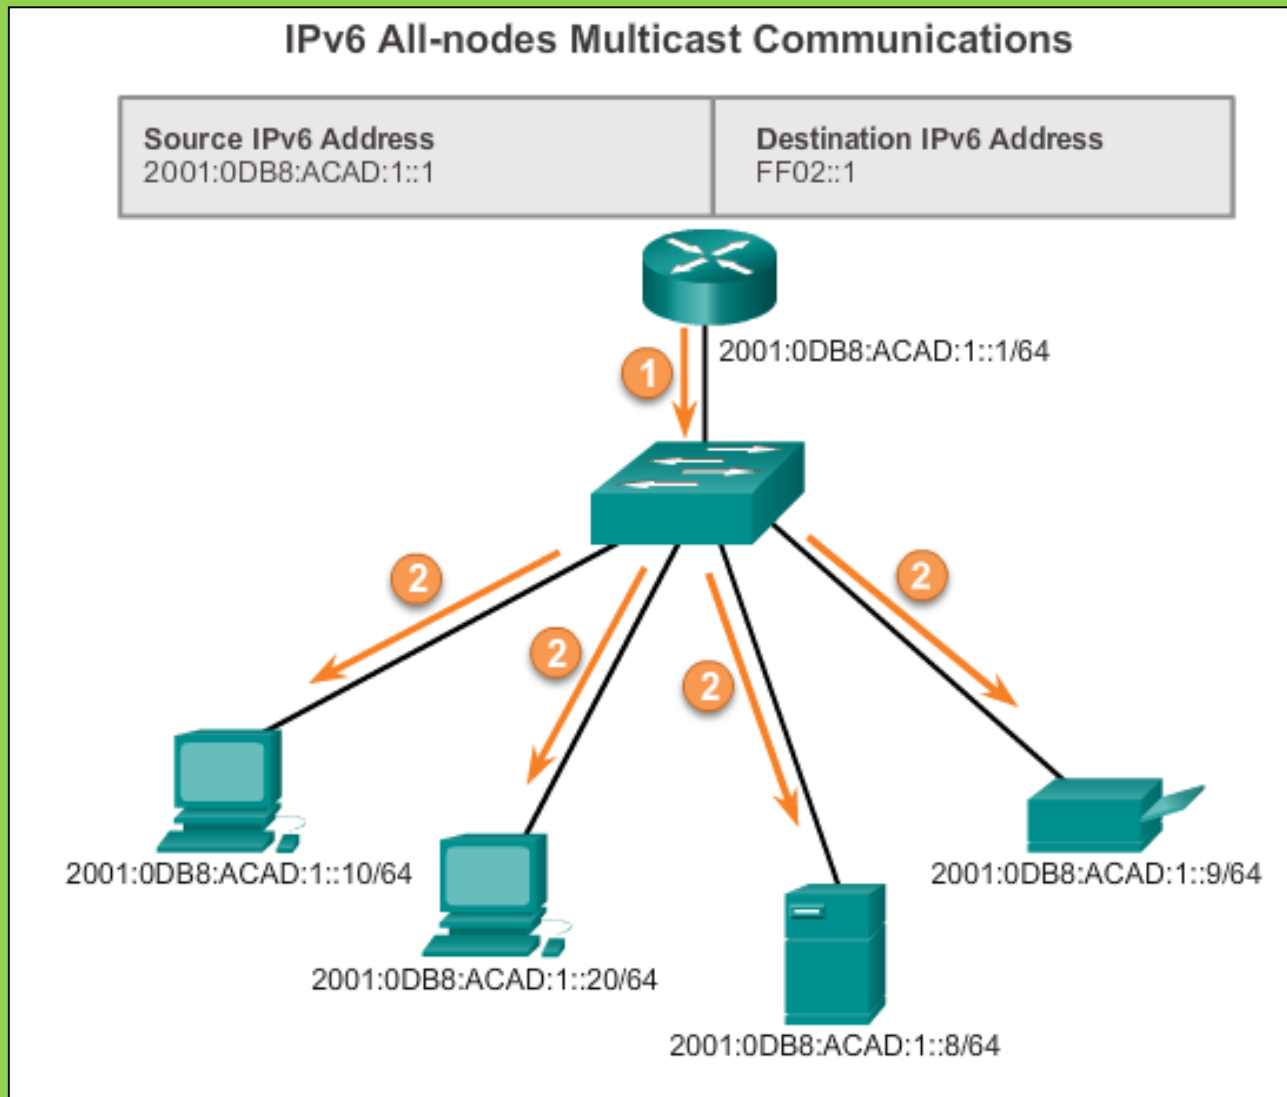

IPv6 Multicast Addresses

Solicited Node IPv6 Multicast Addresses

- Similar to the all-nodes multicast address, **matches only the last 24 bits** of the IPv6 global unicast address of a device
- **Automatically created** when the **global unicast** or **link-local unicast** addresses are assigned
- **Created by** combining a special FF02:0:0:0:0:0:FF00::/104 prefix with the right-most 24 bits of its unicast address

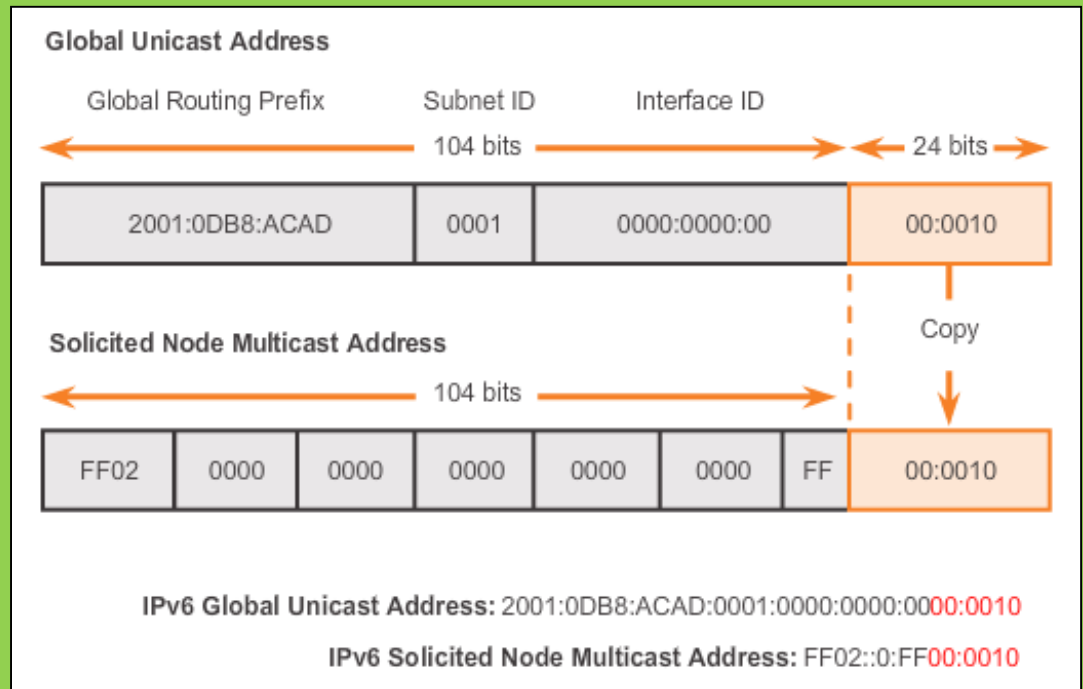


IPv6 Multicast Addresses

Solicited Node IPv6 Multicast Addresses (cont.)

The solicited node multicast address consists of two parts:

- **FF02:0:0:0:0:0:FF00::/104 multicast prefix** – First 104 bits of the all solicited node multicast address
- **Least significant 24-bits** – Copied from the right-most 24 bits of the **global unicast** or **link-local unicast** address of the device

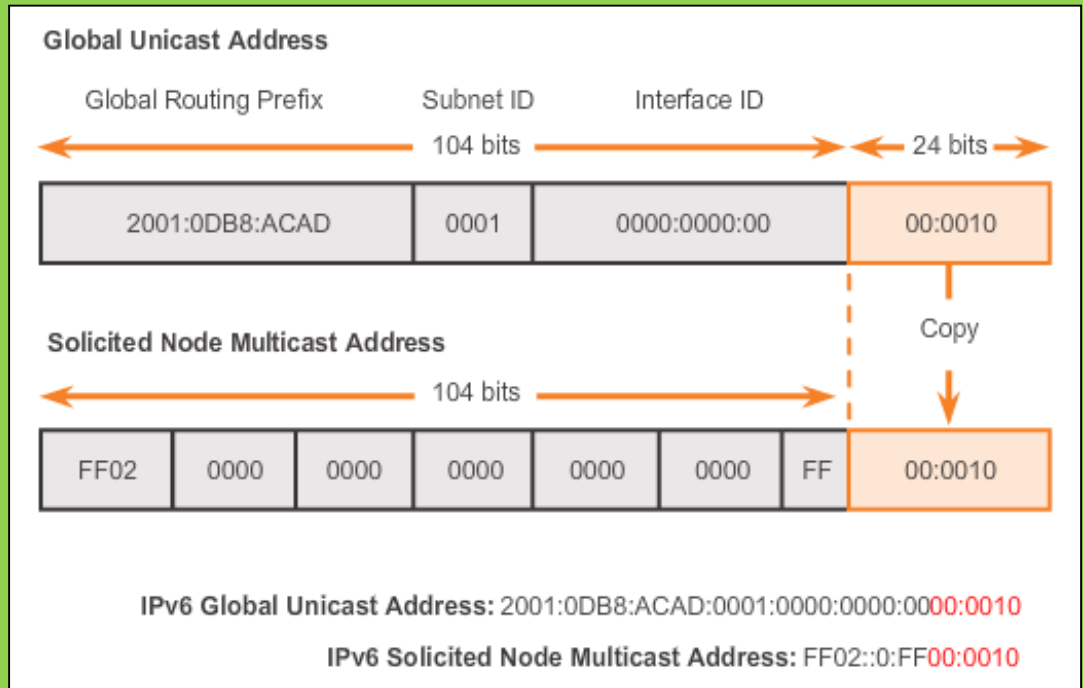

Connectivity Verification

ICMP

ICMPv4 and ICMPv6 Messages

- ICMP messages common to both ICMPv4 and ICMPv6 include:
 - Host confirmation (Echo request and replay)
 - Destination or Service Unreachable (net, host, protocol, port)
 - Time exceeded (Over TTL time)
 - Route redirection
- Although IP is not a reliable protocol, the TCP/IP suite does provide for messages to be sent in the event of certain errors, sent using the services of ICMP.
- A router may use the **ICMP Redirect Message** to notify the hosts on a network that a **better route is available** for a particular destination. This message may only be used when the source host is on the same physical network as **both gateways**


ICMP

ICMPv6 Router Solicitation and Router Advertisement Messages

- ICMPv6 includes four new protocols as part of the Neighbor Discovery Protocol (ND or NDP):
 - Router Solicitation message
 - Router Advertisement message
 - Neighbor Solicitation message
 - Neighbor Advertisement message
- **Router Solicitation and Router Advertisement Message** – Sent between hosts and routers.
- **Router Solicitation (RS) message** – RS messages are sent as an IPv6 all-routers multicast message.
- **Router Advertisement (RA) message** – RA messages are sent by routers to provide addressing information.

ICMP

ICMPv6 Router Solicitation and Router Advertisement Messages (cont.)

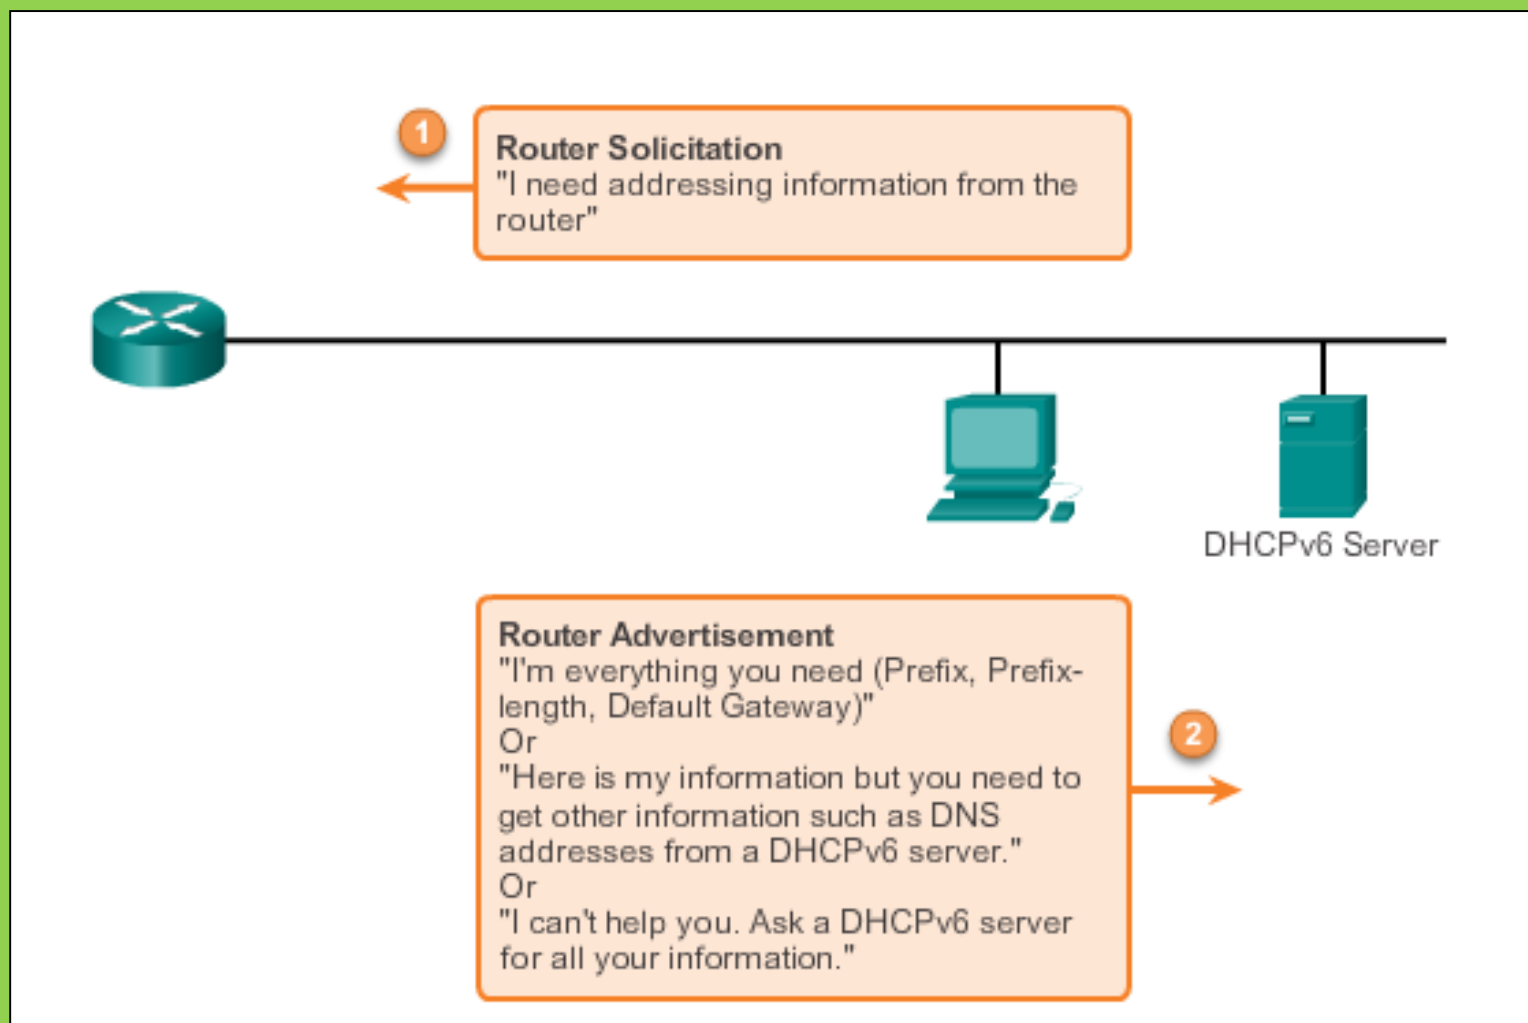


ICMP

ICMPv6 Neighbor Solicitation and Neighbor Advertisement Messages

- Two additional message types:
 - Neighbor Solicitation (NS)
 - Neighbor Advertisement (NA) messages
- **Used for address resolution** is used when a device on the LAN knows the IPv6 unicast address of a destination, but does not know its Ethernet MAC address.
- **Also used for Duplicate Address Detection (DAD)**
 - Performed on the address to ensure that it is unique.
 - The device sends an NS message with its own IPv6 address as the targeted IPv6 address.

ICMP

ICMPv6 Neighbor Solicitation and Neighbor Advertisement Messages (cont.)

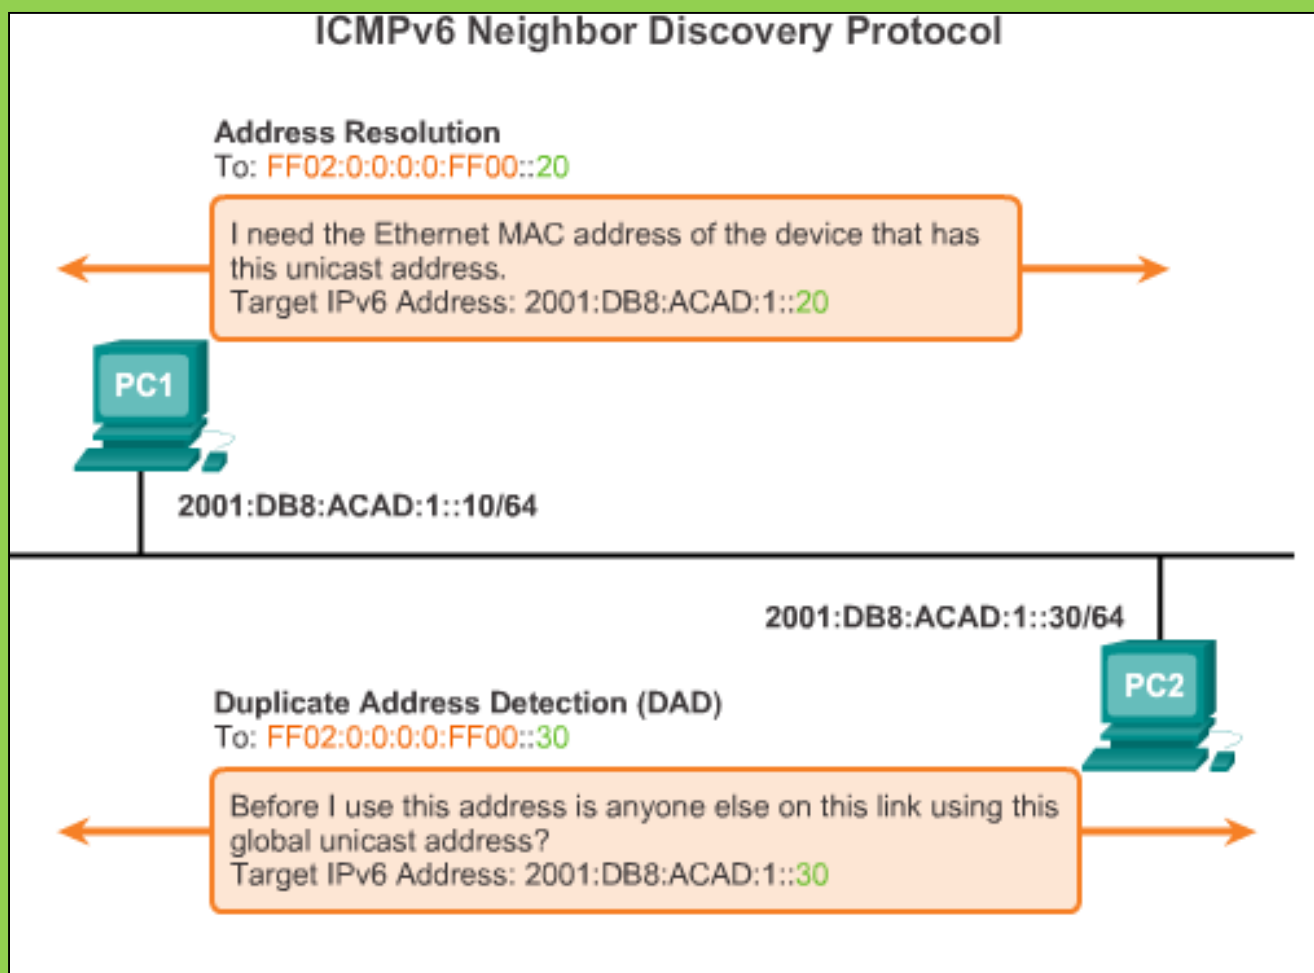

Testing and Verification


Ping – Testing the Local Stack

Testing Local TCP/IP Stack

Pinging the local host confirms that TCP/IP is installed and working on the local host.

`C:\>ping 127.0.0.1`

Pinging **127.0.0.1** causes a device to ping itself.

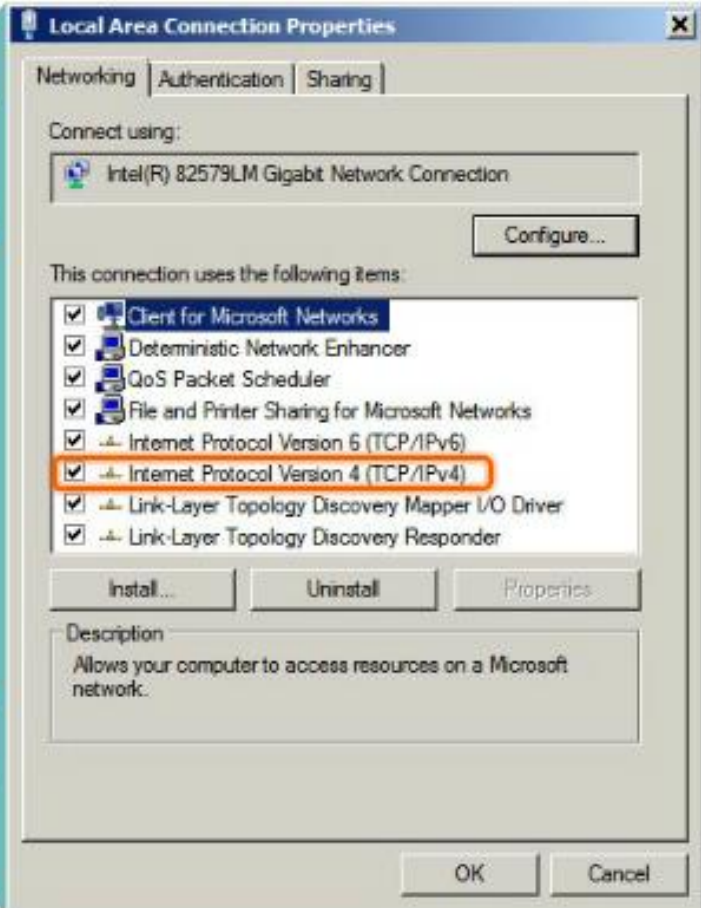

Local Area Connection Properties

Networking | Authentication | Sharing

Connect using:

Intel(R) 82579LM Gigabit Network Connection

Configure...

This connection uses the following items:

- ☒ Client for Microsoft Networks
- ☒ Deterministic Network Enhancer
- ☒ QoS Packet Scheduler
- ☒ File and Printer Sharing for Microsoft Networks
- ☒ Internet Protocol Version 6 (TCP/IPv6)
- ☒ Internet Protocol Version 4 (TCP/IPv4)
- ☒ Link-Layer Topology Discovery Mapper I/O Driver
- ☒ Link-Layer Topology Discovery Responder

Install... Uninstall Properties


Description

Allows your computer to access resources on a Microsoft network.


OK Cancel

Testing and Verification

Ping – Testing Connectivity to the Local LAN

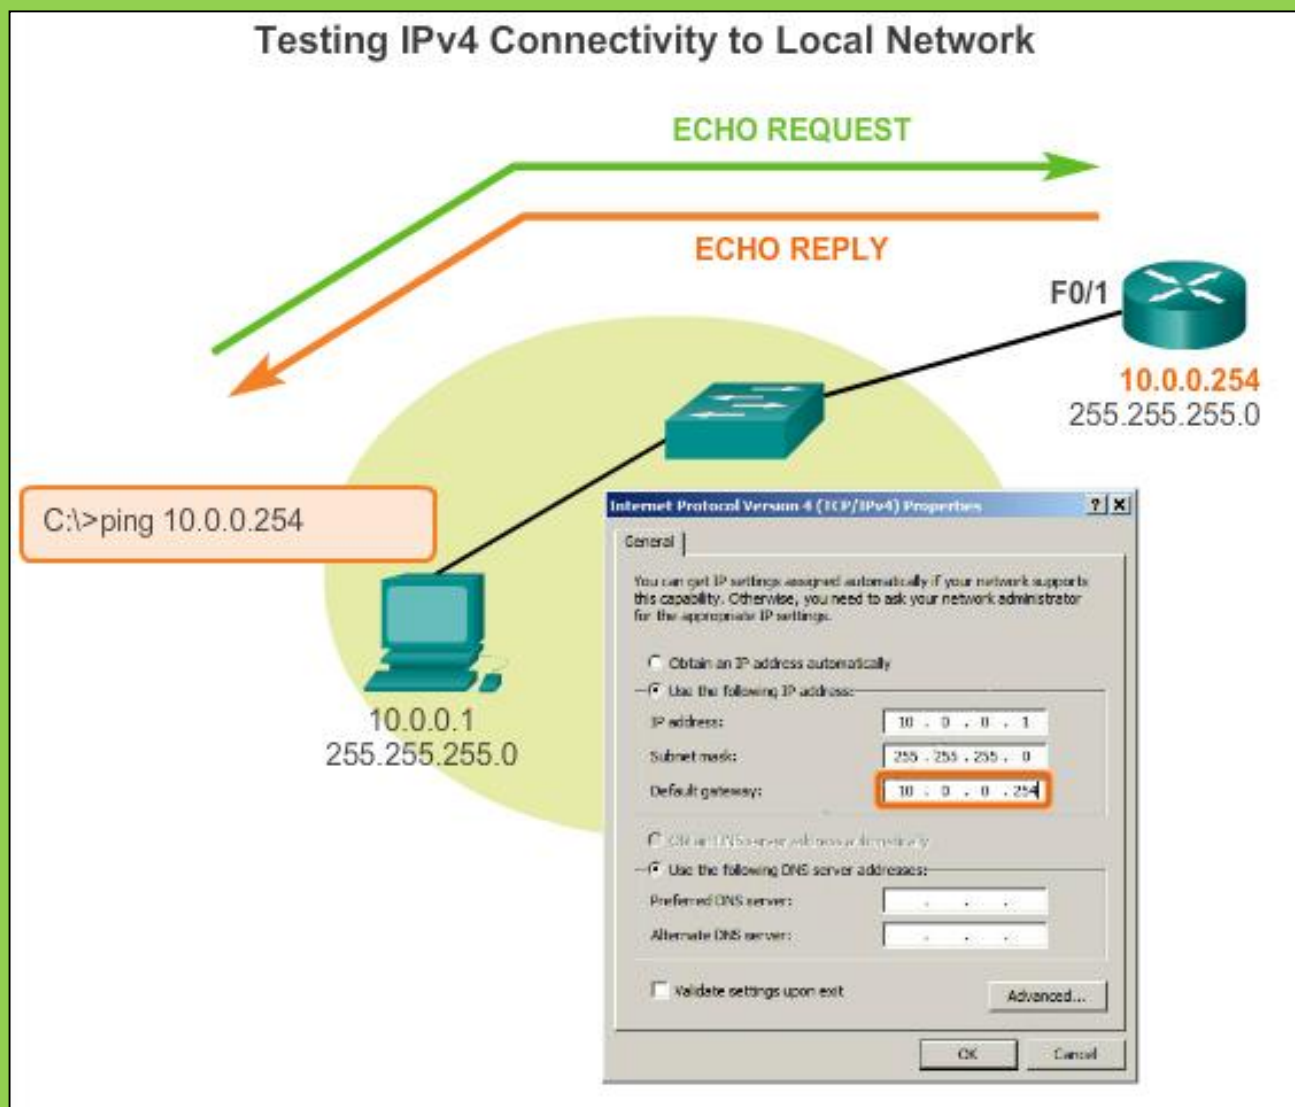

Ping – Testing Connectivity to Remote

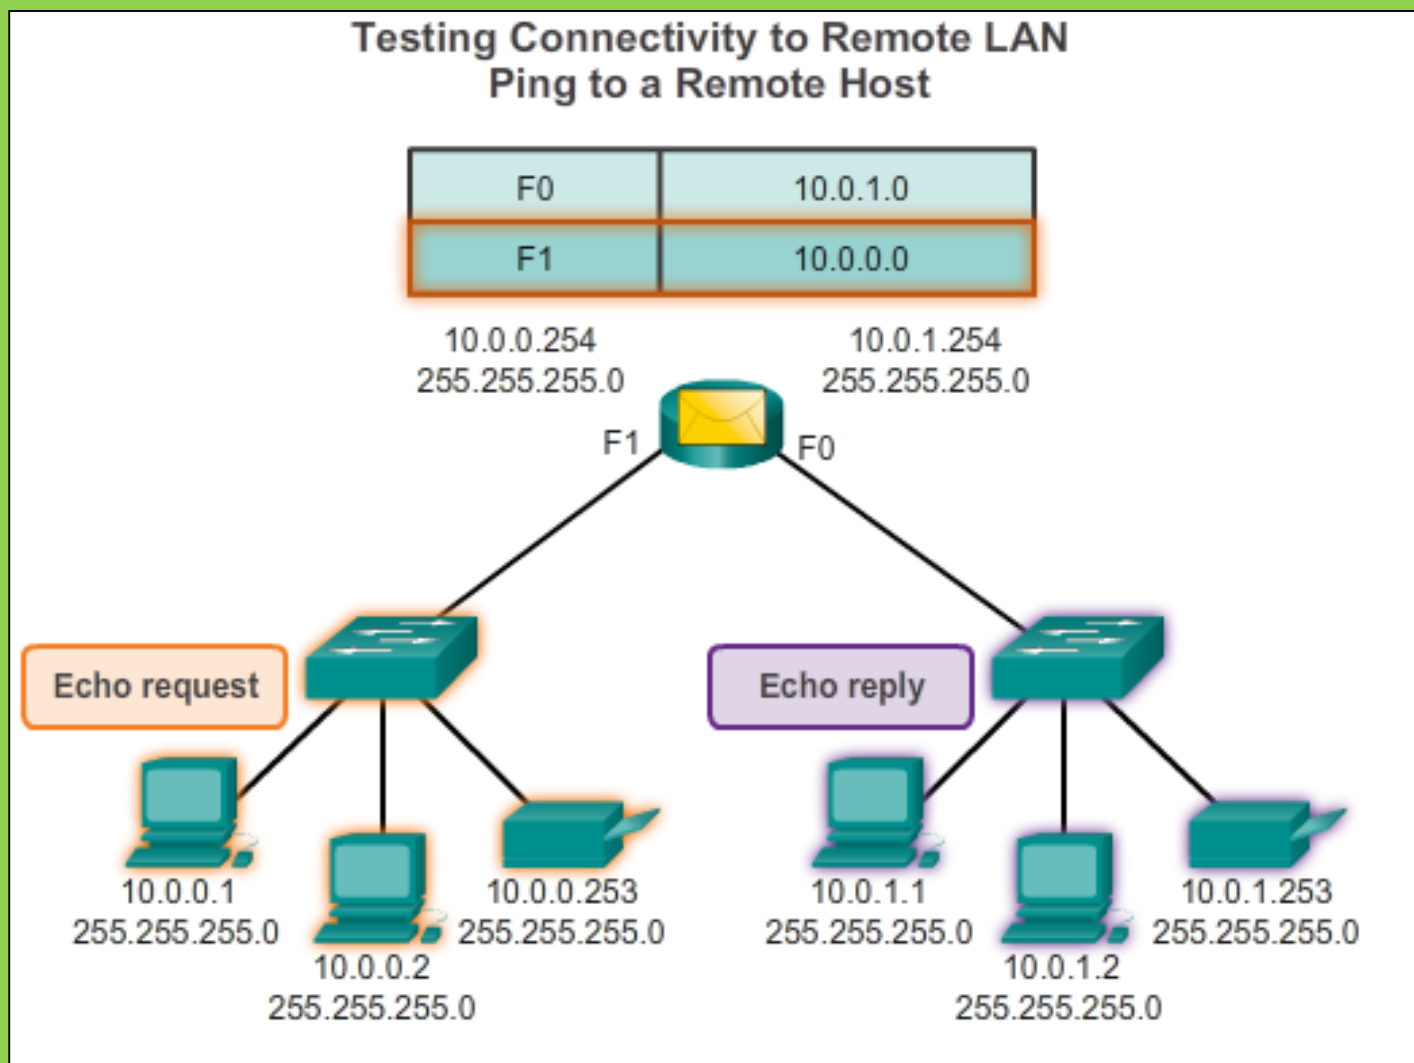

Traceroute – Testing the Path

Traceroute

- Generates a list of hops that were successfully reached along the path.
- Provides important verification and troubleshooting information.
- If the data reaches the destination, then the trace lists the interface of every router in the path between the hosts.
- If the data fails at some hop along the way, the address of the last router that responded to the trace can provide an indication of where the problem or security restrictions are found.
- Provides round-trip time for each hop along the path and indicates if a hop fails to respond.

IP Addressing Summary

- IP addresses are hierarchical with network, subnetwork, and host portions.
- An IP address can represent a complete network, a specific host, or the broadcast address of the network.
- The subnet mask or prefix is used to determine the network portion of an IP address. Once implemented, an IP network needs to be tested to verify its connectivity and operational performance.
- DHCP enables the automatic assignment of addressing information such as IP address, subnet mask, default gateway, and other configuration information.

Summary (cont.)

- IPv4 hosts can communicate one of three different ways: unicast, broadcast, and multicast.
- The private IPv4 address blocks are: 10.0.0.0/8, 172.16.0.0/12, and 192.168.0.0/16.
- The depletion of IPv4 address space is the motivating factor for moving to IPv6.
- Each IPv6 address has 128 bits verses the 32 bits in an IPv4 address.
- The prefix length is used to indicate the network portion of an IPv6 address using the following format: IPv6 address/prefix length.

Summary (cont.)

- There are three types of IPv6 addresses: unicast, multicast, and anycast.
- An IPv6 link-local address enables a device to communicate with other IPv6-enabled devices on the same link and only on that link (subnet).
- Packets with a source or destination link-local address cannot be routed beyond the link from where the packet originated.
- IPv6 link-local addresses are in the FE80::/10 range.
- ICMP is available for both IPv4 and IPv6.